


## OVERVIEW

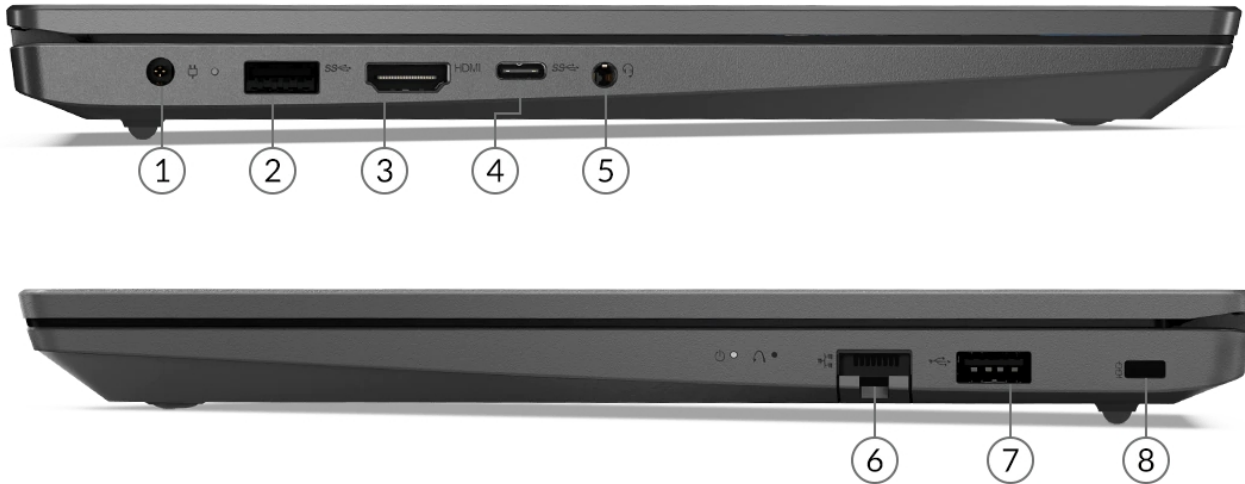

1. Power connector	5. Headphone / microphone combo jack (3.5mm)
2. USB 3.2 Gen 1	6. Ethernet (RJ-45)
3. HDMI	7. USB 2.0
4. USB-C 3.2 Gen 1	8. Kensington Nano Security Slot

## PERFORMANCE

### Processor

#### Processor Family

AMD Ryzen™ 3 / 5 Processor

#### Processor\*\*

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Memory Support	Processor Graphics
AMD Ryzen 3 7330U	4	8	2.3GHz	4.3GHz	2MB L2 / 8MB L3	DDR4-3200	AMD Radeon™ Graphics
AMD Ryzen 5 5500U	6	12	2.1GHz	4.0GHz	3MB L2 / 8MB L3	DDR4-3200	AMD Radeon Graphics
AMD Ryzen 5 7530U	6	12	2.0GHz	4.5GHz	3MB L2 / 16MB L3	DDR4-3200	AMD Radeon Graphics

### Operating System

#### Operating System\*\*

- Windows® 11 Home
- Windows 11 Home Single Language
- Windows 11 Pro
- No operating system

### Graphics

#### Graphics

Graphics	Type	Memory	TGP	Key Features
AMD Radeon Graphics	Integrated	Shared	Share CPU TDP	DirectX® 12

### Monitor Support

#### Monitor Support

Supports up to 3 independent displays (native display and 2 external monitors via HDMI® and USB-C®)

- HDMI supports up to 3840x2160@30Hz
- USB-C supports up to 4096x2160@60Hz

### Chipset

#### Chipset

AMD SoC (System on Chip) platform

### Memory

#### Max Memory<sup>[1]</sup>

Up to 16GB (8GB soldered + 8GB SO-DIMM) DDR4-3200 offering

#### Memory Slots

One memory soldered to systemboard, one DDR4 SO-DIMM slot, dual-channel capable

#### Memory Type

DDR4-3200

Notes:

[1] The max memory is based on the test results with current Lenovo® memory offerings.

### Storage

#### Storage Support<sup>[1]</sup>

- Models with 38Wh battery: up to two drives, 1x 2.5" HDD + 1x M.2 SSD
  - 2.5" HDD up to 1TB
  - M.2 2242 SSD up to 512GB
- Models with 45Wh battery: one drive, 1x M.2 SSD
  - M.2 2242 SSD up to 512GB

**Storage Slot**

- Models with 38Wh battery: one 2.5" drive slot + one M.2 slot
  - One 2.5" SATA HDD slot
  - One M.2 2280 PCIe® 3.0 x4 slot
- Models with 45Wh battery: one M.2 slot
  - One M.2 2280 PCIe 3.0 x4 slot

**Storage Type\*\*\***

Disk Type	Interface	RPM	Offering
2.5" SATA HDD	SATA 6Gb/s	5.4K	1TB
M.2 2242 SSD	PCIe NVMe®, PCIe 3.0 x4	-	128GB
M.2 2242 SSD	PCIe NVMe, PCIe 4.0 x4 <sup>[2]</sup>	-	256GB / 512GB

## Notes:

[1] The storage capacity supported is based on the test results with current Lenovo storage offerings.

[2] The SSD with PCIe 4.0x4 is downgraded to closer to PCIe 3.0 x4 due to AMD platform limitations.

**Removable Storage****Card Reader**

No card reader

**Multi-Media****Audio Chip**

High Definition (HD) Audio, Realtek® ALC3287 codec

**Speakers**

Stereo speakers, 1.5W x2, Dolby® Audio™

**Microphone**

Dual-microphone array with noise-cancelling

**Camera**

HD 720p, with privacy shutter, fixed focus

**Battery****Battery\*\***

- Integrated Li-Polymer 38Wh battery, supports Rapid Charge (charge up to 80% in 1hr)
- Integrated Li-Polymer 45Wh battery, supports Rapid Charge (charge up to 80% in 1hr)

**Max Battery Life<sup>[1]</sup>**

- Models with 38Wh battery:
  - MobileMark® 2018: 7.8 hr
  - Local video (1080p) playback@150nits: 12.1 hr
- Models with 45Wh battery:
  - MobileMark 2018: 8.3 hr
  - Local video (1080p) playback@150nits: 12.8 hr

## Notes:

[1] All battery life claims are approximate maximum and based on results using the MobileMark 2014, MobileMark 2018, MobileMark 25, JEITA 2.0, continuous 1080p video playback (with 150nits brightness and default volume level) or Google Power Load Test (PLT) battery-life benchmark tests. Actual battery life will vary depending on many factors such as product configuration and usage, software use, wireless functionality, power management settings, and screen brightness. The maximum capacity of the battery will decrease with time and use.

**Power Adapter****Power Adapter\*\*<sup>[1]</sup>**

- 65W round tip (3-pin) AC adapter, 100-240V, 50-60Hz
- 65W USB-C (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz<sup>[2]</sup>

## Notes:

[1] AC adapter offerings depend on the country.

[2] Only MT 83CR configured with 65W USB-C AC adapter is certified TCO and EPEAT™.

## DESIGN

### Display

#### Display\*\*

Size	Resolution	Touch	Type	Brightness	Surface	Aspect Ratio	Contrast Ratio	Color Gamut	Refresh Rate	Viewing Angle (L/R/U/D)	Key Features
15.6"	FHD (1920x1080)	None	TN	250nits	Anti-glare	16:9	500:1	45% NTSC	60Hz	45°/45°/15°/35°	TÜV Low Blue Light (Software)
15.6"	FHD (1920x1080)	None	IPS <sup>[1]</sup>	300nits	Anti-glare	16:9	800:1	45% NTSC	60Hz	85°/85°/85°/85°	TÜV Low Blue Light (Software)

#### Touchscreen

Non-touch

Notes:

[1] IPS (in-plane switching) technology may refer to IPS, PLS, ADS, AHVA, AAS.

### Input Device

#### Keyboard

6-row, spill-resistant, multimedia Fn keys, SMB Service Hot key, numeric keypad

#### Keyboard Backlight

Non-backlight

#### Touchpad

Buttonless Mylar® surface multi-touch touchpad, supports Precision TouchPad (PTP), 62 x 104 mm (2.44 x 4.09 inches)

### Mechanical

#### Dimensions (WxDxH)<sup>[1]</sup>

359.2 x 235.8 x 19.9 mm (14.14 x 9.28 x 0.78 inches)

#### Weight<sup>[2]</sup>

Starting at 1.65 kg (3.64 lbs)

#### Case Color\*\*

- Business black
- Iron grey

#### Surface Treatment\*\*

- IMR (in-mold decoration by roller)
- Texture

#### Case Material

PC-ABS (top), PC-ABS (bottom)

Notes:

[1] The system dimensions may vary depending on configurations.

[2] The system weight is approximate and based on results in Lenovo lab, which varies depending on the source of component, variance of the distribution of each component, and manufacturing process. It may not be the exact weight for each specific model.

## CONNECTIVITY

### Network

#### Ethernet

Gigabit Ethernet, 1x RJ-45

#### WLAN + Bluetooth®\*\*<sup>[1]</sup>

- 802.11ac 2x2 Wi-Fi® + Bluetooth 5.1, M.2 card
- Wi-Fi 6, 802.11ax 2x2 Wi-Fi + Bluetooth 5.1, M.2 card<sup>[2]</sup>

Notes:

<sup>[1]</sup> Bluetooth 5.2 is hardware ready but may run at a lower version due to OS limitations.

<sup>[2]</sup> Wi-Fi 6 full features might be limited by country-level restrictions.

## Ports<sup>[1]</sup>

### Standard Ports

- 1x Ethernet (RJ-45)
- 1x HDMI 1.4b
- 1x Headphone / microphone combo jack (3.5mm)
- 1x Power connector
- 1x USB 2.0
- 1x USB 3.2 Gen 1
- 1x USB-C 3.2 Gen 1 (support data transfer, Power Delivery 3.0 and DisplayPort™ 1.2)

Notes:

<sup>[1]</sup> The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.

USB 2.0: 480 Mbit/s;

USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;

USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;

USB4® 20Gbps / USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;

USB4 40Gbps (USB 40Gbps): 40 Gbit/s;

Thunderbolt™ 3/4: 40 Gbit/s.

## Docking

### Docking

Various docking solutions supported via USB-C.

For more compatible docking solutions, please visit [Docking for Lenovo V15 G4 ABP](#)

## SECURITY & PRIVACY

### Security

#### Security Chip

Firmware TPM 2.0 integrated in SoC

#### Physical Locks

Kensington® Nano Security Slot™, 2.5 x 6 mm

#### Fingerprint Reader

No fingerprint reader

#### BIOS Security

- Power-on password
- Supervisor password
- Hard disk password

#### Other Security

Camera privacy shutter

## SERVICE

### Warranty<sup>[1]</sup>

#### Base Warranty\*\*

- 1-year courier or carry-in service

- 2-year (1-yr battery) courier or carry-in service
- No base warranty

---

**Notes:**

[1] The warranty upgrades may be bundled with some models, please check the "Included upgrade" column in the specific model's configurations. For more service extensions, please go to <https://smartfind.lenovo.com/>. To learn more details of warranty policy, please access <https://pcsupport.lenovo.com/warranty>.

## ENVIRONMENTAL

### Operating Environment

#### Temperature<sup>[1]</sup>

- At altitudes up to 2438 m (8,000 ft)
  - Operating: 5°C to 35°C (41°F to 95°F)
  - Storage: 5°C to 43°C (41°F to 109°F)
- At altitudes above 2438 m (8,000 ft)
  - Maximum temperature when operating under the unpressurized condition: 31.3°C (88°F)

#### Humidity

- Operating: 8% to 95% at wet-bulb temperature 23°C (73°F)
- Storage: 5% to 95% at wet-bulb temperature 27°C (81°F)

#### Altitude

Maximum altitude (without pressurization): 3048 m (10,000 ft)

---

**Notes:**

[1] When you charge the battery, its temperature must be no lower than 10°C (50°F).

## CERTIFICATIONS

### Green Certifications<sup>[1]</sup>

#### Green Certifications<sup>[2]</sup>

- (Optional) ENERGY STAR® 8.0
- (Optional) EPEAT Silver Registered<sup>[3]</sup>
- (Optional) TCO Certified 9.0
- ErP Lot 26
- ErP Lot 6
- FSC certified package
- RoHS compliant

---

**Notes:**

[1] The items listed under the "Green Certifications" section may not only refer to certification but also registration or self-declaration.

[2] EPEAT and TCO Certified 9.0 are only available for MT 83CR.

[3] EPEAT is registered where applicable, please see <https://www.epeat.net> for registration status by country.

### Other Certifications

#### Mil-Spec Test

MIL-STD-810H military test passed

#### Other Certifications

TÜV Rheinland® Low Blue Light (Software Solution)

- Feature with \*\* means that only one offering listed under the feature is configured on selected models.
- Feature with \*\*\* means that one or more offerings listed under the feature could be configured on selected models.


- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION “AS IS,” WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.
- The specifications on this page may not be available in all regions, and may be changed or updated without notice.



AMD



AMD

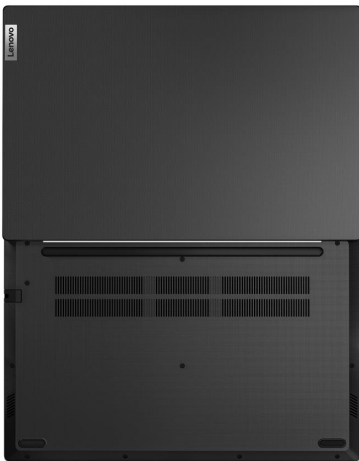

AMD



AMD



AMD



AMD