



ET80/ET85 Soft Handle/Shoulder Strap/Boot Installation Guide




! **IMPORTANT:** To install the soft handle or shoulder strap, the ET80/ET85 boot is required. The boot, soft handle, and shoulder strap are each sold separately.

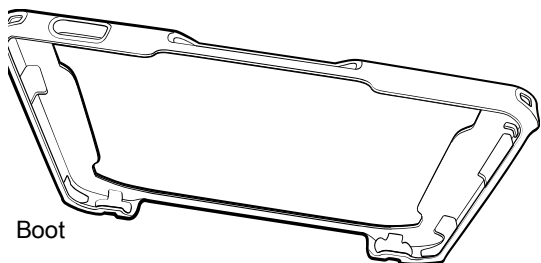

Boot

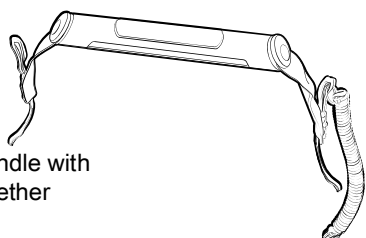

Soft handle with coiled tether

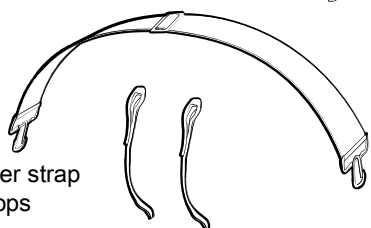

Shoulder strap with loops


When attaching a shoulder strap, first attach the loops to the boot.

Attaching the Soft Handle or Shoulder Strap Loops


The following steps apply to attaching the soft handle and the shoulder strap loops.

If the boot is installed on the tablet, push the top left corner of the boot off the tablet, then remove the tablet from the boot.


1. Hold the boot upside down and pull the pointed end of the soft handle or shoulder strap loop into slot one.

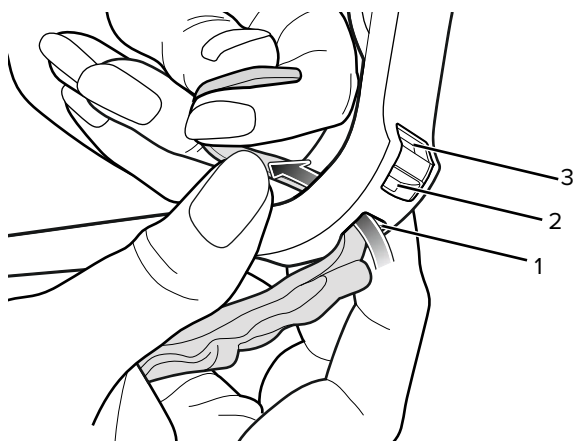


2. Feed the pointed end out of slot two.

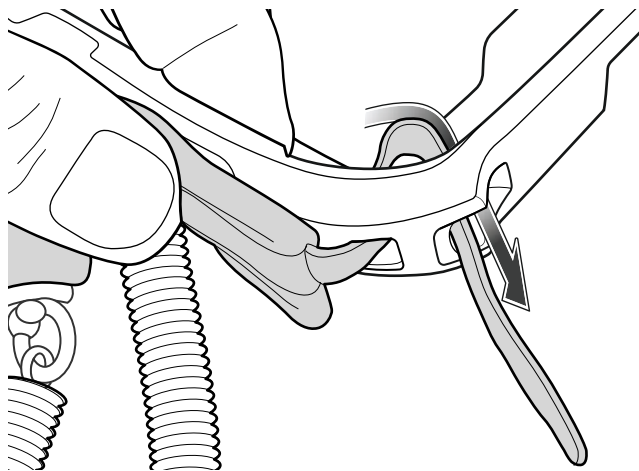

3. Feed the end into slot three.

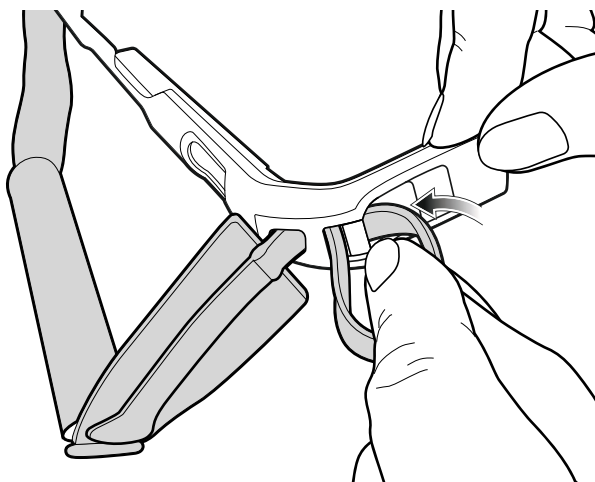

4. Pull the pointed end all the way out of slot one.

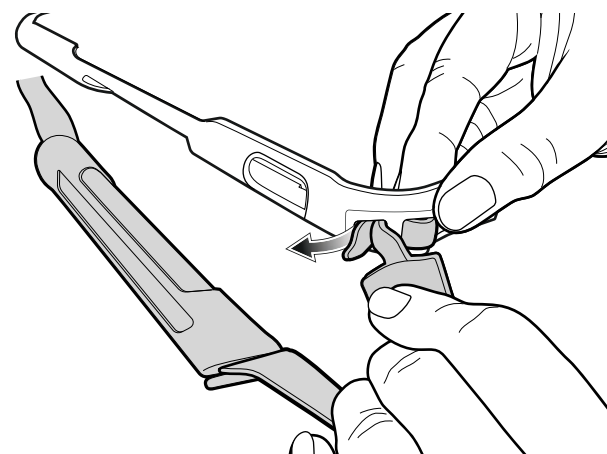

5. Repeat steps 1-4 for the other end of the soft handle or the other shoulder strap loop.

The straps are tightly secured into place after the boot is installed on the tablet.




MN-004222-01EN Rev A

ZEBRA and the stylized Zebra head are trademarks of Zebra Technologies Corp., registered in many jurisdictions worldwide. All other trademarks are the property of their respective owners. © 2021 Zebra Technologies Corp. and/or its affiliates. All rights reserved. | zebra.com

Attaching the Shoulder Strap to the Soft Handle


Use the soft handle alone, or attach a shoulder strap to the soft handle.

1. First attach the soft handle to the boot.
2. Clip both ends of the shoulder strap to the loops on the soft handle.

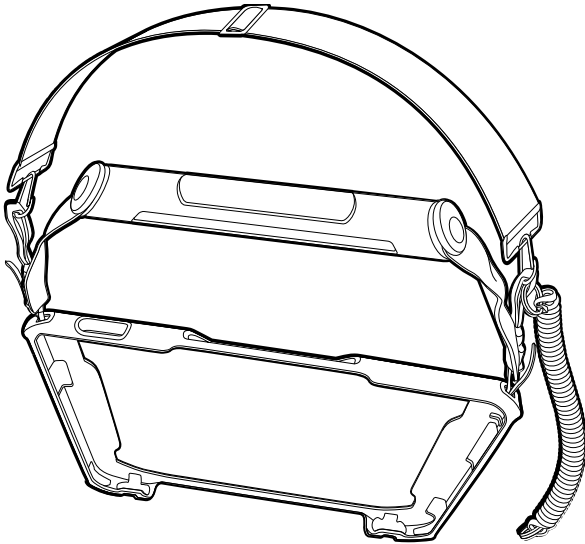


Attaching the Shoulder Strap to the Boot

1. First attach the shoulder strap loops to the boot.
2. Clip both ends of the should strap to the shoulder strap loops.

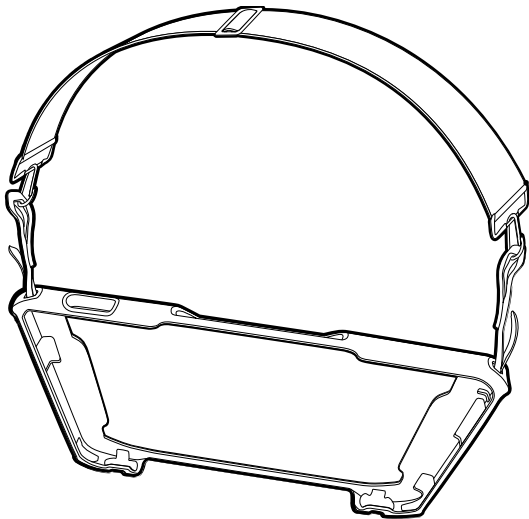


Installing the Boot

1. Insert the bottom of the tablet into the bottom of the boot.

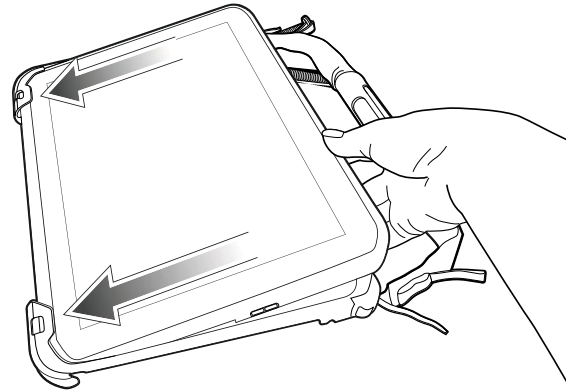

2. Push the top of the tablet into the top of the boot.

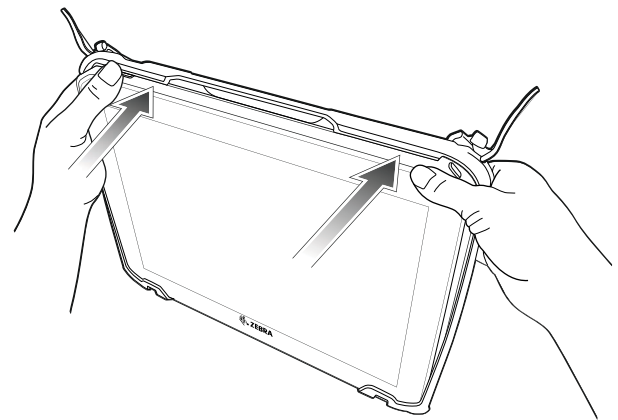

Removing the Boot

Push the top left corner of the boot off the tablet, then remove the tablet from the boot.

