Getac

K120

Hand Strap
User Guide

Rugged Mobile Computing Solutions

Introduction

This hand strap provides three functions for K120:

- Rotatable hand grip
- Kickstand
- Stylus holder

Installation

1. To fasten each upper belt:

   Insert the belt through the matching holder at the back of K120, fold the belt over, and insert it through the two D-rings (❶). Fold the belt over and pull it through the D-rings, going over the closest ring and under the second ring (❷). Pull the end of the belt until the belt is tight.

2. To fasten each lower belt:

   Insert the lower belt into the matching slot at the side of K120, and, as the belt comes out from the other side, insert it though the inner slot of the buckle's hook piece (❶). Then insert the belt through the outer slot (❷), and pull the belt until it is tight. Finally bucket up (❸).

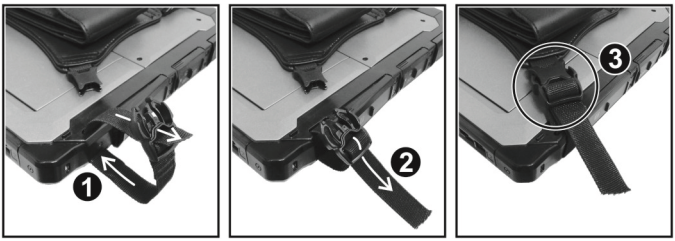

Applications

Hand Grip

Insert your fingers through the hand grip to hold K120.

This imprint indicates the surface on which you put your hand.

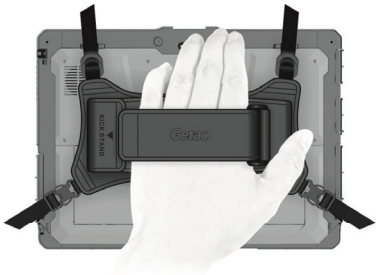

The hand grip is rotatable. The tightness can be adjusted.

Kickstand

1. Rotate the hand grip sideways as shown below.
2. Pull apart to open the hook-and-loop fastener.

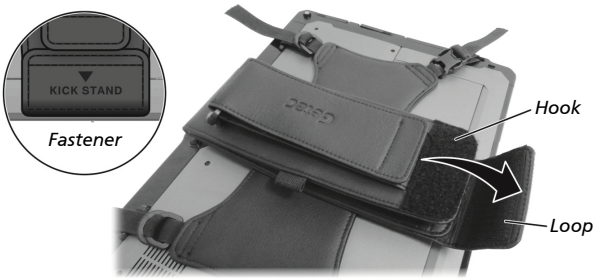

3. Extend the hand grip to form a triangle.

NOTE: When closing the hand grip, be sure to fold up the flexible band properly. Keep the folded band inside the hand grip in a flat and smooth condition.

Stylus Holder

Use the stylus holder to store the stylus.

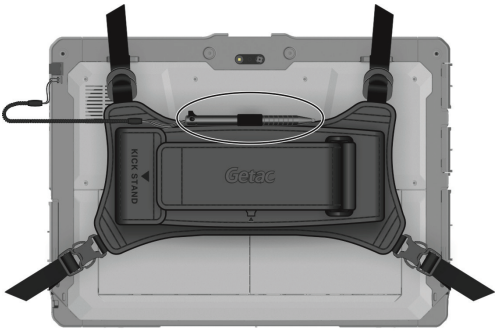

Notes

- The leather part of the hand strap is made of PU material. It is normal for such material to undergo hydrolysis after some time of use and therefore peels off. You can replace the hand strap when needed.
- When removing the hand strap, there is no need to remove the lower belts from K120. Simply release each lower belt by pinching the sides of the buckle and pulling out the hook.

5 6 1 5 1 4 2 0 0 0 0 5 R 0 0