



INSTRUCTIONS for COAT HOOKS



1.

Coat hooks come ready for use on cubicle $1\frac{1}{4}$ " - $2\frac{1}{2}$ " thickness. Loosen screw and slide to desired width. Tighten screw securely.

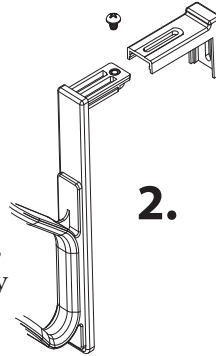

2.

To expand the brackets to fit $2\frac{1}{2}$ " - $3\frac{1}{2}$ " panel, unscrew then slide the bracket into the channel of the longer piece, then adjust the length best suited for the thickness of panel. Tighten screw to securely adjust the fit.