

# Installation and Assembly - Adaptor Bracket for VESA® 400 x 200 Screens



Model: PLP-V4X2

**IMPORTANT!** Read instruction sheet before you start installation and assembly.

Before you start make sure all parts listed are included with your product.

## Parts List

Description	Qty	Part #
<b>A</b> adaptor bracket	1	201-1589
<b>B</b> spacer	4	540-9416
<b>C</b> M6 x 12 mm socket pin serrated washer head screw	4	510-1050
<b>D</b> 4 mm allen wrench	1	560-9646
<b>E</b> M6 x 20mm socket pin serrated washer head screw	4	510-9554
<b>F</b> M5 x 12mm socket pin serrated washer head screw	4	510-1064
<b>G</b> M4 x 12mm socket pin serrated washer head screw	4	510-1079
<b>H</b> M5 x 10mm socket pin screw	4	520-1063
<b>I</b> washer	4	580-1036
<b>J</b> M8 x 15mm socket pin security bolt	4	520-1068

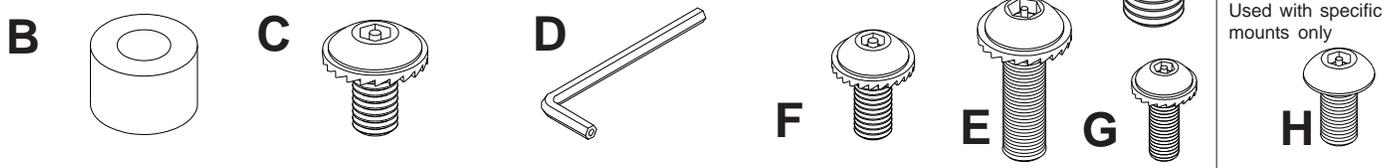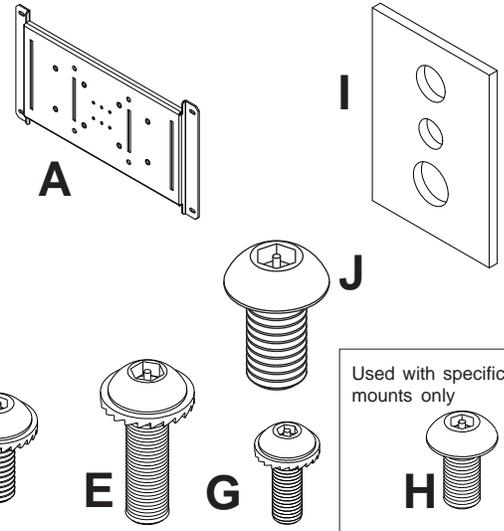

## ⚠ WARNING

- Do not overtighten! Overtightening may cause permanent damage to the screen. Torque to 26-35 in • lb (30-40 kg • cm).

**1** Begin with shortest length screw (**C, F, G, or J**), hand thread through washer (**I**) and adaptor plate into screen as shown below. Screw must make at least three full turns into screen insert and fit snug into place. Do not over tighten. If screw cannot make three full turns into screen insert, select a longer length screw (**E**). Repeat for remaining holes. If you have any questions, please call Peerless-AV customer care at **1-800-865-2112**.

