


TOOLS

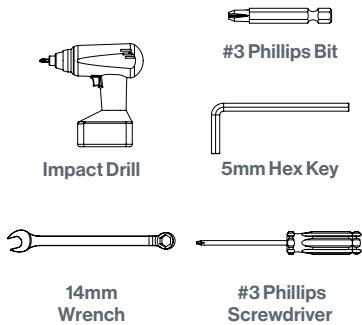

PARTS & HARDWARE LIST








DIAGRAM 1: CORRECT COLUMN PLACEMENT

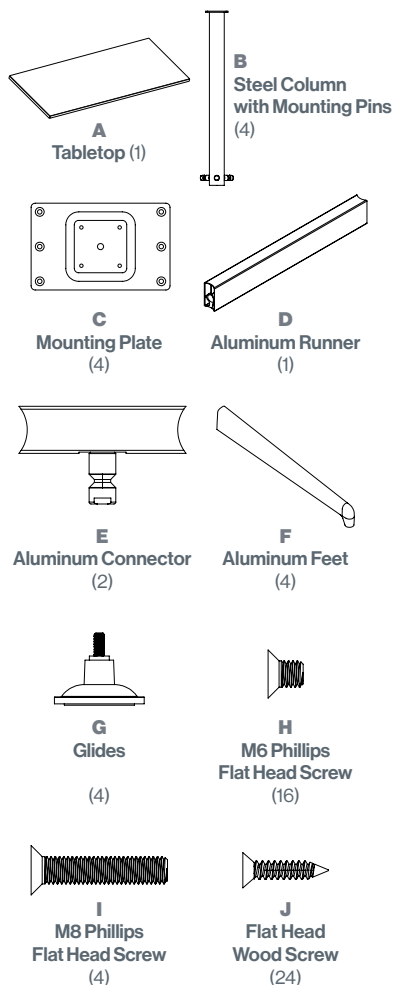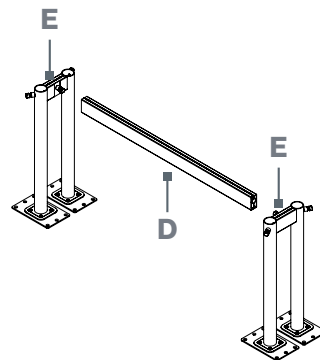

1. Lay the tabletop (**A**) upside down on a cardboard or carpeted surface.

2. Install (4) M6 Flat Head Bolts (**H**) through the steel columns (**B**) onto the Mounting Plates (**C**). See **DIAGRAM 1**.

3. Install (1) M8 Flat Head Bolt (**I**) through the Mounting Plates (**C**) and into the Steel Column (**B**).

4. Ensure that all Mounting Pins are secure on the Steel Columns. If necessary, use a 14 mm wrench to tighten them.

5. Place the Aluminum Connectors (**E**) onto the Mounting Pin between Steel Columns (**B**). (Columns must be oriented correctly, see image for reference).

6. Tighten the Aluminum Connectors (**E**) onto Mounting Pins using a 5mm Hex Key.

7. Place the Aluminum Runner (**D**) onto Mounting Pin on each Aluminum Connector (**E**).

8. Tighten the Aluminum Runner (**D**) onto Mounting Pins using a 5 mm Hex Key.


9. Attach the Mounting Plates to the bottom of the tabletop using (24) Flat Head Wood Screws (**J**).

10. Place (4) Aluminum Feet (**F**) onto pins.

11. Tighten (4) Aluminum Feet (**F**) onto pins using a 5mm Hex Key.

12. Attach (4) Glides (**G**) to (4) Aluminum Feet (**F**).


13. Have two people hold onto the edges of the top to turn the table over to an upright position.

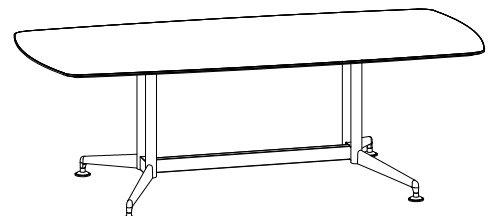


FOR MISSING PARTS OR QUESTIONS, PLEASE CALL
CUSTOMER SERVICE AT 888-705-0777.

ZIA CONFERENCE DUAL COLUMN | SINGLE RUNNER

TOOLS

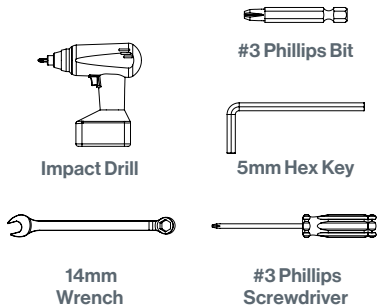

PARTS & HARDWARE LIST

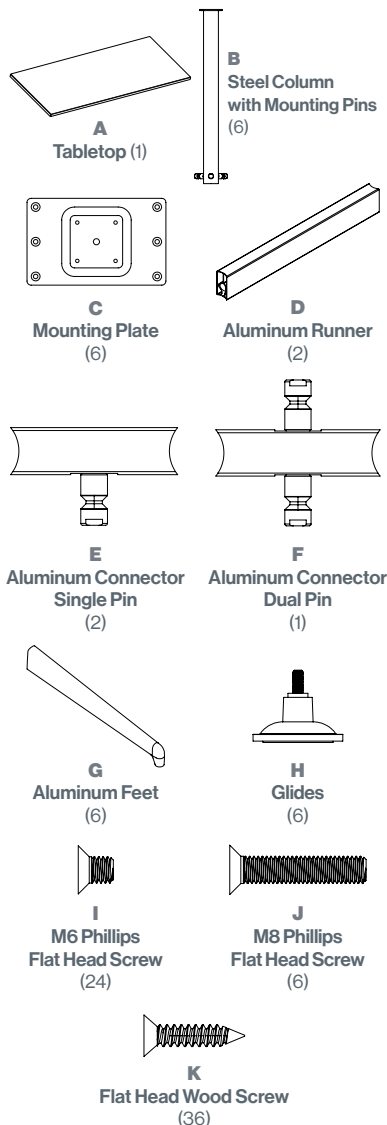

ASSEMBLY STEPS

1. Lay the tabletop (**A**) upside down on a cardboard or carpeted surface.

2. Install (4) M6 Flat Head Bolts (**I**) through the steel columns (**B**) onto the Mounting Plates (**C**). See **DIAGRAM 1**.




DIAGRAM 1: CORRECT COLUMN PLACEMENT

3. Install (1) M8 Flat Head Bolt (**J**) through the Mounting Plates (**C**) and into the Steel Columns (**B**).

4. Ensure that all Mounting Pins are secure on the Steel Columns. If necessary, use a 14 mm wrench to tighten them.

5. Ensure that the Steel Columns are oriented correctly.

6. Place the Single Pin Aluminum Connectors (**E**) onto the Mounting Pins between outer Steel Columns (**B**).

7. Place the Dual Pin Aluminum Connector (**F**) onto the Mounting Pins between inner Steel Columns (**B**).

8. Tighten the (3) Aluminum Connectors (**E & F**) onto Mounting Pins using a 5mm Hex Key.

9. Place the Aluminum Runners (**D**) onto Mounting Pins between the Aluminum Connectors (**E**).

10. Tighten the Aluminum Runners (**D**) onto Mounting Pins using a 5 mm Hex Key.

11. Attach the Mounting Plates to the bottom of the tabletop using (36) Flat Head Screws (**K**).

12. Place (6) Aluminum Feet (**G**) onto pins.

13. Tighten (6) Aluminum Feet (**G**) onto pins using a 5mm Hex Key.

14. Attach (6) Glides (**H**) to (6) Aluminum Feet (**G**).

15. Have two people hold onto the edges of the top to turn the table over to an upright position.

ZIA CONFERENCE DUAL COLUMN | DUAL RUNNER