



Vin-Tak Tackboard


with Aluminum Trim

Aluminum trim
with hairline
mitered corners



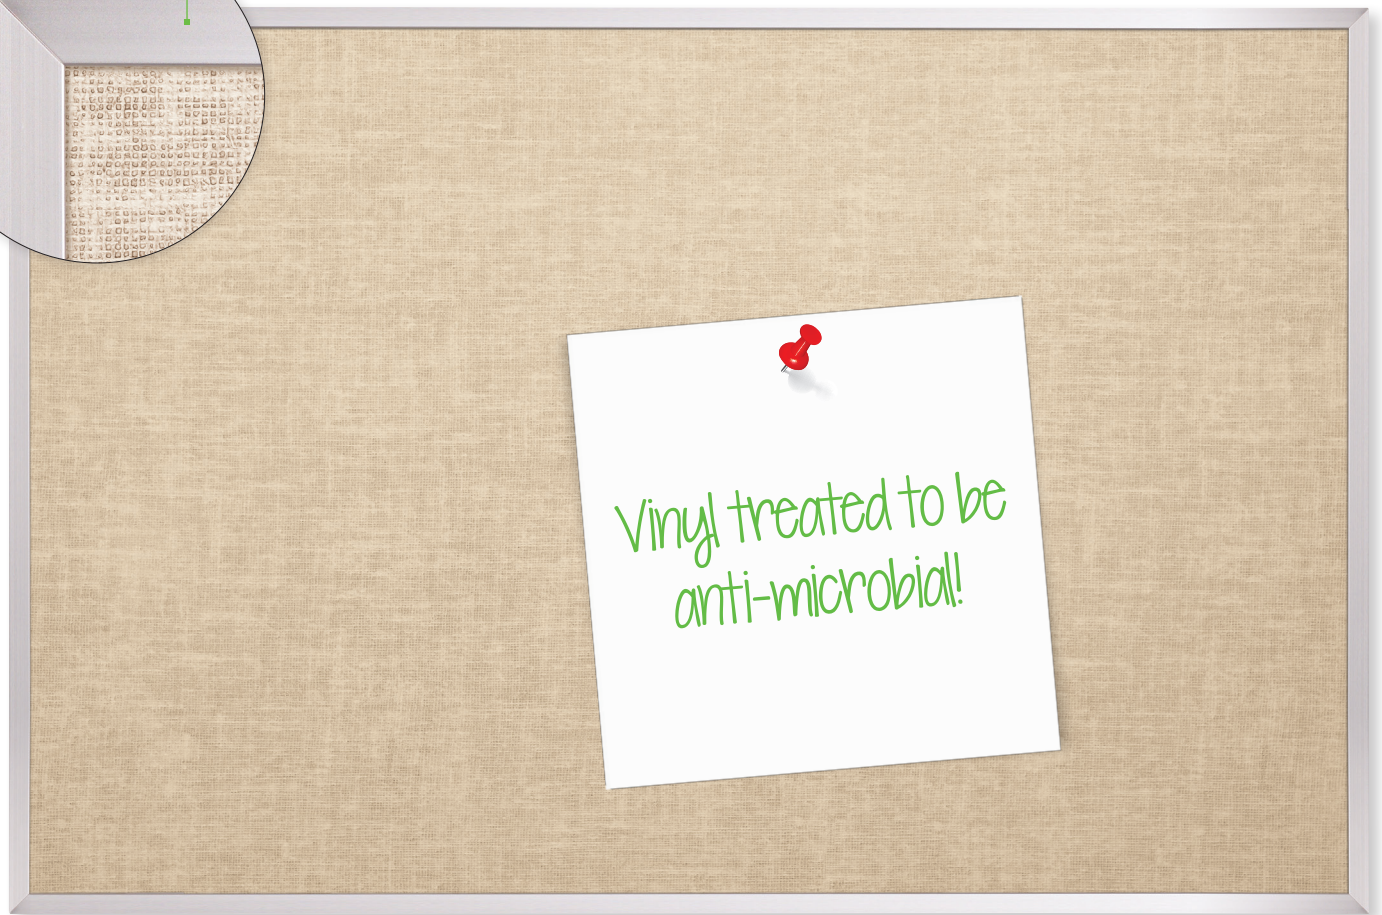

40 - Yellow Bouquet



41 - Champagne




42 - Burgundy



44 - Gray



45 - Antique White




46 - Cotton




47 - Pacific Blue



54 - Powder Blue




56 - Platinum



57 - Natural



74 - Pelican



77 - Sterling

Vin-Tak Tackboard - Aluminum Trim

- Fabric-backed vinyl over lightweight substrate makes an economical and attractive tackboard.
- Easy to clean surface. Vinyl is treated to resist the growth of odor- and stain-causing microbes.
- Featured with standard .88" clear anodized aluminum trim with hairline mitered corners. Anodized black aluminum trim available at an upcharge.
- Aluminum trim Vin-Tak available as a Class A Fire Rated board, manufactured with fire rated gypsum, fire rated adhesive, and fire rated vinyl. Test details and pricing available on request.
- TAA compliant. Manufactured in the US of foreign and domestic materials. Ten year limited warranty. Has achieved GREENGUARD GOLD Certification.

Part No.	Product Dimensions	Ship Wt.
Vin-Tak Tackboard - Aluminum Trim		
311AA*	1.5'H x 2'W	5 lbs
311AB*	2'H x 3'W	14 lbs
311AC**	3'H x 4'W	22 lbs
311AD	4'H x 4'W	41 lbs
311AF	4'H x 5'W	48 lbs
311AG	4'H x 6'W	52 lbs
311AH	4'H x 8'W	63 lbs
311AK	4'H x 10'W	75 lbs
311AM	4'H x 12'W	110 lbs

*Ships UPS **Ships UPS OS1

Shipping weights are listed on a per item basis and may vary based on quantities ordered. All boards listed as 3'H x 4'W actually measure 33.75"H x 48"W due to shipping restrictions.

Vinyl Technical Information

- Vinyl tackboards are fade-resistant and are easily cleaned with common detergents and water.
- The vinyl covering meets or exceeds all requirements of Federal Specifications CCC-W-408A Quality Standard for Vinyl Coated Fabric Wallcovering CFFA-W-101A, and the Standard Classification of Wallcoverings by Durability Characteristics of ASTM-F-793-82 for the type and category classified, including 24 hour cleanability tests based on ASTM method D1308.
- The vinyl is treated with an antimicrobial to resist the growth of mildew and bacteria including *Staphylococcus aureus*, *Streptococcus reticulum* (pink stain), and mixed fungal spore such as *Aspergillus niger*, *Aspergillus flavus*, *Penicillium funiculosum*, and *Chaetomium globosum*.
- Custom sizes are available.



MooreCo | Balt | Best-Rite

2885 Lorraine Avenue | Temple, TX 76501

P. 800.749.2258 | F. 866.888-7483

www.moorecoinc.com