


Clarity Matrix MX46HDX

LCD Video Wall System

The Clarity® Matrix® MX46HDX is an extreme narrow bezel 46" LCD video wall display that provides outstanding tiled visual performance, supports extended operation, and requires minimal installation space. Designed for 24x7 operation, Clarity Matrix MX46HDX features 800 nits brightness, LED backlight technology, and Full HD resolution making it the ideal video wall for high-impact, mission-critical applications. Clarity Matrix MX46HDX sets a new benchmark with a tiled bezel width of a mere 1.7mm, creating a near seamless digital canvas.

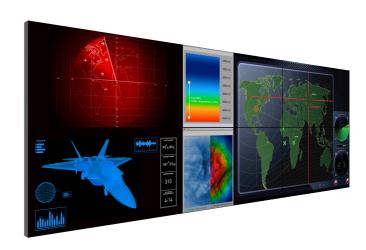

SPECIFICATION	DETAIL
Planar Part Number	997-8995-00
Technology	Commercial-grade direct view LCD
Diagonal	46 inches
Aspect Ratio	16:9
Native Resolution Panels	1920 x 1080
Tiled Bezel Width	0.06" (1.7 mm)
Brightness (typ)	800 cd/m² or nits
Response Time (typ)	8 ms
Contrast ratio (full field)	4000:1
Full viewing angle	178°
Backlight life (1/2 brightness)	50,000 Hrs
Mounted Depth	3.6" wall to front of screen
Acoustic noise	Fanless operation
Heat load	480 BTU per hour at 800 nit
Operating temperature range	5 - 40 Degrees C
Operating humidity range	20-90% RH non-condensing
Backlight control	Individual and wall control
Backlight sensing and reporting	At display level

Display module position sensing	Auto-sensing integrated
Power Consumption (typ)	141 watts
Power supply voltage	100-230V AC ± 10%, 50 to 60 Hz
Power Status	Diagnostics LEDs, health monitoring and alerts
Safety regulations	Complies with EN60950, FCC Class A, CISPR22/85, CE, EU RoHS
Data Inputs	4 Single Link HDMI inputs, 1 DisplayPort input
Control	IR Remote, RS232, Ethernet (optional)
Per Panel Dimensions (Including Mount)	40.15" x 22.64" x 3.58" (1020 mm x 575 mm x 91 mm)
Per Panel Weight (Including Mount)	57 lbs (26 kg)
Shipping weight	142 lbs (64.4 kg)
Touch Options	Clarity Matrix MultiTouch Kits