

FortiAP™ Series

Cloud or FortiOS-managed Access Points

FortiAP access points are managed centrally by the integrated WLAN controller of any FortiGate® security appliance or can be managed through the free FortiCloud provisioning and management portal. With the integration of the wireless controller functionality into the market leading FortiGate appliance, Fortinet delivers a true Unified Access Layer. This enables you to easily manage wired and wireless security from a Single-pane-of-glass management console and protects your network from the latest security threats.



Unified Management

Unified management console simplifies operations, ensuring consistent and effective policy enforcement and compliance.



Advanced Security Protection

Wireless LAN security done right, from the leader in network security. Integrated Firewall, IPS, Application Control, and Web Filtering protect the wireless LAN from the latest security threats.



Built-in WiFi Security


Protects the network from advanced wireless threats and satisfies PCI DSS compliance.

Product Offerings


802.11ac Wave 1	FAP-320C	3x3 MIMO AP with dual radio
	FAP-321C	3x3 MIMO AP with dual radio
	FAP-222C	Outdoor, IP67 rated AP, 2x2 MIMO with dual radio with a variety of external antenna options
802.11ac Wave 2	FAP-221E FAP-223E	2x2 MU-MIMO APs with dual radio
	FAP-222E	Outdoor, IP67 rated AP, 2x2 MU-MIMO with dual radio with a variety of external antenna options
	FAP-224E	Outdoor, IP67 rated AP, 2x2 MU-MIMO with dual radio, internal antennas
	FAP-421E FAP-423E	4x4 MU-MIMO APs with dual radio
	FAP-C24JE	2x2 Indoor wall jack AP with dual 2.4 GHz and 5 GHz radios

DEPLOYMENT

Centralized or Local Wireless Controller

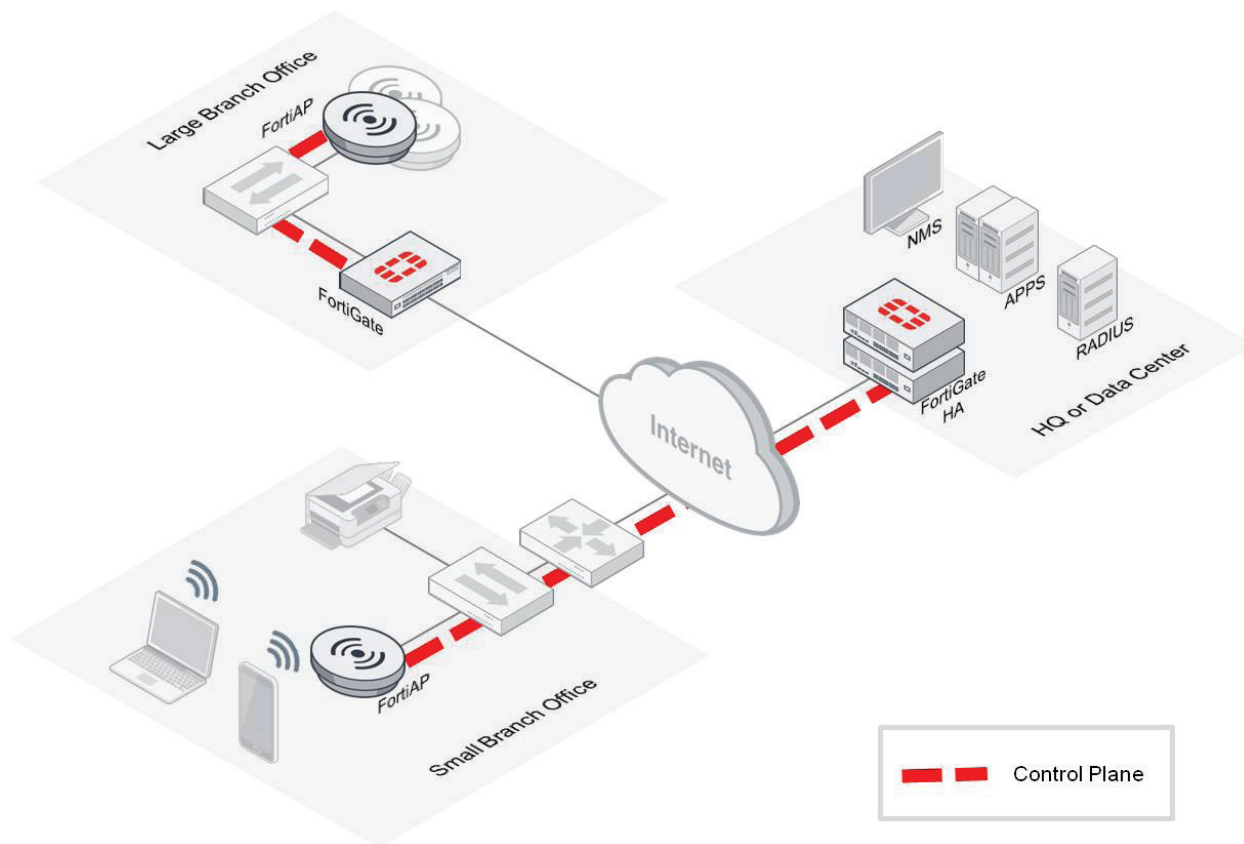


Outdoor Point-to-Point Bridging or Multipoint Mesh Deployment

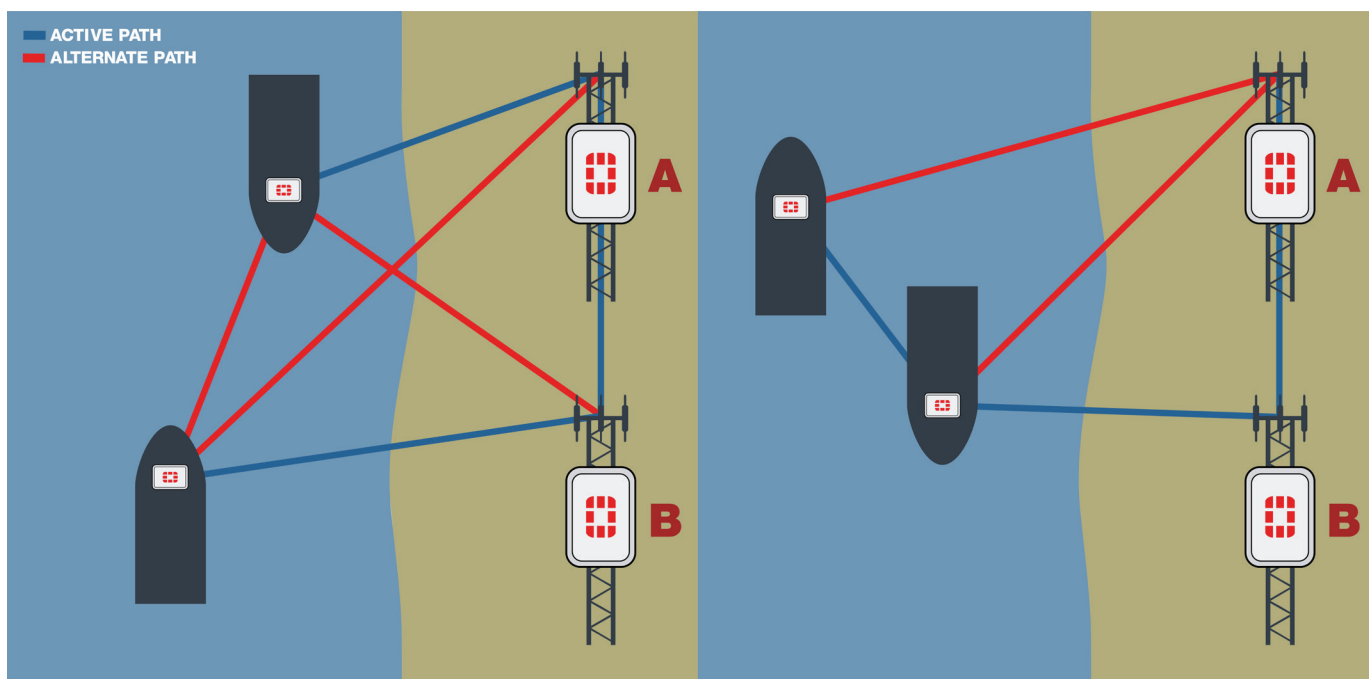

DEPLOYMENT

Outdoor Mesh and PoE Pass-Through Deployment

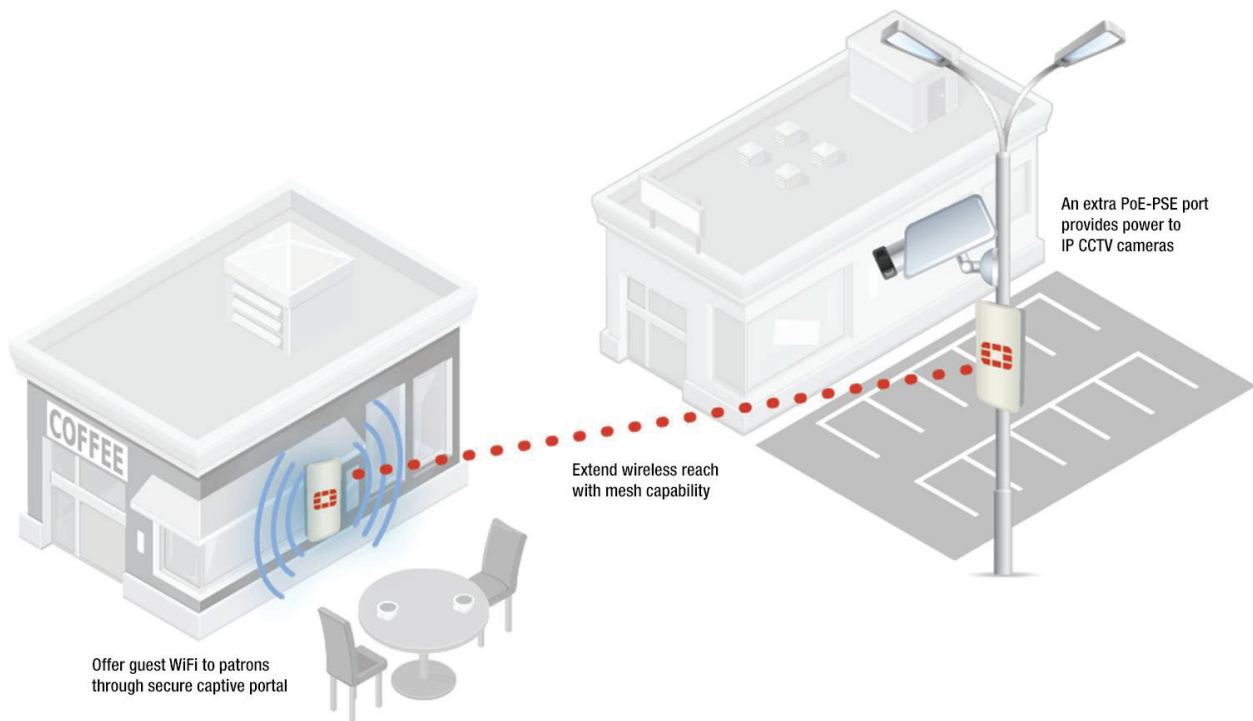

HIGHLIGHTS

FortiAP 320C

The FortiAP 320C is a dual-radio 802.11ac AP for high density environments. Designed with dual redundant PoE Ethernet ports to provide maximum resiliency, this AP is ideal for mission-critical environments such as hospitals and manufacturing facilities. The plenum-rated enclosure and extended temperature range also allows deployment in non-temperature controlled warehouses.



 **802.11ac Wave 1 | Dual Radio 2.4 and 5 GHz | 6 Internal Antennas**

 **3x3 MIMO | Up to 450 + 1,300 Mbps**

SPECIFICATIONS

FORTIAP 320C	
Hardware	
Hardware Type	Indoor AP
Number of Radios	2
Number of Antennas	6 Internal
Antenna Type and Peak Gain	PIFA: 5 dBi for 2.4 GHz, 6 dBi for 5 GHz
Frequency Bands (GHz)*	2.400–2.4835, 5.150–5.250, 5.250–5.350, 5.470–5.725, 5.725–5.850
Radio 1 Capabilities	2.4 GHz b/g/n (3x3:3 stream) 20/40 MHz (64 QAM)
Radio 2 Capabilities	5 GHz a/n/ac (3x3:3 stream) 20/40/80 MHz (256 QAM)
Maximum Data Rate	Radio 1: Up to 450 Mbps, Radio 2: Up to 1300 Mbps
Bluetooth Low Energy (BT/BLE) Radio	—
Interfaces	2x 10/100/1000 Base-T RJ45, 1x Type A USB, 1x RJ45 Serial Port
Power over Ethernet (PoE)	Dual redundant PoE power ports with support for IEEE 802.3af
Simultaneous SSIDs	Up to 16 (14 if background scanning enabled)
EAP Type(s)	EAP-TLS, EAP-TTLS/MSCHAPv2, EAPv0/EAP-MSCHAPv2, PEAPv1/EAP-GTC, EAP-SIM, EAP-AKA, EAP-FAST
User/Device Authentication	WPA™ and WPA2™ with 802.1x or Preshared key, WEP, Web Captive Portal, MAC blacklist & whitelist
Maximum Tx Power	2.4 GHz: 23.7 dBm / 234 mW (3 chains combined)* 5 GHz: 24.7 dBm / 295 mW (3 chains combined)*
Kensington Lock	Yes
IEEE Standards	802.11a, 802.11b, 802.11e, 802.11g, 802.11h, 802.11i, 802.11j, 802.11k, 802.11n, 802.11r, 802.11v, 802.11ac, 802.1X, 802.3af
SSID Types Supported	Local-Bridge, Tunnel, Mesh
Per Radio Client Capacity	Up to 128
Cellular Co-existence	No
LED Off Mode	Yes
Advanced 802.11 Features	
802.11ac MU-MIMO Wave 2	No
Transmit Beam Forming (TxBF)	No
Low-Density Parity Check (LDPC) Encoding	Yes
Maximum Likelihood Demodulation (MLD)	Yes

FORTIAP 320C	
Maximum Ratio Combining (MRC)	Yes
A-MPDU and A-MSDU Packet Aggregation	Yes
MIMO Power Save	Yes
Short Guard Interval	Yes
Wireless Monitoring Capabilities	
Rogue Scan Radio Modes	Background, Full-time
WIPS / WIDS Radio Modes	Background, Full-time
Packet Sniffer Mode	Yes
Spectrum Analyzer	Yes
Dimensions	
Length x Width x Height	6.5 x 6.5 x 1.4 inches (165 x 165 x 35 mm)
Weight	1.33 lbs (0.6 kg)
Package (shipping) Weight	1.79 lbs (0.81 kg)
Mounting Options	Ceiling, T-Rail, and Wall
Included Accessories	Mount kits for Ceiling, T-Rail, and Wall
Environment	
Power Supply	SP-FG20C-PA-XX, GPI-115, or GPI-130
Power Consumption (Maximum)	12.08 W
Humidity	5–90% non-condensing
Operating / Storage Temperature	-4–122°F (-20–50°C) / -40–158°F (-40–70°C)
Directives	Low Voltage Directive • RoHS
UL2043 Plenum Material	Yes
Mean Time Between Failures	>30 Years
IP Rating	—
Surge Protection Built In	—
Hit-less PoE Failover	No
Certifications	
WiFi Alliance Certified	Yes
DFS	CE, Japan
Warranty	
Limited Lifetime Warranty	Yes

* Frequency selection and power may be restricted to abide by regional regulatory compliance laws.




RF RX/TX PERFORMANCE TABLE

FORTIAP 320C				
	RADIO 1		RADIO 2	
	2.4 GHz Tx Power (dBm)	Rx Sensitivity (dBm)	5 GHz Tx Power (dBm)	Rx Sensitivity (dBm)
802.11 a/g				
6 Mbps	19	-85	21	-89
9 Mbps	19	-84	21	-88
12 Mbps	19	-83	21	-87
18 Mbps	19	-81	21	-85
24 Mbps	19	-78	20	-84
36 Mbps	16	-74	19	-83
48 Mbps	16	-70	18	-79
54 Mbps	16	-69	17	-76
802.11n HT20				
MCS 0/8	18	-85	20	-89
MCS 1/9	18	-83	20	-88
MCS 2/10	18	-81	20	-87
MCS 3/11	18	-78	19	-85
MCS 4/12	16	-74	19	-84
MCS 5/13	16	-70	18	-83
MCS 6/14	15	-69	17	-79
MCS 7/15	15	-68	16	-73
802.11n HT40				
MCS 0/8	17	-82	18	-91
MCS 1/9	17	-80	18	-85
MCS 2/10	17	-78	18	-85
MCS 3/11	17	-75	18	-80
MCS 4/12	15	-71	18	-78
MCS 5/13	15	-67	17	-76
MCS 6/14	14	-66	16	-74
MCS 7/15	14	-65	15	-71

FORTIAP 320C				
	RADIO 1		RADIO 2	
	2.4 GHz Tx Power (dBm)	Rx Sensitivity (dBm)	5 GHz Tx Power (dBm)	Rx Sensitivity (dBm)
802.11ac VHT20				
MCS 0	—	—	20	-85
MCS 1	—	—	20	-84
MCS 2	—	—	20	-83
MCS 3	—	—	19	-82
MCS 4	—	—	19	-81
MCS 5	—	—	18	-78
MCS 6	—	—	17	-74
MCS 7	—	—	16	-70
MCS 8	—	—	15	-69
802.11ac VHT40				
MCS 0	—	—	18	-85
MCS 1	—	—	18	-84
MCS 2	—	—	18	-83
MCS 3	—	—	18	-82
MCS 4	—	—	18	-81
MCS 5	—	—	17	-78
MCS 6	—	—	16	-74
MCS 7	—	—	15	-70
MCS 8	—	—	14	-69
MCS 9	—	—	14	-68
802.11ac VHT80				
MCS 0	—	—	18	-78
MCS 1	—	—	18	-75
MCS 2	—	—	18	-73
MCS 3	—	—	18	-70
MCS 4	—	—	18	-67
MCS 5	—	—	17	-65
MCS 6	—	—	16	-62
MCS 7	—	—	15	-60
MCS 8	—	—	14	-58
MCS 9	—	—	14	-56

ANTENNA RADIATION PATTERNS

FAP-320C

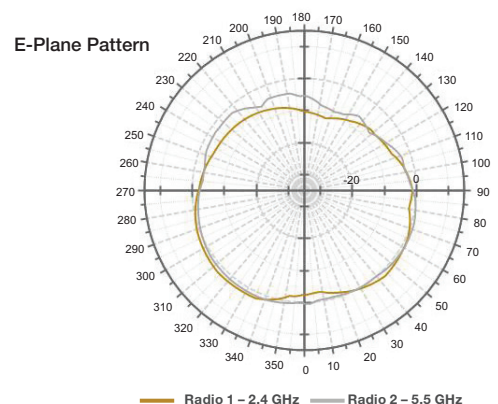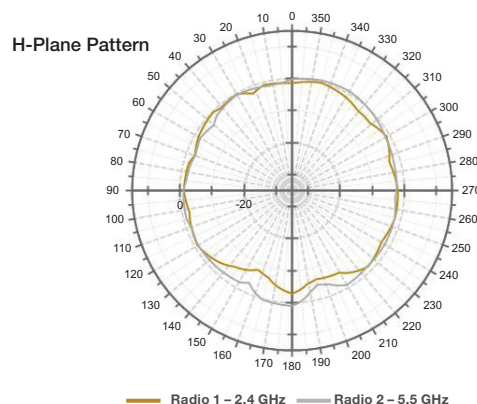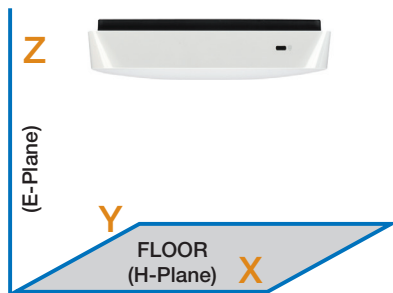

HIGHLIGHTS

FortiAP 321C

The FortiAP 321C is a dual-radio 802.11ac AP, designed for medium density indoor environments, including hotspot and guest or social WiFi deployments. The smoke detector form factor is perfect where discreet installation is required, like school classrooms and retail stores.



 **802.11ac Wave 1 | Dual Radio 2.4 and 5 GHz | 6 Internal Antennas**

 **3x3 MIMO | Up to 450 + 1,300 Mbps**

SPECIFICATIONS

FORTIAP 321C	
Hardware	
Hardware Type	Indoor AP
Number of Radios	2
Number of Antennas	6 Internal
Antenna Type and Peak Gain	PIFA: 4 dBi for 2.4 GHz, 5 dBi for 5 GHz
Frequency Bands (GHz)*	2.400–2.4835, 5.150–5.250, 5.250–5.350, 5.470–5.725, 5.725–5.850
Radio 1 Capabilities	2.4 GHz b/g/n (3x3:3 stream) 20/40 MHz (64 QAM)
Radio 2 Capabilities	5 GHz a/n/ac (3x3:3 stream) 20/40/80 MHz (256 QAM)
Maximum Data Rate	Radio 1: up to 450 Mbps Radio 2: up to 1,300 Mbps
Bluetooth Low Energy (BT/BLE) Radio	—
Interfaces	1x 10/100/1000 Base-T RJ45
Power over Ethernet (PoE)	IEEE 802.3af
Simultaneous SSIDs	Up to 16 (14 if background scanning enabled)
EAP Type(s)	EAP-TLS, EAP-TTLS/MSCHAPv2, EAPv0/EAP-MSCHAPv2, PEAPv1/EAP-GTC, EAP-SIM, EAP-AKA, EAP-FAST
User/Device Authentication	WPA™ and WPA2™ with 802.1x or Preshared key, WEP, Web Captive Portal, MAC blacklist & whitelist
Maximum Tx Power	2.4 GHz: 24 dBm / 251 mW (3 chains combined)* 5 GHz: 25 dBm / 316 mW (3 chains combined)*
Kensington Lock	Yes
IEEE Standards	802.11a, 802.11b, 802.11e, 802.11g, 802.11h, 802.11i, 802.11j, 802.11k, 802.11n, 802.11r, 802.11v, 802.11ac, 802.11x, 802.3af
SSID Types Supported	Local-Bridge, Tunnel, Mesh
Per Radio Client Capacity	Up to 128
Cellular Co-existence	No
LED Off Mode	Yes
Advanced 802.11 Features	
802.11ac MU-MIMO Wave 2	No
Transmit Beam Forming (TxBF)	No
Low-Density Parity Check (LDPC) Encoding	Yes
Maximum Likelihood Demodulation (MLD)	Yes
Maximum Ratio Combining (MRC)	Yes

FORTIAP 321C	
A-MPDU and A-MSDU Packet Aggregation	Yes
MIMO Power Save	Yes
Short Guard Interval	Yes
Wireless Monitoring Capabilities	
Rogue Scan Radio Modes	Background, Full-time
WIPS / WIDS Radio Modes	Background, Full-time
Packet Sniffer Mode	Yes
Spectrum Analyzer	Yes
Dimensions	
Length x Width x Height	6.3 x 6.3 x 1.66 inches (160 x 160 x 42 mm)
Weight	0.77 lbs (0.35 kg)
Package (shipping) Weight	1.33 lbs (0.6 kg)
Mounting Options	Ceiling, T-Rail, and Wall
Included Accessories	Mount kits for Ceiling, T-Rail, and Wall
Environment	
Power Supply	SP-FG20C-PA-XX, GPI-115, or GPI-130
Power Consumption (Maximum)	12.6 W
Humidity	5–90% non-condensing
Operating / Storage Temperature	32–113°F (0–45°C) / -4–140°F (-20–60°C)
Directives	Low Voltage Directive • RoHS
UL2043 Plenum Material	No
Mean Time Between Failures	>30 Years
IP Rating	—
Surge Protection Built In	—
Hit-less PoE Failover	No
Certifications	
WiFi Alliance Certified	Yes
DFS	CE, Japan
Warranty	
Limited Lifetime Warranty	Yes



* Frequency selection and power may be restricted to abide by regional regulatory compliance laws.

RF RX/TX PERFORMANCE TABLE

FORTIAP 321C				
RADIO 1			RADIO 2	
802.11 a/g	2.4 GHz Tx Power (dBm) (Total)	RX Sensitivity (dBm) (Combined)	5 GHz Tx Power (dBm) (Total)	RX Sensitivity (dBm) (Combined)
6 Mbps	24	-90	25	-93
9 Mbps	24	-90	25	-91
12 Mbps	24	-89	25	-89
18 Mbps	24	-87	25	-87
24 Mbps	24	-84	25	-84
36 Mbps	21	-80	25	-80
48 Mbps	21	-76	19	-78
54 Mbps	21	-75	19	-77
802.11n HT20				
MCS 0/8/16	23	-90	25	-93
MCS 1/9/17	23	-87	25	-87
MCS 2/10/18	23	-85	25	-85
MCS 3/11/19	23	-82	25	-82
MCS 4/12/20	21	-78	25	-78
MCS 5/13/21	21	-76	25	-77
MCS 6/14/22	20	-75	25	-76
MCS 7/15/23	20	-74	24	-75
802.11n HT40				
MCS 0/8/16	22	-87	25	-90
MCS 1/9/17	22	-84	25	-84
MCS 2/10/18	22	-82	25	-82
MCS 3/11/19	22	-79	25	-79
MCS 4/12/20	20	-75	25	-76
MCS 5/13/21	20	-73	25	-75
MCS 6/14/22	19	-72	25	-74
MCS 7/15/23	19	-71	24	-73
802.11ac VHT20				
MCS 0	—	—	25	-93
MCS 1	—	—	25	-87
MCS 2	—	—	25	-85
MCS 3	—	—	25	-82
MCS 4	—	—	25	-78
MCS 5	—	—	25	-77
MCS 6	—	—	25	-76
MCS 7	—	—	24	-75
MCS 8	—	—	22	-71
802.11ac VHT40				
MCS 0	—	—	25	-90
MCS 1	—	—	25	-84
MCS 2	—	—	25	-82
MCS 3	—	—	25	-79
MCS 4	—	—	25	-76
MCS 5	—	—	25	-75
MCS 6	—	—	25	-74
MCS 7	—	—	24	-73
MCS 8	—	—	22	-67
MCS 9	—	—	20	-65
802.11ac VHT80				
MCS 0	—	—	25	-88
MCS 1	—	—	25	-81
MCS 2	—	—	25	-79
MCS 3	—	—	25	-76
MCS 4	—	—	25	-72
MCS 5	—	—	25	-69
MCS 6	—	—	25	-68
MCS 7	—	—	24	-67
MCS 8	—	—	22	-65
MCS 9	—	—	20	-63

ANTENNA RADIATION PATTERNS

FAP-321C

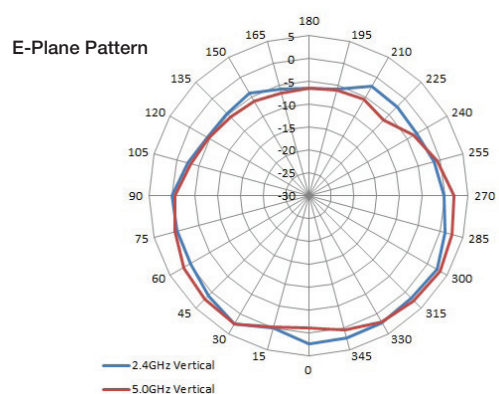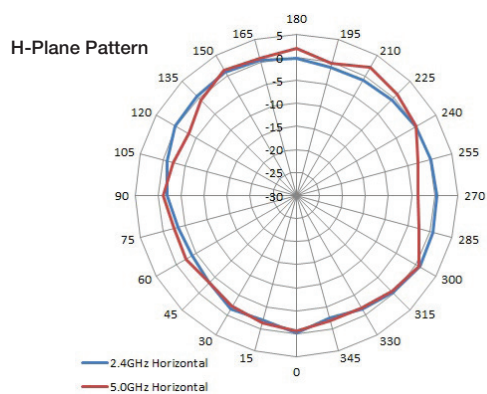

HIGHLIGHTS

FortiAP 222C

The FortiAP 222C is a high-performance dual-band 2x2 MIMO 802.11ac AP. Designed in a ruggedized IP67-rated enclosure and capable of withstanding extended temperature ranges, this AP is suitable for deployment in the harsh conditions. The AP uses high-quality external antennas for long-distance and mission-critical bridging or mesh deployments.



802.11ac Wave 1 | Dual Radio 2.4 and 5 GHz | 4 External Antennas



2x2 MIMO | Up to 300 + 867 Mbps



SPECIFICATIONS

FORTIAP 222C	
Hardware	
Hardware Type	Outdoor AP
Number of Radios	2
Number of Antennas	4 External (Type N)
Antenna Type and Peak Gain	Dipole: 3.5 dBi for 2.4 GHz, 6 dBi for 5 GHz
Frequency Bands (GHz)*	2.400–2.4835, 5.150–5.250, 5.250–5.350, 5.470–5.725, 5.725–5.850
Radio 1 Capabilities	2.4 GHz b/g/n (2x2:2 stream) 20/40 MHz (64 QAM)
Radio 2 Capabilities	5 GHz a/n/ac (2x2:2 stream) 20/40/80 MHz (256 QAM)
Maximum Data Rate	Radio 1: Up to 300 Mbps, Radio 2: Up to 867 Mbps
Bluetooth Low Energy (BT/BLE) Radio	—
Interfaces	1x GE RJ45
Power over Ethernet (PoE)	IEEE 802.3at or proprietary PoE injector
Simultaneous SSIDs	Up to 16 (14 if background scanning enabled)
EAP Type(s)	EAP-TLS, EAP-TTLS/MSCHAPv2, EAPv0/EAP-MSCHAPv2, PEAPv1/EAP-GTC, EAP-SIM, EAP-AKA, EAP-FAST
User/Device Authentication	WPA™ and WPA2™ with 802.1x or Preshared key, WEP, Web Captive Portal, MAC blacklist & whitelist
Maximum Tx Power	2.4 GHz: 30 dBm / 1 W (2 chains combined)* 5 GHz: 27 dBm / 501 mW (2 chains combined)*
Kensington Lock	No
IEEE Standards	802.11a, 802.11b, 802.11e, 802.11g, 802.11h, 802.11i, 802.11j, 802.11k, 802.11n, 802.11r, 802.11v, 802.11ac, 802.11x, 802.3af
SSID Types Supported	Local-Bridge, Tunnel, Mesh
Per Radio Client Capacity	Up to 128
Cellular Co-existence	No
LED Off Mode	Yes
Advanced 802.11 Features	
802.11ac MU-MIMO Wave 2	No
Transmit Beam Forming (TxBF)	No
Low-Density Parity Check (LDPC) Encoding	Yes
Maximum Likelihood Demodulation (MLD)	Yes
Maximum Ratio Combining (MRC)	Yes

FORTIAP 222C	
A-MPDU and A-MSDU Packet Aggregation	Yes
MIMO Power Save	Yes
Short Guard Interval	Yes
Wireless Monitoring Capabilities	
Rogue Scan Radio Modes	Background, Full-time
WIPS / WIDS Radio Modes	Background, Full-time
Packet Sniffer Mode	Yes
Spectrum Analyzer	Yes
Dimensions	
Length x Width x Height	9.8x 8.7 x 2.1 inches (249 x 220 x 53 mm)
Weight	3.68 lbs (1.67 kg)
Package (shipping) Weight	9.1 lbs (4.31 kg)
Mounting Options	Wall Mount or Pole Mount
Included Accessories	Mounting kit for wall or pole, Grounding Cable, PoE injector, 4 dipole antennas, surge protector (GPI-SGPT)**
Environment	
Power Supply	SP-FAP222B-PA (includes PoE injector) + SP-ADAPTORPLUG-01-XX, GPI-115, or GPI-130
Power Consumption (Maximum)	18.4 W
Humidity	5–90% non-condensing
Operating / Storage Temperature	-40–140°F (-40–60°C) / -40–158°F (-40–70°C)
Directives	Low Voltage Directive • RoHS
UL2043 Plenum Material	No
Mean Time Between Failures	>15 Years
IP Rating	IP67
Surge Protection Built In	—
Hit-less PoE Failover	No
Certifications	
WiFi Alliance Certified	Yes
DFS	CE, Japan, Korea
Warranty	
Limited Lifetime Warranty	No — 1 Year Limited Warranty

* Frequency selection and power may be restricted to abide by regional regulatory compliance laws.


** GPI-SGPT consists of a surge protector box and a surge protected power injector. It is not available for order separately.

RF RX/TX PERFORMANCE TABLE


	FORTIAP 222C RADIO 1		RADIO 2	
	2.4 GHz Tx Power (dBm)	Rx Sensitivity (dBm)	5 GHz Tx Power (dBm)	Rx Sensitivity (dBm)
6 Mbps	27	-92	24	-93
54 Mbps	25	-75	20	-77
802.11n HT20				
MCS 0/8	27	-91	24	-93
MCS 1/9	27	-89	24	-91
MCS 2/10	27	-88	24	-87
MCS 3/11	27	-85	23	-84
MCS 4/12	26	-81	23	-81
MCS 5/13	25	-78	21	-77
MCS 6/14	25	-76	20	-76
MCS 7/15	24	-73	20	-74
802.11n HT40				
MCS 0/8	27	-86	24	-89
MCS 1/9	27	-87	24	-86
MCS 2/10	27	-86	24	-84
MCS 3/11	27	-83	24	-81
MCS 4/12	26	-79	24	-78
MCS 5/13	24	-77	22	-76
MCS 6/14	24	-72	20	-75
MCS 7/15	24	-71	20	-73
802.11ac VHT80				
MCS 0	—	—	24	-87
MCS 1	—	—	24	-85
MCS 2	—	—	24	-83
MCS 3	—	—	24	-79
MCS 4	—	—	24	-77
MCS 5	—	—	22	-76
MCS 6	—	—	21	-75
MCS 7	—	—	20	-73
MCS 8	—	—	18	-65
MCS 9	—	—	17	-61

ANTENNA RADIATION PATTERNS


FAP-222C

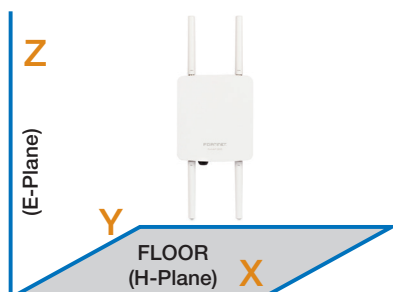

H-Plane Pattern



E-Plane Pattern

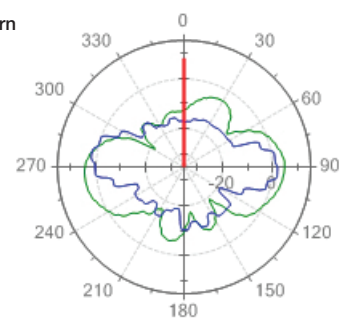

HIGHLIGHTS

FortiAP 221E and 223E

The FortiAP 221E and 223E are medium-density 802.11ac Wave 2 access points. These Enterprise-class access points are ideal for medium-density environments such as office or classroom with Performance Throughput of up to 867 Mbps.



802.11ac Wave 2 | Dual Radio 2.4 and 5 GHz | 4 Internal/External Antennas



2x2 MU-MIMO | Up to 400 + 867 Mbps



SPECIFICATIONS

	FORTIAP 221E	FORTIAP 223E
Hardware		
Hardware Type	Indoor AP	Indoor AP
Number of Radios	2	2
Number of Antennas	4 Internal	4 External (RP-SMA)
Antenna Type and Peak Gain	Patch: 4 dBi for 2.4 GHz, 5 dBi for 5 GHz	Dipole: 4 dBi for 2.4 GHz, 5 dBi for 5 GHz
Frequency Bands (GHz)*	2.400–2.4835, 5.150–5.250, 5.250–5.350, 5.470–5.725, 5.725–5.850	
Radio 1 Capabilities	2.4 GHz b/g/n (2x2:2 stream) 20/40 MHz (256 QAM)	2.4 GHz b/g/n (2x2:2 stream) 20/40 MHz (256 QAM)
Radio 2 Capabilities	5 GHz a/n/ac (2x2:2 stream) 20/40/80 MHz (256 QAM)	5 GHz a/n/ac (2x2:2 stream) 20/40/80 MHz (256 QAM)
Maximum Data Rate	Radio 1: up to 400 Mbps Radio 2: up to 867 Mbps	Radio 1: up to 400 Mbps Radio 2: up to 867 Mbps
Bluetooth Low Energy (BT/BLE) Radio	—	—
Interfaces	1x 10/100/1000 Base-T RJ45	1x 10/100/1000 Base-T RJ45
Power over Ethernet (PoE)	IEEE 802.3af	IEEE 802.3af
Simultaneous SSIDs	16 (14 if background scanning enabled)	16 (14 if background scanning enabled)
EAP Type(s)	EAP-TLS, EAP-TTLS/MSCHAPv2, EAPv0/EAP-MSCHAPv2, PEAPv1/EAP-GTC, EAP-SIM, EAP-AKA, EAP-FAST	
User/Device Authentication	WPA™ and WPA2™ with 802.1x or Preshared key, WEP, Web Captive Portal, MAC blacklist & whitelist	
Maximum Tx Power	2.4 GHz: 23 dBm / 200 mW (2 chains combined)** 5 GHz: 24 dBm / 251 mW (2 chains combined)**	
Kensington Lock	Yes	Yes
IEEE Standards	802.11a, 802.11b, 802.11d, 802.11e, 802.11g, 802.11h, 802.11i, 802.11j, 802.11k, 802.11n, 802.11r, 802.11v, 802.11ac, 802.1X, 802.3af, 802.3az	
SSID Types Supported	Local-Bridge, Tunnel, Mesh	Local-Bridge, Tunnel, Mesh
Per Radio Client Capacity	Up to 512	Up to 512
Cellular Co-existence	Yes	Yes
LED Off Mode	Yes	Yes
Advanced 802.11 Features		
802.11ac Wave 2 MU-MIMO	Yes	Yes
Transmit Beam Forming (TxBF)	Yes	Yes
Low-Density Parity Check (LDPC) Encoding	Yes	Yes
Maximum Likelihood Demodulation (MLD)	Yes	Yes
Maximum Ratio Combining (MRC)	Yes	Yes

	FORTIAP 221E	FORTIAP 223E
802.11ac 20/40/80 MHz Channel	Yes	Yes
A-MPDU and A-MSDU Packet Aggregation	Yes	Yes
MIMO Power Save	Yes	Yes
Short Guard Interval	Yes	Yes
Wireless Monitoring Capabilities		
Rogue Scan Radio Modes	Background, Full-time	Background, Full-time
WIPS / WIDS Radio Modes	Background, Full-time	Background, Full-time
Packet Sniffer Mode	Yes	Yes
Spectrum Analyzer	Yes	Yes
Dimensions		
Length x Width x Height	6.3 x 6.3 x 1.85 inches (160 x 160 x 47 mm)	6.3 x 6.3 x 1.85 inches (160 x 160 x 47 mm)
Weight	1.1 lbs (0.5 kg)	1.1 lbs (0.5 kg)
Package (shipping) Weight	4.95 lbs (2.2 kg)	5.3 lbs (2.4 kg)
Mounting Options	Ceiling, T-Rail and Wall	Ceiling, T-Rail and Wall
Included Accessories	Mount kits for Ceiling, T-Rail, and Wall	Mount kits for Ceiling, T-Rail, and Wall, 4 dipole antennas
Environment		
Power Supply	SP-FAP200-PA-XX, GPI-115, or GPI-130	SP-FAP200-PA-XX, GPI-115, or GPI-130
Power Consumption (Max.)	12.36 W	12.36 W
Humidity	5–90% non-condensing	5–90% non-condensing
Operating / Storage Temperature	-4–122°F (-20–50°C) / -40–158°F (-40–70°C)	-4–122°F (-20–50°C) / -40–158°F (-40–70°C)
Directives	Low Voltage Directive • RoHS	
UL2043 Plenum Material	Yes	Yes
Mean Time Between Failures	>30 Years	>30 Years
IP Rating	—	—
Surge Protection Built In	—	—
Hit-less PoE Failover	No	No
Certifications		
WiFi Alliance Certified	Yes	Yes
DFS	FCC, IC, CE, Japan, Taiwan	FCC, IC, CE, Japan, Taiwan
Warranty		
Limited Lifetime Warranty	Yes	Yes

* Frequency selection and power may be restricted to abide by regional regulatory compliance laws.

RF RX/TX PERFORMANCE TABLE


FORTIAP 221E / 223E				
RADIO 1			RADIO 2	
802.11 a/g	2.4 GHz Tx Power (dBm)	RX Sensitivity (dBm)	5 GHz Tx Power (dBm)	RX Sensitivity (dBm)
6 Mbps	20	-93	21	-91
9 Mbps	20	-91	21	-90
12 Mbps	20	-90	21	-89
18 Mbps	19	-88	21	-86
24 Mbps	19	-85	21	-83
36 Mbps	18	-82	21	-80
48 Mbps	18	-77	19	-76
54 Mbps	17	-75	19	-74
802.11n HT20				
MCS 0/8/16	20	-91	21	-91
MCS 1/9/17	19	-89	21	-88
MCS 2/10/18	19	-86	21	-86
MCS 3/11/19	18	-83	21	-83
MCS 4/12/20	18	-80	21	-79
MCS 5/13/21	17	-75	21	-75
MCS 6/14/22	17	-73	19	-74
MCS 7/15/23	16	-71	19	-72
802.11n HT40				
MCS 0/8/16	19	-89	20	-88
MCS 1/9/17	19	-86	20	-85
MCS 2/10/18	18	-84	20	-82
MCS 3/11/19	18	-81	20	-79
MCS 4/12/20	17	-77	20	-76
MCS 5/13/21	17	-73	20	-72
MCS 6/14/22	16	-71	19	-70
MCS 7/15/23	16	-69	19	-69
802.11ac VHT20				
MCS 0	19	-91	21	-91
MCS 1	19	-89	21	-88
MCS 2	19	-86	21	-86
MCS 3	18	-83	21	-83
MCS 4	18	-80	21	-79
MCS 5	18	-76	21	-75
MCS 6	18	-73	19	-74
MCS 7	18	-71	19	-72
MCS 8	18	-68	18	-69
802.11ac VHT40				
MCS 0	19	-89	20	-88
MCS 1	19	-86	20	-85
MCS 2	19	-84	20	-82
MCS 3	18	-81	20	-79
MCS 4	17	-77	20	-76
MCS 5	17	-73	20	-72
MCS 6	17	-71	19	-70
MCS 7	17	-69	19	-69
MCS 8	17	-68	18	-65
MCS 9	16	-66	17	-64
802.11ac VHT80				
MCS 0	—	—	19	-85
MCS 1	—	—	19	-83
MCS 2	—	—	19	-80
MCS 3	—	—	19	-77
MCS 4	—	—	19	-74
MCS 5	—	—	19	-71
MCS 6	—	—	18	-69
MCS 7	—	—	18	-68
MCS 8	—	—	17	-63
MCS 9	—	—	17	-61

ANTENNA RADIATION PATTERNS




FAP-221E




H-Plane Pattern

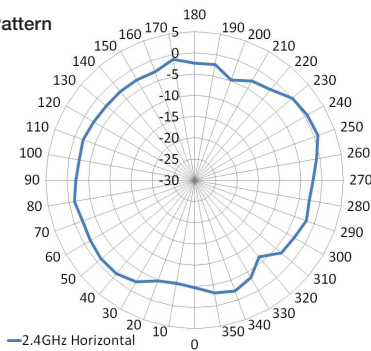


E-Plane Pattern

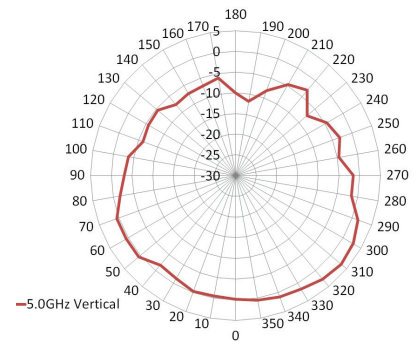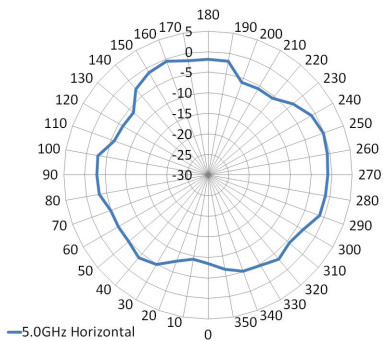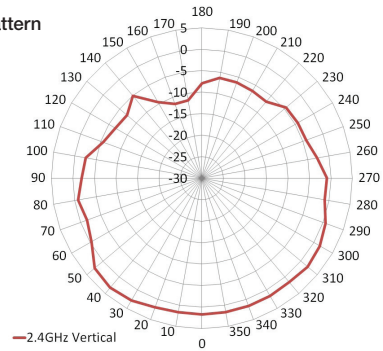




FAP-223E

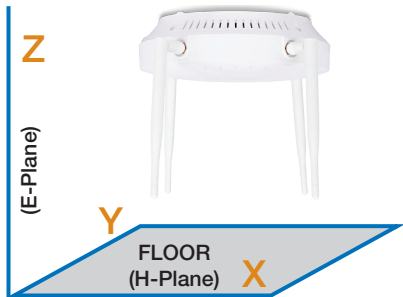

H-Plane Pattern

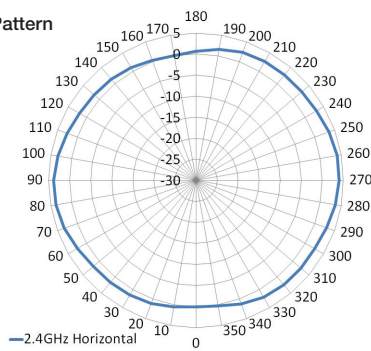

E-Plane Pattern

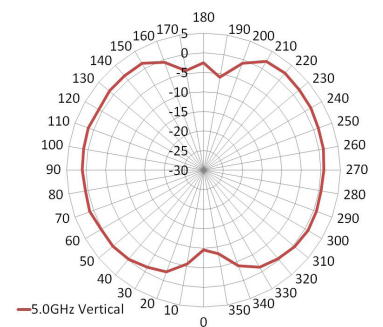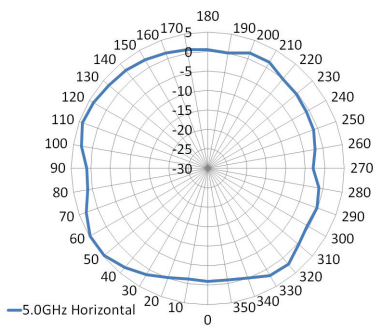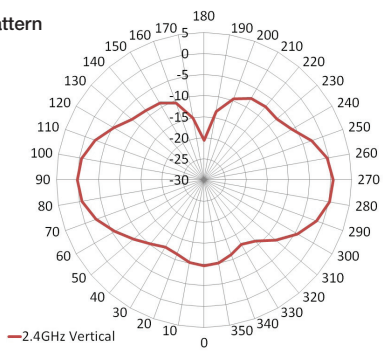

HIGHLIGHTS

FortiAP 222E

The FAP-222E is a new member of our 802.11ac Wave 2 family with MU-MIMO capability and transmit beam forming capable of handling an astounding 512 clients per radio. This high-performance dual-band AP is ruggedized with an Ingress Protection IP67-rated enclosure capable of withstanding extended temperature ranges. The FAP-222E is suitable for deployment in the harsh conditions. It has 4 external antennas for WiFi and one Bluetooth and is suitable for mission-critical bridging or mesh deployments.



802.11ac Wave 2 | Dual Radio 2.4 and 5 GHz | High Gain Omni-directional Antennas



2x2 MU-MIMO | Up to 400 + 866.7 Mbps

SPECIFICATIONS

FORTIAP 222E	
Hardware	
Hardware Type	Outdoor AP
Number of Radios	2 + 1 BT/BLE
Number of Antennas	4 External (Type N) + 1 BT/BLE External (RP-SMA)
Antenna Type and Peak Gain	Dipole: 5 dBi for 2.4 GHz, 7 dBi for 5 GHz
Frequency Bands (GHz)*	2.400–2.4835, 5.150–5.250, 5.250–5.350, 5.470–5.725, 5.725–5.850
Radio 1 Capabilities	2.4 GHz b/g/n (2x2:2 stream) 20/40 MHz (256 QAM)
Radio 2 Capabilities	5 GHz a/n/ac (2x2:2 stream) 20/40/80 MHz (256 QAM)
Maximum Data Rate	Radio 1: up to 400 Mbps, Radio 2: up to 867 Mbps
Bluetooth Low Energy (BT/BLE) Radio	Bluetooth scanning and iBeacon advertisement @ 4 dBm max TX power
Interfaces	1x 10/100/1000 Base-T RJ45
Power over Ethernet (PoE)	IEEE 802.3af/at
Simultaneous SSIDs	Up to 16 (14 if background scanning enabled)
EAP Type(s)	EAP-TLS, EAP-TTLS/MSCHAPv2, EAPv0/EAP-MSCHAPv2, PEAPv1/EAP-GTC, EAP-SIM, EAP-AKA, EAP-FAST
User/Device Authentication	WPA™ and WPA2™ with 802.1x or Preshared key, WEP, Web Captive Portal, MAC blacklist & whitelist
Maximum Tx Power	2.4 GHz: 27.2 dBm / 525 mW (2 chains combined)* 5 GHz: 29.5 dBm / 891 mW (2 chains combined)*
Kensington Lock	No
IEEE Standards	802.11a, 802.11b, 802.11d, 802.11e, 802.11g, 802.11h, 802.11i, 802.11j, 802.11k, 802.11n, 802.11r, 802.11v, 802.11ac, 802.11x, 802.3af, 802.3at, 802.3az
SSID Types Supported	Local-Bridge, Tunnel & Mesh (when managed by controller)
Per Radio Client Capacity	Up to 512
Cellular Co-existence	Yes
LED Off Mode	Yes
Advanced 802.11 Features	
802.11ac Wave2 MU-MIMO	Yes
Transmit Beam Forming (TxBF)	Yes
Low-Density Parity Check (LDPC) Encoding	Yes
Maximum Likelihood Demodulation (MLD)	Yes
Maximum Ratio Combining (MRC)	Yes

FORTIAP 222E	
A-MPDU and A-MSDU Packet Aggregation	Yes
MIMO Power Save	Yes
Short Guard Interval	Yes
Wireless Monitoring Capabilities	
Rogue Scan Radio Modes	Background, Full-time
WIPS / WIDS Radio Modes	Background, Full-time
Packet Sniffer Mode	Yes
Spectrum Analyzer	Yes
Dimensions	
Length x Width x Height	9.8 x 8.66 x 2 inches (249 x 220 x 53 mm)
Weight	3.40 lbs (1.54 kg)
Package (shipping) Weight	8.40 lbs (3.81 kg)
Mounting Options	Wall Mount or Pole Mount
Included Accessories	Mounting kit for Wall or Pole, Grounding cable, 4 dipole WiFi antennas, 1 BLE antenna
Environment	
Power Supply	GPI-115, or GPI-130
Power Consumption (Maximum)	12.95 W
Humidity	5–90% non-condensing
Operating / Storage Temperature	-40–140°F (-40–60°C) / -40–158°F (-40–70°C)
Directives	Low Voltage Directive • RoHS
UL2043 Plenum Material	No
Mean Time Between Failures	>10 Years
IP Rating	IP67
Surge Protection Built In	Yes
Hit-less PoE Failover	No
Certifications	
WiFi Alliance Certified	Yes
DFS	FCC, IC, CE
Warranty	
Limited Lifetime Warranty	No — 1 Year Limited Warranty




* Frequency selection and power may be restricted to abide by regional regulatory compliance laws.

RF RX/TX PERFORMANCE TABLE

FORTIAP 222E				
RADIO 1			RADIO 2	
802.11 a/g	2.4 GHz Tx Power (dBm) per Chain	RX Sensitivity (dBm) per Chain	5 GHz Tx Power (dBm) per Chain	RX Sensitivity (dBm) per Chain
6 Mbps	24.2	-91	26.5	-90
9 Mbps	24.2	-90	26.5	-89
12 Mbps	24.2	-88	26.5	-88
18 Mbps	24.1	-86	26.4	-85
24 Mbps	24.1	-83	26.4	-82
36 Mbps	23.5	-79	24.2	-79
48 Mbps	23.5	-75	23.3	-75
54 Mbps	23.5	-74	23.3	-73
802.11n HT20				
MSC 0/8/16	24.5	-91	26.5	-90
MSC 1/9/17	24.5	-88	26.5	-87
MSC 2/10/18	24.5	-86	26.5	-85
MSC 3/11/19	24.2	-82	26.4	-82
MSC 4/12/20	24.2	-78	26.4	-78
MSC 5/13/21	23.6	-75	24.2	-74
MSC 6/14/22	23.1	-74	23.2	-72
MSC 7/15/23	23.1	-73	23.2	-70
802.11n HT40				
MCS 0/8/16	23.8	-89	26.4	-87
MCS 1/9/17	23.8	-86	26.4	-84
MCS 2/10/18	23.8	-84	26.4	-82
MCS 3/11/19	23.8	-80	26.3	-79
MCS 4/12/20	23.8	-77	26.3	-75
MCS 5/13/21	23.2	-74	25.4	-71
MCS 6/14/22	22.6	-73	24.5	-69
MCS 7/15/23	22.6	-72	23.5	-68
802.11ac VHT20				
MCS 0	—	—	26.4	-90
MCS 1	—	—	26.4	-86
MCS 2	—	—	26.4	-84
MCS 3	—	—	26.3	-82
MCS 4	—	—	26.3	-80
MCS 5	—	—	25.3	-75
MCS 6	—	—	23.3	-73
MCS 7	—	—	22.5	-71
MCS 8	—	—	22.4	-68
802.11ac VHT40				
MCS 0	—	—	26.3	-87
MCS 1	—	—	26.3	-85
MCS 2	—	—	26.3	-83
MCS 3	—	—	26.3	-80
MCS 4	—	—	26.3	-77
MCS 5	—	—	25.3	-73
MCS 6	—	—	23.3	-72
MCS 7	—	—	22.2	-70
MCS 8	—	—	22.1	-66
MCS 9	—	—	21.9	-64
802.11ac VHT80				
MCS 0	—	—	25.4	-84
MCS 1	—	—	25.4	-81
MCS 2	—	—	25.4	-78
MCS 3	—	—	25.4	-74
MCS 4	—	—	25.3	-70
MCS 5	—	—	24.2	-66
MCS 6	—	—	23.6	-65
MCS 7	—	—	22.3	-64
MCS 8	—	—	22.1	-60
MCS 9	—	—	22.1	-60

ANTENNA RADIATION PATTERNS

FAP-222E

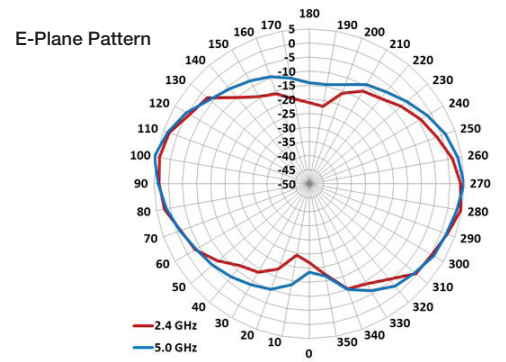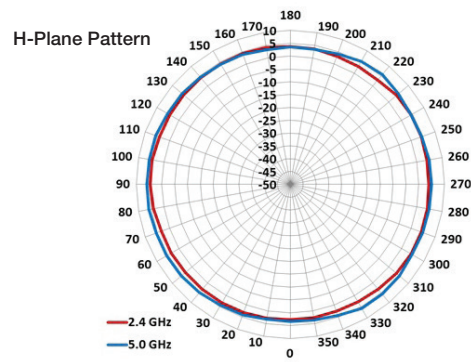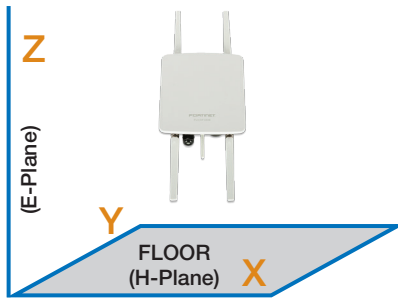

HIGHLIGHTS

FortiAP 224E

The FAP-224E is a new member of our 802.11ac Wave 2 family with MU-MIMO capability and transmit beam forming capable of handling an astounding 512 clients per radio. This high-performance dual-band AP is ruggedized with an Ingress Protection IP67-rated enclosure capable of withstanding extended temperature ranges. The FAP-224E is suitable for deployment in the harsh conditions. It has 4 internal antennas for WiFi and one Bluetooth and also provides SFP cage to allow for long-distance fiber connectivity and is suitable for mission-critical bridging or mesh deployments.



 **802.11ac Wave 2 | Dual Radio 2.4 and 5 GHz | 4 Internal Antennas**

 **2x2 MU-MIMO | Up to 400 + 867 Mbps**

SPECIFICATIONS

FORTIAP 224E	
Hardware	
Hardware Type	Outdoor AP
Number of Radios	2
Number of Antennas	4 Internal + 1 BT/BLE Internal
Antenna Type and Peak Gain	Dipole: 6 dBi for 2.4 GHz, 8 dBi for 5 GHz
Frequency Bands (GHz)*	2.400–2.4835, 5.150–5.250, 5.250–5.350, 5.470–5.725, 5.725–5.850
Radio 1 Capabilities	2.4 GHz b/g/n (2x2:2 stream) 20/40 MHz (256 QAM)
Radio 2 Capabilities	5 GHz a/n/ac (2x2:2 stream) 20/40/80 MHz (256 QAM)
Maximum Data Rate	Radio 1: up to 400 Mbps Radio 2: up to 867 Mbps
Bluetooth Low Energy (BT/BLE) Radio	
Interfaces	1x 10/100/1000 Base-T RJ45, 1x 10/100/1000 Base-T RJ45 (PoE), 1x optical fiber SFP cage
Power over Ethernet (PoE)	IEEE 802.3af/at
Simultaneous SSIDs	Up to 16 (14 if background scanning enabled)
EAP Type(s)	EAP-TLS, EAP-TTLS/MSCHAPv2, EAPv0/EAP-MSCHAPv2, PEAPv1/EAP-GTC, EAP-SIM, EAP-AKA, EAP-FAST
User/Device Authentication	WPA™ and WPA2™ with 802.1x or Preshared key, WEP, Web Captive Portal, MAC blacklist & whitelist
Maximum Tx Power	2.4 GHz: 24 dBm / 251 mW (2 chains combined)* 5 GHz: 24 dBm / 251 mW (2 chains combined)*
Kensington Lock	No
IEEE Standards	802.11a, 802.11b, 802.11d, 802.11e, 802.11g, 802.11h, 802.11i, 802.11j, 802.11k, 802.11n, 802.11r, 802.11v, 802.11ac, 802.1X, 802.3af, 802.3at, 802.3az
SSID Types Supported	Local-Bridge, Tunnel & Mesh (when managed by controller)
Per Radio Client Capacity	Up to 512
Cellular Co-existence	No
LED Off Mode	Yes
Advanced 802.11 Features	
802.11ac MU-MIMO Wave 2	Yes
Transmit Beam Forming (TxBF)	Yes
Low-Density Parity Check (LDPC) Encoding	Yes
Maximum Likelihood Demodulation (MLD)	Yes

FORTIAP 224E	
Maximum Ratio Combining (MRC)	Yes
A-MPDU and A-MSDU Packet Aggregation	Yes
MIMO Power Save	Yes
Short Guard Interval	Yes
Wireless Monitoring Capabilities	
Rogue Scan Radio Modes	Background, Full-time
WIPS / WIDS Radio Modes	Background, Full-time
Packet Sniffer Mode	Yes
Spectrum Analyzer	Yes
Dimensions	
Length x Width x Height	8.4 x 8.4 x 2.66 inches (214 x 214 x 67.5 mm)
Weight	3.8 lbs (1.7 kg)
Package (shipping) Weight	5.82 lbs (2.64 kg)
Mounting Options	Wall Mount or Pole Mount
Included Accessories	Mounting kit for Wall or Pole, Grounding cable
Environment	
Power Supply	GPI-115, or GPI-130
Power Consumption (Maximum)	12.95 W
Humidity	5–90% non-condensing
Operating / Storage Temperature	-4–149°F (-20–65°C) / -4–158°F (-20–70°C)
Directives	Low Voltage Directive • RoHS
UL2043 Plenum Material	No
Mean Time Between Failures	>10 Years
IP Rating	IP67
Surge Protection Built In	Yes
Hit-less PoE Failover	No
Certifications	
WiFi Alliance Certified	Yes
DFS	CE
Warranty	
Limited Lifetime Warranty	No — 1 Year Limited Warranty

* Frequency selection and power may be restricted to abide by regional regulatory compliance laws.




RF RX/TX PERFORMANCE TABLE

FORTIAP 224E				
RADIO 1			RADIO 2	
802.11 a/b/g	2.4 GHz Tx Power (dBm) per Chain	RX Sensitivity (dBm) per Chain	5 GHz Tx Power (dBm) per Chain	RX Sensitivity (dBm) per Chain
1 Mbps	24	-96	—	—
6 Mbps	24	-93	24	-93
9 Mbps	24	-92	24	-91
12 Mbps	24	-90	24	-90
18 Mbps	24	-88	24	-88
24 Mbps	24	-85	24	-85
36 Mbps	23	-82	23	-82
48 Mbps	22	-78	22	-77
54 Mbps	22	-76	22	-76
802.11 HT20				
MCS 0 (BPSK)	24	-92	24	-91
MCS 1 (QPSK)	24	-89	24	-88
MCS 2 (QPSK)	24	-87	23	-85
MCS 3 (16-QAM)	24	-84	23	-83
MCS 4(16-QAM)	23	-81	22	-80
MCS 5 (64-QAM)	23	-76	22	-75
MCS 6 (64-QAM)	23	-74	21	-74
MCS 7 (64-QAM)	22	-73	20	-72
MCS 8 (256-QAM)	—	—	18	-68
MCS 9 (256-QAM)	—	—	—	—
802.11 HT40				
MCS 0 (BPSK)	23	-90	23	-89
MCS 1 (QPSK)	23	-87	22	-86
MCS 2 (QPSK)	23	-85	22	-83
MCS 3 (16-QAM)	23	-81	21	-80
MCS 4(16-QAM)	23	-78	21	-77
MCS 5 (64-QAM)	23	-74	21	-73
MCS 6 (64-QAM)	22	-73	20	-72
MCS 7 (64-QAM)	22	-71	19	-70
MCS 8 (256-QAM)	—	—	18	-66
MCS 9 (256-QAM)	—	—	17	-64
802.11 HT80				
MCS 0 (BPSK)	—	—	22	-86
MCS 1 (QPSK)	—	—	22	-83
MCS 2 (QPSK)	—	—	22	-81
MCS 3 (16-QAM)	—	—	21	-78
MCS 4(16-QAM)	—	—	21	-74
MCS 5 (64-QAM)	—	—	21	-70
MCS 6 (64-QAM)	—	—	20	-69
MCS 7 (64-QAM)	—	—	19	-67
MCS 8 (256-QAM)	—	—	17	-63
MCS 9 (256-QAM)	—	—	16	-60

Maximum capability of the Hardware provided (Excluding antenna gain)

ANTENNA RADIATION PATTERNS

FAP-224E

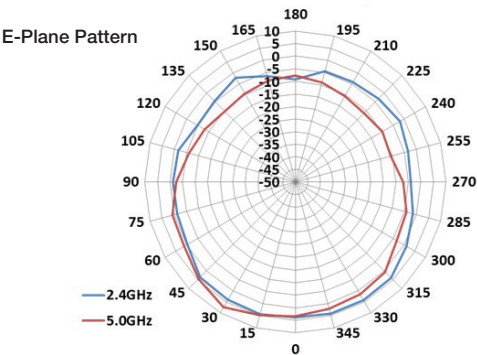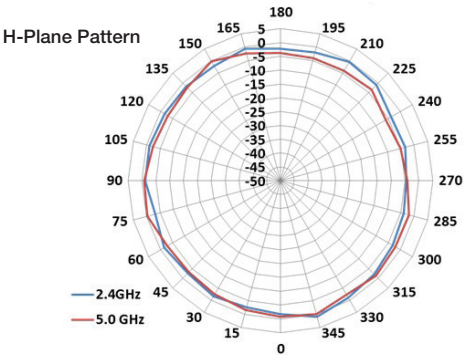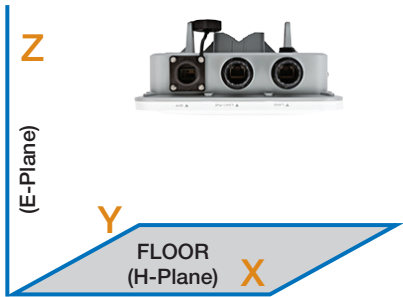

HIGHLIGHTS

FortiAP 421E and 423E

The FortiAP 421E and 423E access points support the latest 802.11ac Wave 2 standard. Additional features include 802.11ac explicit transmit beamforming (TxBF), multi-user MIMO (MU-MIMO), and more.



802.11ac Wave 2 | Dual Radio 2.4 and 5 GHz | 8 Internal/External Antennas



4x4 MU-MIMO | Up to 800 + 1,733 Mbps



SPECIFICATIONS

	FORTIAP 421E	FORTIAP 423E
Hardware		
Hardware Type	Indoor AP	Indoor AP
Number of Radios	2	2
Number of Antennas	8 Internal	8 External (RP-SMA)
Antenna Type and Peak Gain	PIFA: 4 dBi for 2.4 GHz, 5 dBi for 5 GHz	Dipole: 3 dBi for 2.4 GHz, 3 dBi for 5 GHz
Frequency Bands (GHz)*	2.400–2.4835, 5.150–5.250, 5.250–5.350, 5.470–5.725, 5.725–5.850	
Radio 1 Capabilities	2.4 GHz b/g/n (4x4:4 stream) 20/40 MHz (256 QAM)	
Radio 2 Capabilities	5 GHz a/n/ac (4x4:4 stream) 20/40/80 MHz (256 QAM)	
Maximum Data Rate	Radio 1: up to 800 Mbps Radio 2: up to 1,733 Mbps	Radio 1: up to 800 Mbps Radio 2: up to 1,733 Mbps
Bluetooth Low Energy (BT/BLE) Radio	—	—
Interfaces	2x 10/100/1000 Base-T RJ45, 1x Type A USB, 1x RS-232 RJ45 Serial Port	
Power over Ethernet (PoE)	Dual redundant PoE power ports with support for IEEE 802.3at (2x2 operation with 802.3af)	
Simultaneous SSIDs	Up to 16 (14 if background scanning enabled)	Up to 16 (14 if background scanning enabled)
EAP Type(s)	EAP-TLS, EAP-TTLS/MSCHAPv2, EAPv0/EAP-MSCHAPv2, PEAPv1/EAP-GTC, EAP-SIM, EAP-AKA, EAP-FAST	
User/Device Authentication	WPA™ and WPA2™ with 802.1x or Preshared key, WEP, Web Captive Portal, MAC blacklist & whitelist	
Maximum Tx Power	2.4 GHz: 24 dBm / 251 mW (4 chains combined)* 5 GHz: 25 dBm / 316 mW (4 chains combined)*	
Kensington Lock	Yes	Yes
IEEE Standards	802.11a, 802.11b, 802.11d, 802.11e, 802.11g, 802.11h, 802.11i, 802.11j, 802.11k, 802.11n, 802.11r, 802.11v, 802.11ac, 802.1X, 802.3ad, 802.3af, 802.3at, 802.3az	
SSID Types Supported	Local-Bridge, Tunnel, Mesh	Local-Bridge, Tunnel, Mesh
Per Radio Client Capacity	Up to 512	Up to 512
Cellular Co-existence	No	No
LED Off Mode	Yes	Yes
Advanced 802.11 Features		
802.11ac MU-MIMO Wave 2	Yes	Yes
Transmit Beam Forming (TxBF)	Yes	Yes
Low-Density Parity Check (LDPC) Encoding	Yes	Yes
Maximum Likelihood Demodulation (MLD)	Yes	Yes

	FORTIAP 421E	FORTIAP 423E
Maximum Ratio Combining (MRC)	Yes	Yes
A-MPDU and A-MSDU Packet Aggregation	Yes	Yes
MIMO Power Save	Yes	Yes
Short Guard Interval	Yes	Yes
Wireless Monitoring Capabilities		
Rogue Scan Radio Modes	Background, Full-time	Background, Full-time
WIPS / WIDS Radio Modes	Background, Full-time	Background, Full-time
Packet Sniffer Mode	Yes	Yes
Spectrum Analyzer	Yes	Yes
Dimensions		
Length x Width x Height	8.5 x 8.5 x 2.2 inches (215 x 215 x 56 mm)	8.5 x 8.5 x 2.2 inches (215 x 215 x 56 mm)
Weight	3.53 lbs (1.6 kg)	3.57 lbs (1.62 kg)
Package (shipping) Weight	4.95 lbs (2.2 kg)	5.3 lbs (2.4 kg)
Mounting Options	Ceiling, T-Rail, and Wall	Ceiling, T-Rail, and Wall
Included Accessories	Mount kits for Ceiling, T-Rail, and Wall	Mount kits for Ceiling, T-Rail, and Wall, 8 dipole antennas
Environment		
Power Supply	SP-FAP400-PA-XX, GPI-115, or GPI-130	SP-FAP400-PA-XX, GPI-115, or GPI-130
Power Consumption (Max.)	23 W max power draw in 802.3at mode and 12.95 W max power draw when in 802.3af power mode (operates in 2x2 mode)	
Humidity	5–90% non-condensing	5–90% non-condensing
Operating / Storage Temperature	-4–122°F (-20–50°C) / -40–158°F (-40–70°C)	-4–122°F (-20–50°C) / -40–158°F (-40–70°C)
Directives	Low Voltage Directive • RoHS	Low Voltage Directive • RoHS
UL2043 Plenum Material	Yes	Yes
Mean Time Between Failures	>30 Years	>30 Years
IP Rating	—	—
Surge Protection Built In	—	—
Hit-less PoE Failover	Yes	Yes
Certifications		
WiFi Alliance Certified	Yes	Yes
DFS	FCC, IC, CE, Japan, Taiwan, Korea	FCC, IC, CE, Japan, Taiwan, Korea
Warranty		
Limited Lifetime Warranty	Yes	Yes


* Frequency selection and power may be restricted to abide by regional regulatory compliance laws.

RF RX/TX PERFORMANCE TABLE


FORTIAP 421E / 423E				
802.11 a/g	RADIO 1		RADIO 2	
	2.4 GHz Tx Power per Chain (dBm)	RX Sensitivity (dBm)	5 GHz Tx Power per Chain (dBm)	RX Sensitivity (dBm)
6 Mbps	18	-93	19	-86
9 Mbps	18	-91	19	-83
12 Mbps	18	-88	19	-81
18 Mbps	18	-85	19	-78
24 Mbps	18	-80	19	-76
36 Mbps	18	-77	18	-74
48 Mbps	18	-76	18	-70
54 Mbps	18	-75	16	-66
802.11 HT20				
MSC 0/8/16 (BPSK)	18	-87	18	-84
MSC 1/9/17 (QPSK)	17	-84	17	-81
MSC 2/10/18 (QPSK)	17	-81	17	-79
MSC 3/11/19 (16-QAM)	16	-78	16	-76
MSC 4/12/20 (16-QAM)	16	-73	16	-72
MSC 5/13/21 (64-QAM)	15	-70	15	-68
MSC 6/14/22 (64-QAM)	15	-69	15	-67
MSC 7/15/23 (64-QAM)	15	-67	15	-66
802.11 HT40				
MSC 0/8/16 (BPSK)	18	-84	18	-83
MSC 1/9/17 (QPSK)	17	-80	17	-80
MSC 2/10/18 (QPSK)	17	-77	17	-78
MSC 3/11/19 (16-QAM)	16	-74	16	-75
MSC 4/12/20 (16-QAM)	16	-71	16	-73
MSC 5/13/21 (64-QAM)	15	-67	15	-72
MSC 6/14/22 (64-QAM)	15	-65	15	-70
MSC 7/15/23 (64-QAM)	15	-65	15	-69
MSC 8/16/24 (256-QAM)	—	—	15	-65
MSC 9/17/25 (256-QAM)	—	—	15	-63
802.11 HT80				
MSC 0 (BPSK)	—	—	18	-83
MSC 1 (QPSK)	—	—	17	-80
MSC 2 (QPSK)	—	—	17	-78
MSC 3 (16-QAM)	—	—	16	-75
MSC 4 (16-QAM)	—	—	16	-73
MSC 5 (64-QAM)	—	—	15	-72
MSC 6 (64-QAM)	—	—	15	-70
MSC 7 (64-QAM)	—	—	15	-69
MSC 8 (256-QAM)	—	—	15	-65
MSC 9 (256-QAM)	—	—	15	-63

ANTENNA RADIATION PATTERNS


FAP-421E

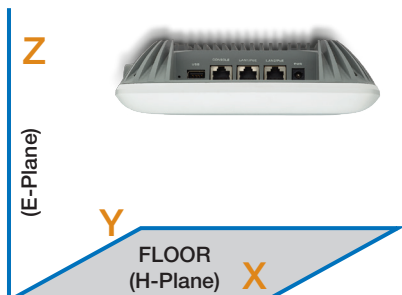


H-Plane Pattern

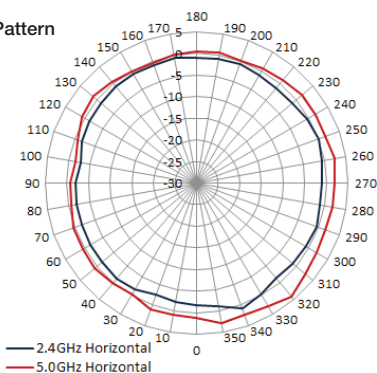


E-Plane Pattern

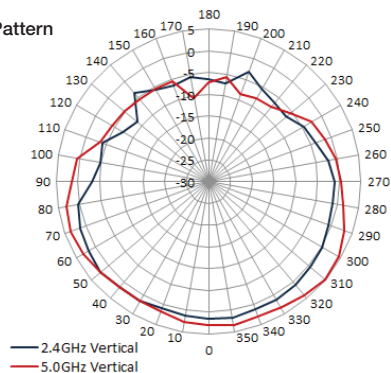


FAP-423E

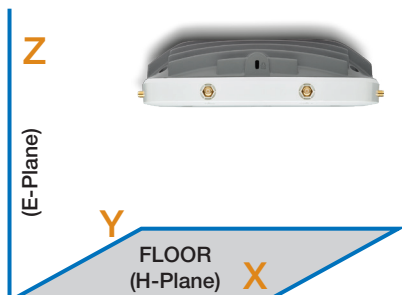

H-Plane Pattern

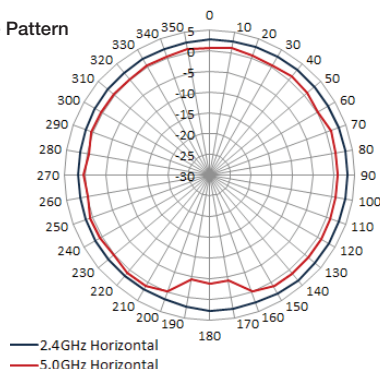

E-Plane Pattern

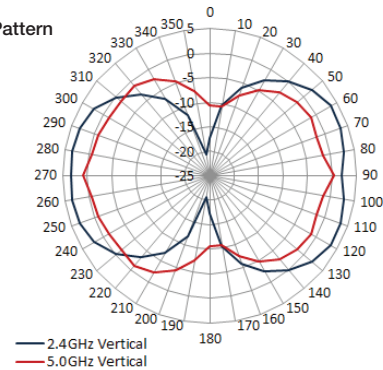

PERFORMANCE MATRIX

802.11ac PERFORMANCE — DATA RATES (Mbps)							
Descriptor	Data Streams	VHT20		VHT40		VHT80	
		Normal GI	Short GI	Normal GI	Short GI	Normal GI	Short GI
MCS 0	1	6.5	7.2	13.5	15	29.3	32.5
MCS 1	1	13	14.4	27	30	58.5	65
MCS 2	1	19.5	21.7	40.5	45	87.8	97.5
MCS 3	1	26	28.9	54	60	117	130
MCS 4	1	39	43.3	81	90	175.5	195
MCS 5	1	52	57.8	108	120	234	260
MCS 6	1	58.5	65	121.5	135	263.3	292.5
MCS 7	1	65	72.2	135	150	292.5	325
MCS 8	1	78	86.7	162	180	351	390
MCS 9	1	NA	NA	180	200	390	433.3
MCS 0	2	13	14.4	27	30	58.5	65
MCS 1	2	26	28.9	54	60	117	130
MCS 2	2	39	43.3	81	90	175.5	195
MCS 3	2	52	57.8	108	120	234	260
MCS 4	2	78	86.7	162	180	351	390
MCS 5	2	104	115.6	216	240	468	520
MCS 6	2	117	130	243	270	526.5	585
MCS 7	2	130	144.4	270	300	585	650
MCS 8	2	156	173.3	324	360	702	780
MCS 9	2	NA	NA	360	400	780	866.7
MCS 0	3	19.5	21.7	40.5	45	87.8	97.5
MCS 1	3	39	43.3	81	90	175.5	195
MCS 2	3	58.5	65	121.5	135	263.3	292.5
MCS 3	3	78	86.7	162	180	351	390
MCS 4	3	117	130	243	270	526.5	585
MCS 5	3	156	173.3	324	360	702	780
MCS 6	3	175.5	195	364.5	405	NA	NA
MCS 7	3	195	216.7	405	450	877.5	975
MCS 8	3	234	260	486	540	1053	1170
MCS 9	3	260	288.9	540	600	1170	1300
MCS 0	4	26	28.9	54	60	117	130
MCS 1	4	52	57.8	108	120	234	260
MCS 2	4	78	86.7	162	180	351	390
MCS 3	4	104	115.6	216	240	468	520
MCS 4	4	156	173.3	324	360	702	780
MCS 5	4	208	231.1	432	480	936	1040
MCS 6	4	234	260	486	540	1053	1170
MCS 7	4	260	288.9	540	600	1170	1300
MCS 8	4	312	346.7	648	720	1404	1560
MCS 9	4	NA	NA	720	800	1560	1733.3

PERFORMANCE MATRIX

802.11n PERFORMANCE — DATA RATES (Mbps)					
Descriptor	Spatial Streams	HT20		HT40	
		Normal GI	Short GI	Normal GI	Short GI
MCS 0	1	6.5	7.2	13.5	15
MCS 1	1	13	14.4	27	30
MCS 2	1	19.5	21.7	40.5	45
MCS 3	1	26	28.9	54	60
MCS 4	1	39	43.3	81	90
MCS 5	1	52	57.8	108	120
MCS 6	1	58.5	65	121.5	135
MCS 7	1	65	72.2	135	150
MCS 8	2	13	14.4	27	30
MCS 9	2	26	28.9	54	60
MCS10	2	39	43.3	81	90
MCS 11	2	52	57.8	108	120
MCS 12	2	78	86.7	162	180
MCS 13	2	104	115.6	216	240
MCS 14	2	117	130	243	270
MCS 15	2	130	144.4	270	300
MCS 16	3	19.5	21.7	40.5	45
MCS 17	3	39	43.3	81	90
MCS 18	3	58.5	65	121.5	135
MCS 19	3	78	86.7	162	180
MCS 20	3	117	130	243	270
MCS 21	3	156	173.3	324	360
MCS 22	3	175.5	195	364.5	405
MCS 23	3	195	216.7	405	450

HIGHLIGHTS

FortiAP C24JE

The FAP-C24JE is a performance/price competitive 2.4 GHz/5 GHz concurrent MU-MIMO wall plate AP with support of PoE IP phone and RJ45 pass-through. This access point can be installed in minutes, right over the existing wall plate.



 **802.11 ac Wave 2 | Dual Radio 2.4 & 5 GHz | 4 Internal Antennas**

 **Up to 300 + 867 Mbps**

SPECIFICATIONS

FORTIAP C24JE	
Hardware	
Hardware Type	Wall Plate AP
Number of Radios	2
Number of Antennas	4 Internal
Antenna Type and Peak Gain	Chip: 1.5 dBi for 2.4 GHz, 2 dBi for 5 GHz
Frequency Bands (GHz)*	2.400–2.4835, 5.150–5.250, 5.250–5.350, 5.470–5.725, 5.725–5.850
Radio 1 Capabilities	2.4 GHz b/g/n (2x2:2 stream) 20/40 MHz (64 QAM)
Radio 2 Capabilities	5 GHz a/n/ac (2x2:2 stream) 20/40/80 MHz (256 QAM)
Maximum Data Rate	Radio 1: up to 300 Mbps, Radio 2: up to 867 Mbps
Bluetooth Low Energy (BT/BLE) Radio	—
Interfaces	6x 10/100/1000 Base-T RJ45 Ports (1x 802.3at PoE (PD), 1x 802.3af PoE (PSE), 2x Non-PoE Ports, 1x Pass-through in, 1x Pass-through out, 1x RS-232 RJ45 Serial Port)
Serial Console Port	1x RJ45 RS232
Power over Ethernet (PoE)	802.3af (max PSE output of 4W) or 802.3at (full 802.3af PSE output)
Simultaneous SSIDs	Up to 4
EAP Type(s)	EAP-TLS, EAP-TTLS/MSCHAPv2, EAPv0/EAP-MSCHAPv2, PEAPv1/EAP-GTC, EAP-SIM, EAP-AKA, EAP-FAST
User/Device Authentication	WPA™ and WPA2™ with 802.1x or Preshared key, WEP, Web Captive Portal, MAC blacklist & whitelist
Maximum Tx Power	23 dBm / 100mW (2 chains combined)*
Kensington Lock	No
IEEE Standards	802.11a, 802.11b, 802.11d, 802.11e, 802.11g, 802.11h, 802.11i, 802.11j, 802.11k, 802.11n, 802.11r, 802.11v, 802.11ac, 802.1X, 802.3af, 802.3at, 802.3az
SSID Types Supported	Local-Bridge, Tunnel
Per Radio Client Capacity	Up to 64
Cellular Co-existence	No
LED Off Mode	Yes
Advanced 802.11 Features	
802.11ac MU-MIMO Wave 2	Yes
Transmit Beam Forming (TxBF)	Yes
Low-Density Parity Check (LDPC) Encoding	Yes
Maximum Likelihood Demodulation (MLD)	Yes

FORTIAP C24JE	
Maximum Ratio Combining (MRC)	Yes
A-MPDU and A-MSDU Packet Aggregation	Yes
MIMO Power Save	Yes
Short Guard Interval	Yes
Wireless Monitoring Capabilities	
Rogue Scan Radio Modes	Background, Full-time
WIPS / WIDS Radio Modes	Background, Full-time
Packet Sniffer Mode	No
Spectrum Analyzer	No
Dimensions	
Length x Width x Height	6.69 x 4.04 x 1.08 inches 170 x 102.5 x 27.5 mm
Weight	1.3 lbs (0.6 kg)
Package (shipping) Weight	1.6 lbs (0.74 kg)
Mounting Options	Wall Plate
Included Accessories	Mounting kit for Wall Plate
Environment	
Power Supply	GPI-115, or GPI-130
Power Consumption (Maximum)	Depends on PoE connected
Humidity	5–90% non-condensing
Operating / Storage Temperature	32–104°F (0–40°C) / -4–158°F (-20–70°C)
Directives	Low Voltage Directive • RoHS
UL2043 Plenum Material	No
Mean Time Between Failures	>10 Years
IP Rating	—
Surge Protection Built In	—
Hit-less PoE Failover	No
Certifications	
WiFi Alliance Certified	No
DFS	In Process
Warranty	
Limited Lifetime Warranty	Yes

* Frequency selection and power may be restricted to abide by regional regulatory compliance laws.

RF RX/TX PERFORMANCE TABLE

FORTIAP C24JE				
802.11 a/g	Radio 1 2.4 GHz		Radio 2 5 GHz	
	Maximum TX Power per Transmit Chain (dBm)	RX Sensitivity (dBm) per Receiver Chain	Maximum TX Power per Transmit Chain (dBm)	RX Sensitivity (dBm) per Receiver Chain
6 Mbps	21	-91	21	-91
9 Mbps	20	-89	20	-89
12 Mbps	20	-87	20	-87
18 Mbps	20	-85	19	-84
24 Mbps	19	-82	19	-80
36 Mbps	19	-76	19	-76
48 Mbps	18	-75	18	-74
54 Mbps	17	-74	18	-73
802.11 HT20				
MSC 0/8/16 (BPSK)	20	-90	19	-91
MSC 1/9/17 (QPSK)	19	-88	18	-88
MSC 2/10/18 (QPSK)	19	-85	18	-84
MSC 3/11/19 (16-QAM)	19	-83	17	-80
MSC 4/12/20 (16-QAM)	19	-76	17	-76
MSC 5/13/21 (64-QAM)	18	-72	17	-73
MSC 6/14/22 (64-QAM)	17	-72	16	-71
MSC 7/15/23 (64-QAM)	16	-71	16	-70
802.11 HT40				
MSC 0/8/16 (BPSK)	20	-89	19	-87
MSC 1/9/17 (QPSK)	19	-87	18	-84
MSC 2/10/18 (QPSK)	19	-84	18	-81
MSC 3/11/19 (16-QAM)	19	-82	18	-78
MSC 4/12/20 (16-QAM)	18	-77	17	-75
MSC 5/13/21 (64-QAM)	18	-72	17	-72
MSC 6/14/22 (64-QAM)	17	-71	17	-70
MSC 7/15/23 (64-QAM)	17	-70	17	-68
MSC 8/16/24 (256-QAM)	16	-69	16	-66
MSC 9/17/25 (256-QAM)	16	-69	16	-64
802.11 HT80				
MSC 0 (BPSK)			19	-85
MSC 1 (QPSK)			18	-82
MSC 2 (QPSK)			18	-80
MSC 3 (16-QAM)			18	-77
MSC 4 (16-QAM)			17	-75
MSC 5 (64-QAM)			17	-74
MSC 6 (64-QAM)			17	-72
MSC 7 (64-QAM)			17	-69
MSC 8 (256-QAM)			16	-65
MSC 9 (256-QAM)			16	-61

Maximum capability of the Hardware provided (Excluding antenna gain)

ORDER INFORMATION

Product	SKU	Description
FortiAP-320C	FAP-320C	Indoor wireless AP — 2x GE RJ45 ports, dual radio (802.11 a/n/ac and 802.11 b/g/n, 3x3 MIMO), ceiling/wall mount kit included, power adapter not included. For Gigabit PoE injector order: GPI-115. For AC power adapter order: SP-FG20C-PA.
	FC-10-P0321-311-02-DD	8x5 FortiCare Contract
	FC-10-P0321-247-02-DD	24x7 FortiCare Contract
	SP-FG20C-PA	AC Power Adapter for FAP-320C
FortiAP-321C	FAP-321C	Indoor wireless AP — 1x GE RJ45 port, dual radio (802.11 b/g/n and 802.11 a/n/ac, 3x3 MIMO), ceiling/wall mount kit included, power adapter not included. For Gigabit PoE injector order: GPI-115. For AC power adapter order: SP-FG20C-PA.
	FC-10-P0322-311-02-DD	8x5 Enhanced FortiCare
	FC-10-P0322-247-02-DD	24x7 Comprehensive FortiCare
	SP-FG20C-PA	AC Power Adapter for FAP-321C
FortiAP 222C	FAP-222C	Outdoor Wireless AP — 1x GE RJ45 port, dual radio (802.11 a/n/ac and 802.11 b/g/n, 2x2 MIMO), external antennas, ceiling/wall mount kit included, proprietary PoE injector with AC power adapter included.
	FC-10-P0226-311-02-DD	8x5 Enhanced FortiCare
	FC-10-P0226-247-02-DD	24x7 Comprehensive FortiCare
	SP-FAP222B-PA	Proprietary PoE injector with AC power adapter for FortiAP 222C
FortiAP 221E	FAP-221E	Indoor Wireless AP — 1x GE RJ45 port, 802.11 a/b/g/n/ac Wave 2, dual radio (2.4 GHz/5 GHz), 2x2 MU-MIMO, ceiling/wall mount kit included, power adapter not included.
	FC-10-PE221-311-02-DD	8x5 Enhanced FortiCare
	FC-10-PE221-247-02-DD	24x7 Comprehensive FortiCare
FortiAP 223E	FAP-223E	Indoor Wireless AP — 1x GE RJ45 port, 802.11 a/b/g/n/ac Wave 2, dual radio (2.4 GHz/5 GHz), 2x2 MU-MIMO, external antennas, ceiling/wall mount kit included, power adapter not included.
	FC-10-PE223-311-02-DD	8x5 Enhanced FortiCare
	FC-10-PE223-247-02-DD	24x7 Comprehensive FortiCare
FortiAP 222E	FAP-222E	Outdoor Wireless Wave 2 AP — dual radio (802.11 a/b/g/n and 802.11 a/n/ac, 2x2 MU-MIMO and Bluetooth/BLE), 1x GE RJ45 port, pole/wall mount kit, lightning protector and PoE injector and 5 antennas included. Region Code E.
	FC-10-PE222-311-02-DD	8x5 Enhanced FortiCare
	FC-10-PE222-247-02-DD	24x7 Comprehensive FortiCare
FortiAP 224E	FAP-224E	Outdoor Wireless Wave 2 AP — dual radio with internal antenna (802.11 b/g/n and 802.11 a/n/ac/ac2, 2x2 MU-MIMO), BLE radio, 2x GE RJ45 port and 1 SFP port. IP67 water resistance, and 802.3af PoE powered.
	FC-10-PE224-311-02-DD	8x5 Enhanced FortiCare
	FC-10-PE224-247-02-DD	24x7 Comprehensive FortiCare
FortiAP 421E	FAP-421E	Indoor Wireless AP — 2x GE RJ45 ports, 802.11 a/b/g/n/ac Wave 2, dual radio (2.4 GHz/5 GHz), 4x4 MU-MIMO, ceiling/wall mount kit included, power adapter not included. For Gigabit PoE injector order: GPI-130.
	FC-10-P421E-311-02-DD	8x5 FortiCare Contract
	FC-10-P421E-247-02-DD	24x7 FortiCare Contract
FortiAP 423E	FAP-423E	Indoor Wireless AP — 2x GE RJ45 ports, 802.11 a/b/g/n/ac Wave 2, dual radio (2.4 GHz/5 GHz), 4x4 MU-MIMO, external antennas, ceiling/wall mount kit included, power adapter not included. For Gigabit PoE injector order: GPI-130.
	FC-10-P423E-311-02-DD	8x5 FortiCare Contract
	FC-10-P423E-247-02-DD	24x7 FortiCare Contract
FortiAP C24JE	FAP-C24JE	FAP-C24JE is a performance/price competitive 2.4 GHz/5 GHz concurrent MU-MIMO wall plate AP with support of PoE IP phone and RJ45 pass-through. Total WiFi speed is 1167 Mbps (300 Mbps/2.4 GHz + 867 Mbps/5 GHz).
	FC-10-PC24E-311-02-DD	8x5 FortiCare Contract
	FC-10-PC24E-247-02-DD	24x7 FortiCare Contract
Gigabit PoE Injector	GPI-115	1-Port Gigabit PoE Power Injector, 802.3af 15.4 W, 10/100/1000.
	GPI-130	1-Port Gigabit PoE Power Injector, 802.3at up to 30 W.
Power Adapter	SP-FAP400-PA	AC Power Adapter for FAP-U421EV, FAP-U423EV, FAP-S421E, FAP-S423E, FAP-421E and FAP-423E.

Note: Additional external antenna options available for some models. Please see antenna datasheet for details.

ORDER INFORMATION

REGION/COUNTRY SKU SUFFIX*								
Americas-FCC	Bangladesh	China	India	Europe ETSI	Indonesia	International	Japan	Korea
-A	-B	-C	-D	-E	-F	-I	-J	-K
Non-FFCA	Russia	Singapore	Taiwan	Ukraine	Vietnam, Thailand	World 2.4G	Egypt	
-N	-P	-S	-T	-U	-V	-W	-Y	

Note: Additional countries may apply to given suffix codes. Please work with your local supplier for the correct model in your regulatory domain.



GLOBAL HEADQUARTERS
Fortinet Inc.
899 KIFER ROAD
Sunnyvale, CA 94086
United States
Tel: +1.408.235.7700
www.fortinet.com/sales

EMEA SALES OFFICE
905 rue Albert Einstein
06560 Valbonne
France
Tel: +33.4.8987.0500

APAC SALES OFFICE
8 Temasek Boulevard
#12-01 Suntec Tower Three
Singapore 038988
Tel: +65.6395.2788

LATIN AMERICA SALES OFFICE
Sawgrass Lakes Center
13450 W. Sunrise Blvd., Suite 430
Sunrise, FL 33323
United States
Tel: +1.954.368.9990