




ZX10 FULLY RUGGED TABLET

- Qualcomm® Snapdragon™ 660, Octa-core Processor
- 10.1" LumiBond® display with Getac sunlight readable technology and glove-enabled capacitive touchscreen
- Dual hot-swappable batteries for uninterrupted operation
- 6ft drop, MIL-STD-810H and IP66 certified
- Optional 1D/2D imager barcode reader
- Verified as Android enterprise recommended ^{vi}

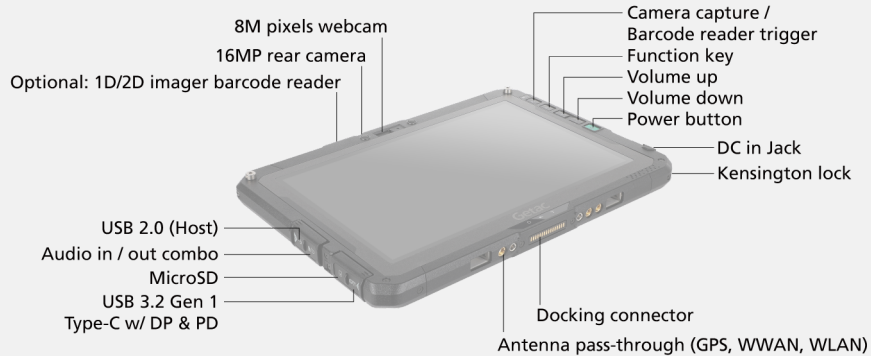

ZX10 FULLY RUGGED TABLET

SPECIFICATIONS

Generation	G1
Operating System	Android™ 11.0
Mobile Computing Platform	Qualcomm® Snapdragon™ 660, Octa-core 1.95GHz Max. 2.2GHz
VGA Controller	Qualcomm® Adreno™ 512 GPU
Display	10.1" TFT LCD WUXGA (1920 x 1200) Protection film 800 nits LumiBond® display with Getac sunlight readable technology Capacitive multi-touch screen
Storage & Memory	4GB LPDDR4, 64GB eMMC Optional: 6GB LPDDR4, 128GB eMMC
Device Button	Power button 4 tablet programmable buttons
Pointing Device	Touchscreen - Capacitive multi-touch screen
Expansion Slot	Optional: 1D/2D imager barcode reader Optional: Smart card reader Optional: HF RFID/NFC combo reader ¹
I/O Interface	8M pixels webcam x 1 16M pixels auto focus rear camera x 1 Audio in/out combo x 1 DC in Jack x 1 USB 3.2 Gen 1 Type-C w/ DP & PD x 1 USB 2.0 (Host) x 1 MicroSD x 1 Docking connector x 1 Optional: RF antenna pass-through for GPS, WLAN and WWAN

ZX10 FULLY RUGGED TABLET

Communication Interface	Wi-Fi 802.11 ac Bluetooth (v5.0) ⁱⁱ Dual Micro SIM Dedicated GPS Optional: 4G LTE mobile broadband
Security Feature	Kensington lock Optional: HF RFID/NFC combo reader ⁱ Optional: Smart card reader
Power	AC adapter (65W, 100-240VAC, 50/60Hz) Li-ion battery(3.84V, typical 4990mAh; min. 4870mAh)x 2 LifeSupport™ battery swappable technology Optional: High capacity Li-ion battery (3.84V, typical 9980mAh; min. 9470mAh) x 2
Dimension (W x D x H) & Weigh	275 x 192 x 17.9mm (10.8" x 7.56" x 0.7") 1.04kg (2.29lbs) ⁱⁱⁱ
Rugged Feature	MIL-STD-810H certified IP66 certified Vibration & 6 feet (1.8m) drop resistant Optional: ANSI/UL 121201, CSA C22.2 NO. 213 (Class I, Division 2, Groups A, B, C, D)
Environmental Specification	Temperature ^{iv} : - Operating: -29°C to 63°C / -20°F to 145°F - Storage: -51°C to 71°C / -60°F to 160°F Humidity: - 95% RH, non-condensing
Pre-installed software	Getac File Browser Getac Camera Getac Input Method Getac settings and Google applications (Search, Chrome, Gmail, Maps, YouTube, Play, Drive, Play music, Play movies, Duo and photos)
Optional software	Getac Driving Safety Utility Getac deployXpress Getac OEMConfig

ZX10 FULLY RUGGED TABLET

Accessories

Battery (3.84V, typical 4990mAh; min. 4870mAh)
AC adapter (65W, 100-240VAC, 50/60Hz)
Capacitive stylus with tether

Optional:

Carry bag
Battery (3.84V, typical 4990mAh; min. 4870mAh)
High capacity Li-ion battery (3.84V, typical 9980mAh; min. 9470mAh)
Multi-Bay charger (Dual-Bay)
Multi-Bay charger (Eight-Bay)
AC adapter (65W, 100-240VAC, 50/60Hz)
Office dock AC adapter (65W, 100-240VAC)
DC-DC vehicle adapter (120W, 22-32VDC)
Capacitive stylus with tether
Protection film
Hand strap
Shoulder strap (2-point)
Shoulder harness (4-point; handsfree)
Vehicle dock ^v
Office dock
100W Type-C adapter
Hard handle

Bumper-toBumper warranty

Accidents can take your equipment out of service when you least expect it, especially in a rugged environment, which can cause costly equipment downtime.

That is why Getac has introduced accidental damage as standard under our Bumper-to-Bumper warranty, to help minimize your enterprise IT costs.

Bumper-to-Bumper is your hassle-free guarantee.

That means you can depend on us to have your unit back in service within days.

Standard

3 years Bumper-to-Bumper

- I. 13.56MHz HF RFID/NFC combo reader (ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
- II. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- III. Weight and dimensions vary from configurations and optional accessories; optional high-capacity batteries add approx. 7.65mm (H), 144g.
- IV. Tested by an independent third-party test lab following MIL-STD-810H.
- V. Gamber Johnson and Havis vehicle docks are e-mark certified.
- VI. Android enterprise recommended rugged devices deliver a consistent set of features verified by Google with an elevated device baseline, increased security standards and enterprise-focused features and behaviors to meet the needs of users. Google and Android are trademarks of Google LLC.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

ZX10 FULLY RUGGED TABLET

	Office Dock (Pogo)
Serial Port	-
Microphone	1
Audio Output	1
DC in Jack	1
USB	USB 2.0 x 3
LAN	1
HDMI	1
RF Pass-through	-
Kensington Lock	1

Getac (UK) Ltd.

Getac House, Stafford Park 12,
Telford, Shropshire TF3 3BJ, United Kingdom
Tel : +44 (0) 1952 207 222

Sales-Getac-UK@getac.com | www.getac.com/en/

Copyright © 2022 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved.

Information provided herewith is for reference only,
available specification shall be subjected to quotation by request.