




# UX10 FULLY Rugged tablet

- 10th Generation Intel<sup>®</sup> Core<sup>™</sup> i7 / i5 Processor
- 10.1" FHD LumiBond<sup>®</sup> 2.0 display with Getac sunlight readable technology (1,000 nits) and capacitive touchscreen
- Enhanced enterprise security with optional Intel vPro, Windows Hello face-authentication camera and multi-factor authentication options
- Detachable keyboard & multi-funtional hard handle for on-the-job flexibility
- Multiple configurable options to fit diverse usage scenarios



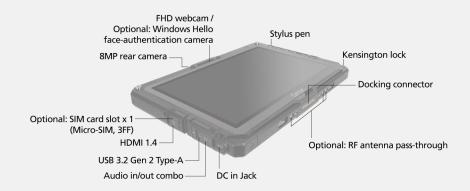

### **SPECIFICATIONS**

Generation	G2 Windows 10 Pro	
Operating System		
Mobile Computing Platform	Intel <sup>®</sup> Core™ i5-10210U Processor 1.6GHz Max. 4.2GHz with Intel <sup>®</sup> Turbo Boost Technology - 6MB Intel <sup>®</sup> Smart Cache	
	<b>Platform options:</b> Intel <sup>®</sup> Core™ i5-10310U, vPro Processor 1.7GHz Max. 4.4GHz with Intel <sup>®</sup> Turbo Boost Technology - 6MB Intel <sup>®</sup> Smart Cache	
	Intel <sup>®</sup> Core™ i7-10510U Processor 1.8GHz Max. 4.9GHz with Intel <sup>®</sup> Turbo Boost Technology - 8MB Intel <sup>®</sup> Smart Cache	
	Intel <sup>®</sup> Core™ i7-10610U vPro Processor 1.8GHz Max. 4.9GHz with Intel <sup>®</sup> Turbo Boost Technology - 8MB Intel <sup>®</sup> Smart Cache	
VGA Controller	Intel <sup>®</sup> UHD Graphics	
Display	10.1" IPS TFT LCD WUXGA (1920 x 1200) Protection film 1,000 nits LumiBond <sup>®</sup> display with Getac sunlight readable technology Capacitive multi-touch screen	
Storage & Memory	8GB DDR4 Optional 16GB/32GB DDR4 256GB PCIe NVMe SSD Optional: 512GB / 1TB PCIe NVMe SSD	
Keyboard	Power button 5 tablet programmable buttons	
Pointing Device	Touchscreen – Capacitive multi-touch screen – Optional dual mode touchscreen (multi-touch and digitizer)	



Expansion Slots	Optional (top side): 1D/2D imager barcode reader, or Serial port, or USB 3.2 Gen 1 Type-A port, or USB 3.2 Gen 1 Type-C port, or LAN port (RJ45), or VGA port i, or HF RFID reader <sup>ii</sup> Optional (right side): Fingerprint reader, or Serial port + LAN port (RJ-45) iii, or HF RFID reader <sup>ii</sup> Optional (back side): Smart card reader, or Bridge battery, or Bridge battery + Smart card reader <sup>iv</sup>
I/O Interface	FHD webcam x 1 <sup>v</sup>
	8M pixels auto focus rear camera x 1
	Audio in/out combo x 1
	DC in Jack x 1
	USB 3.2 Gen 2 Type-A x 1
	HDMI 1.4 x 1
	Docking connector x 1
	Optional: SIM card slot x 1 (Micro-SIM, 3FF)
	Optional: Windows Hello face-authentication camera (front-
	facing) x 1 $^{\vee}$
	Optional: RF antenna pass-through for GPS, WWAN and WLAN
Communication Interface	Intel <sup>®</sup> Wi-Fi 6 AX200, 802.11ax
	Bluetooth (v5.1) <sup>vi</sup>
	Optional: Dedicated GPS <sup>vii</sup>
	Optional: 4G LTE mobile broadband with integrated GPS <sup>vii,viii</sup> Optional: 10/100/1000 base-T Ethernet
Security Features	TPM 2.0
	Kensington lock
	Optional: Intel <sup>®</sup> vPro™ Technology
	Optional: HF RFID reader "
	Optional: Fingerprint reader "
	Optional: Smart card reader <sup>iv</sup>
Power	AC adapter (65W, 100-240VAC, 50/60 Hz)
	Li-ion smart battery (11.1V, typical 4200mAh; min. 4080mAh) x
	1
	Optional: High capacity battery (10.8V, 9240mAh) x 1
	Optional: Bridge battery <sup>iv</sup>
Dimension (W x D x H) & Weigh	276.8 x 194.5 x 23.5 mm (10.89□ x 7.65□ x 0.92□) 1.22kg (2.68lbs) <sup>ix</sup>

Rugged Feature	MIL-STD-810H certified IP65 certified MIL-STD-461G certified <sup>x</sup> Vibration & 6ft (1.8m) drop resistant <sup>xi</sup> e-Mark certified for vehicle usage Optional: ANSI/UL 121201, CSA C22.2 NO. 213 (Class I, Division 2, Groups A, B, C, D) Optional: Salt fog certified
Environmental Specification	Temperature <sup>xii</sup> : – Operating: -29°C to 63°C / -20°F to 145°F – Storage: -51°C to 71°C / -60°F to 160°F Humidity: – 95% RH , non-condensing
Pre-installed software	Getac Utility Getac Camera Getac Geolocation Getac Barcode Manager <sup>xiii</sup> Optional: Absolute Persistence <sup>®</sup>
Optional software	Getac Driving Safety Utility Getac KeyWedge Barcode Reader Utility Getac Device Monitoring System (GDMS) Getac VGPS Utility <sup>xiv</sup>



#### Accessories

Battery (11.1V, typical 4200mAh; min. 4080mAh) AC adapter (65W, 100-240VAC) Capacitive stylus with tether

#### **Optional:**

Carry bag Folio case Battery (11.1V, typical 4200mAh; min. 4080mAh) High capacity battery (10.8V, 9240 mAh) Multi-Bay charger (Dual-Bay) Multi-Bay charger (Eight-Bay) AC adapter (65W, 100-240VAC) Office dock AC adapter (90W, 100-240VAC) MIL-STD-461G certified AC adapter (90W, 100-240VAC) DC-DC vehicle adapter (120W, 11-32VDC) Digitizer pen Capacitive stylus with tether Protection film Hand strap Shoulder strap (2-point) Shoulder harness (4-point; handsfree) Detachable keyboard Vehicle cradle Keyboard dock Vehicle dock Office dock 100W Type-C adapter Getac rugged keyboard

#### **Bumper-toBumper warranty**

Accidents can take your equipment out of service when you least expect it, especially in a rugged environment, which can cause costly equipment downtime.

That is why Getac has introduced accidental damage as standard under our Bumper-to-Bumper warranty, to help minimize your enterprise IT costs.

Bumper-to-Bumper is your hassle-free guarantee. That means you can depend on us to have your unit back in service within days.

#### Standard

3 years Bumper-to-Bumper

- 1D/2D imager barcode reader, Serial port, USB 3.2 Gen 1 Type-A port, USB 3.2 Gen 1 Type-C port, LAN port (RJ45) and VGA port are mutually exclusive options.
- II. 13.56MHz contactless HF RFID reader (ISO 15693, 14443 A/B, Mifare and FeliCa™ compliant).
- III. Fingerprint scanner, HF RFID reader and Serial port + LAN port (RJ45) are mutually exclusive options.
- IV. Smart card reader, Bridge battery and Bridge battery + Smart card reader are mutually exclusive options.
- V. FHD webcam and optional Windows Hello face-authentication camera (front-facing) are mutually exclusive options.
- VI. Bluetooth performance and connectable distance may be subject to interference with the environments and performance on client devices, users may be able to reduce effects of interference by minimizing the number of active Bluetooth wireless devices that is operating in the area.
- VII. Supports GPS and Glonass.
- VIII. Units with 4G LTE option come with an embedded SIM card slot.
- IX. Weight and dimensions vary from configurations and optional accessories.
- X. MIL-STD-461 90W AC adapter sold separately.
- XI. Drop test results vary from configurations and optional accessories.
- XII. Tested by an independent third-party test lab following MIL-STD-810H.

XIII. Available when barcode reader option is selected.

XIV. Models require either embedded or standalone GPS module.

Information provided herewith is for reference only, available specification shall be subjected to quotation by request.

	Vehicle Dock	Office Dock
Serial Port	1	1
External VGA	-	1
Microphone	-	1
Audio Output	-	1
DC in Jack	1	1
USB	USB 2.0 x 2 USB 3.2 Gen 1 x 2	USB 2.0 x 2 USB 3.2 Gen 1 x 2
LAN	1	1
HDMI 1.4	-	1
RF Antenna Connector	3 (WWAN, WLAN, GPS)	-
Kensington Lock	1	1

Getac (UK) Ltd.

Getac House, Stafford Park 12, Telford, Shropshire TF3 3BJ, United Kingdom Tel : +44 (0) 1952 207 222 Sales-Getac-UK@getac.com I www.getac.com/en/ Copyright © 2022 Getac Technology Corporation and/or any of its affiliates. All Rights Reserved. Information provided herewith is for reference only, available specification shall be subjected to quotation by request.