



## Key Features

- Built-in battery ensures extended, worry-free on-the-go usage
- Plug-and-Play wireless connectivity with no network setup or software installation required
- 16:10 WUXGA/FHD+ (1920 x 1200) display, ideal for extending or mirroring content
- USB-C ports located on both the right and left sides for flexible connectivity options
- Ergonomic smart cover serves as an adjustable stand and protects the monitor while on-the-go

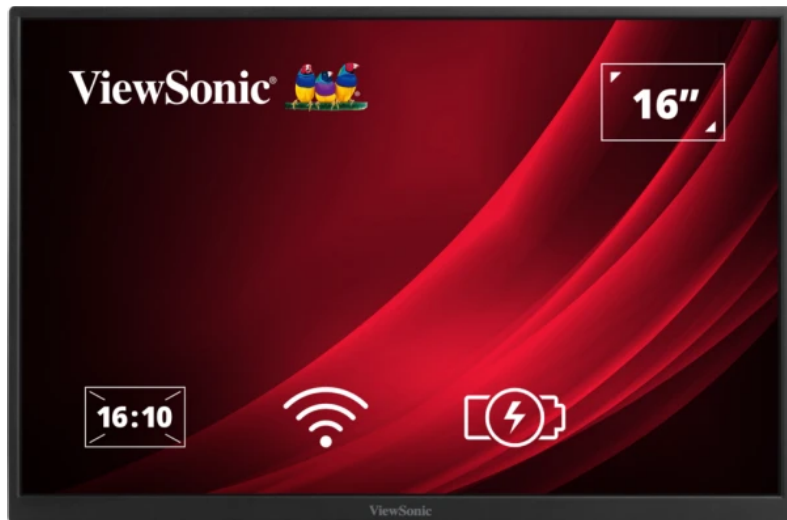

## Product Description

The VG1656N is a 16" WUXGA/FHD+ (1920 x 1200) wireless extended portable business monitor with a built-in battery. This monitor offers expansive space for work and play with its 16:10 aspect ratio. The built-in battery extends usability, while wireless connectivity through a Wi-Fi dongle ensures effortless content sharing, enabling easy screen mirroring or extension from another screen. Designed for optimal flexibility, this monitor features dual USB-C ports for versatile connectivity and supports auto-screen rotation, making it perfect for professionals and multitaskers. The smart cover serves as an adjustable stand for convenient use and protects the monitor while on-the-go.

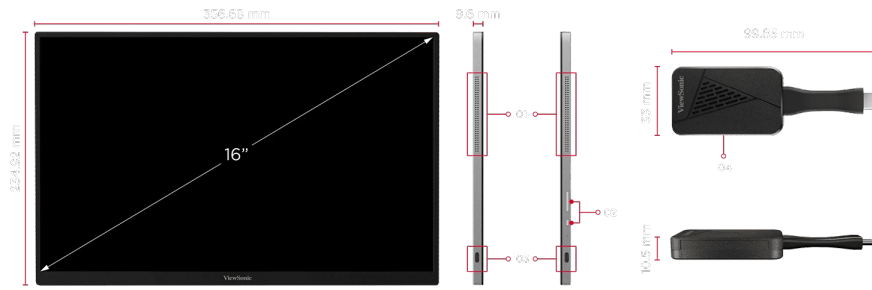

1. Speakers
2. Menu Control Key
3. USB Type C \*2
4. Wi-Fi Dongle

---

**Visit Us**    [www.viewsonic.com](http://www.viewsonic.com)

## DISPLAY

Display Size (in.):	16
Viewable Area (in.):	16
Panel Type:	IPS Technology
Resolution:	1920 x 1200
Resolution Type:	WUXGA (Wide UXGA)
Static Contrast Ratio:	1,000:1 (typ)
Dynamic Contrast Ratio:	50M:1
Light Source:	LED
Brightness:	250 cd/m <sup>2</sup> (typ)
Colors:	16.2M
Color Space Support:	8 bit (6 bit + FRC)
Aspect Ratio:	16:10
Response Time (Typical GTG):	9.5ms
Response Time (GTG w/OD):	9.5ms
Response Time (Typical Tr+Tf):	16ms
Viewing Angles:	170° horizontal, 170° vertical
Backlight Life (Hours):	15000 Hrs (Min)
Curvature:	Flat
Refresh Rate (Hz):	60
Low Blue Light:	Software solution
Color Gamut:	NTSC: 45% size (Typ) sRGB: 64% size (Typ)
Pixel Size:	0.18 mm (H) x 0.18 mm (V)
Surface Treatment:	Anti-Glare, Hard Coating (3H)

## COMPATIBILITY

PC Resolution (max):	1920x1200
Mac® Resolution (max):	1920x1200
PC Operating System:	Windows 10/11 certified; macOS tested
Mac® Resolution (min):	1920x1200

## CONNECTOR

USB 3.2 Type C DisplayPort Alt mode only :	2 (60W power charger)
Power in:	USB Type C (with video & data)

## AUDIO

Internal Speakers:	2Watts x2
--------------------	-----------

## POWER

Consumption (typical):	8W
Consumption (max):	8.2W
Voltage:	AC 100-240V
Stand-by:	0.5W
Power Supply:	External Power Adaptor

## CONTROLS

## INPUT SIGNAL

Frequency Horizontal:	15 ~ 82KHz
Frequency Vertical:	50 ~ 75Hz

## VIDEO INPUT

Digital Sync:	Micro-Packet - Type C, Micro-Packet - HDMI (v1.4) for internal port to connect WiFi receiver
---------------	--

## ERGONOMICS

Height Adjust (mm):	50 (by smart cover)
Tilt (Forward/Back):	20° / 70 (by smart cover)°
Pivot (Right/Left):	90° / 0°

## WEIGHT (IMPERIAL)

Net (lbs):	1.8
Net Without Stand (lbs):	1.8
Gross (lbs):	4.6

## WEIGHT (METRIC)

Net (kg):	0.8
Net Without Stand (kg):	0.8
Gross (kg):	2.1

## DIMENSIONS (IMPERIAL) (WXHXD)

Packaging (in.):	17.2 x 11.8 x 3.2
Physical (in.):	14.04 x 9.25 x 0.38
Physical Without Stand (in.):	14.04 x 9.25 x 0.38

## DIMENSIONS (METRIC) (WXHXD)

Packaging (mm):	438 x 300 x 81
Physical (mm):	356.68 x 234.92 x 9.6
Physical Without Stand (mm):	356.68 x 234.92 x 9.6

## GENERAL

Regulations:	cTUVus, FCC-B, ICES003, Energy Star, EPEAT, CEC, NRCAN, NOM, Mexico Energy
--------------	--

## PACKAGE CONTENTS:

	VG1656N x1, USB Type-C Cable (Male-Male) x1, AC/DC Adapter x1, Quick Start Guide x1, Smart cover x1, WiFi Transmitter Dongle x1
--	---

Recycle/Disposal:	Please dispose of in accordance with local, state or federal laws.
-------------------	--

Warranty:	*Warranty offered may differ from market to market
-----------	--

Power Management:	Energy Star standards, EPEAT
-------------------	------------------------------

Physical Controls: Up; Down, Power

On Screen Display: Input Select, Power Select, Contrast, Brightness, Volume, Audio Mode, Information, Memory Recall

**OPERATING CONDITIONS**

Temperature: 32°F to 104°F (0°C to 40°C)

Humidity (non-condensing): 20% to 90%

Copyright © ViewSonic Corporation 2000-2024. All rights reserved.