

Product data sheet

Specifications



APC Smart-UPS On-Line,
1500VA, Rackmount 2U, 120V, 6x
5-15R NEMA outlets, Network
Card, Extended runtime, W/ rail kit

SRT1500RMXLA-NC

Overview

Lead time Usually in Stock

Main

Main Input Voltage	120 V AC 1 phase
Input Connection Type	NEMA 5-15P
Efficiency at full load	108...150 V 50...150 V 40% load
Input Frequency	40 - 70 Hz auto-sensing
Output voltage	120 V 1 phase
Rated power in W	1350 W
rated power in VA	1500 VA
output connection type	6 NEMA 5-15R
Bypass type	Built-in Bypass
Crest factor	3 : 1
Harmonic distortion	Less than 2%
Maximum configurable power in VA	1500 VA
Max Configurable Power (Watts)	1350 W
Topology	On-Line
Waveform Type	Sine wave
Output Frequency (sync to mains)	50/60 Hz +/- 3 Hz sync to mains

Complementary

Battery Size	Lead-acid internal included
Emergency Power Off (EPO)	Yes
Free slots	0
Pre-Installed SmartSlot™ Cards	Network management card 3 with environmental monitoring
Alarm	Audible and visible alarms : prioritized by severity
UPS connectivity	Serial port USB port Pre-installed network management card 3
Surge energy rating	432 J
Number of rack unit	2U
Cable length	5.9 ft (1.8 m)


Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.



Number of cables	1
color	Black
Height	3.3 in (85 mm)
Width	17.008 in (432 mm)
Depth	20 in (508 mm)
Net Weight	48.5 lb(US) (22 kg)
Mounting Location	Front
Mounting preference	No preference
Mounting Mode	Rack-mounted with kit
Two post mountable	0
USB compatible	Yes
Mounting position	Horizontal
Mounting mode	Rack-mounted with included kit
Provided equipment	CD with software Communication Cable Documentation CD Installation guide Network Management Card Rack mounting hardware Rack Mounting brackets Rack Mounting support rails Temperature Probe USB cable Warranty card
Number of power module filled slots	0
Number of power module free slots	0
Additional specification	High density
Redundant	No
Range of Product	Smart-UPS On-Line
Product or Component Type	Uninterruptible power supply (UPS)

Environment

Product Certifications	ENERGY STAR V2.0 (USA)
Ambient Air Temperature for Operation	32...104 °F (0...40 °C)
Ambient Air Temperature for Storage	-4...122 °F (-20...50 °C)
Storage altitude	0...50000 ft (0...15240 m)
IP degree of protection	IP20
Relative Humidity	0...95 % non-condensing
Storage Relative Humidity	0...95 % non-condensing
Acoustic level	50 dBA
Heat dissipation	463 Btu/h
Operating altitude	0...10000 ft

Batteries & Runtime

Run Time [View Runtime Graph](#) 

Efficiency	View Efficiency Graph 
Battery Type	Lead-Acid battery
Battery Voltage	48V
Extendable Run Time	1
Included Battery Modules	1
Battery Slots Empty	0
Typical recharge time	3 h
RBC Quantity	1
Battery Life	3...5 year(s)
Replacement battery	APCRBC155 
Battery Charge Power (Watts)	91 W rated

Ordering and shipping details

GTIN	731304330080
------	--------------

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	9.6 in (24.5 cm)
Package 1 Width	27.2 in (69.0 cm)
Package 1 Length	23.4 in (59.5 cm)
Package weight(Lbs)	71.83 lb(US) (32.58 kg)

Contractual warranty

Warranty (in months)	36 UPS 24 Battery
----------------------	-------------------



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



Environmental footprint

Total lifecycle Carbon footprint	4 885 kg CO2 eq.
Carbon footprint of the manufacturing phase [A1 to A3]	369 kg CO2 eq.
Carbon footprint of the distribution phase [A4]	4 kg CO2 eq.
Carbon footprint of the installation phase [A5]	0 kg CO2 eq.
Carbon footprint of the use phase [B2, B3, B4, B6]	4 508 kg CO2 eq.
Carbon footprint of the end-of-life phase [C1 to C4]	4 kg CO2 eq.
Environmental Disclosure	Product Environmental Profile

Use Better



Materials and Substances

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	No
EU RoHS Directive	Compliant By Exemption
REACH Regulation	Reference contains Substances of Very High Concern above the threshold
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



Energy efficiency



ENERGY STAR®

ENERGY STAR UPS V2.0 (USA)

Use Longer



Lifetime extension

Repair	No
--------	----

Use Again



Repack and remanufacture

Recyclability potential, in %	65
Circularity Profile	End of Life Information
Removable battery	User replaceable
Take-back	Yes

WEEE Label



The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Technical Illustration

Dimensions



Offer Marketing Illustration

Product benefits / Features



Offer Marketing Illustration

Product benefits / Features

Live Swappable Batteries

Ensure clean, uninterrupted power to protected equipment while batteries are being replaced.



Offer Marketing Illustration

Product benefits / Features

Automatic Voltage Regulation-AVR

Voltage fluctuations put your devices at risk. AVR instantly corrects variances in incoming voltage, ensuring stable and consistent power to your connected devices.



- Benefits of AVR
-  Increased battery life
 -  Protection against system crash
 -  Protection against data loss


Offer Marketing Illustration

Product benefits / Features

Extended Runtime

Supports up to 10 external battery packs.

Estimated battery runtime at half load

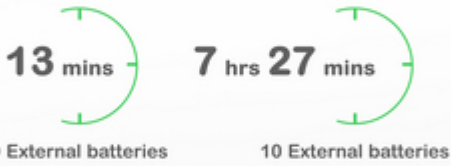

Offer Marketing Illustration

Product benefits / Features

Network Management Card

Remotely monitor and manage your Smart-UPS with a pre-installed Network Management Card 3



Configuration and control options



Event and data logging



Enterprise management system compatible



Enables connection to EcoStruxure IT




Offer Marketing Illustration

Product benefits / Features

Communication Ports and Outlets

Advanced monitoring and management capabilities with numerous outlets to power and protect all your sensitive devices.

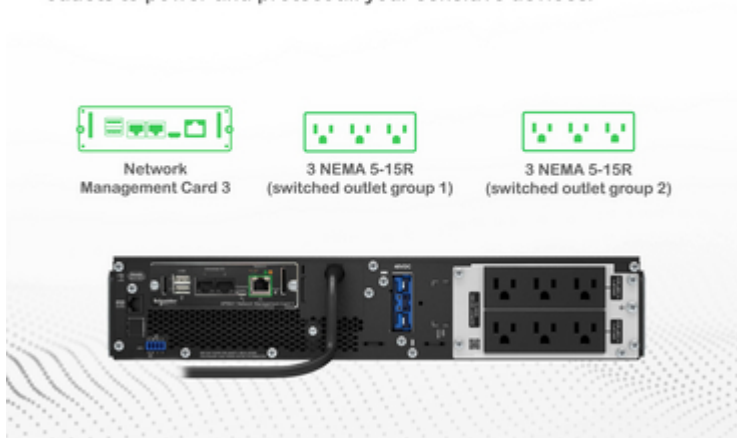

Offer Marketing Illustration

Product benefits / Features

Keep your critical applications running
when you need them the most



Offer Marketing Illustration

Product benefits / Features

Intelligent battery management



Battery replacement recommendations



Temperature-compensated charging



Periodic battery self-test



Disconnect battery notifications



Offer Marketing Illustration

Product benefits / Features

Peace of mind at home or office with PowerChute™ Serial Shutdown Software

UPS management, graceful shutdown, and energy management software for:



Desktops



Servers



Workstations



Offer Marketing Illustration

Product benefits / Features

Intuitive LCD interface

Real-time status updates with multiple language options, and intuitive navigation keys.



Offer Marketing Illustration

Product benefits / Features



Peace of Mind
Ensure that your equipment remains powered, protected and available in any scenario.

3-year
Warranty on UPS

2-year
Warranty on battery

Offer Marketing Illustration

Product benefits / Features

Premium Power Protection

Maintain business operations, customer satisfaction, and revenue by mitigating power and voltage disruptions.



1500VA/1350W
Battery backup



Pure Sine Wave
Power



Double-conversion
on-line power
protection



91.6%
Online efficiency



Image of product / Alternate images

Alternative

