

Product data sheet

Specifications



APC Smart-UPS, Line Interactive,
2200VA, Rackmount 2U, 120V, 6x
NEMA 5-15R+2x NEMA 5-20R
outlets, Network Card, AVR, LCD

SMT2200RM2UNC

Product availability: Non-Stock - Not normally stocked in
distribution facility

Overview

Lead time	Usually in Stock
-----------	------------------

Main

Main Input Voltage	120 V AC 1 phase
Input Connection Type	NEMA 5-20P
Efficiency at full load	75...154 V adjustable 82...143 V
Input Frequency	50/60 Hz +/- 3 Hz auto-sensing
Output voltage	120 V AC 1 phase
Rated power in W	1920 W
rated power in VA	1920 VA
output connection type	6 NEMA 5-15R 2 NEMA 5-20R
Harmonic distortion	Less than 5%
Maximum configurable power in VA	2200 VA
Max Configurable Power (Watts)	1920 W
Transfer Time	4ms typical : 8ms maximum
Topology	Line Interactive
Waveform Type	Sine wave
Output Frequency (sync to mains)	50/60 Hz +/- 3 Hz sync to mains

Complementary

Battery Size	Lead-acid internal included
Control panel	Multi-function LCD status and control console
Emergency Power Off (EPO)	Yes
Free slots	0
Pre-Installed SmartSlot™ Cards	Network management card 3 with environmental monitoring
Control panel	LED status display with on line : on battery : replace battery and overload indicators
Alarm	Alarm when on battery : distinctive low battery alarm : overload continuous tone alarm
UPS connectivity	Serial port USB port Pre-installed network management card 3

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Surge energy rating	530 J
Number of rack unit	2U
Cable length	8 ft (2.4 m)
Number of cables	1
color	Black
Height	3.4 in (86 mm)
Width	17.0080 in (432.0032 mm) 17.008 in (432 mm)
Depth	26.9 in (683 mm)
Net Weight	93.28 lb(US) (42.31 kg)
Mounting Location	Front
Mounting preference	Lower
Mounting Mode	Rack-mounted
Two post mountable	0
USB compatible	Yes
Mounting mode	Rack-mounted with included kit
Provided equipment	CD with software Documentation CD Rack Mounting brackets Rack Mounting support rails Smart UPS signalling RS-232 cable USB cable
Number of power module	0
Number of power module filled slots	0
Number of power module free slots	0
Redundant	No
Range of Product	Smart-UPS
Product or Component Type	Uninterruptible power supply (UPS)

Environment

Product Certifications	CSA
Equipment protection policy	Lifetime : \$150000
Ambient Air Temperature for Operation	32...104 °F (0...40 °C)
Ambient Air Temperature for Storage	5...113 °F (-15...45 °C)
Storage altitude	0...50000 ft (0...15240 m)
Relative Humidity	0...95 %
Storage Relative Humidity	0...95 %
Acoustic level	55 dBA
Heat dissipation	215 Btu/h
Operating altitude	0...10000 ft

Batteries & Runtime

Run Time

[View Runtime Graph](#) 

Efficiency	View Efficiency Graph 
Battery Type	Lead-Acid battery
Extendable Run Time	0
Included Battery Modules	0
Battery Slots Empty	0
Typical recharge time	3 h
RBC Quantity	1
Battery Life	3...5 year(s)
Replacement battery	RBC43 
Battery Charge Power (Watts)	164 W rated

Ordering and shipping details

GTIN	731304332763
Country of origin	PH

Packing Units

Unit Type of Package 1	PCE
Nbr. of units in pkg.	1
Package 1 Height	10.0 in (25.4 cm)
Package 1 Width	38.6 in (98 cm)
Package 1 Length	23.6 in (60 cm)
Package weight(Lbs)	109.61 lb(US) (49.72 kg)

Contractual warranty

Warranty (in months)	24 Battery 36 UPS
----------------------	-------------------



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



Environmental footprint

Total lifecycle Carbon footprint	3 098 kg CO2 eq.
Carbon footprint of the manufacturing phase [A1 to A3]	1 645 kg CO2 eq.
Carbon footprint of the distribution phase [A4]	0 kg CO2 eq.
Carbon footprint of the installation phase [A5]	19 kg CO2 eq.
Carbon footprint of the use phase [B2, B3, B4, B6]	1 429 kg CO2 eq.
Carbon footprint of the end-of-life phase [C1 to C4]	5 kg CO2 eq.
Environmental Disclosure	Product Environmental Profile

Use Better



Materials and Substances

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	No
SCIP Number	0637234b-27c7-4e32-ae29-543dd4803a99
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov



Energy efficiency

Optimized Energy Efficiency	Energy efficient product
-----------------------------	--------------------------

Use Longer



Lifetime extension

Repair	No
--------	----

Use Again



Repack and remanufacture

Recyclability potential, in %	58
Circularity Profile	End of Life Information
Removable battery	User replaceable
Take-back	Yes
WEEE Label	 The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Technical Illustration

Dimensions



Offer Marketing Illustration

Product benefits / Features

Peace of mind at home or office with
PowerChute™ Serial Shutdown Software

UPS management, graceful shutdown, and
energy management software for :



Desktops



Servers



Workstations



Offer Marketing Illustration

Product benefits / Features

Intelligent battery management



Battery replacement recommendations



Temperature-compensated charging



Periodic battery self-test



Disconnect battery notifications



Offer Marketing Illustration

Product benefits / Features



Offer Marketing Illustration

Product benefits / Features



Offer Marketing Illustration

Product benefits / Features

Premium Power Protection

Maintain business continuity and positive customer experience while avoiding revenue loss due to power and voltage disruptions.



Offer Marketing Illustration

Product benefits / Features



Offer Marketing Illustration

Product benefits / Features

Runtime

Support your sensitive electronics with battery power during utility power outages.

15
min



At half load

5
min



At full load




Offer Marketing Illustration

Product benefits / Features

AVR : Automatic Voltage Regulation

Voltage fluctuations put your devices at risk.
AVR instantly corrects variances in incoming voltage,
ensuring stable and consistent power to
your connected devices.

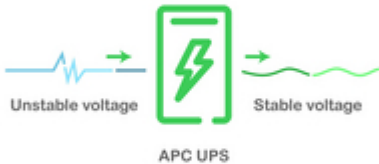

Benefits of AVR

Increased
battery life

Protection against
system crash

Protection against
data loss

Alternative



