


Available in



Appliance

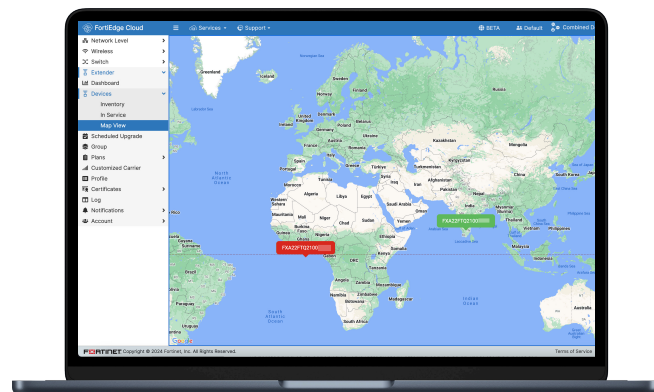

- Extends network edge into vehicle and harsh site deployments
- Unifies LTE and Wi-Fi in a single device
- Dust and splash tight (IP64)
- Ruggedized against extreme temperatures, shock, vibration, and humidity
- Certified for a variety of deployment scenarios
- Enables secure network fabrics with VxLAN extension
- Cloud management and on-premises management options
- Rich interface for multiple LAN, WAN, OT/IoT, and console connections
- Small form-factor for easy deployment and optimal cellular signal

FortiExtender ruggedized 5G/LTE gateways offer scalable, secure, and resilient connectivity for operational technology networks and enterprise networks with harsh deployment environments. Driven by Fortinet's unique approach of Secure Networking, FortiExtender allows organizations business continuity, improved network availability while securing connectivity with wired broadband and cellular networks.


From remote sites in harsh conditions, to factories, healthcare facilities, and fleet vehicles—FortiExtender ruggedized 5G/LTE gateways provide reliable broadband access to the internet and extends the value of the Fortinet Security Fabric to support fluid business operations dependent on remote device connectivity.

Hardware

FortiExtender Vehicle 211F

The FortiExtender Vehicle 211F interface includes 4 LAN ports and 1 WAN port, featuring an industrial digital I/O port for external device control, as well as Console and USB 2.0 ports for out of band management (OOB).

FEV-211F Rear View

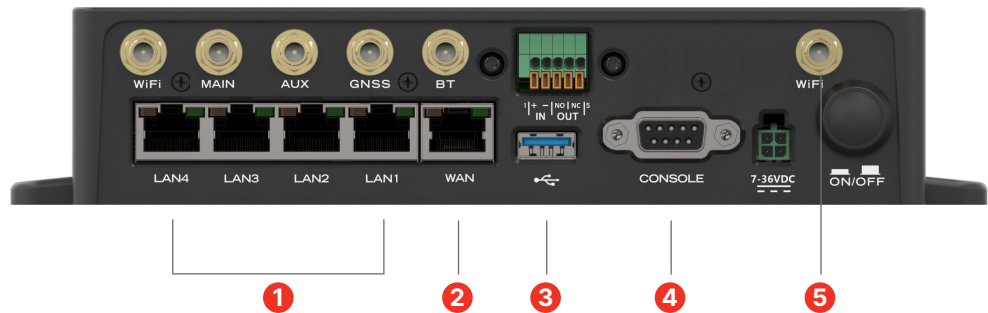

For interface details, please see the Quick Start Guide online:

<https://docs.fortinet.com/product/fortiextender/>


Interfaces

- | | |
|--|----------------------|
| 1. 4 x GE RJ45 Ethernet Ports | 4. 1 x Console Port |
| 2. 1 x GE RJ45 WAN Port | 5. 6 x Antenna Ports |
| 3. 1 x Digital I/O Connector
1 x USB 2.0 Port | |

FEV-211F Front View



FEV-211F Top View

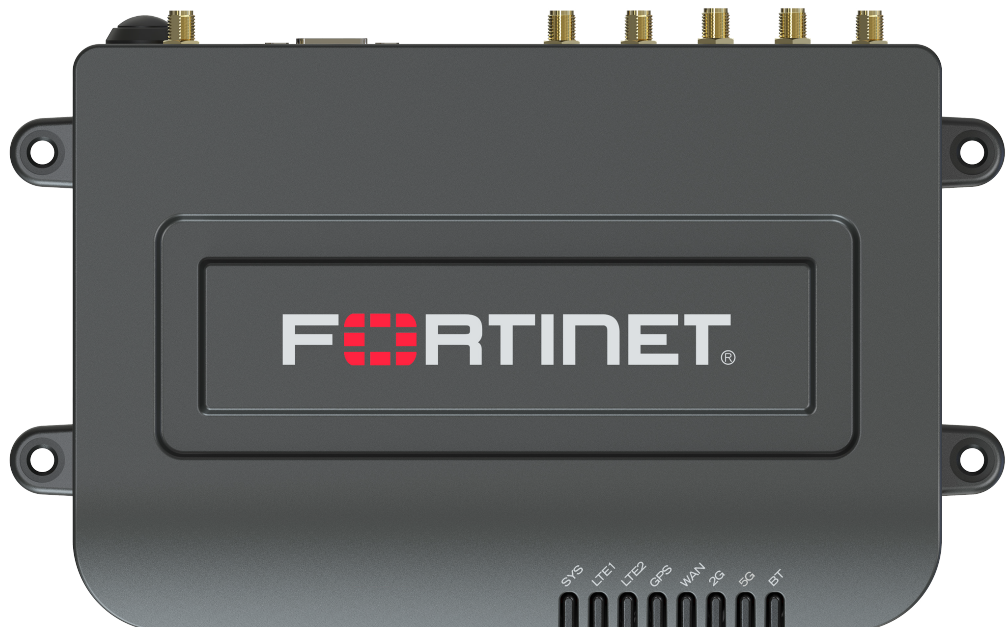


Hardware

FortiExtender Vehicle 511G

The FortiExtender Vehicle 511G interface includes 4 LAN ports and 1 WAN port, featuring an industrial digital I/O port for external device control, as well as Console and USB 2.0 ports for out of band management (OOB).

FEV-511G Rear View

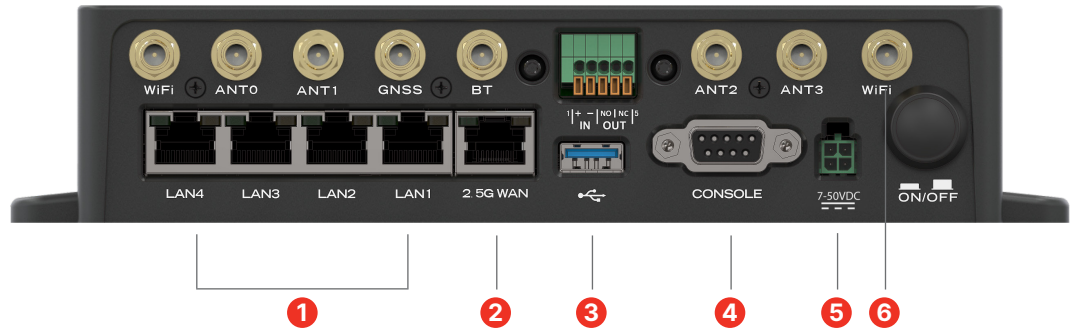

For interface details, please see the Quick Start Guide online:

<https://docs.fortinet.com/product/fortiextender/>

Interfaces

1. 4 x LAN Ports
2. 1 x GE RJ45 WAN Port
3. 1 x USB 2.0 Port
4. 1 x Console Port
5. 7-50VDC input
6. WiFi Antenna

FEV-511G Front View



FEV-511G Top View




Hardware

FortiExtender Rugged 511G

The FortiExtender Rugged 511G interface includes 1x LAN1 1/2.5G/POE (RJ-45) IP67 port, 1x LAN2/1G (RJ-45) IP67 port, as well as Console and USB 2.0 (USB-A) ports for out of band management (OOB). FER-511G also provides 2 × 2 MIMO 2.4G/5G concurrent Wi-Fi6 of 802.11 a/b/g/n/ac/ax up to max 1800Mbps.

FER-511G Bottom View

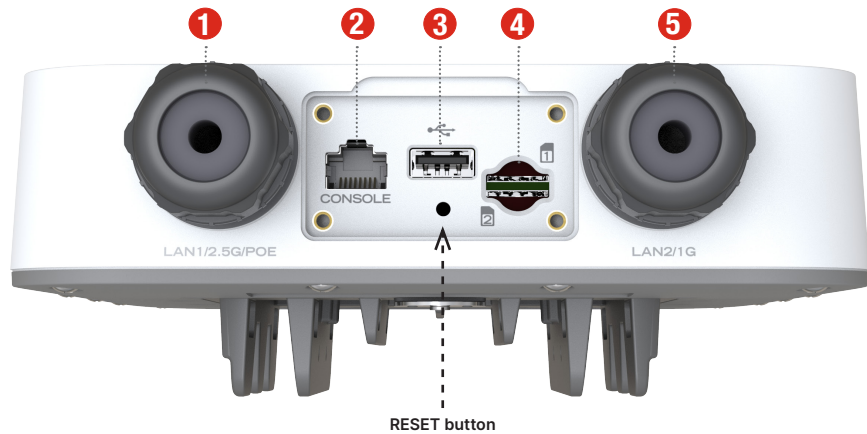

Interfaces

For interface details, please see the Quick Start Guide online:

<https://docs.fortinet.com/product/fortiextender/>

1. LAN1/2.5G/POE (RJ-45) 2.5 Gbps 802.3at (25.5W) PoE Ethernet IP67 Port
2. CONSOLE (RJ-45) CLI management
3. USB 2.0 (USB-A)
4. SIM Slots (x2) MicroSIM - 3FF
5. LAN2/1G (RJ-45) 1 Gbps Ethernet IP67 Port


FER-511G Top View



Features

Superior Management, Security, and Control

FortiExtender Rugged is a plug-and-play device. Once deployed in a vehicle or at a harsh site remotely over VxLAN, FortiExtender appears as a regular network interface in FortiOS management. IT administrators can manage the connection and implement advanced protection from FortiGuard, just like any other FortiGate interface.



Ruggedized for Any Deployment Scenario


FortiExtender rugged devices allow you to deploy the device in a vehicle or at a harsh site. The devices are protected against temperature extremes, shock, vibration, humidity, and provide ingress protection against dust and splash. In addition, FortiExtender ruggedized devices are certified for deployment in unique scenarios, such as rail deployments.

5G/LTE Wireless WAN

FortiExtender ruggedized devices support dual-SIM and dual-modem options, enabling up to four different ISPs for ultra-reliable connectivity. Dual-SIM models enable active/passive cellular for failover based on data plan, disconnects, signal strength, and link health, allowing you to balance connectivity quality and cost. Dual-Modem provides active/active cellular links for high-availability, traffic isolation, and load-balancing use cases.

LAN Connectivity

FortiExtender offers multiple LAN Ethernet ports to enable multiple connections at the Wireless WAN site. Ideal for High Availability (HA) pairs of FortiGates, each FortiGate can be directly connected to the FortiExtender. Either FortiGate can run in load-balancing or failover modes and receive WAN connectivity from the FortiExtender.



VxLAN Extension

You don't need a FortiGate on site to deploy AI-powered security with your FortiExtender. Enhanced LAN Extension in FortiExtender creates a network fabric using VxLAN technology where you can extend the Layer 2 broadcast domain of a remote FortiGate to the standalone FortiExtender with no extra license needed. Depending on the FortiGate model*, Enhanced LAN Extension supports over 1000 FortiExtenders per firewall.

*Contact your Sales Engineer for specific details.


Private 5G/LTE (CBRS)

All FortiExtender 5G/LTE models support CBRS in either the form of LTE Band 48 or 5G N48. This allows FortiExtender to play a critical role in Private 5G/LTE deployments as a rapid secure uplink at the edge. When equipped with a Private 5G/LTE SIM card, FortiExtenders can also receive CBRS signal from Private 5G/LTE Access Points to deployed on Automated Guided Vehicles (AGVs), Autonomous Mobile Robots (AMRs), or as virtual LAN mobile zones in parking lots, pop-up tents, and more.



Deployment

Industrial Site

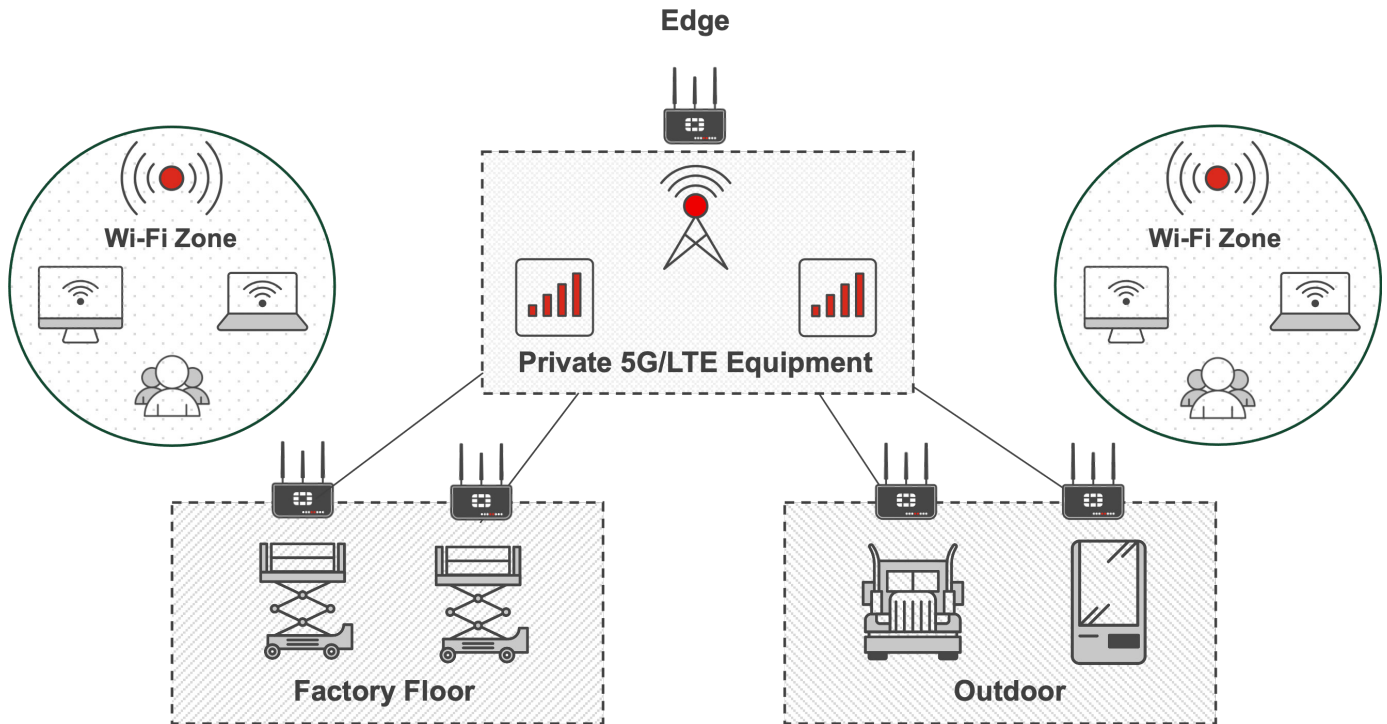

Hardware Specifications

	FEV-211F-AM / FEV-211F	FEV-212F/FEV-212F-AM
Hardware and System		
Modem Support	Internal (1x Modem)	Internal (2x Modems)
Number of Antennas	Vehicle LTE Antenna sold separately. 2x Wi-Fi/1x BT antenna included.	Vehicle LTE Antenna sold separately. 2x Wi-Fi/1x BT antenna included.
Power over Ethernet (PoE) Powered	No	No
Ethernet Ports	5 GE RJ45 Ports (WAN + LAN)	5 GE RJ45 Ports (WAN + LAN)
USB Ports	1 x USB 2.0 Type A	1 x USB 2.0 Type A
Bluetooth	Maximum Transmit Power 10 dBm Frequency 2.4 GHz	Maximum Transmit Power 10 dBm Frequency 2.4 GHz
GPS Antenna Port	Yes	Yes
WiFi	2x2 2.4/5GHz 802.11 a/b/g/n/ac wave2 WiFi	2x2 2.4/5GHz 802.11 a/b/g/n/ac wave2 WiFi
Mounting Options	Wall mount for Vehicle/Desktop	Wall mount for Vehicle/Desktop
Type	Indoor/In-Vehicle	Indoor/In-Vehicle
Dimensions		
Height x Width x Length (inches)	1.77 × 5.11 × 7.16 (not including antenna length)	1.77 × 5.11 × 7.16 (not including antenna length)
Height x Width x Length (mm)	45 × 130 × 182 (not including antenna length)	45 × 130 × 182 (not including antenna length)
Weight	2.1 lbs (0.97kg)	2.1 lbs (0.97kg)
Environment		
Power Required	7-36V DC for 12V/24V vehicle battery system	7-36V DC for 12V/24V vehicle battery system
Power Consumption (Average)	17.88W	17.88W
Power Consumption (Maximum)	22.74W	22.74W
Operating Temperature	-40°F to 158°F (-40°C to 70°C)	-40°F to 158°F (-40°C to 70°C)
Storage Temperature	-40°F to 158°F (-40°C to 70°C)	-40°F to 158°F (-40°C to 70°C)
Humidity	5% to 95%	5% to 95%
Carrier Certifications		
Verizon	①	①
ATT	②	②
PTCRB	③	③
T-Mobile	—	—
Public Safety Network	FirstNet Capable (LTE Only)	FirstNet Capable (LTE Only)
Certifications		
FCC	FCC Part 15B, 15C, 2.1091	FCC Part 15B, 15C, 2.1091
IC	ICES-003, RSS-247, RSS-102	ICES-003, RSS-247, RSS-102
CE	CE (4.1) RR&TTE Directive 1999 / 5 / EC (4.2) EN 300 328 / EN 301 489 / EN 301 893 / EN 50385 (4.3) EU Directive 2004 / 108 / EC EMC (4.4) EU Directive 2006 /95 / EC LVD (4.5) EN 55022 / EN 55024 / EN 61000	CE (4.1) RR&TTE Directive 1999 / 5 / EC (4.2) EN 300 328 / EN 301 489 / EN 301 893 / EN 50385 (4.3) EU Directive 2004 / 108 / EC EMC (4.4) EU Directive 2006 /95 / EC LVD (4.5) EN 55022 / EN 55024 / EN 61000
UL	Pending	Pending
CB	IEC/EN 62368-1	IEC/EN 62368-1
Ingress Protection	IP64 (dust tight and splashing water)	IP64 (dust tight and splashing water)
Rail	EN 50155 Class S1	EN 50155 Class S1
Shock/Vibration/Humidity	MIL STD 810H, SAE J1455	MIL STD 810H, SAE J1455
Bandwidth and Throughput Information		
IPsec VPN (Wired)	120 Mbps	120 Mbps
IPsec VPN (LTE/5G)	120 Mbps	120 Mbps
Lan-Extension (VxLAN over IPsec)	90 Mbps	90 Mbps
LAN-LAN Layer-2 Frames	930 Mbps	930 Mbps
LAN-WAN NAT 'ed Layer-3 packets	930 Mbps	930 Mbps
Max WAN Uplinks Supported	1	1

* Applies to AM model only. ** Applies to EA model only.

Certification notes:

The built-in modem offers quad-band connectivity to HSPA+ networks worldwide and expected to work in 3G mode worldwide, subject to carrier support.

There are exceptions however, as some carriers control the access to their network to specific carrier certified devices. These carriers allow only certified modem IMEI numbers on their network and have the ability to disable the LTE connection after a period of time.

The following carriers are known to require additional testing to obtain certification. Please reach out to the Fortinet sales team and to evaluate your specific regional requirements: Brazil (VIVO), USA (Sprint), New Zealand, Arabian Peninsula (all carriers), UK (All carriers).



3G/4G-LTE/5G Specifications

FEV-211F-AM FEV-212F-AM		FEV-211F FEV-212F
Regional Compatibility		
	North America Carriers	Global Carriers
Internal Modem Specifications		
Modem Model	Sierra Wireless EM7511 (1x Modem)	Sierra Wireless EM7511 (2x Modem)
5G NR SA and NSA	—	—
4G: LTE	CAT-12 Bands: 1, 2, 3, 4, 5, 7, 8, 9, 12, 13, 14, 18, 19, 20, 26, 29, 30, 32, 41, 42, 43, 46, 48, 66	CAT-12 Bands: 1, 2, 3, 4, 5, 7, 8, 9, 12, 13, 18, 19, 20, 26, 28, 29, 30, 32, 41, 42, 43, 46, 48, 66
3G: UMTS/HSPA+	Bands: 1, 2, 4, 5, 6, 8, 9, 19	Bands: 1, 2, 4, 5, 6, 8, 9, 19
3G: WCDMA	Bands: 1, 2, 4, 5, 6, 8, 9, 19	Bands: 1, 2, 4, 5, 6, 8, 9, 19
Additional Ports	GPS antenna port	GPS antenna port
Connector Type	SMA LTE (MAIN, AUX, GPS)	SMA LTE (MAIN, AUX, GPS)
Module Certifications	FCC, IC, GCF, PTCRB	(1) CB IEC 60950-1:2005 (2) UL UL 60950-1, CSA C22.2 No. 60950-1-07 (3) FCC FCC Part 15, Class B and Subpart C and EICES-003 (4) CE (4.1) RR&TTE Directive 1999 / 5 / EC (4.2) EN 300 328 / EN 301 489 / EN 301 893 / EN 50385 (4.3) EU Directive 2004 / 108 / EC EMC (4.4) EU Directive 2006 /95 / EC LVD (4.5) EN 55022 / EN 55024 / EN 61000 (5) IC (5.1) Canada RSS-210 Issue 7 / Canada RSS-Gen Issue 2 (5.2) RSS102, Issue 4 (6) Directives Low Voltage Directive RoHS
Diversity	✓	✓
MIMO	✓	✓
GNSS Bias	✓	✓
Advanced Radio Technology		
2×2 MIMO — enables industry leading data speeds	✓	✓
4×4 MIMO — enables industry leading data speeds	—	—
5G Downlink 4×4 MIMO bands: 1, 2, 3, 7, 25, 38, 40, 41, 48, 66, 77, 78, 79	—	—
5G Uplink 2 × 2 MIMO Band: 41	—	—
LTE Downlink 4 × 4 MIMO bands: 1, 2, 3, 4, 7, 25, 30, 32, 34, 38, 39, 40, 41, 42, 43, 48, 66	—	—
LTE Downlink 4 × 4 MIMO bands: 1, 2, 3, 4, 7, 25, 30, 32, 38, 39, 40, 41, 66	—	—
Receiver Equalization — improves performance in noisy and highly mobile environments	✓	✓
Receiver Diversity — improves performance at cell edges and in buildings	✓	✓
Dual Modem	—	✓
2×2 2.4/5GHz 802.11 a/b/g/n/ac Wave2 WiFi Support	✓	✓
2×2 2.4G/5GHz concurrent WiFi6 (802.11ax)	—	—



Features

	FEV-211F-AM FEV-212F-AM	FEV-211F FEV-212F
Advanced Software Features		
Connection Status	✓	✓
Auto-connect	✓	✓
Auto-select Network	✓	✓
Data Byte Count	✓	✓
Network Profile	✓	✓
Self-diagnostics	✓	✓
Power Management — standby and hibernate selective suspend	✓	✓
DIAG and AT Commands	✓	✓
Private IP SIM Support	✓	✓
L2 Tunnel Mode via VLAN or CAPWAP for fast and flexible deployments	✓	✓
Single Pane of Glass Management via FortiGate and FortiManager	✓	✓
SIM Features		
Dual-SIM Support with intelligent fail-over algorithms	✓	✓
SIM Size: Micro-SIM type 3FF	✓	✓
SIM Security Cover	✓	✓
IMEI printed at bottom of enclosure for ease of activation	✓	✓

* Applies to AM model only.

The built-in modem offers quad-band connectivity to HSPA+ networks worldwide and is expected to work in 3G mode worldwide, subject to carrier support. There are exceptions however, as some carriers control the access to their network to specific carrier certified devices. These carriers allow only certified modem IMEI numbers on their network and have the ability to disable the LTE connection after a period of time.

ⓘ Certifications are in progress. The following carriers are known to require additional testing to obtain certification. Please reach out to the Fortinet sales team and to evaluate your specific regional requirements: Brazil (VIVO), USA (Sprint), New Zealand, Arabian Peninsula (all carriers), and UK (all carriers).



Hardware Specifications

	FEV-511G	FER-511G
Hardware Specifications		
Hardware and System	IPQ6010, Quad-Core A53@1.8GHz	IPQ6010-1, Quad-Core A53@1.8GHz
Modem Support	Telit FN990A28-HP	Telit FN990A28-HP
Number of Antennas	7 (4× 5G/LTE + 1x GNSS + 2× 2.4G/5G WiFi)	7 (4× 5G/LTE + 1x GNSS + 2× 2.4G/5G WiFi)
Power over Ethernet (PoE) Powered	No	Yes, on 2.5G WAN port
Ethernet Ports	1× 2.5G + 4× 1G	1× 2.5G/PoE + 1× 1G
USB Ports	1x USB2.0-A	1x USB2.0-A
Bluetooth	Yes	Yes
GPS Antenna Port	Dedicated GNSS port	Dedicated GNSS port
WiFi	Wi-Fi6 (802.11ax)	Wi-Fi6 (802.11ax)
Mounting Options	Desk, wall, DIN Rail (Optional DIN rail clip required)	Pole, Wall
Type	Vehicle	Outdoor
Dimensions		
Height x Width x Length (inches)	7.6 × 5.1 × 1.8	9.5 × 7.1 × 1.85
Height x Width x Length (mm)	192 × 130 × 45	242 × 181 × 47
Weight	0.96 (Kg)	1.7 (Kg)
Environment		
Power Required	7 - 50V	PoE 802.3at
Power Consumption (Average)	18.5 (W)	11 (W)
Power Consumption (Maximum)	20 (W)	16 (W)
Operating Temperature	-40°C - 70°C	-40°C - 60°C
Storage Temperature	-40°C - 70°C	-40°C - 70°C
Humidity	5% to 95% RH (non-condensing)	5% to 95% RH (non-condensing)
Carrier Certifications		
Verizon	in progress	In Progress
ATT	in progress	In Progress
PTCRB	✓	✓
T-Mobile	in progress	in progress
Public Safety Network	FirstNet (Trusted) In-progress	FirstNet (Trusted) In-progress
Certifications		
FCC	FCC Part 15B, 15C, 15E, 2.1091	FCC Part 15B, 15C, 15E, 2.1091
IC	ICES-003, RSS-247, RSS-102	ICES-003, RSS-247, RSS-102
CE	EMC 2014/30/EU (EN 55032, EN 55035, EN IEC 61000-3-2, EN 61000-3-3, EN 301 489-1/-3/-17/-19/-52) RED 2014/53/EU (EN 300 328, EN 301 893, EN 300 440, EN 303 413, EN 301 908-1/-2/-13/-25, EN IEC 62311, EN 50665, EN 50385) LVD 2014/35/EU (EN 62368-1)	EMC 2014/30/EU (EN 55032, EN 55035, EN IEC 61000-3-2, EN 61000-3-3, EN 301 489-1/-3/-17/-19/-52) RED 2014/53/EU (EN 300 328, EN 301 893, EN 300 440, EN 303 413, EN 301 908-1/-2/-13/-25, EN IEC 62311, EN 50665, EN 50385) LVD 2014/35/EU (EN 62368-1, EN 60950-22)
UL	UL/CSA 62368-1	UL/CSA 62368-1
CB	IEC/EN 62368-1	IEC/EN 62368-1, IEC/EN 60950-22
Ingress Protection	IP64	IP67
Rail	Yes	No
C1D2	No	In Progress
Shock/Vibration/Humidity	MIL-STD-810H	IEC 61850-3 / IEEE 1613
Bandwidth and Throughput Information		
IPsec VPN (Wired)	850 Mbps	850 Mbps
IPsec VPN (LTE/5G)	400 Mbps	400 Mbps
Lan-Extension (VxLAN over IPsec)	600 Mbps	600 Mbps
LAN-LAN Layer-2 Frames	950 Mbps	950 Mbps
LAN-WAN NAT 'ed Layer-3 packets	940 Mbps	940 Mbps
Max WAN Uplinks Supported	1	1



3G/4G-LTE/5G Specifications

	FEV-511G	FER-511G
Regional Compatibility	North America, EMEA and APAC	North America, EMEA and APAC
Applied Region	Global	Global
Internal Modem Specifications		
Modem Model	FN990A28-HP	FN990A28-HP
5G NR SA and NSA	n1, n2, n3, n5, n7, n8, n12, n13, n14, n18, n20, n25, n26, n28, n29, n30, n38, n40, n41, n48, n66, n71, n75, n76, n77, n78, n79	n1, n2, n3, n5, n7, n8, n12, n13, n14, n18, n20, n25, n26, n28, n29, n30, n38, n40, n41, n48, n66, n71, n75, n76, n77, n78, n79
4G: LTE	B1, B2(B25), B3, B4(B66), B26(B5, B18, B19), B7, B8, B12(B17), B13, B14, B20, B28, B29(DL), B30, B32(DL), B34, B38, B39, B40, B41, B42, B43, B46(LAA), B48(CBRS), B66, B71	B1, B2(B25), B3, B4(B66), B26(B5, B18, B19), B7, B8, B12(B17), B13, B14, B20, B28, B29(DL), B30, B32(DL), B34, B38, B39, B40, B41, B42, B43, B46(LAA), B48(CBRS), B66, B71
3G: UMTS/HSPA+	B1, B2, B4, B5(B6, B19), B8	B1, B2, B4, B5(B6, B19), B8
3G: WCDMA	B1, B2, B4, B5(B6, B19), B8	B1, B2, B4, B5(B6, B19), B8
Additional Ports		
Connector Type	SMA	N/A (Internal antennas)
Module Certifications	AT&T, FirstNet, VZW, TMO, KDDI, Docomo, FCC, ISED, RED, JATE/TELEC, Anatel, RCM, NCC, GCF, PTCRB, KC, Telstra	AT&T, FirstNet, VZW, TMO, KDDI, Docomo, FCC, ISED, RED, JATE/TELEC, Anatel, RCM, NCC, GCF, PTCRB, KC, Telstra
Diversity	5G n41/77/78/79 PC1.5. No on others	5G n41/77/78/79 PC1.5. No on others
MIMO	Yes	Yes
GNSS Bias	Yes	Yes, not used in FER-511G
Advanced Radio Technology		
2×2 MIMO — enables industry leading data speeds	MIMO UL support on bands: 5G FR1:n38,n41, n48, n77, n78, n79	MIMO UL support on bands: 5G FR1:n38,n41, n48, n77, n78, n79
4×4 MIMO — enables industry leading data speeds	"4×4 MIMO DL support on bands: 5G FR1: n1/n2/n3/n7/n25/n30/n38/n40/n41/n48/n66/n75/n77/n78/n79 4G: B1/B2/B3/B4/B7/B25/B30/B38/B39/B40/B41/B42/B43/B48/B66"	"4×4 MIMO DL support on bands: 5G FR1: n1/n2/n3/n7/n25/n30/n38/n40/n41/n48/n66/n75/n77/n78/n79 4G: B1/B2/B3/B4/B7/B25/B30/B38/B39/B40/B41/B42/B43/B48/B66"
5G Downlink 4×4 MIMO bands: 1, 2, 3, 7, 25, 38, 40, 41, 48, 66, 77, 78, 79	n1/n2/n3/n7/n25/n30/n38/n40/n41/n48/n66/n75/n77/n78/n79	n1/n2/n3/n7/n25/n30/n38/n40/n41/n48/n66/n75/n77/n78/n79
5G Uplink 2 × 2 MIMO Band: 41	n38, n41, n48, n77, n78, n79	n38, n41, n48, n77, n78, n79
LTE Downlink 4 × 4 MIMO bands: 1, 2, 3, 4, 7, 25, 30, 32, 34, 38, 39, 40, 41, 42, 43, 48, 66	B1/B2/B3/B4/B7/B25/B30/B38/B39/B40/B41/B42/B43/B48/B66	B1/B2/B3/B4/B7/B25/B30/B38/B39/B40/B41/B42/B43/B48/B66
LTE Downlink 4 × 4 MIMO bands: 1, 2, 3, 4, 7, 25, 30, 32, 38, 39, 40, 41, 66	See above	See above
Receiver Equalization — improves performance in noisy and highly mobile environments	☑	☑
Receiver Diversity — improves performance at cell edges and in buildings	☑	☑
Dual Modem	—	—
2×2 2.4/5GHz 802.11 a/b/g/n/ac Wave2 WiFi Support	☑, covered by WiFi6	☑, covered by WiFi6
2×2 2.4G/5GHz concurrent WiFi6 (802.11ax)	☑	☑
Advanced Software Features		
Connection Status	☑	☑
Auto-connect	☑	☑
Auto-select Network	☑	☑
Data Byte Count	☑	☑
Network Profile	☑	☑
Self-diagnostics	—	—
Power Management — standby and hibernate selective suspend	☑	☑
DIAG and AT Commands	☑	☑
Private IP SIM Support	☑	☑
L2 Tunnel Mode via VLAN or CAPWAP for fast and flexible deployments	☑	☑
Single Pane of Glass Management via FortiGate and FortiManager	☑	☑
SIM Features		
Dual-SIM Support with intelligent fail-over algorithms	☑	☑
SIM Size: Micro-SIM type 3FF	☑	☑
SIM Security Cover	☑	☑
IMEI printed at bottom of enclosure for ease of activation	☑	☑
eSIM	In progress	In Progress



Ordering Information


PRODUCT	SKU	DESCRIPTION
3G/4G-LTE/5G Models		
FortiExtenderVehicle 211F-AM	FEV-211F-AM	Rugged Broadband Wireless WAN Router for Vehicle and OT applications with 1x Dual SIM 3G/4G LTE CAT-12 M.2 Module (DL/UL=600M/150Mbps) for North America Carriers. 1x GE WAN + 4x GE LAN RJ45 ports including 802.11ac Wi-Fi and GPS/GNSS Service. External LTE antenna required. Wi-Fi Region A.
FortiExtenderVehicle 211F	FEV-211F	Rugged Broadband Wireless WAN Router for Vehicle and OT applications with 1x Dual SIM 3G/4G LTE CAT-12 M.2 Module (DL/UL=600M/150Mbps) for EU/APEC/LATAM Carriers. 1x GE WAN + 4x GE LAN RJ45 ports including 2x 2.4/5GHz 802.11ac Wi-Fi and GPS/GNSS systems. External LTE antenna required (not included). Band28 Supported, but not Band14.
FortiExtenderVehicle 212F-AM	FEV-212F-AM	Rugged Broadband Wireless WAN Router for Vehicle and OT applications with 2x Dual SIM 3G/4G LTE CAT-12 M.2 Module (DL/UL=600M/150Mbps) for North America Carriers. 1x GE WAN + 4x GE LAN RJ45 ports including 802.11ac Wi-Fi and GPS/GNSS Service. External LTE antenna required. Wi-Fi Region A.
FortiExtenderVehicle 212F	FEV-212F	Rugged Broadband Wireless WAN Router for Vehicle and OT applications with 2x Dual SIM 3G/4G LTE CAT-12 M.2 Module (DL/UL=600M/150Mbps) for EU/APEC/LATAM Carriers. 1x GE WAN + 4x GE LAN RJ45 ports including 2x 2.4/5GHz 802.11ac Wi-Fi and GPS/GNSS systems. External LTE antenna required (not included). Band28 Supported, but not Band14.
FortiExtenderVehicle 511G	FEV-511G	Rugged Broadband Wireless WAN Router for Vehicle and OT applications with 1x "Dual SIM 5G Sub-6GHz M.2 Module (DL/UL=3.4Gbps/0.46Gbps)" + 1x reserved eSIM for NA/EMEA/APAC Carriers. It has 1x 2.5GE WAN + 4x GE LAN RJ45 ports, 1x USB2.0 Type A, 1x DB9 console port and an industrial digital I/O port for external device control, and provides 2x 2.4/5GHz concurrent 802.11 a/b/g/n/ac/ax WiFi6 speeds up to 1800Mbps (Max.) and Bluetooth 5.0 communication.
FortiExtender Rugged 511G	FER-511G	Ruggedized outdoor 5G sub6/LTE wireless WAN Router with 1x "Dual SIM 5G NR Sub-6GHz M.2 Module" for North/South America and Europe Carriers. 1x 2.5GbE/POE PD(802.3at (25.5W)) port and 1x 1GbE port.
FortiCare		
FortiCare Support	FC-10-FV21F-247-02-DD	24x7 FortiCare for FEV-211F and FEV-211F-AM.
	FC-10-FG21F-247-02-DD	FortiCare Premium Support.
	FC-10-FG21F-210-02-DD	Next Calendar Day Delivery Priority RMA Service (Requires FortiCare Premium or FortiCare Elite).
Accessories		
PoE Injector	GPI-115	IEEE 802.3af-compliant single-port, mid-span, with 15.4 Watt Gigabit Ethernet (GE) PoE.
PoE Injector	GPI-130	IEEE 802.3af-compliant single-port, mid-span, with 30 Watt Gigabit Ethernet (GE) PoE.
Vehicle Mount LTE/5G Antennas	FANT-3IN1-TG-5M-FEV	3-in-1 permanent vehicle roof mount antenna for FEV-211F and FEV-211F-AM. Outdoor waterproof antenna with 2x 5G/LTE + 1x active GNSS and 5 meter antenna cable with SMA male connectors.
	FANT-5IN1-TG-5M-FEV	5-in-1 outdoor, waterproof, permanent vehicle roof mount antenna for FEV-212F/-AM and FEV-511G with 4x 5G/LTE + 1x Active GNSS and a 5-meter antenna cable with 5x SMA male connectors.
	FANT-7IN1-TG-5M-FEV	7-in-1 outdoor, waterproof, permanent vehicle roof mount antenna for FEV-212F/-AM and FEV-511G with 4x 5G/LTE, 2x 2.4G/5G Wi-Fi, 1x Active GNSS and a 5-meter antenna cable with 2x RP-SMA male connectors for Wi-Fi + 5x SMA male connectors for 5G/LTE and GNSS connectivity.
Vehicle Mount LTE Antenna	FEV-ANT-MNT-2BRKT	

Visit <https://www.fortinet.com/resources/ordering-guides> for related ordering guides.



Fortinet Corporate Social Responsibility Policy

Fortinet is committed to driving progress and sustainability for all through cybersecurity, with respect for human rights and ethical business practices, making possible a digital world you can always trust. You represent and warrant to Fortinet that you will not use Fortinet's products and services to engage in, or support in any way, violations or abuses of human rights, including those involving illegal censorship, surveillance, detention, or excessive use of force. Users of Fortinet products are required to comply with the [Fortinet EULA](#) and report any suspected violations of the EULA via the procedures outlined in the [Fortinet Whistleblower Policy](#).

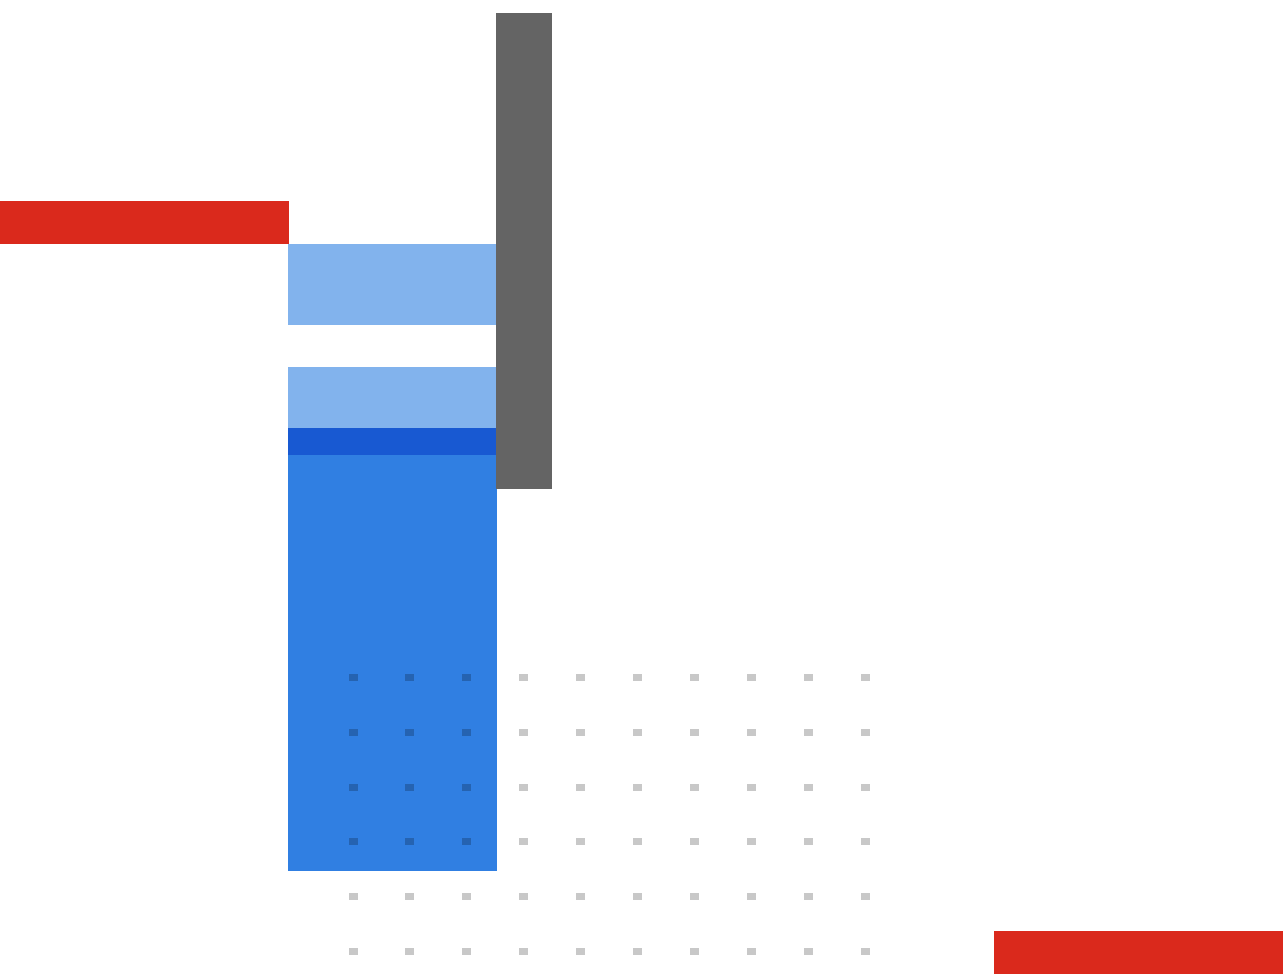

www.fortinet.com

Copyright © 2025 Fortinet, Inc. All rights reserved. Fortinet®, FortiGate®, FortiCare® and FortiGuard®, and certain other marks are registered trademarks of Fortinet, Inc., and other Fortinet names herein may also be registered and/or common law trademarks of Fortinet. All other product or company names may be trademarks of their respective owners. Performance and other metrics contained herein were attained in internal lab tests under ideal conditions, and actual performance and other results may vary. Network variables, different network environments and other conditions may affect performance results. Nothing herein represents any binding commitment by Fortinet, and Fortinet disclaims all warranties, whether express or implied, except to the extent Fortinet enters a binding written contract, signed by Fortinet's SVP Legal and above, with a purchaser that expressly warrants that the identified product will perform according to certain expressly-identified performance metrics and, in such event, only the specific performance metrics expressly identified in such binding written contract shall be binding on Fortinet. For absolute clarity, any such warranty will be limited to performance in the same ideal conditions as in Fortinet's internal lab tests. Fortinet disclaims in full any covenants, representations, and guarantees pursuant hereto, whether express or implied. Fortinet reserves the right to change, modify, transfer, or otherwise revise this publication without notice, and the most current version of the publication shall be applicable.