




# HP Series 5 Pro 14 inch WQXGA Portable Monitor - 514pn (B88JWAA)

## Overview

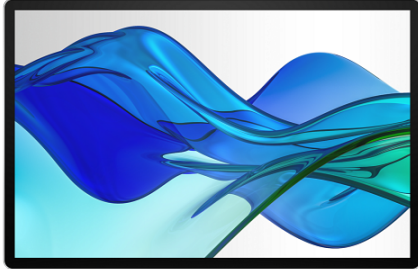

### Transform every space into a dual display workspace

Take your dual screen setup anywhere and stay productive on the go without sacrificing picture quality with the HP Series 5 Pro 14" Portable Monitor. Breakthrough Neo:LED delivers stunning visuals in a feather-light frame to fit any space, making it the perfect sidekick for your notebook.



### Portable dual-screen productivity powered by one cable

Carry your office space everywhere. See more and do more on the go with a 14" WQXGA 16:10 display that connects to your notebook via a single USB-C cable delivering up to 65W[1] of power for dual-screen productivity anywhere.



### Thin, light, and versatile enough to take wherever work takes you

Exercise versatility in any space with an ultra-thin, lightweight portable monitor you can easily add to your bag with a durable magnetic hard screen cover that doubles as a mousepad. The built-in kick-stand adapts to landscape or portrait to fit your workflow.

### Take your work anywhere with uncompromising visuals

Put your work in the best light with breakthrough IPS Black with Neo:LED panel technology. Experience rich, true-to-life color with AdobeRGB 100% and Display P3 100%. Wide color coverage paired with 400 nits brightness makes this display the perfect on the go device for those who demand excellence.[2]



### Materials that make an impact

This energy-efficient monitor is thoughtfully designed with at least 90% recycled plastic content in the monitor's enclosure, 20% recycled glass in the monitor panel, and 55% recycled aluminum.[3] Plus, 100% of the paper-based packaging is sustainably sourced or recycled.[4]

## Features

### Seamless Color Consistency Without Compromise

IPS Black with Neo:LED panel technology offers wide color coverage with 100% Adobe RGB, and 100% Display P3.<sup>[2]</sup>

### Deeper Blacks, Vibrant Whites

With a wide contrast ratio, enjoy true blacks that add depth to shadows and dimly lit scenes for clear detail in every photo, movie, or video game.<sup>[2]</sup>

### WQXGA Resolution

Crisp, clear visuals for smoother images with 2560 x 1600 WQXGA resolution and perfect 16:10 aspect ratio to match your notebook on this 14" portable display.<sup>[2]</sup>

### See Your Work in Any Light

With 400 nits of brightness, view beautiful details, enhanced image quality, and distinct shades of color in any environment.<sup>[2]</sup>

### 75 Hz Refresh Rate

Smoothly transition across projects from anywhere with this 14" portable display using a 75 Hz refresh rate capable of clearer, high-resolution details.<sup>[2]</sup>

### Progressive White Balance

Work better with content that looks the same on both screens. Progressive White Balance is an HP technology that provides consistent white-point matching from screen-to-screen.<sup>[10]</sup>

---

[1] Cable included. 5v@3A from the connected device required for power to the display. Video over USB-C™ requires a device with USB-C™ DisplayPort™ Alt mode or Thunderbolt™ 3.

[2] All performance specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary, either higher or lower.

[3] Recycled plastic is expressed as a percentage of the total weight plastic. Post-consumer recycled is based on the definition set in the EPEAT® standard for computers, IEEE 1680.1-2018 standard. Percentage of recycled glass in the monitor panel varies by product. Recycled glass is expressed as a percentage of the total weight of the glass. Recycled metal is expressed as a percentage of the total weight of the metal according to ISO 14021 definitions for metal parts over 25 grams.

[4] HP paper and fiber based packaging for PCs, displays, home and office print, and supplies is reported by suppliers as recycled or certified, with a minimum of 97% by volume verified by HP. Packaging is the box that comes with the product and all paper-based materials inside the box. Packaging for personal systems accessories and spare parts is not included.

[10] Based on internal testing of HP Series 7 Pro and HP Series 5 Pro monitors with USB Type-C® or HDMI connections to devices on macOS and Windows, March 2024 and September 2024. Requires USB Type-C® or HDMI connectivity. Some features may not be supported.

[10] HP's Progressive White Balance feature is designed to calibrate 100% full white on HP Series 5 Pro monitors. This adjustment is intended to align the white point more closely among various HP Series 5 Pro monitors. However, due to the nature of monitors, perceptible differences in the white color may still occur when the monitors are viewed from varying angles.

## Specifications

|                                     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|-------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Color                               | Silver                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Display size (diagonal)             | 14.36"                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Panel technology                    | IPS Black; Neo:LED                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Display size (diagonal)             | 36.5 cm (14.36")                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Aspect ratio                        | 16:10 <sup>[1]</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Native resolution                   | WQXGA (2560 x 1600) <sup>[1,2]</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Resolutions supported               | 640 x 480 @ 60 Hz; 640 x 480 @ 75 Hz; 720 x 400 @ 70 Hz; 800 x 600 @ 60 Hz; 800 x 600 @ 75 Hz; 1024 x 768 @ 60 Hz; 1280 x 720 @ 60 Hz; 1280 x 1024 @ 60 Hz; 1440 x 900 @ 60 Hz; 1600 x 900 @ 60 Hz; 1600 x 1200 @ 60 Hz; 1680 x 1050 @ 60 Hz; 1920 x 1080 @ 60 Hz; 1920 x 1200 @ 60 Hz; 1280 x 1024 @ 75 Hz; 2560 x 1600 @ 60 Hz; 1024 x 768 @ 75 Hz; 2560 x 1600 @ 75 Hz                                                                                                   |
| Pixel pitch                         | 0.1178 x 0.1178 mm <sup>[1]</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                           |
| Brightness                          | 400 nits <sup>[1]</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Contrast ratio                      | 2000:1 <sup>[1]</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Response time (typical)             | 7ms GtG (with overdrive) <sup>[1]</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Dimensions With Stand (W x D x H)   | 32.06 x 0.88 x 20.86 cm                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Weight                              | 0.63 kg                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Weight                              | 1.4 lb                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Display features                    | Tilt <sup>[1]</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Onscreen controls                   | Brightness+; Color                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Display colors                      | Up to 16.7 million colors supported <sup>[1]</sup>                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Display scan frequency (horizontal) | 31-124 kHz <sup>[1]</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Display scan frequency (vertical)   | 50-75 Hz <sup>[1]</sup>                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Camera                              | No integrated camera                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Power                               | USB Type-C® input : DC 5V or 9V or 10V or 12V or 15V or 20V, 4.5A MAX; USB Type-C® output: DC 5V or 9V or 12V or 15V, 3A MAX or 20V, 3.25A MAX                                                                                                                                                                                                                                                                                                                              |
| Power consumption                   | 13 W (maximum); 7 W (typical) <sup>[14]</sup>                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Operating temperature range         | 5 to 35°C                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Operating humidity range            | 20 to 80% RH (non-condensing)                                                                                                                                                                                                                                                                                                                                                                                                                                               |
| Sustainable impact specifications   | Low halogen; 90% post-consumer recycled plastic; Contains ocean-bound plastic; Contains 20% recycled glass in the monitor panel; Outside box and corrugated cushions are 100% sustainably sourced or recyclable; Molded paper pulp cushion inside box is 100% sustainably sourced or recyclable; 55% recycled aluminum                                                                                                                                                      |
| Certifications and compliances      | BIS; BSMI; CB; CCC; CE; cTUVus; EAC; FCC; ISO 9241-307; KC; KCC; NOM; TUV/GS; VCCI; Vietnam MEPS; WEEE; ISC; ICE; UAE; NRCS                                                                                                                                                                                                                                                                                                                                                 |
| Physical security                   | None                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Management Software                 | HP Display Center; HP Client Management Script Library <sup>[4,5]</sup>                                                                                                                                                                                                                                                                                                                                                                                                     |
| UPC number                          | (A2K) 198990467504; (A2N) 198990467559; (AB0) 198990467580; (AB1) 198990467634; (AB2) 198990467672; (AB4) 198990467702; (ABA) 198990467719; (ABB) 198990467757; (ABG) 198990467771; (ABJ) 4582712594344; (ABT) 198990467801; (ABU) 198990467832; (ABV) 198990467856; (ABY) 198990467887; (AC8) 198990467900; (ACJ) 198990467924; (ACQ) 198990467955; (AH3) 198990467993; (AKH) 198990468006; (AKL) 198990468037; (AR6) 198990468075; (UUF) 198990468112; (UUZ) 198990468143 |
| Manufacturer Warranty               | HP three-year limited warranty <sup>[16]</sup>                                                                                                                                                                                                                                                                                                                                                                                                                              |
| What's in the box                   | Monitor; Warranty card; Quick Setup Poster; 1 USB Type-C® to Type-C cable; Hard screen cover <sup>[3]</sup>                                                                                                                                                                                                                                                                                                                                                                 |

## Additional specifications

|                                                  |                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|--------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Backlight lamp life minimum (to half brightness) | 15,000 hours                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Backlight type                                   | Edge-lit                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Bezel                                            | Narrow                                                                                                                                                                                                                                                                                                                                                                                                                              |
| Color gamut                                      | 100% sRGB; 100% Display P3 <sup>[1]</sup>                                                                                                                                                                                                                                                                                                                                                                                           |
| Curvature                                        | Flat                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Datasheet photo 1                                | <a href="https://hp.widen.net/content/s38ibjbmzy/png/Badger_514pn_GlacierSilver_Catalog_Horizontal_TransparentBG_Front_4522533.png?w=800&amp;h=800&amp;position=c&amp;color=ffffff00&amp;quality=80&amp;u=dlkxlp">https://hp.widen.net/content/s38ibjbmzy/png/Badger_514pn_GlacierSilver_Catalog_Horizontal_TransparentBG_Front_4522533.png?w=800&amp;h=800&amp;position=c&amp;color=ffffff00&amp;quality=80&amp;u=dlkxlp</a>       |
| Datasheet photo 2                                | <a href="https://hp.widen.net/content/osr3fpeanf/png/Badger_514pn_GlacierSilver_Catalog_Vertical_TransparentBG_FrontRight_4522493.png?w=800&amp;h=800&amp;position=c&amp;color=ffffff00&amp;quality=80&amp;u=dlkxlp">https://hp.widen.net/content/osr3fpeanf/png/Badger_514pn_GlacierSilver_Catalog_Vertical_TransparentBG_FrontRight_4522493.png?w=800&amp;h=800&amp;position=c&amp;color=ffffff00&amp;quality=80&amp;u=dlkxlp</a> |
| Datasheet photo 3                                | <a href="https://hp.widen.net/content/8khzy1s0jo/png/Badger_514pn_GlacierSilver_Catalog_TransparentBG_Rear_4524092.png?w=800&amp;h=800&amp;position=c&amp;color=ffffff00&amp;quality=80&amp;u=dlkxlp">https://hp.widen.net/content/8khzy1s0jo/png/Badger_514pn_GlacierSilver_Catalog_TransparentBG_Rear_4524092.png?w=800&amp;h=800&amp;position=c&amp;color=ffffff00&amp;quality=80&amp;u=dlkxlp</a>                               |
| Datasheet photo 4                                | <a href="https://hp.widen.net/content/ipmb4kp2sh/png/Badger_514pn_GlacierSilver_Catalog_TransparentBG_LeftProfile_4522532.png?w=800&amp;h=800&amp;position=c&amp;color=ffffff00&amp;quality=80&amp;u=dlkxlp">https://hp.widen.net/content/ipmb4kp2sh/png/Badger_514pn_GlacierSilver_Catalog_TransparentBG_LeftProfile_4522532.png?w=800&amp;h=800&amp;position=c&amp;color=ffffff00&amp;quality=80&amp;u=dlkxlp</a>                 |
| Display area (imperial)                          | 11.87 x 7.42 in                                                                                                                                                                                                                                                                                                                                                                                                                     |
| Display area (metric)                            | 30.15 x 18.84 cm                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Display contrast ratio (dynamic)                 | 10,000,000:1                                                                                                                                                                                                                                                                                                                                                                                                                        |
| Ecolabels                                        | Taiwan Green Mark; Japan PC Green Label; EPEAT® registered with Climate+                                                                                                                                                                                                                                                                                                                                                            |
| Energy efficiency class                          | B                                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Energy efficiency class logo                     | <a href="https://h10003.www1.hp.com/digmedialib/proding/lowres/c07055643.png">https://h10003.www1.hp.com/digmedialib/proding/lowres/c07055643.png</a>                                                                                                                                                                                                                                                                               |
| Energy star certified                            | ENERGY STAR® certified                                                                                                                                                                                                                                                                                                                                                                                                              |
| Flicker-free                                     | Yes (TÜV certified)                                                                                                                                                                                                                                                                                                                                                                                                                 |
| HDCP                                             | Yes, USB Type-C®                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Hardness                                         | 3H <sup>[1]</sup>                                                                                                                                                                                                                                                                                                                                                                                                                   |
| Haze                                             | 25%                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Horizontal viewing angle                         | 178°                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Low blue light                                   | HP Eye Ease (TÜV Low Blue Light Hardware Solution certified) <sup>[1]</sup>                                                                                                                                                                                                                                                                                                                                                         |
| Non-Operating Humidity Range                     | 5 - 95%                                                                                                                                                                                                                                                                                                                                                                                                                             |
| Non-operating temperature - Celsius              | -40 to 65°C                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Non-operating temperature - fahrenheit           | -40 to 149°F                                                                                                                                                                                                                                                                                                                                                                                                                        |

|                                                      |                                                                                                                                                                                                                                                                                                                     |
|------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| On mode power demand in Standard Dynamic Range (SDR) | 5.6 W                                                                                                                                                                                                                                                                                                               |
| Operating altitude                                   | Up to 16,400 ft                                                                                                                                                                                                                                                                                                     |
| Operating altitude                                   | Up to 5,000 m                                                                                                                                                                                                                                                                                                       |
| Operating temperature range                          | 41 to 95°F                                                                                                                                                                                                                                                                                                          |
| Package dimensions (W x D x H)                       | 39.8 x 6 x 27.8 cm                                                                                                                                                                                                                                                                                                  |
| Package dimensions (W x D x H)                       | 15.67 x 2.36 x 10.94 in                                                                                                                                                                                                                                                                                             |
| Package weight                                       | 1.27 kg                                                                                                                                                                                                                                                                                                             |
| Package weight                                       | 2.8 lb                                                                                                                                                                                                                                                                                                              |
| Pallet (layers)                                      | Slip Sheet: 7 (20ft; 40ft); 8 (40 HQ); Pallet: 6 (20ft; 40 ft); 7 (40 HQ)                                                                                                                                                                                                                                           |
| Pallet dimensions                                    | Slip sheet: 39.37 x 47.24 x 83 in (20 ft, 40 ft); 39.37 x 47.24 x 94.81 in (40 HQ); Pallet: 39.37 x 47.24 x 76.42 in (20 ft, 40 ft); 39.37 x 47.24 x 88.23 in (40 HQ)                                                                                                                                               |
| Pallet dimensions (W x D x H)                        | Slip sheet: 100 x 120 x 210.8 cm (20 ft, 40 ft); 100 x 120 x 240.8 cm (40 HQ); Pallet: 100 x 120 x 194.1 cm (20 ft, 40 ft); 100 x 120 x 224.1 cm (40 HQ)                                                                                                                                                            |
| Pallet weight                                        | Slip sheet: 1053.59 lb (20 ft, 40 ft); 1204.14 lb (40 HQ); Pallet: 946.16 lb (20 ft, 40 ft); 1093.58 lb (40 HQ)                                                                                                                                                                                                     |
| Pallet weight                                        | Slip sheet: 477.9 kg (20 ft, 40 ft); 546.19 kg (40 HQ); Pallet: 429.17 kg (20 ft, 40 ft); 496.04 kg (40 HQ)                                                                                                                                                                                                         |
| Panel bit depth                                      | 8 bit <sup>[1]</sup>                                                                                                                                                                                                                                                                                                |
| Pixels per inch (ppi)                                | 216 ppi <sup>[1]</sup>                                                                                                                                                                                                                                                                                              |
| Playbook TS icon 1                                   | <a href="https://h10003.www1.hp.com/digmedialib/proding/lowres/c03795738.png">https://h10003.www1.hp.com/digmedialib/proding/lowres/c03795738.png</a>                                                                                                                                                               |
| Playbook TS icon 2                                   | <a href="https://h10003.www1.hp.com/digmedialib/proding/lowres/c08169098.png">https://h10003.www1.hp.com/digmedialib/proding/lowres/c08169098.png</a>                                                                                                                                                               |
| Playbook TS icon 4                                   | <a href="https://h10003.www1.hp.com/digmedialib/proding/lowres/c08380672.png">https://h10003.www1.hp.com/digmedialib/proding/lowres/c08380672.png</a>                                                                                                                                                               |
| Playbook TS icon 5                                   | <a href="https://h10003.www1.hp.com/digmedialib/proding/lowres/c08192837.png">https://h10003.www1.hp.com/digmedialib/proding/lowres/c08192837.png</a>                                                                                                                                                               |
| Power supply type                                    | External                                                                                                                                                                                                                                                                                                            |
| Product caption image                                | <a href="https://prismpui-int.inc.hpincorp.net/PRO.Crystal.1/DAMHandler/Accessories/Badger_514pn_GlacierSilver_PortCallout_TransparentBG_FrontRight (1).png">https://prismpui-int.inc.hpincorp.net/PRO.Crystal.1/DAMHandler/Accessories/Badger_514pn_GlacierSilver_PortCallout_TransparentBG_FrontRight (1).png</a> |
| Product caption image                                | <a href="https://prismpui-int.inc.hpincorp.net/PRO.Crystal.1/DAMHandler/Accessories/Badger_514pn_GlacierSilver_PortCallout_TransparentBG_FrontLeft (1).png">https://prismpui-int.inc.hpincorp.net/PRO.Crystal.1/DAMHandler/Accessories/Badger_514pn_GlacierSilver_PortCallout_TransparentBG_FrontLeft (1).png</a>   |
| Product color                                        | Silver                                                                                                                                                                                                                                                                                                              |
| Product dimensions with stand (W x D x H)            | 12.62 x 0.35 x 8.21 in                                                                                                                                                                                                                                                                                              |
| Products per pallet                                  | Slip Sheet: 252 (20 ft & 40 ft); 288 (40 ft HQ); Pallet: 216 (20 ft & 40 ft); 252 (40 ft HQ)                                                                                                                                                                                                                        |

|                                  |                                                                                                                                                                                                                 |
|----------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Products per pallet layer</b> | 36                                                                                                                                                                                                              |
| <b>Refresh rate (maximum)</b>    | 75 Hz                                                                                                                                                                                                           |
| <b>Resolution (maximum)</b>      | WQXGA (2560 x 1600 @ 75 Hz) <sup>[1]</sup>                                                                                                                                                                      |
| <b>Screen treatment</b>          | Anti-glare                                                                                                                                                                                                      |
| <b>Special features</b>          | Ergonomic OOB setup coaching; TUV Eye Comfort 3.0 3-Star                                                                                                                                                        |
| <b>Stand color</b>               | Silver                                                                                                                                                                                                          |
| <b>Stand type</b>                | With stand                                                                                                                                                                                                      |
| <b>Standby mode power demand</b> | 0.5 W                                                                                                                                                                                                           |
| <b>Storage altitude</b>          | Up to 12,192 m                                                                                                                                                                                                  |
| <b>Storage altitude</b>          | Up to 40,000 ft                                                                                                                                                                                                 |
| <b>Technology logo 1</b>         | <a href="https://primpui-int.inc.hpcorp.net/PRO.Crystal.1/DAMHandler/Accessories/EPEAT_GOLD_PLUS_ICON.png">https://primpui-int.inc.hpcorp.net/PRO.Crystal.1/DAMHandler/Accessories/EPEAT_GOLD_PLUS_ICON.png</a> |
| <b>Technology logo 2</b>         | <a href="https://h10003.www1.hp.com/digmedialib/proding/lowres/c08717783.png">https://h10003.www1.hp.com/digmedialib/proding/lowres/c08717783.png</a>                                                           |
| <b>Tilt</b>                      | +18.8 to +46.2°                                                                                                                                                                                                 |
| <b>UNSPSC code</b>               | 43211902                                                                                                                                                                                                        |
| <b>USB Type-C® video input</b>   | 2 USB Type-C® (up to 65W USB Power Delivery, Alt Mode DisplayPort™ 1.2)                                                                                                                                         |
| <b>Vertical viewing angle</b>    | 178°                                                                                                                                                                                                            |
| <b>Video connectors</b>          | USB Type-C®                                                                                                                                                                                                     |
| <b>Viewable diagonal size</b>    | 14" (35.56 cm)                                                                                                                                                                                                  |

[1] All performance specifications represent the typical specifications provided by HP's component manufacturers; actual performance may vary, either higher or lower.

[2] DisplayPort™ 1.2 required to drive panel at its native resolution. The video card of the connected PC must be capable of supporting 2560 x 1600 at 60 Hz with 8-bit color using one USB Type-C® (DisplayPort™ alt mode). The video card of the connected PC must be capable of supporting 1920 x 1080 at 60 Hz and include 1 USB Type-C® (DisplayPort™ alt mode) outputs to drive the monitor at the Preferred Mode.

[3] Included cables may vary by country.

[4] Host PC requires Windows 10 or higher. HP Display Center is available for download on the Microsoft store for Windows or support.hp.com for Windows and MacOS.

[5] The Client Management Script Library must be downloaded to the connected PC to run CMSL commands. Some limitations may apply to legacy displays. Visit hp.com to download HP CMSL.

[14] Maximum brightness and contrast setting with maximum power loading on USB downstream ports (for power consumption maximum); Factory default brightness and contrast setting with 25% power loading on USB downstream ports (for power consumption typical).

[16] Please refer to the warranty card supplied with the product for details. Warranty may vary by country as required by law. Go to hp.com/support to learn about HP award winning service and support options in your region.

## Disclaimer — Copyright

DisplayPort™ and the DisplayPort™ logo are trademarks owned by the Video Electronics Standards Association (VESA®) in the United States and other countries. USB Type-C® and USB-C® are registered trademarks of USB Implementers Forum. ENERGY STAR® is a registered mark owned by the U.S. government. EPEAT® is a registered trademark of Green Electronics Council.

© Copyright 2025 HP Development Company, L.P. The information contained herein is subject to change without notice. The only warranties for HP products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. HP shall not be liable for technical or editorial errors or omissions contained herein.

Generated by Dynamic Collateral Tool – (ww-en) – Dec 15, 2025 8:25 AM UTC+0000