


INSTRUCTION SHEET  
**VWM SERIES**  
LEVER LOCK™ BACKPAN OPTION

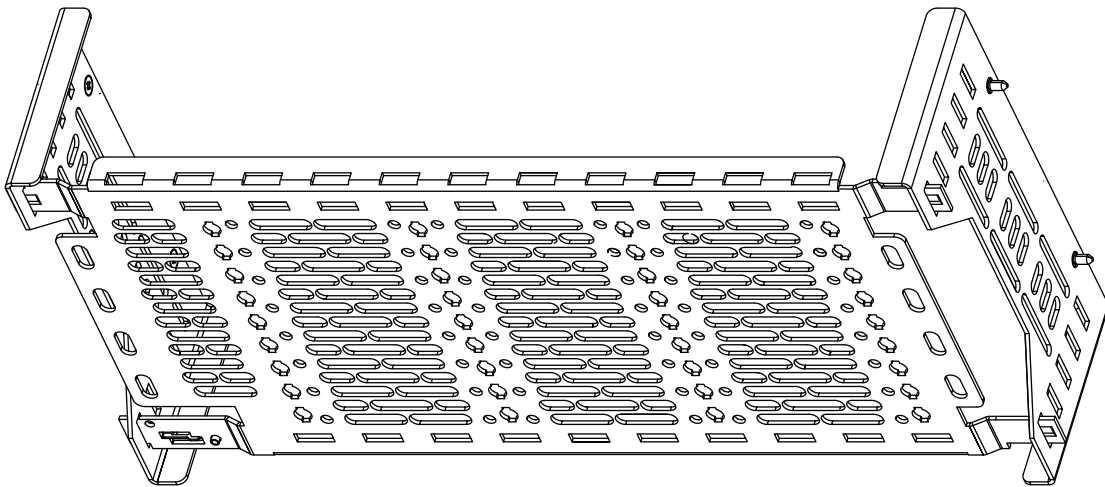

## **THANK YOU**


Thank you for purchasing a VWM Lever Lock™ Backpan option. Please read these instructions thoroughly before installing or assembling this product. For more information, refer to the VWM Series Vertical Wall Mount Rack Instruction Sheet (I-00796).

## **PRODUCT FEATURES**

- Locks in place without tools in VWM Series Vertical Wall Mount enclosures
- 6" plate with multi-pattern designed to hold a wide range of small devices



## SUPPLIED COMPONENTS AND HARDWARE




Backpan  
Lever Lock  
Brackets

A



(6x) 6-32 x 5/16  
Phil. Bonding Screw

B

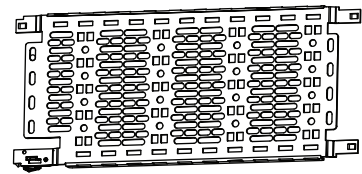

Backpan  
Lever Lock Plate  
(LL-VP176-SWP)

C



(2x) Lever Lock  
Securing Rivet

D



(20x) Lever Lock  
Plate Washer

E

## REQUIRED TOOLS

- No. 2 Phillips Driver



## INSTALLING THE LEVER LOCK BACKPAN OPTION

1. Use (4x) 6-32 x 5/16 bonding screws (B, 2 per side) to install the brackets (A) into any of the following backpan locations. (FIGURE A)

**CAUTION!** The bonding screws must be used as explained to ensure proper bonding.

**ATTENTION!** Les vis doivent être utilisées comme expliqué pour assurer approprié électrique de liaison.

B

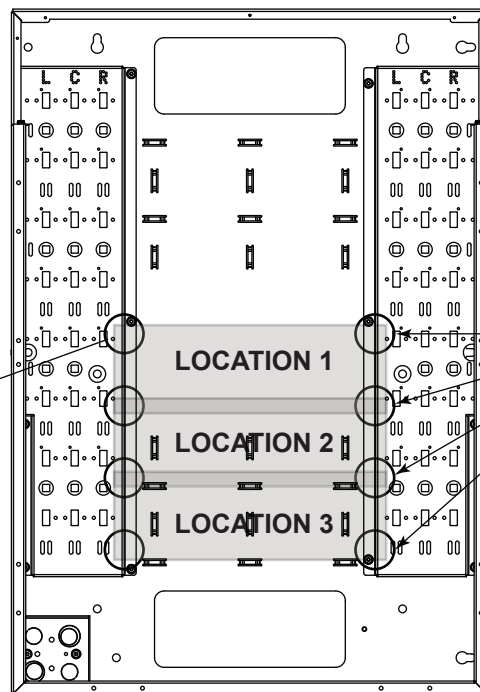


Bracket  
Bonding Screw  
Holes on  
Backpan  
(4x holes per  
location)

FIGURE A

## INSTALLING THE LEVER LOCK BACKPAN OPTION (CONTINUED)


**NOTE:** The bracket bonding screw holes are located on the inside edges of the backpan. Each bracket is assembled as shown. (**FIGURE B**)

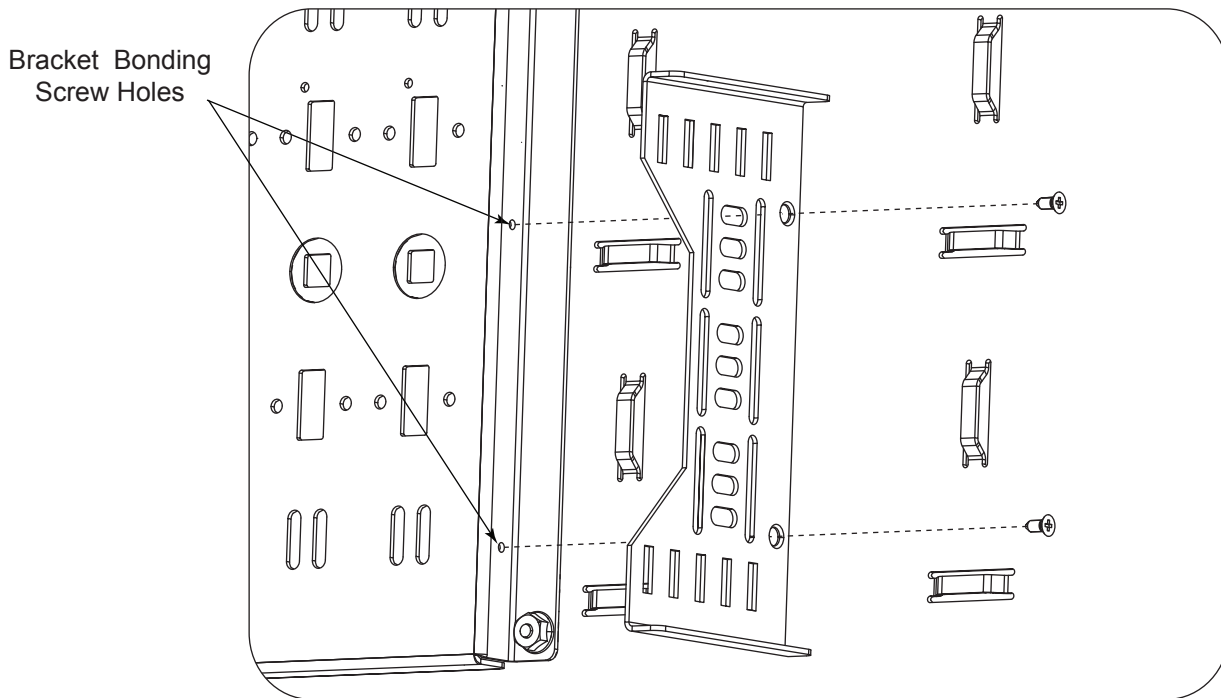

**FIGURE B**

## INSTALLING THE LEVER LOCK BACKPAN OPTION (CONTINUED)

2. Insert the side of the Lever Lock backpan plate (C) without the clip into the brackets (A) first. Then install the side with the clip until it clicks into place. (FIGURE C)

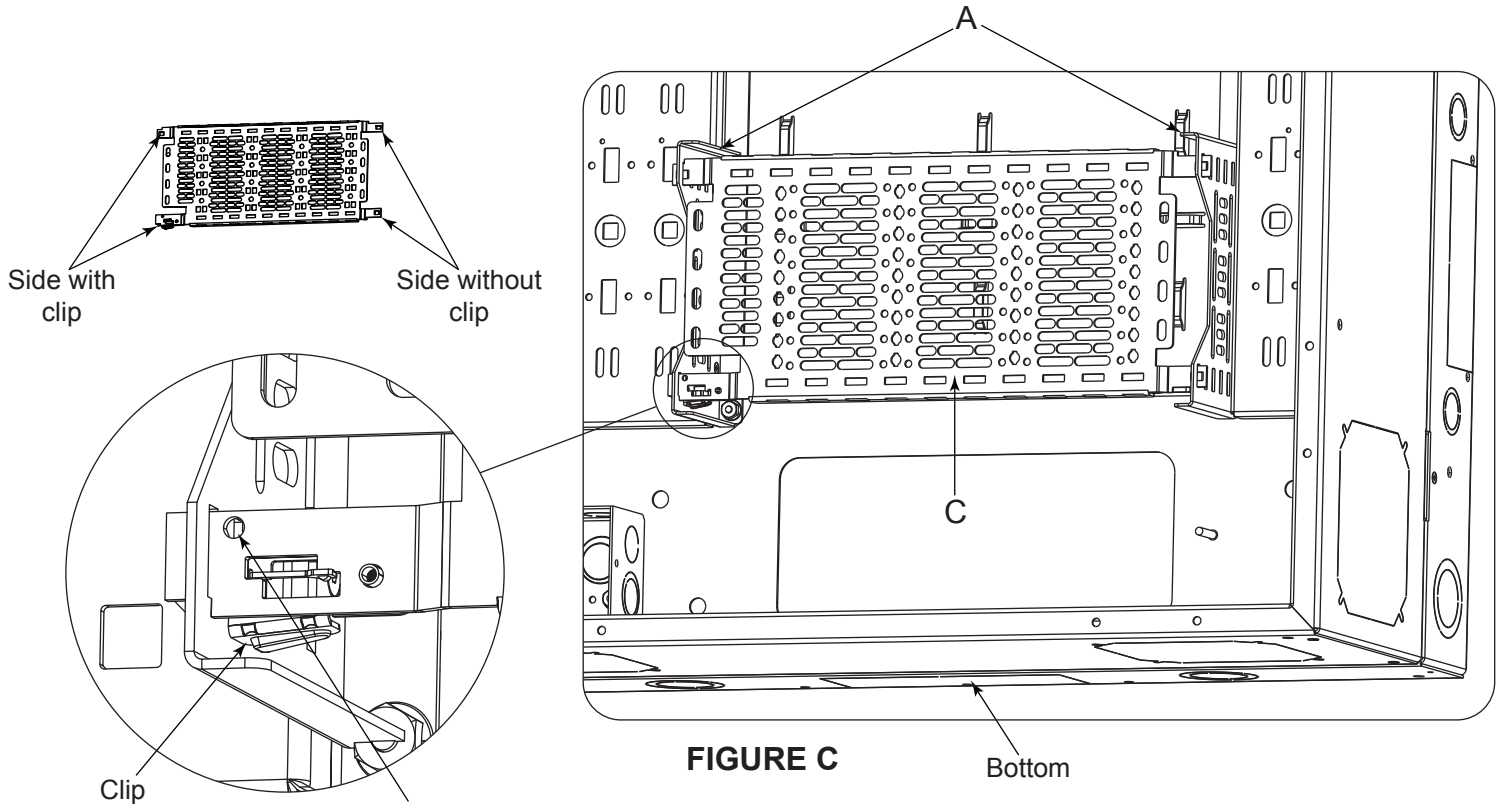

**NOTE:** Install plastic securing rivet (D) into hole to secure the clip more permanently, if desired.

### NOTE:

- The Lever Lock backpan plate may be installed on the brackets at different depths. All 4 corners of the Lever Lock backpan plate must be inserted into the brackets at the same depth in order to function correctly.
- (20x) Lever Lock plate washers (E) are provided for equipment mounting convenience.

## **WARRANTY**

For warranty information, refer to [www.middleatlantic.com/terms](http://www.middleatlantic.com/terms).

### **Corporate Headquarters**

Corporate Voice: 973-839-1011 - Fax: 973-839-1976 / International Voice: +1 973-839-8821

Fax: +1 973-839-4982

[www.middleatlantic.com](http://www.middleatlantic.com) - [info@middleatlantic.com](mailto:info@middleatlantic.com)

### **Middle Atlantic Canada**

Voice: 613-836-2501 - Fax: 613-836-2690 / [ca.middleatlantic.com](http://ca.middleatlantic.com) -

[customerservicecanada@middleatlantic.ca](mailto:customerservicecanada@middleatlantic.ca)

### **Factory Distribution**

USA: NJ - CA - IL Canada: ON - BC

**At Middle Atlantic Products we are always listening. Your comments are welcome.**

**Middle Atlantic Products is an ISO 9001 and ISO 14001 Registered Company.**



**Middle Atlantic Products**

what great systems are built on™

[middleatlantic.com](http://middleatlantic.com) ■ 800.266.7225