



5

Reattach silicone jacket. Be sure that all edges are covered. Smooth the jacket into a snug fit on all sides of the case.

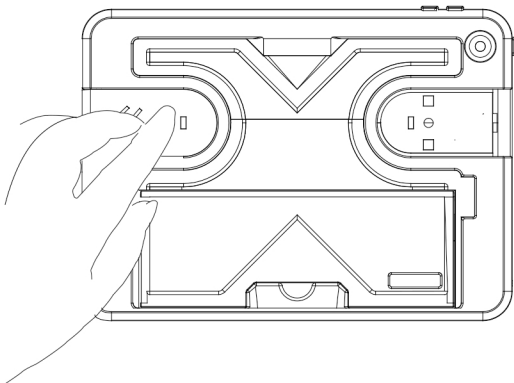

6

Insert cable lock head into K-slot on one of the clasps. Insert key and turn clockwise to lock. Repeat for other cable head.

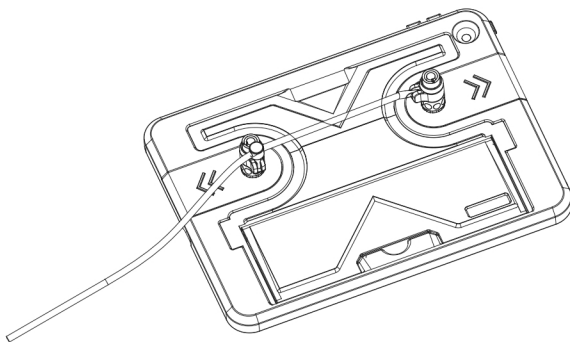


CTA Digital

Rugged Security Case with Kickstand and Anti-Theft Cable


for iPad Pro 9.7, iPad Gen. 5-6, and iPad Air

PAD-RSCK9

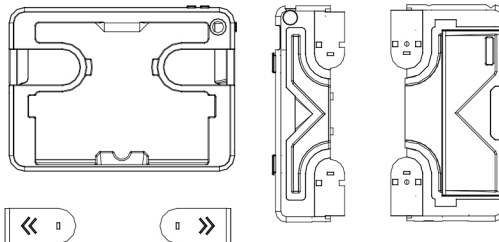


support@ctadigital.com


- 1** Remove outer silicone jacket (1), remove slide clasps by sliding out (4), then pull apart two pieces from case (2 and 4).

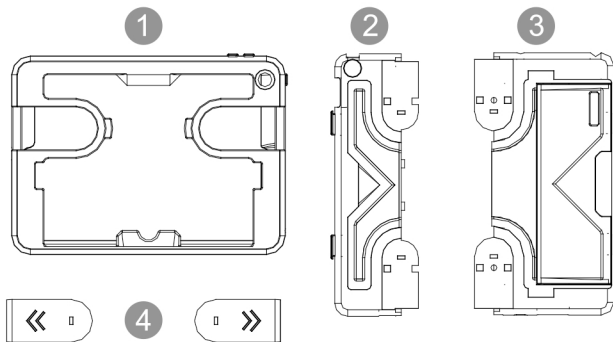

- 3** Slide smaller case piece (2) over tablet. Slide all the way until it meets larger piece (3).

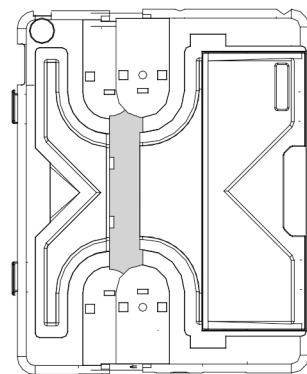

- 2** Insert tablet into larger case piece (3). Slide all the way to the edge.

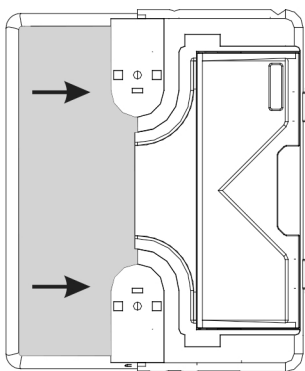

- 4** Slide clasps (4) back onto each side of the case. Be sure that the clasps click into place.

