CTA

Rotary & Tilting VESA-Compatible Mount
with Universal Security Enclosure (Black)
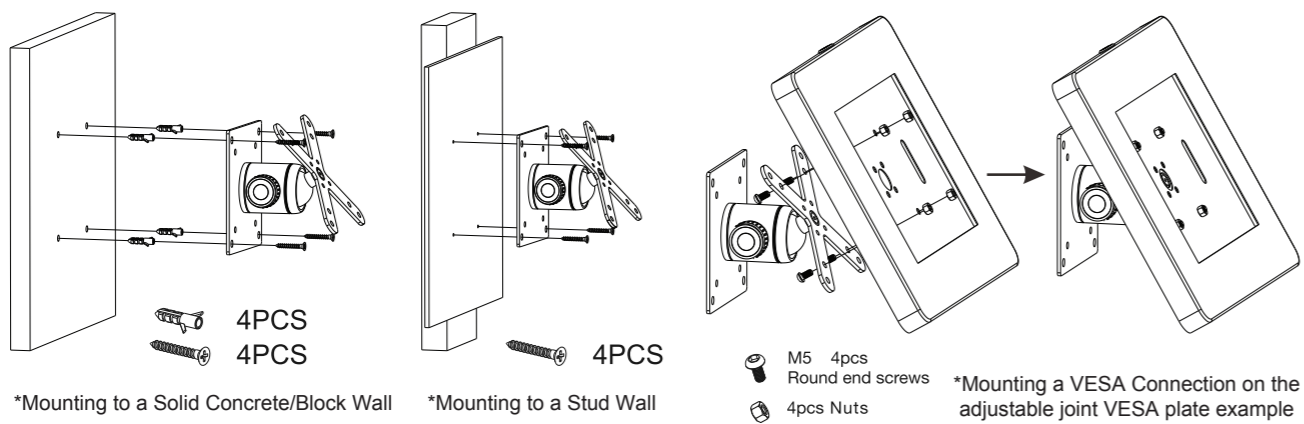
USER MANUAL

PAD-PARABRH
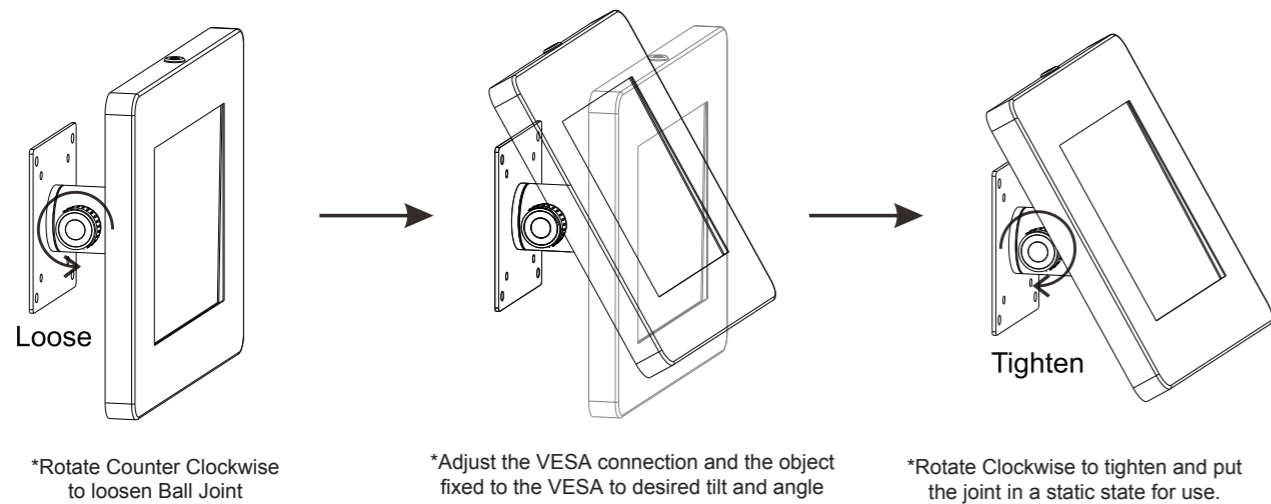
Contents:

x4   x1

x4   x4   x1   x1   x1
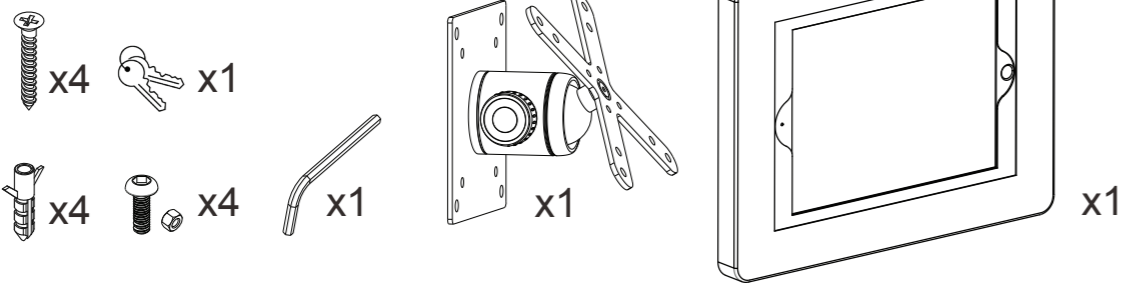
Instructions:

1. Mounting Options:

4PCS
4PCS

4PCS

M5   4pcs
Round end screws

4pcs Nuts

*Mounting to a Solid Concrete/Block Wall

*Mounting to a Stud Wall

*Mounting a VESA Connection on the adjustable joint VESA plate example

2. Adjusting the Ball Joint:

*Disclaimer
DO NOT ATTEMPT TO MOVE JOINT WHEN BALL JOINT IS TIGHTENED. FAILURE TO COMPLY WILL RESULT IN PRODUCT INTEGRITY AND NOT OPERATING AT FULL CAPACITY. RESPONSIBILITY WILL BE ON USER IF PRODUCT MALFUNCTIONS IN ANY SHAPE OR FORM.

Loose

Tighten

*Rotate Counter Clockwise to loosen Ball Joint

*Adjust the VESA connection and the object fixed to the VESA to desired tilt and angle

*Rotate Clockwise to tighten and put the joint in a static state for use.

3. Setting up Enclosure and Tablet

1 - Unlock the tablet enclosure by rotating the key until it pops open

2 - Find the appropriate size included foam padding for the tablet you wish to use. Make sure device is compatible for the enclosure

3- Lay your device in and connect any cables or cords you may have

4 - If needed, make sure to lay-in the correct masking cover. Then close and lock the enclosure and you're ready to go.