

### Overview

#### HPE MSA 2052 SAN Storage

Looking for seriously simple and affordable flash storage? The hybrid flash HPE MSA 2052 SAN Storage system with Gen10 ProLiant Branding is designed for affordable application acceleration that is ideal for small and remote office deployments. But do not let the low cost fool you. The HPE MSA 2052 SAN Storage system gives you the combination of simplicity, flexibility to grow now and into the future, and advanced features you may not expect to find in an entry-priced array. Start with 1.6 TB of flash capacity included and scale as needed with any combination of solid-state disks (SSD), high-performance enterprise, or lower-cost midline SAS-based drives.


HPE MSA Storage has been the industry-leading entry storage Fibre Channel platform for the past eight years, with nearly 500,000 storage systems sold worldwide. Delivering performance in excess of 200,000 IOPS, the hybrid flash MSA 2052 Storage system can save you up to 40% with an all-inclusive software suite and 1.6 TB of flash capacity included. It's seriously simple and affordable flash storage to help you get the most performance for the lowest cost.

- **HPE MSA 2052 performs in excess of 200,000 IOPS for affordable application acceleration**
  - Delivers 2x IOPS performance than the previous generation MSA 2042
  - Save 40% on the hybrid flash MSA 2052 with all-inclusive software and 1.6 TB of SSD capacity included
- **Advanced data services with no experience required**
  - Easy to install, easy to use, easy to maintain—no storage expertise necessary
  - Automated tiering dynamically responds to workload changes, so you don't have to
- **Keep your business running with expanded data protection features**
  - Virtualized snapshot technology makes data protection and instant recovery a snap
  - Remote replication with FC and iSCSI supports affordable disaster recovery
- **Grow flexibly now and into the future**
  - Data-in-place upgrades protect drive investments and eliminate data migrations
  - Start small and scale as needed with any combination of SSD, Enterprise or Midline SAS drives



HPE MSA 2052 SAN Storage

## Overview

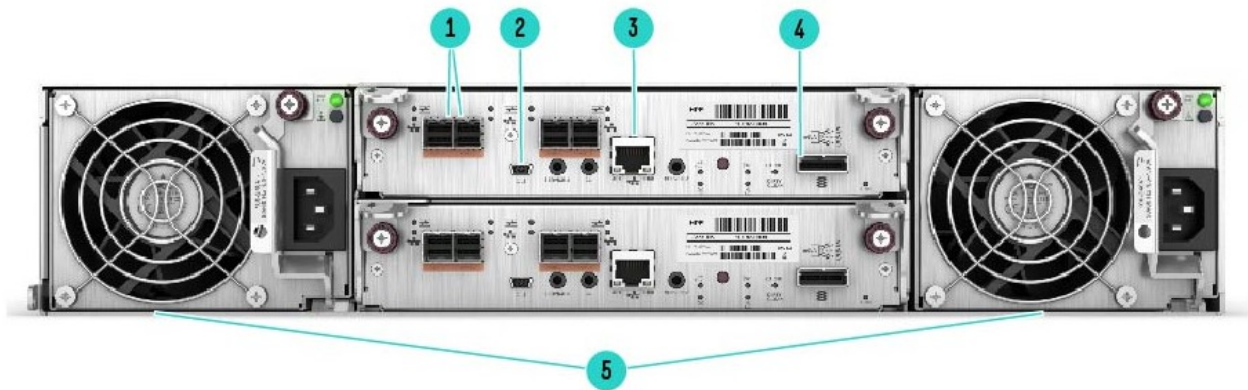

### HPE MSA 2052 SAN Storage

- |                             |                      |
|-----------------------------|----------------------|
| 1. Host connection ports*   | 4. Expansion port    |
| 2. CLI port (mini-USB)      | 5. AC power supplies |
| 3. Management Ethernet port |                      |

**Notes:** \*8 and/or 16Gb FC, / 1 and/or 10GbE iSCSI or 12Gb SAS

### What's New in the MSA 2052 array family

- New TAA-compliant MSA 2052 Dual Controller Storage Array models including support for SAN SFF, SAN LFF, SAS SFF and SAS LFF

### MSA 2052 Storage Models

#### Descriptions

	<b>SKU</b>
HPE MSA 2052 SAN Dual Controller LFF Storage	Q1J02B
HPE MSA 2052 SAN Dual Controller SFF Storage	Q1J03B
HPE MSA 2052 SAS Dual Controller LFF Storage	Q1J30B
HPE MSA 2052 SAS Dual Controller SFF Storage	Q1J31B
HPE MSA 2052 SAN Dual Controller LFF TAA-compliant Storage	R4Y03A
HPE MSA 2052 SAN Dual Controller SFF TAA-compliant Storage	R4Y04A
HPE MSA 2052 SAS Dual Controller LFF TAA-compliant Storage	R4Y05A
HPE MSA 2052 SAS Dual Controller SFF TAA-compliant Storage	R4Y06A



## Standard Features

HPE MSA 2052 SAN Storage	
<b>Array</b>	
Access Type	Block
Form Factor	2U, SFF or LFF
Number of controllers per array	2
Number of host ports per array	8
FC host connectivity	8/16Gb
iSCSI host connectivity	1Gb or 10Gbl
SAS host connectivity	6/12Gb
<b>Cache, per array</b>	
Max Read cache per array	8TB
Data (read/write) cache + system memory per array	16GB
Pool Capacity (with Large Pool Support)	562 TB (512 TiB)
RAID Levels supported: Virtual mode	RAID 0*,1, 5, 6, 10 <b>Notes: *Read Cache Only</b>
<b>Enclosures</b>	
Expansion Drive Enclosures	0-7 enclosures
LFF/SFF array/enclosure mixing	Supported
Maximum number of drives per array enclosure	24 SFF/12 LFF
Maximum number of drives per drive enclosure	24 SFF/12 LFF
Drive enclosure interface type	6Gb SAS
<b>Drives</b>	
Maximum total HDDs per array	192 SFF / 96 LFF
Maximum total SSDs per array	192 SFF / 96 LFF
Max raw capacity per array enclosure	76.8 TB SFF / 168TB LFF
Max raw capacity per drive enclosure	76.8 TB SFF / 168TB LFF
Max raw capacity per array	614.4TB SFF / 1344TB LFF
Integrated SSDs	2x800GB Mixed Use SSDs
<b>Drive Capacities</b>	
SFF SSDs	800GB, 960GB, 1.6TB, 1.92TB, 3.2TB
LFF SSDs	800GB, 960GB, 1.92TB
SFF HDDs	15K: 600GB, 900GB 10K: 600GB, 1.2TB, 1.8TB, 2.4TB
LFF HDDs	7.2K: 4TB, 6TB, 8TB, 10TB, 12TB,14TB
SEDs	Encryption not supported
<b>Software Features</b>	
Thin Technologies	Thin Provisioning, Space Reclamation, Thin Rebuild
Tiering	Performance Tier, Standard Tier, Archive Tier
Replication	Snapshots (512), Volume Copy, Remote Snaps
Quality of Service	Virtual Tier Affinity
Bundled/Integrated Licenses	Advanced Data Services LTU standard
<b>Additional Features</b>	
Maximum number of volumes	512
Maximum number of snapshots	512
Maximum number of hosts	512
Maximum number of initiators	1024
Customer self-installable	Yes
Customer self-repairable	Yes
Customer self-upgradeable	Yes
Health Check analytics	Yes



## Standard Features

### All MSA 2052 models offer a common set of valuable features

- MSA 2052 storage system architecture maximizes performance
- Includes MSA 2050-branded SFF or LFF array chassis, depending on model
- Two MSA 2050 SAN or SAS controllers
  - Four host ports per controller
  - Each SAN controller supports 8 GB FC, 16 GB FC, 1GbE iSCSI or 10GbE iSCSI host connectivity
  - Each SAS controller supports 6Gb and/or 12Gb SAS host connectivity
- 8 GB cache per controller.
- Battery-free cache backup with super capacitors and compact flash
- Two .7m PDU cords (IEC C14)
- One rack-mount kit
- Two pre-installed 800GB Mixed Use SSDs which allow IT managers to accelerate application performance
- One Advanced Data Services Software Suite LTU
- MSA 2050 SAN Controller allows customers to create their own Combo Controller by mixing FC and iSCSI **SFPs**.
- The two 800GB SSDs can be optionally deployed either as read cache, or as an SSD virtual disk group for tiered storage.
  - Deploy the two embedded SSDs as Read Cache to improve random read performance. A maximum of 2 SSD's are supported per pool providing a maximum of 4-TB of read cache per controller, max 8TB of read cache per array.
  - Deploy the two embedded SSDs as tiered storage. The MSA 2052 can manage up to three tiers of storage: Performance tier, Standard tier and Archive tier.
  - The Performance Auto Tiering License necessary to create an SSD virtual disk group for both read and write capabilities comes standard with all MSA 2052 models. No additional software license purchase is necessary.
- All MSA 2052 models come standard with the Advanced Data Services (ADS) Software Suite LTU, which includes automatic tiering, 512 snapshots, and remote snaps for remote replication. The Advanced Data Services LTU requires license activation.
- Storage Management Utility V3 (SMU). This MSA management GUI brings a new modern look and feel to array management.
- Thin Provisioning allows storage allocation of physical storage resources only once they are consumed by an application. Thin Provisioning also allows over-provisioning of physical storage pool resources allowing ease of growth for volumes without predicting storage capacity upfront.
- All models feature a wide variety of drives: High-performance SSD drives, enterprise-class SAS, and SAS Midline drives.
- The MSA 2052 will support a maximum of 7 disk enclosures (either LFF and/or SFF). Add-on enclosures can either be HPE MSA 2050 LFF Disk Enclosure or HPE MSA 2050 SFF Disk Enclosure.
- The MSA 2050 can grow incrementally to a maximum of 96 LFF, 192 SFF drives, or a combination of SFF and LFF enclosures up to the maximum of 8 total enclosures.
- Virtual Storage Disks Groups can be spanned across multiple enclosures.
- Virtual Storage RAID levels supported; 1, 5, 6, 10.
- RAID 0 supported for Read Cache only. SSD read cache is a feature that extends the MSA controller cache. Read cache is most effective for workloads that are high in random reads. A maximum of 2 SSDs per pool can be added for read cache.
- Maximum hard drive counts vary by RAID levels: 2 drive max for RAID level 1; max of 16 drives for RAID levels 5, 6, and 10.
- Multiple Disk Groups can be aggregated into a single Storage Pool.
- The maximum LUN size is 140TB (128TiB)
- Storage Pools allow data on a given LUN to span across all drives in a pool. When capacity is added to a system, the user is also getting a performance benefit of the additional spindles.
- Snapshot enhancements for virtual storage, including performance improvements, hierarchical snapshots, and simplified resource management. Administrators can monitor and optionally control snapshot space usage.

## Standard Features

- Non-disruptive on-line controller code upgrade. Requires Multi-pathing software.
- Upgradable by design. Owners of an MSA 2040, MSA 2042 and MSA 1040 array are able to do data-in-place upgrades to the MSA 2052 array. This unique ability protects the earlier investments in drives, and JBODs.
  - Certain limitations are applicable. Please review the Upgrading to the HPE MSA 2050/2052 Technical Whitepaper before upgrading your MSA 2040, MSA 2042 or MSA 1040 systems.

---

## Product Technology

### MSA 2052 Solution

The MSA 2052 is a pre-configured bundle that includes an MSA 2050-branded LFF or SFF array chassis depending on model, two AC power supplies, two MSA 2050 SAN or SAS controllers, two 800GB Mixed Use SSDs, one Advanced Data Services LTU. The two 800GB SSDs are shipped integrated in the MSA 2050 array. The Advanced Data Services LTU is shipped with the MSA 2050 array and requires license activation.

### SAN controller

MSA 2052 SAN controller supports 8Gb FC, 16Gb FC, 1GbE iSCSI or 10GbE iSCSI host connectivity. .

### SAS controller

MSA 2052 SAS controller supports 12Gb host connectivity.

---

## Modular Chassis

2U rack height. 12 LFF or 24 SFF drive bays. All MSA 2052 Storage Systems come standard with 2 SAN or SAS controllers depending on model

**Notes:** The MSA 2052 does not support single controller configurations. Single-controller support is provided only when a controller fails over to its partner controller.

---

## Available Drives

The MSA 2052 SAN and SAS Storage systems support a wide variety of the MSA 3.5-inch LFF drives, and the MSA 2.5-inch SFF drives.

- Solid-State Drives (SSDs) deliver the highest levels of performance and reliability.
- Enterprise-class SAS hard disk drives (10K/15K RPM) offer a balance of performance, capacity, and cost while delivering enterprise grade reliability.
- Midline SAS hard disk drives (7.2K RPM) are optimized to provide the best ratio of capacity to cost.

---

## Optional Disk Enclosures

Just as the user has a choice of chassis for the array enclosure (LFF or SFF drive bays), they also have a choice of expansion disk enclosures accommodating either drive size. Both the MSA 2050 LFF Disk Enclosure and MSA 2050 SFF Disk Enclosure can be hot added to an operating array. SFF and LFF Array enclosures and Disk Enclosures can be mixed without limitations.

### MSA 2050 LFF Disk Enclosure.

This 2U enclosure is designed to support twelve HPE Storage LFF drives and accepts MSA dual-ported 12Gb SSD, Enterprise SAS, and SAS Midline (MDL) hard drives. The pre-configured MSA 2050 LFF Disk Enclosure has two I/O modules and supports the MSA 2052 dual controller arrays.

- The MSA 2050 LFF Disk Enclosure can be attached to the MSA 2052 LFF or SFF storage models.
- Each MSA 2050 LFF Disk Enclosure ships standard with two .5m mini-SAS to mini-SAS cables for connection to the MSA 2052 array expansion port or existing disk enclosure cascade port.
- LFF and/or SFF Disk Enclosures can be mixed up to the maximum of 7 total Disk Enclosures



## Standard Features

### HPE MSA 2050 SFF Disk Enclosure

This 2U enclosure is designed to support twenty four HPE Storage 2.5-inch SFF drives and accepts MSA dual ported 12Gb SSD, Enterprise SAS, or SAS Midline (MDL) hard drives. The pre-configured MSA 2050 SFF Disk Enclosure has two I/O modules and supports the MSA 2052 dual controller arrays.

- The MSA 2050 SFF Disk Enclosure can be attached to the MSA 2052 LFF or SFF storage models
- Each MSA 2050 SFF Disk Enclosure ships standard with a two .5m mini-SAS to mini-SAS cables for connection to the MSA 2052 array expansion port or existing disk enclosure cascade port.
- LFF and/or SFF Disk Enclosures can be mixed up to the maximum of 7 total Disk Enclosures.

---

### Scalability

The MSA 2052 array configurations are designed to allow an installation to begin with smaller capacity and be able to grow gradually as needed. The flexibility of SSD, Enterprise SAS or SAS Midline (MDL) drives technology, form factors, sizes, speeds, and costs per GB allows a system to easily fit in almost any budget.

- Large Form Factor configurations can scale up to 168TB SAS MDL per array enclosure, expandable to 1344TB SAS MDL with the addition of a maximum of seven MSA 2050 LFF Disk Enclosure.
- Small Form Factor configurations can scale up to 76.8 TB SAS SSDs per array enclosure, expandable to 614.4 TB SAS with the addition of a maximum of seven MSA 2050 SFF Disk Enclosure.
- Users may configure an MSA 2052 SFF array enclosure with MSA 2050 LFF Disk Enclosure. This is an excellent option for a configuration that supports high-speed SFF SSDs or fast SFF enterprise-class SAS drives in the array enclosure, combined with economical LFF drives staged for archival purposes, all in the same array.

---

### Disk Group

A Disk Group is a collection of disks in a given redundancy mode (RAID 1, 5, 6, 10). Disk Group RAID level and size can be created based on performance and/or capacity requirements. Multiple Disk Groups can be allocated into a Storage Pool for use with the Virtual Storage features.

---

### LUNs

The MSA 2052 arrays support 512 volumes and up to 512 snapshots in a system. All of these volumes can be mapped to LUNs. Maximum LUN sizes up to 140TB (128 TiB). Thin Provisioning allows the user to create the LUNs independent of the physical storage.

---

### Storage Pools

Storage Pools are comprised of one or more Disk Groups. A volume's data on a given LUN can now span all disk drives in a pool. When capacity is added to a system, users will benefit from the performance of all spindles in that pool.

The MSA 2052 supports large, flexible Volumes with sizes up to 128TiB and facilitates seamless capacity expansion. As volumes are expanded data automatically reflows to balance capacity utilization on all drives.

---

### RAID 0,1, 5, 6, 10

The MSA 2052 features several important additional levels. RAID 6 offers the highest level of RAID protection. It allocates two sets of parity data across drives and allows simultaneous write operations. It can withstand two simultaneous drive failures without downtime or data loss. RAID 10 is mirroring and striping without parity and allows large Disk Groups to be created with high performance and mirroring for fault tolerance. RAID 5 combines the block striping and parity. Because data and parity are striped across all the disks, no single disk is a bottleneck. Striping also allows users to reconstruct data in case of a disk failure. RAID 0 (Striping) is supported for Read Cache only.

---



## Standard Features

### Configuration and Management Tools

Management access, out-of-band, Storage Management Utility (SMU), CLI.

Interface Types: USB 100/1000 Ethernet.

Protocols Supported SNMP, SMI-S, SSH, SMTP, FTP, SFTP, HTTP, HTTPS, Telnet

---

### Web Browser support

The MSA 2052 arrays come integrated with web browser and CLI based software for storage and RAID management, setup, configuration, and troubleshooting. The MSA 2052 management supports Microsoft Internet Explorer, Mozilla Firefox, and Google Chrome.

---

### Hot Plug Expansion and Replacement Support

All MSA 2052 models support hot plug expansion and replacement of redundant controllers, enclosures, fans, power supplies, and I/O modules for simple, fast installation and maintenance. Hot add expansion of disk enclosures is also supported.

---

### HPE Server Compatibility

The MSA 2052 supports most HPE ProLiant, BladeSystems and Integrity servers including

- HPE ProLiant DL, ML Servers
- HPE c-Class Blade Servers
- Integrity servers, IA64
- Compatibility must be confirmed at: <http://www.hpe.com/storage/spock>

**Notes:** depends on protocol.

---

### 3<sup>rd</sup> Party server support

The MSA 2052 supports most multi-vendor industry standard Intel and AMD based (x86) servers. Hewlett Packard Enterprise requires the Third-Party Server to be logged and listed on the Microsoft Windows Server Catalog.

- Hewlett Packard Enterprise recommends that the Third-Party Server Vendor is an active member of TSANet. Refer to the TSANet website for details: <http://www.tsanet.com>
  - Non-HPE servers will generally be supported if the HPE storage stack is used. This includes supported HPE branded HBAs and drivers, and supported FC switches.
- 

### OS Support

Refer to the Hewlett Packard Enterprise support statements for complete current OS version support

<http://www.hpe.com/storage/spock>

- Microsoft Windows Server 2019
- Microsoft Windows Server 2016
- Microsoft Windows Server 2012
- VMware
- HP-UX
- Red Hat Linux
- SuSE SLES Linux
- Solaris
- Oracle Linux
- Citrix XenServer
- OpenVMS

**Notes:** depends on protocol.

---



## Standard Features

### Advanced Data Services Software Suite

The HPE MSA Advanced Data Service Suite is included as a standard feature on the MSA 2052 at no extra charge. The standard MSA Advanced Data Services Software Suite includes the following functionality:

- Performance Tiering and Archive Tiering Software
  - 512 Snapshots and Volume Copy Software
  - Remote Snap Software
- 

### Performance Tiering and Archive Tiering

Disk tiers are comprised of aggregating 1 or more Disk Groups of similar physical disks. The MSA 2052 supports 3 distinct tiers:

- A Performance tier with SSDs
- A Standard SAS tier with Enterprise SAS HDDs
- An Archive tier utilizing Midline SAS HDDs.

The MSA 2052 supports sub-LUN tiering and automated data movement between tiers. The MSA 2052 automated tiering engine moves data between available tiers based on the access characteristics of that data. Frequently accessed “pages” will migrate to the highest available tier delivering maximum I/O’s to the application.

---

### Snapshot and Volume Copy

- 512 Snapshots and Volume Copy are standard features on the MSA 2052
- Snapshots create up to 512 point-in-time copies of data
- Volume Copies create up to 128 point-in-time copies of data
- Volume copies become standard volumes when they are complete
- Recovery is instant - revert data from any previous Snapshot or Volume Copy
- Backup 'snapped' data to disk, virtual tape, or physical tape without a backup window

### Remote Snaps

- HPE MSA Remote Snap Software is array-based software that provides remote replication on the HPE MSA 2050 array products. MSA Remote Snap is a form of asynchronous replication which consists of replication of block-level data from a volume on a local system to a volume on a second independent system. This second system may be co-located with the first system or may be located at a remote site.
- HPE Remote Snap functionality is based on existing Snapshot technology offered by HPE MSA array products. Snapshots are used to track the data to be replicated as well as to determine the differences in data updated on the primary volume, minimizing the amount of data to be transferred.
- HPE Remote Snap replication technology provides the ability to accomplish key data management and protection capabilities. First, because Remote Snap uses snapshots as the underlying technology it creates multiple local recovery points which can be used for such tasks as to complement daily backups; second, replication provides the ability to access data in a remote site which could be used for dispersed operations; and third but definitely not least important replication allows for business continuance in the event of a failure on the primary site.
- In order to perform a replication, a snapshot of the volume to be replicated is taken, creating a point-in-time image of the data. This point-in-time image is then replicated to the destination volume by copying the data represented by the snapshot via a transport medium such as TCP/IP (iSCSI) or Fibre Channel. The amount of data transferred is minimized though the use of snapshots whenever possible.
- Storage based asynchronous snapshot replication
- Support of both Ethernet and Fibre Channel interconnects provides flexible options to the application environments.
- Snapshot based replication technology means only changed data will be replicated to alternate site
- Many to 1 replication (up to 4 nodes) - primary use case is to replicate from "many" branch offices to the home office for the purpose of backing up data from the branches





## Standard Features

- Advanced scheduler provides several options to IT administrators for business continuance
- Flexible architecture allows remote replication between MSA 2052 and MSA 2040 or MSA 1040 arrays using the virtual storage architecture and licensed for Remote Snap. Protects existing investments and enhances business continuity planning objectives.
- Snapshot based replication enables both local and remote recovery depending on the need. Snapshot replication isolates problems to a specific point in time which can be selected by the administrator. Additionally, snapshot replication supports longer distance replication.
- Multiple relationships provide greater storage flexibility and utilization.
- 512 Snapshots and Volume Copy integration provides better efficiencies by combining the management and array technologies to create local copies.
- Fast application recovery with minimal or no transaction loss
- Creation of disaster tolerant copies of your critical business data
- No-single-point-of-failure solution to increase the availability of your data

**Notes:** One Advanced Data Services Suite License per array is required for replication. For example, if you have two MSA arrays performing replication (from Primary system to Remote System), you will need a total of 2 licenses.

---

### HPE OneView for VMware vCenter

HPE OneView for VMware vCenter is a component within the HPE OneView plug-in for vCenter. It enables vSphere administrators to quickly obtain context-aware information and manage supported HPE storage devices like the MSA in their VMware vSphere environment directly from within vCenter. This plug-in operates independently of the core HPE OneView product and does not require a license to use. By providing a clear relationship between VM's, datastores and storage, the VMware administrator's productivity increases, as does the ability to ensure quality of service. Roles for administrators can be defined on an individual basis, providing the ability to apply specific permissions for both view and control functions.

HPE OneView for VMware vCenter supports mixed array environments including MSA Storage, and other HPE Storage systems including 3PAR Storage, Nimble Storage, StoreVirtual and StoreOnce.

When deployed with MSA Storage, HPE OneView provides the following:

- Active Management functionality for the MSA Storage:
  - Create/Expand/Delete a Datastore
  - Create a Virtual Machine from a template
- Monitors the health and status of the MSA Storage
- Displays LUN / volume connections from VMs and ESX servers to the arrays and provides the location and attributes of the MSA array within the SAN
- Identifies what storage features are available to allow administrators to match the features available on the MSA array to their requirements
- Provide a cluster-level view of the storage

HPE OneView for VMware vCenter is downloadable from Software Depot:

<https://h20392.www2.hpe.com/portal/swdepot/displayProductInfo.do?productNumber=HPVPR>

---



## Standard Features

### HPE OneView for System Center

HPE OneView for Microsoft System Center provides a comprehensive integration of HPE Storage, HPE Servers, HPE Blade System and HPE Virtual Connect with Microsoft System Center. HPE OneView for System Center enables management and monitoring of HPE MSA Storage running in Microsoft environment with a single pane-of-glass view to events/alerts, capacity and health dashboards and detailed virtual infrastructure information. It provides seamless integration with Microsoft System Center Operations Manager (SCOM) enabling predefined discovery and monitoring policies, event processing rules and topology views for HPE Storage including the MSA Storage Systems.

When deployed with the MSA 2052 array, HPE OneView for System Center provides the following:

- Monitors the health, events and alerts for the MSA 2052 – virtual pools, and volumes
- Provides topology information for VMs provisioned on the MSA Storage array

HPE OneView for System Center is downloadable at no charge from Software Depot:

[https://h20392.www2.hpe.com/portal/swdepot/displayProductInfo.do?productNumber=System\\_Center](https://h20392.www2.hpe.com/portal/swdepot/displayProductInfo.do?productNumber=System_Center)

---

### vStorage API for Array Integration (VAAI)

The vStorage API for Array Integration (VAAI) is one of the storage application programming interface (API) sets in vSphere. VAAI is an API storage partners can leverage to enhance performance of virtual machine (VM) management operations by delegating these operations to the storage array. With hardware offload, ESX/ESXi hosts perform certain operations faster and consume less server CPU, memory resources, and storage port/storage fabric bandwidth. VAAI includes high performance and scalable VM data path primitives.

Storage Hardware Primitives for VAAI

- Full Copy or Hardware Assisted Move
- Block Zeroing or Hardware Assisted Zeroing
- Hardware Assisted Locking or Atomic Test and Set (ATS)

UNMAP reclaims space that is no longer on a thinly provisioned VMFS volume

---

### LDAP Support

LDAP (Lightweight Directory Access Protocol) is an industry standard application protocol for accessing and maintaining distributed directory information services over an IP network. LDAP provides the ability to authenticate MSA users with a central directory.

- Domain or Directory Credentials are not stored on the MSA for authentication – avoids a security issue
  - Once user groups are configured on all MSAs in your organization, users can be authenticated on any MSA through the Active Directory
  - Uses an LDAP implementation to authenticate users with a Windows Active Directory
  - The MSA CLI and SMU will allow the configuration of new LDAP users groups into the MSA security scheme (manage vs monitor users, interface restrictions Web/CLI/FTP)
  - Ability to authenticate Local or LDAP users
- 

### I/O Workload Functionality

A user interface element called “I/O Workload” has been added to the main screen on MSA’s WBI home screen for GL270 or later firmware. The MSA array controllers keep track of a substantial amount of data pertaining to the I/O dynamics at a logical page level (4MB chunks). From this data, it is possible to provide some visibility to what percent (%) of I/O’s are being processed by what percent (%) of the overall array’s capacity across a 7 day timeline. While some workloads have “transient” data access patterns, many workloads have steady access patterns on small portions of the array’s capacity. This produces “hot” pages in the array which remain hot a large amount of the array’s uptime. Users would see substantial benefits if these pages could be served from the fastest media in the array (ideally SSDs).As has been described in the MSA’s tiering functionality, the MSA array’s tiering engine will work to position the hottest pages on the fastest media at any given time.

The I/O Workload graph will show a line labeled Capacity and a line plot for each selected workload percentage (100%, 80%, or Other% value). Below are two examples of user scenarios where the I/O Workload Graph might be useful and how to utilize the data the graph provides.



## Standard Features

- New User or SSD Installation
  - Once the MSA array is installed and has had workloads running against it for a week's time, the I/O Workload data will give a representation of what Capacity is servicing 100% of I/O and 80% of I/O. Users may select a custom % value if desired. In a new installation or in an installation with no SSD tier installed, the 80% line is a reasonable starting point for an SSD tier. Based on SSD RAID settings, customers can then calculate a good starting point with regard to SSD tier sizing based on that week's workload. While not a hard-fast rule, it is a good starting point. These values should also be compared to the Best Practices "rule of thumb" which suggest that 5-15% of the array's capacity should be SSDs for tiered solutions.
- Users with existing SSD tiering or read caching installed and running
  - For arrays running with SSDs installed (tiered or read cache), the I/O Workload graph will have a dotted line which shows the installed SSD capacity. The I/O Workload graphs can be checked periodically to see where the 80% I/O line is with regard to the SSD capacity line. While there are no hard and fast rules which indicate good/bad situations, users can use the graph with other system performance tools to better understand specific dynamics of their installation and the normal dynamics of a system in the day-to-day activities for a specific environment.

Interpreting the I/O Workload graphs allow users to strike a balance between the SSD costs versus performance benefits. For example, some customers may be willing to have a couple of days where peak usage is far above the SSD capacity line as it may be acceptable to have slower performance as the system uses HDDs for a larger percentage of the workload I/O. This may be perfectly acceptable for systems sized to optimize \$/TB due to budget constraints. Other users may want to optimize the system such that a sizeable percentage of daily I/O can reside on SSD media (sized to 80% or 90%). When combined with other performance monitoring tools, the I/O Workload function gives users some representation as to how the workloads and the MSA are working together in a user's real-world environment.

---

## ENERGY STAR Certification

The HPE MSA 2052 SAN Storage systems are ENERGY STAR certified. ENERGY STAR certified products are energy efficient which result in cost savings via reduced energy consumption and regulatory rebates. Please refer to the US EPA website for details on ENERGY STAR certification criteria and process. MSA 2052 ENERGY STAR Certification is listed on the EPA website.

---

## Carrier-Grade Storage System (NEBS)

The HPE MSA 2052 SAN Storage system does not offer a NEBS certified carrier-grade bundled solution. Refer to the MSA 2050 QuickSpecs on how to configure and order carrier-grade components.

---

## TAA Compliance

TAA refers to the Trade Agreements Act (19 U.S.C. § 2501–2581), which is intended to foster fair and open international trade. TAA requires that products must be produced or undergo "substantial transformation" within the United States or a designated country. HPE offers multiple 2050 and 2052 models that are TAA compliant. Please refer to the "Configuration Information" section for more details regarding models that are designated TAA compliant.

---

## Application Solutions

The HPE MSA 2052 SAN Storage is the ideal solution for customers running Oracle, Microsoft, SAP environments and those customers who are deploying virtual server technologies like VMware and Hyper-V. The MSA 2052 delivers enterprise functionality that enhances virtual environments, simplifies management, and reduces costs. Easy to deploy, scale and maintain, HPE MSA 2052 Arrays ensure that crucial business data remains available.

Hewlett Packard Enterprise has developed best-in-class expertise in Oracle, Microsoft, SAP, and Virtualization Hypervisor technology through extensive testing with the HPE MSA 2052, HPE servers, and management software; high availability and disaster recovery solutions; and backup and recovery on the Oracle, Microsoft, and SAP application platforms.

## Learn more

To learn more about specific HPE Storage Solutions that are built with Oracle, Microsoft, SAP and Virtualization environments in mind, visit the solution sites supporting each of these applications.  
HPE MSA Storage hyperlink to: <http://www.hpe.com/storage/MSA>



## Standard Features

### HPE Complete – Zerto

HPE MSA Storage users can leverage Zerto Virtual Replication to replicate applications and data from one MSA array to another MSA array. Popular use cases include departmental MSA storage replicated to enterprise storage, enterprise storage replicated into MSA array, or protect MSA workloads into the cloud.

Zerto operates on the hypervisor level and includes orchestration and automation built-in to enable faster recovery of workloads (RTO in minutes) at much lower Recovery Point Objective (RPO of seconds) available through other data protection tools like backup. Zerto is also a workload mobility tool and allow IT to confidently move workloads and data across heterogeneous storage or cloud.

Ordering, configuring and installing Zerto is simple. Zerto is licensed by number of Virtual Machines that are being protected or moved. For mobility use cases, order the appropriate number of migration licenses needed. For replication use cases, order the appropriate quantity of Zerto Virtual Replication licenses using a combination of the tiered licenses plus the corresponding maintenance part numbers. The license is independent of source and target array size, type or capacity being replicated. See the HPE Complete/Zerto Quickspec for a complete list of part numbers. A corresponding MSA Advanced Data Services LTU is not required for data replication when using Zerto Virtual Replication. An MSA Advanced Data Services LTU would be required if deploying MSA array-based replication.

Zerto installs as a virtual machine under VMware or Hyper-V or in the Cloud as a VM in AWS and Azure in minutes Zerto does not install any components in the guest operating system and does not depend on any specific configuration of the storage or use MSA array or VMware snapshots to replicate and recover applications.

Zerto virtual replication is available on HPE Catalog via HPE Complete program.

For more information on the HPE Complete – Zerto solution, visit;

<https://h20195.www2.hpe.com/v2/getdocument.aspx?docname=a00006013enw>

---

### HPE Complete – Arxscan

Arxscan is an HPE Complete Partner delivering innovative software that drives value through unique enterprise data center monitoring and reporting. Arxscan provides infrastructure monitoring for Storage, Network, Servers and Applications. Arxscan is fully supported on the HPE MSA 1050, 2050 and 2052 storage arrays, and is available for purchase directly from HPE. Arxscan's intuitive dashboard delivers an unprecedented view of how organizations store, distribute and protect their data, providing relevant views around device quality and performance metrics. Benefits include:

- Remote delivery from any location to any location worldwide.
- Supports all SAN/NAS storage OEM product lines, SAN switch and server OS platforms without agents.
- Quickly installed in under two hours in SMB, midrange or enterprise customer environments.
- Presents views that are business operations and infrastructure/system operations centric.
- Creates global collaborative touch points for all users of local and remote data center resources.
- One Stop Shop – ability to purchase complete solutions from HPE that include both HPE products and best-in-class third party branded products, all on a single HPE purchase order.

For more information please refer to [HPE Complete](#) on [HPE.com](#)

---

### MSA Health Check Tool

MSA Health Check is a cloud-based tool that provides users insight into the general health of their MSA array. The tool uses a powerful rules-based analytics engine which can predict failures before they happen. The MSA Health Check tool performs a full sweep of analytics and checking thousands of data points from sensors inside the MSA array. The analytics engine will pick up common failure signatures and check against MSA best practices producing a simple, easy to digest PDF report with status and suggested courses of action to correct anything found in the scan. The tool is free of charge to HPE MSA customers. The MSA Health Check tool is supported across all current MSA 1050/2050/2052 arrays as well as the prior two generations of arrays (MSA P2000 G3 and MSA 1040/2040/2042). The tool is available immediately at:

<http://www.hpe.com/storage/MSAHealthCheck>

---



## Service and Support

### Warranty

Three-year limited warranty, parts exchange Next Business day delivery.

3 Years 9x5 telephone support, with Rights to New Versions bundled with the MSA 2052. Disk enclosures, Hard drives, and Options for the MSA 2052 carry their own warranty. Refer to **Hewlett Packard Enterprise Limited Warranty Statement** for more information.

The MSA 2052 has been designed with customer self-repairable parts to minimize repair time and provide greater flexibility in performing defective parts replacement. Please refer to Hewlett Packard Enterprise limited warranty Statement and parts replacement instructions for further details.

#### Notes:

- The warranty of the hard drive options purchased with the MSA 2052 models is different for SAS hard drives versus SAS MDL. SAS hard drive options have a three year warranty and SAS MDL have a one year warranty.
- Firmware updates beyond the 3 year warranty period requires a support contract.

---

### Solid State Drives (SSD) Warranty

3/0/0 warranty; Customer Self Repair (CSR) subject to maximum usage and or maximum supported lifetime limitations, whichever occurs first. Maximum Supported Lifetime is the period in years set to equal the warranty for the device. Maximum usage limit is the maximum amount of data that can be written to the device before reaching the device's write endurance limit.

**Notes:** SSDs used for replacement will be of equal or greater capacity and are designed to meet or exceed the original SSD warranty. Replacement drive/s could be of the same model drive or of a different model qualified to operate interchangeably inside the MSA array. Warranties of these components are unaffected by any substitution.

---

## Service and Support

### Protect your business beyond warranty with HPE Support Services

HPE Pointnext provides a comprehensive portfolio including Advisory and Transformational, Professional, and Operational Services to help accelerate your digital transformation. From the onset of your transformation journey, Advisory and Transformational Services focus on designing the transformation and creating a solution roadmap. Professional Services specializes in creative configurations with flawless and on-time implementation, and on-budget execution. Finally, operational services provide innovative new approaches like Flexible Capacity and Datacenter Care, to keep your business at peak performance. HPE is ready to bring together all the pieces of the puzzle for you, with an eye on the future, and make the complex simple.

---

### Connect your devices

Unlock all of the benefits of your technology investment by connecting your products to Hewlett Packard Enterprise. Achieve up to 77%<sup>1</sup> reduction in down time, near 100%<sup>2</sup> diagnostic accuracy and a single consolidated view of your environment. By connecting, you will receive 24x7 monitoring, pre-failure alerts, automatic call logging, and automatic parts dispatch. HPE Proactive Care Service and HPE Datacenter Care Service customers will also benefit from proactive activities to help prevent issues and increase optimization. All these benefits are already available to you with your server storage and networking products, securely connected to HPE support

#### Notes:

- <sup>1</sup> IDC
- <sup>2</sup> HP CSC reports 2014-2015

Learn more about getting connected at <http://www.hpe.com/services>



## Service and Support

### Optimized Care

#### **HPE Proactive Care with 6 hour call-to-repair commitment, three year Support Service**

HPE Proactive Care gives customers an enhanced call experience. When your products are connected to HPE, Proactive Care helps prevent problems and maintains IT stability by utilizing personalized proactive reports with recommendations and advice.

This Service combines three years' proactive reporting and advice with our highest level of hardware support; the HPE 24x7, six hour hardware call-to-repair. HPE is the only leading manufacturer who makes this level of coverage available as a standard service offering for your most valuable servers and storage, including the HPE MSA 2050/2052 Storage.

<https://www.hpe.com/h20195/v2/GetPDF.aspx/4AA3-8855ENW.pdf>

---

### Standard Care

#### **HPE Proactive Care with 24x7 coverage, three year Support Service**

HPE Proactive Care gives customers an enhanced call experience. When your products are connected to HPE, Proactive Care helps prevent problems and maintains IT stability by utilizing personalized proactive reports with recommendations and advice

This Service combines three years proactive reporting and advice with our 24x7 coverage, four hour hardware response time when there is a problem.

<https://www.hpe.com/h20195/v2/GetPDF.aspx/4AA3-8855ENW.pdf>

---

### Basic Care

#### **HPE Foundation Care 24x7, three-year Support Service**

HPE Foundation Care 24x7 gives you access to HPE 24 hours a day, seven days a week for assistance on resolving issues. This service includes need-based Hardware onsite response within four hours. Simplify your support experience and make HPE your first call to help resolve hardware or software problems.

<https://www.hpe.com/h20195/V2/GetDocument.aspx?docname=4AA4-8876ENW&cc=us&lc=en>

---

### Foundation Care

#### **HPE Foundation Care 24x7, three-year Support Service**

HPE Foundation Care 24x7 gives you access to HPE 24 hours a day, seven days a week for assistance on resolving issues. This service includes need-based Hardware onsite response within four hours. In addition, collaborative software support is included in this service that provides troubleshooting assistance on industry leading software running on your HPE server. Simplify your support experience and make HPE your first call to help resolve hardware or software problems.

<https://www.hpe.com/h20195/V2/GetDocument.aspx?docname=4AA4-8876ENW&cc=us&lc=en>

---

### Related Services

#### **HPE Hardware Installation**

Provides for the basic hardware installation of HPE branded servers, HPE storage including the MSA 1050 devices and networking options to assist you in bringing your new hardware into operation in a timely and professional manner.

#### **HPE Installation and Startup Service**

Provides for the installation and startup of HPE technology including BladeSystems, C-Class enclosure, HPE ProLiant c-Class and Integrity server blades, storage blades, SAN switch blades, HPE Virtual Connect modules (Ethernet and Fibre Channel), Ethernet network interconnects, and InfiniBand, as well as the installation of one supported operating system type (Windows® or Linux). Included the HPE MSA 1050.

---



## Service and Support

### HPE Datacenter Care service

Helps improve IT stability and security, increase the value of IT, and enable agility and innovation. It is a structured framework of repeatable, tested, and globally available services “building blocks.” You can deploy, operate, and evolve your datacenter wherever you are on your IT journey. With HPE Datacenter Care, you benefit from a personalized relationship with HPE via a single point of accountability for HPE and others’ products.

---

### HPE Factory Express for Servers and Storage

HPE Factory Express offers configuration, customization, integration and deployment services for HPE servers and storage products. Customers can choose how their factory solutions are built, tested, integrated, shipped and deployed.

Factory Express offers service packages for simple configuration, racking, installation, complex configuration and design services as well as individual factory services, such as image loading, asset tagging, and custom packaging. HPE products supported through Factory Express include a wide array of servers and storage: HPE Integrity, HPE ProLiant, HPE Apollo, HPE ProLiant Server Blades, HPE BladeSystem, HPE 9000 servers as well as the HPE MSA Storage, HPE 3PAR Storage, HPE XP, rack-mount tape libraries and configurable network switches.

---

### HPE Support Center

The HPE Support Center is a personalized online support portal with access to information, tools and experts to support HPE business products. Submit support cases online, chat with Hewlett Packard Enterprise experts, access support resources or collaborate with peers.

Learn more <http://www.hpe.com/support/hpesc>

HPE Insight Remote Support and HPE Support Center are available at no additional cost with a HPE warranty, HPE Support Service or HPE contractual support agreement.

For more information: <http://www.hpe.com/services>

---

### Parts and Materials

Hewlett Packard Enterprise will provide HPE-supported replacement parts and materials necessary to maintain the covered hardware product in operating condition, including parts and materials for available and recommended engineering improvements.

Parts and components that have reached their maximum supported lifetime and/or the maximum usage limitations as set forth in the manufacturer's operating manual, product quick-specs, or the technical product data sheet will not be provided, repaired, or replaced as part of these services.

The defective media retention service feature option applies only to Disk or eligible SSD/Flash Drives replaced by Hewlett Packard Enterprise due to malfunction.

---



## Configuration Information

### Step 1 - MSA 2052 - Base Configurations

#### Pre-Configured Systems

##### Description

	<b>SKU</b>
HPE MSA 2052 SAN Dual Controller LFF Storage	Q1J02B
HPE MSA 2052 SAN Dual Controller LFF TAA-compliant Storage	R4Y03A

##### Notes:

- The MSA 2052 is a pre-configured bundle that includes an MSA 2050-branded LFF array chassis, two AC power supplies, two MSA 2050 SAN controllers, two 800GB Mixed Use SSDs, one Advanced Data Services LTU, two .7m PDU cords (IEC C14), and one rack-mount kit. The two 800GB SSDs are shipped integrated in the MSA 2050 array. The Advanced Data Services LTU is shipped with the MSA 2050 array and requires license activation.
- SFPs not included.

HPE MSA 2052 SAN Dual Controller SFF Storage	Q1J03B
HPE MSA 2052 SAN Dual Controller SFF TAA-compliant Storage	R4Y04A

##### Notes:

- The MSA 2052 is a pre-configured bundle that includes an MSA 2050-branded SFF array chassis, two AC power supplies, two MSA 2050 SAN controllers, two 800GB Mixed Use SSDs, one Advanced Data Services LTU, two .7m PDU cords (IEC C14), and one rack-mount kit. The two 800GB SSDs are shipped integrated in the MSA 2050 array. The Advanced Data Services LTU is shipped with the MSA 2050 array and requires license activation.
- SFPs not included.

HPE MSA 2052 SAS Dual Controller LFF Storage	Q1J30B
HPE MSA 2052 SAS Dual Controller LFF TAA-compliant Storage	R4Y05A

##### Notes:

- The MSA 2052 is a pre-configured bundle that includes an MSA 2050-branded LFF array chassis, two AC power supplies, two MSA 2050 SAS controllers, two 800GB Mixed Use SSDs, one Advanced Data Services LTU, two .7m PDU cords (IEC C14), and one rack-mount kit. The two 800GB SSDs are shipped integrated in the MSA 2050 array. The Advanced Data Services LTU is shipped with the MSA 2050 array and requires license activation.
- SFPs are not required for SAS Storage systems.

HPE MSA 2052 SAS Dual Controller SFF Storage	Q1J31B
HPE MSA 2052 SAS Dual Controller SFF TAA-compliant Storage	R4Y06A

##### Notes:

- The MSA 2052 is a pre-configured bundle that includes an MSA 2050-branded SFF array chassis, two AC power supplies, two MSA 2050 SAS controllers, two 800GB Mixed Use SSDs, one Advanced Data Services LTU, two .7m PDU cords (IEC C14), and one rack-mount kit. The two 800GB SSDs are shipped integrated in the MSA 2050 array. The Advanced Data Services LTU is shipped with the MSA 2050 array and requires license activation.
- SFPs are not required for SAS Storage systems.





## Configuration Information

### Step 2 – Choose Your SFP+ Module

#### SFP+ Modules

Description	SKU
HPE MSA 8Gb Short Wave Fibre Channel SFP+ 4-pack Transceiver	C8R23B
HPE MSA 16Gb Short Wave Fibre Channel SFP+ 4-pack Transceiver	C8R24B
HPE MSA 10Gb Short Range iSCSI SFP+ 4-pack Transceiver	C8R25B
HPE MSA 1Gb RJ-45 iSCSI SFP+ 4-pack Transceiver	C8S75B

#### Notes:

- MSA SFPs are for use only with MSA 2052 SAN Controllers.
- MSA SAS controllers do not require SFP modules.
- MSA 2052 SAN Controllers do not ship with any SFPs.
- Customer must select at least one of the above SFP options.
- Each MSA 2052 SAN controller can be configured with 2 or 4 SFPs.
- For MSA 2052 10Gb iSCSI configuration, DAC cables can be used instead of SFPs.

#### Configuration Table for mixing SFPs

Configuration	Controller	Host Port 1 SFP <sup>1</sup>	Host Port 2 SFP <sup>1</sup>	Host Port 3 SFP <sup>2</sup>	Host Port 4 SFP <sup>2</sup>
Dual SAN Controller	Controller A	16Gb FC	16Gb FC	None	None
				16Gb FC	16Gb FC
				8Gb FC	8Gb FC
				10GbE iSCSI	10GbE iSCSI
				1GbE iSCSI	1GbE iSCSI
		8Gb FC	8Gb FC	None	None
				16Gb FC	16Gb FC
				8Gb FC	8Gb FC
				10GbE iSCSI	10GbE iSCSI
				1GbE iSCSI	1GbE iSCSI
	10GbE iSCSI	10GbE iSCSI	None	None	
			10GbE iSCSI	10GbE iSCSI	
			1GbE iSCSI	1GbE iSCSI	
			1GbE iSCSI	1GbE iSCSI	
1GbE iSCSI	1GbE iSCSI	None	None		
		10GbE iSCSI	10GbE iSCSI		
		1GbE iSCSI	1GbE iSCSI		
		1GbE iSCSI	1GbE iSCSI		
	Controller B	Match Controller A	Match Controller A	Match Controller A	Match Controller A

#### Notes:

- <sup>1</sup> SFP in Host Port 1 must match SFP in Host Port 2
- <sup>2</sup> SFP in Host Port 3 must match SFP in Host Port 4

### Step 3 – Select Your Drives

MSA HDDs and SSDs drives are for use with MSA Storage Systems only.

Customers can mix SSD, SAS, and SAS MDL drives in the same array enclosure and disk enclosure

#### SFF SSDs

HPE MSA 800GB 12G SAS Mixed Use SFF (2.5in) 3yr Warranty Solid State Drive	N9X96A
HPE MSA 1.6TB 12G SAS Mixed Use SFF (2.5in) 3yr Warranty Solid State Drive	N9X91A
HPE MSA 3.2TB 12G SAS Mixed Use SFF (2.5in) 3yr Warranty Solid State Drive	N9X92A
HPE MSA 960GB SAS 12G Read Intensive SFF (2.5in) 3yr Wty SSD	ROQ35A

## Configuration Information

Description	SKU
HPE MSA 1.92TB SAS 12G Read Intensive SFF (2.5in) 3yr Wty SSD	ROQ37A
<b>SFF HDDs</b>	
<b>12G SFF 15K SAS Enterprise HDDs</b>	
HPE MSA 600GB 12G SAS 15K SFF(2.5in) Dual Port Enterprise 3yr Warranty Hard Drive	J9F42A
HPE MSA 900GB 12G SAS 15K SFF (2.5in) Enterprise 3yr Warranty Hard Drive	Q1H47A
<b>12G SFF 10K SAS Enterprise HDDs</b>	
HPE MSA 600GB 12G SAS 10K SFF(2.5in) Dual Port Enterprise 3yr Warranty Hard Drive	J9F46A
HPE MSA 1.2TB 12G SAS 10K SFF(2.5in) Dual Port Enterprise 3yr Warranty Hard Drive	J9F48A
HPE MSA 1.8TB 12G SAS 10K SFF (2.5in) 512e Enterprise 3yr Warranty Hard Drive	J9F49A
HPE MSA 2.4TB 12G SAS 10K SFF (2.5in) Enterprise 512e 3yr Warranty Hard Drive	Q2R41A
<b>LFF SSDs</b>	
HPE MSA 800GB 12G SAS Mixed Use LFF (3.5in) Converter Carrier 3yr Wty Solid State Drive	P9M80A
HPE MSA 960GB SAS 12G Read Intensive LFF (3.5in) 3yr Wty SSD	ROQ36A
HPE MSA 1.92TB SAS 12G Read Intensive LFF (3.5in) 3yr Wty SSD	ROQ38A
<b>LFF HDDs</b>	
<b>12G LFF 7.2K SAS Midline Drives</b>	
HPE MSA 4TB 12G SAS 7.2K LFF (3.5in) Midline 1yr Warranty Hard Drive	K2Q82A
HPE MSA 6TB 12G SAS 7.2K LFF(3.5in) Midline 1yr Warranty Hard Drive	J9F43A
HPE MSA 8TB 12G SAS 7.2K LFF (3.5in) 512e Midline 1yr Warranty Hard Drive	M0S90A
HPE MSA 10TB 12G SAS 7.2K rpm LFF (3.5in) Midline 512e 1yr Wty Hard Drive	P9M82A
HPE MSA 12TB 12G SAS 7.2K LFF (3.5in) Midline 512e 1yr Warranty Hard Drive	Q2R42A
HPE MSA 14TB SAS 12G Midline 7.2K LFF (3.5in) 1yr Wty 512e HDD	ROQ21A
<b>6-Pack Drive Bundles</b>	
<b>SFF Drive Bundles</b>	
HPE MSA 7.2TB SAS 12G Enterprise 10K SFF (2.5in) 3yr Wty 512n 6-pack HDD Bundle	R0P85A
<b>Notes:</b> Contains 6 x MSA 1.2TB 12G SAS 10K SFF Enterprise HDDs (J9F48A)	
HPE MSA 10.8TB SAS 12G Enterprise 10K SFF (2.5in) 3yr Wty 512e 6-pack HDD Bundle	R0P86A
<b>Notes:</b> Contains 6 x MSA 1.8TB 12G SAS 10K SFF Enterprise HDDs (J9F49A)	
HPE MSA 14.4TB SAS 12G Enterprise 10K SFF (2.5in) 3yr Wty 512e 6-pack HDD Bundle	R0P87A
<b>Notes:</b> Contains 6 x MSA 2.4TB 12G SAS 10K SFF Enterprise HDDs (Q2R41A)	
HPE MSA 3.6TB SAS 12G Enterprise 15K SFF (2.5in) 3yr Wty 512n 6-pack HDD Bundle	R0P88A
<b>Notes:</b> Contains 6 x MSA 600GB 12G SAS 15K SFF Enterprise HDDs (J9F42A)	
HPE MSA 5.4TB SAS 12G Enterprise 15K SFF (2.5in) 3yr Wty 512n 6-pack HDD Bundle	R0P89A
<b>Notes:</b> Contains 6 x MSA 900GB 12G SAS 15K SFF Enterprise HDDs (Q1H47A)	

## Configuration Information

### LFF Drive Bundles

Description	SKU
HPE MSA 48TB SAS 12G Midline 7.2K LFF (3.5in) 1yr Wty 512e 6-pack HDD Bundle <b>Notes:</b> Contains 6 x <a href="#">MSA 8TB 12G SAS 7.2K LFF Midline HDDs (MOS90A)</a>	R0P90A
HPE MSA 60TB SAS 12G Midline 7.2K LFF (3.5in) 1yr Wty 512e 6-pack HDD Bundle <b>Notes:</b> Contains 6 x <a href="#">MSA 10TB 12G SAS 7.2K LFF Midline HDDs (P9M82A)</a>	R0P91A
HPE MSA 72TB SAS 12G Midline 7.2K LFF (3.5in) 1yr Wty 512e 6-pack HDD Bundle <b>Notes:</b> Contains 6 x <a href="#">MSA 12TB 12G SAS 7.2K LFF Midline HDDs (Q2R42A)</a>	R0P92A
HPE MSA 84TB SAS 12G Midline 7.2K LFF (3.5in) 1yr Wty 512e 6-pack HDD Bundle <b>Notes:</b> Contains 6 x <a href="#">MSA 14TB 12G SAS 7.2K LFF Midline HDDs (ROQ21A)</a>	ROQ22A

### Step 4 – Options

#### Disk Enclosures

HPE MSA 2050 LFF Disk Enclosure	Q1J06B
HPE MSA 2050 SFF Disk Enclosure	Q1J07B

#### Notes:

- Each disk enclosure includes a single rack-mount kit and two 0.5m MiniSAS to MiniSAS cables
- Add up to 7 expansion disk enclosures.
- MSA 2052 LFF Disk Enclosure can be connected to either the MSA 2052 SFF or LFF dual controller systems.
- HPE MSA 2052 SFF Disk Enclosure can be connected to either the MSA 2052 SFF or LFF dual controller systems.
- Models Q1J06A and Q1J07A may continue to have limited availability in Americas and Asia-Pacific regions. Please check with your local HPE sales representative or partner regarding current availability.

#### SAS Cables

HPE External Mini SAS 1m Cable ALL	407337-B21
HPE External Mini SAS 2m Cable	407339-B21

**Notes:** When connecting a MSA 2052 Controller to a disk enclosure if a longer cable is needed or desired.

#### Power Cords

HPE C13 - C14 WW 250V 10Amp 2.0m Jumper Cord	A0K02A
HPE C13 - C14 WW 250V 10Amp Flint Gray 2.0m Jumper Cord	AF573A
HPE C13 - AS3112-3 AU 250V 10Amp 2.5m Power Cord	AF569A
HPE C13 - BS-1363A UK/HK/SG 250V 10Amp 1.83m Power Cord	AF570A
HPE C13 - C14 WW 250V 10A Gray 0.7m Jumper Cord	A0K03A
HPE C13 - CEE-VII EU 250V 10Amp 1.83m Power Cord	AF568A
HPE C13 - CNS-690 TW 110V 13Amp 1.83m Power Cord	AF561A
HPE C13 - DK-2.5A DK 250V 10Amp 1.83m Power Cord	AF566A
HPE C13 - GB-1002 CN 250V 10Amp 1.83m Power Cord	AF557A



## Configuration Information

Description	SKU
HPE C13 - IRAM -2073 AR 250V 10A 2.5m Power Cord	AF558A
HPE C13 - IS-1293 IN 240V 6Amp LV 2.0m Power Cord	AF562A
HPE C13 - JIS C8303 JP 100V 12Amp 2.0m Power Cord	AF572A
HPE C13 - KSC- 8305 KR 250V 10Amp 1.83m Power Cord	AF560A
HPE C13 - NBR-14136 BR 250V 10Amp 1.83m Power Cord	AF591A
HPE C13 - Nema 5-15P US/CA 110V 10Amp 1.83m Power Cord	AF556A
HPE C13 - SABS-164 ZA 250V 10Amp 2.5m Power Cord	AF567A
HPE C13 - SEV 1011 CH 250V 10Amp 1.83m Power Cord	AF565A
HPE C13 - SI-32 IL 250V 10Amp 1.83m Power Cord	AF564A
HPE C13-NEMA 6-15P 10A/250V 3.6m Black Power Cord	AON33A

**Notes:** Two PDU cables: one 142263-008 (Black) and one 1422633-013 (Grey), ship standard with all AC-powered enclosures.

### Step 5

#### Step 5a - Choose Supported Options For Fibre Channel Infrastructure

##### PremierFlexOM4 type cables

HPE Premier Flex LC/LC Multi-mode OM4 2 fiber 1m Cable	QK732A
HPE Premier Flex LC/LC Multi-mode OM4 2 fiber 2m Cable	QK733A
HPE Premier Flex LC/LC Multi-mode OM4 2 fiber 5m Cable	QK734A
HPE Premier Flex LC/LC Multi-mode OM4 2 fiber 15m Cable	QK735A
HPE Premier Flex LC/LC Multi-mode OM4 2 fiber 30m Cable	QK736A
HPE Premier Flex LC/LC Multi-mode OM4 2 fiber 50m Cable	QK737A

##### OM3 LC-LC cables

HPE LC to LC Multi-mode OM3 2-Fiber 0.5m 1-Pack Fiber Optic Cable	AJ833A
HPE LC to LC Multi-mode OM3 2-Fiber 1.0m 1-Pack Fiber Optic Cable	AJ834A
HPE LC to LC Multi-mode OM3 2-Fiber 2.0m 1-Pack Fiber Optic Cable	AJ835A
HPE LC to LC Multi-mode OM3 2-Fiber 5.0m 1-Pack Fiber Optic Cable	AJ836A
HPE LC to LC Multi-mode OM3 2-Fiber 15.0m 1-Pack Fiber Optic Cable	AJ837A
HPE LC to LC Multi-mode OM3 2-Fiber 30.0m 1-Pack Fiber Optic Cable	AJ838A
HPE LC to LC Multi-mode OM3 2-Fiber 50.0m 1-Pack Fiber Optic Cable	AJ839A

#### Step 5b - Choose Supported Options For 10GbE Infrastructure

##### Direct Attach Copper Cables

Aruba 10G SFP+ to SFP+ 1m Direct Attach Copper Cable	J9281D
Aruba 10G SFP+ to SFP+ 3m Direct Attach Copper Cable	J9283D
Aruba 10G SFP+ to SFP+ 7m Direct Attach Copper Cable	J9285D
HPE BladeSystem c-Class 10GbE SFP+ to SFP+ 3m Direct Attach Copper Cable	487655-B21
HPE BladeSystem c-Class 10GbE SFP+ to SFP+ 5m Direct Attach Copper Cable	537963-B21
HPE FlexNetwork X240 10G SFP+ to SFP+ 0.65m Direct Attach Copper Cable	JD095C



## Configuration Information

### Description

	<b>SKU</b>
HPE FlexNetwork X240 10G SFP+ to SFP+ 1.2m Direct Attach Copper Cable	JD096C
HPE FlexNetwork X240 10G SFP+ to SFP+ 3m Direct Attach Copper Cable	JD097C
HPE FlexNetwork X240 10G SFP+ to SFP+ 5m Direct Attach Copper Cable	JG081C
HPE FlexNetwork X240 10G SFP+ SFP+ 7m Direct Attach Copper Cable	JC784C

### Step 5c - Choose Supported Options for SAS Infrastructure

#### Supported options

##### Mini SAS Cables

HPE 1.0m External Mini SAS High Density to Mini SAS Cable	716189-B21
HPE 2.0m External Mini SAS High Density to Mini SAS Cable	716191-B21

**Notes:** These cables are used to connect 6Gb SAS initiator to MSA 2050 SAS controller. These are not used for connecting to a disk enclosure.

HPE External 1.0m (3ft) Mini-SAS HD 4x to Mini-SAS HD 4x Cable	716195-B21
HPE External 2.0m (6ft) Mini-SAS HD 4x to Mini-SAS HD 4x Cable	716197-B21

**Notes:** These cables are used to connect 12Gb SAS initiator to MSA 2050 SAS controller. These are not used for connecting to a disk enclosure.

HPE 4.0m External Mini SAS High Density to Mini SAS Cable	716193-B21
-----------------------------------------------------------	------------

**Notes:** This cable is used to connect 6Gb SAS initiator to MSA 2050 SAS controller. This is not used for connecting to a disk enclosure.

HPE External 4.0m (13ft) Mini-SAS HD 4x to Mini-SAS HD 4x Cable	716199-B21
-----------------------------------------------------------------	------------

**Notes:** These cables are used to connect 12Gb SAS initiator to MSA 2050 SAS controller. These are not used for connecting to a disk enclosure

##### SAS Controllers/HBAs

HPE Smart Array E208e-p SR Gen10 (8 External Lanes/No Cache) 12G SAS PCIe Plug-in Controller	804398-B21
HPE Smart Array P408e-p SR Gen10 (8 External Lanes/4GB Cache) 12G SAS PCIe Plug-in Controller	804405-B21
HPE Smart Array P408e-m SR Gen10 (8 External Lanes/2GB Cache) 12G SAS Mezzanine Controller	804381-B21

### Step 6 – Software

The MSA Advanced Data Services Software Suite comes standard on the MSA 2052. No optional software titles are available on the MSA 2052.



## Technical Specifications

### MSA 2052

#### Power requirements

Input Power Requirements (typical-running I/O) SFF/LFF arrays	110VAC 3.32A, 344-390 W; 220VAC 1.61A,374-432W
Max Input Power	100-240 VAC, 50/60 Hz., 4.5-1.9A; 48-60 VDC 10.4A/8.3A
Heat Dissipation	1622 BTU/hr

#### Temperature and humidity ranges

Operating Temperature	41°F to 104°F (5°C to 40°C)
Shipping Temperature	-40°F to 158°F (-40°C to 70°C)
Operating Humidity	10% to 90% RH @ 104°F (40°C) non-condensing
Non-Operating Humidity	Up to 93% RH @ 104°F (40°C)

#### Declared acoustic noise levels

Sound Power	A weighted sound power LWAd=6,75 B
Sound Pressure	A weighted sound pressure LpAm - 55dB

#### Shock and vibration

Shock, Operational	3G's for 11 milliseconds
Shock, Non-Operational	15G 11ms half sine
Vibration, Operational	5-500Hz, 0.14 Grms shaped
Vibration, Non-Operational	3-365-3Hz, 1.22 Grms, z-axis,0.85 Grms, X&Y axis shaped spectrum

#### Physical

Height	3.5 in/ 8.9 cm
Depth (excluding cables) (back of ear to back of controller handle)	SFF 24-bay array: 19.5 in / 49.5 cm LFF 12-bay array: 22.5in. / 57.2 cm
Width (body only)	17.6 in / 44.7 cm (w/ ears 19 in / 48.26 cm)
Weight (Includes chassis and 2 controllers. No drives)	LFF chassis: 40.6 lbs. SFF chassis: 38.7 lbs



## Technical Specifications

### Performance

The performance figures provided here are for reference as many variables exist between array configurations, workloads, hard drive types, disk group setup parameters and host system setup. Hewlett Packard Enterprise has traditionally published a set of end-to-end MSA performance specifications that are fed into HPE Sizer tools which are based on conservative real-world configurations. These end-to-end performance numbers are subject to change without notice.

<b>MSA 2052 End-to-End Performance Results</b>		
<b>MSA 2050 Array Performance <sup>1</sup></b>	<b>HPE MSA 2052 Converged SAN Controllers with HDDs</b>	<b>HPE MSA 2052 Converged SAN Controllers with SSDs</b>
Protocol (host connect)	16 Gb Fibre Channel	16 Gb Fibre Channel
<b>MSA 2050 RAID 1 SSD Performance Results <sup>2</sup></b>		
Random Reads (IOPs)		220,600
Random Writes (IOPs)		102,800
<b>MSA 2050 RAID 5 Performance Results <sup>3,4</sup></b>		
Segmented Sequential Reads (MB/s)	5,280	
Segmented Sequential Writes (MB/s)	4,650	

#### Notes: End-to-End performance notes

- <sup>1</sup>Performance results were generated using internal HPE test tools. Number and type of applications, drive type and number of drives, operating system used, and the number of hosts will affect overall performance. This table is provided strictly as a test-lab comparison.
- <sup>2</sup>Dual Controller configuration, (8) SSDs, RAID: 1, two drives per Disk Group; two Disk Groups per Pool, 2 volumes per Pool, block size: 8k, average latency under 5ms, Windows Server 2012 host, 16Gb FC direct connect to array.
- <sup>3</sup>Dual Controller configuration, (72) 15k HDD, RAID: 5, nine drives per Disk Group, 4 Disk Groups per Pool, 32 volumes per Pool, block size: 256k, average latency under 30ms, Windows Server 2012 host, 16Gb FC direct connect to array.
- <sup>4</sup>Sequential performance numbers were generated using segmented sequential workloads. For segmented sequential workloads with a queue depth greater than 1, each sequential stream is targeted to operate on a separate LBA range. Other types of sequential workloads that target specific LBA ranges may achieve higher results.



## Technical Specifications

### End-to-End Performance Figures using Virtual Storage

#### HPE MSA 2050 End-to-End Performance Figures <sup>1</sup>

Controller Model	HPE MSA 2050 SAN						HPE MSA 2050 SAS	
Host Protocol <sup>2</sup>	16 Gb FC		10 GbE iSCSI		1 GbE iSCSI		12 Gb SAS	
Drive Technology	HDD	SSD	HDD	SSD	HDD	SSD	HDD	SSD

#### MSA 2050 RAID 10 Performance Results\*\* 3,4,5,11

Random Reads IOPS	63,600	220,800	63,500	208,400	63,200	103,700	50,800	219,100
Random Writes IOPS	37,300	103,000	37,300	94,300	37,200	93,300	37,100	97,500
Random Mix 60/40 IOPS	47,600	142,100	46,600	133,000	46,800	130,500	44,500	138,800
Sequential Reads MB/s	5,350		5,350		880		5,350	
Sequential Writes MB/s	3,110		3,110		880		3,120	

#### MSA 2050 RAID 5 Performance Results <sup>6,7,12</sup>

Random Reads IOPS	56,300	219,200	55,800	201,400	56,000	103,400	47,300	209,600
Random Writes IOPS	18,100	43,400	18,000	41,400	18,300	40,600	18,000	43,100
Random Mix 60/40 IOPS	29,100	80,000	29,200	75,400	28,700	73,900	28,000	78,700
Sequential Reads MB/s	5,290		5,280		880		5,290	
Sequential Writes MB/s	4,650		3,870		880		4,710	

Controller Model	HPE MSA 2050 SAN						HPE MSA 2050 SAS	
------------------	------------------	--	--	--	--	--	------------------	--

#### MSA 2050 RAID 6 Performance Results <sup>8,9,10,13</sup>

Random Reads IOPS	56,100	219,000	55,700	201,300	55,700	105,000	47,400	209,800
Random Writes IOPS	13,000	36,000	13,000	35,600	13,200	35,300	13,000	36,700
Random Mix 60/40 IOPS	21,400	72,200	21,200	68,500	21,300	67,300	21,300	71,500
Sequential Reads MB/s	5,550		5,530		880		5,560	
Sequential Writes MB/s	4,440		3,680		880		4,600	

#### Notes:

- \*\*RAID 1 was used for SSD testing.
- Number and type of applications, drive type and number of drives, operating system used, and the number of hosts will affect overall performance. This table is provided strictly as a test-lab comparison. These numbers reflect a full array configuration with the maximum number of front-end ports and controllers. The test results shown for the HPE MSA 2050 are designed to give a conservative reference point for comparisons.
- <sup>1</sup>Sequential tests (MB/s) are based on 256K block sizes and random tests (IOPS) are based on 8K block sizes run against the storage. For sequential workloads with a queue depth greater than 1, each sequential stream is targeted to operate on a separate LBA range. Other types of sequential workloads that target specific LBA ranges may achieve higher results. Results cannot be expected with a single host.
- <sup>2</sup>Fibre Channel results were measured using 16 Gb FC Host Bus Adapters. SAS results were measured using 12 Gb SAS Host Bus Adapters. 10 GbE iSCSI results were measured using 10GbE iSCSI Host Bus Adapters. 1 GbE iSCSI results were measured using 1GbE network interface controllers (NICs). Hosts were directly attached to the HPE MSA 2050 array.
- <sup>3</sup>MSA 2050 RAID 10 Hard Disk Drive random results: Dual Controller configuration, (192) 15K HDD, 12 drives per disk group, 8 disk groups per pool, 8 volumes per pool.
- <sup>4</sup>MSA 2040 RAID 10 Hard Disk Drive sequential read results: Dual Controller configuration, (96) 15K SAS HDDs, 12 drives per disk group, 4 disk groups per pool, 4 volumes per pool.
- <sup>5</sup>MSA 2040 RAID 10 Hard Disk Drive sequential write results: Dual Controller configuration, (48) 15K SAS HDDs, 12 drives per disk group, 2 disk groups per pool, 4 volumes per pool.
- <sup>6</sup>MSA 2050 RAID 5 Hard Disk Drive random results: Dual Controller configuration, (180) 15K HDD, 9 drives per disk group, 10 disk groups per pool, 10 volumes per pool.
- <sup>7</sup>MSA 2050 RAID 5 Hard Disk Drive sequential results: Dual Controller configuration, (72) 15K HDD, 9 drives per disk group, 4 disk groups per pool, 4 volumes per pool.



## Technical Specifications

- <sup>8</sup>MSA 2050 RAID 6 Hard Disk Drive random results: Dual Controller configuration, (180) 15K HDD, 10 drives per disk group, 9 disk groups per pool, 9 volumes per pool.
- <sup>9</sup>MSA 2050 RAID 6 Hard Disk Drive sequential read results: Dual Controller configuration, (80) 15K HDD, 10 drives per disk group, 4 disk groups per pool, 4 volumes per pool.
- <sup>10</sup>MSA 2050 RAID 6 Hard Disk Drive sequential write results: Dual Controller configuration, (40) 15K HDD, 10 drives per disk group, 2 disk groups per pool, 4 volumes per pool.
- <sup>11</sup>MSA 2050 RAID 1 Solid State Drive results: Dual Controller configuration, (8) SSDs, 2 SSDs per disk group, 2 disk groups per pool, 4 volumes per pool.
- <sup>12</sup>MSA 2050 RAID 5 Solid State Drive results: Dual Controller configuration, (6) SSDs, 3 SSDs per disk group, 1 disk group per pool, 4 volumes per pool.
- <sup>13</sup>MSA 2050 RAID 6 Solid State Drive results: Dual Controller configuration, (8) SSDs, 4 SSDs per disk group, 1 disk group per pool, 4 volumes per pool.

---

## MSA 2052 Regulatory Info

### Safety

- UL/CSA 62368-1 (USA/Canada)
- EN 62368-1 (European Union)
- IEC 60950-1 (International)

### Electromagnetic Compatibility

- VCCI Class A (Japan)
- FCC Class A (USA)
- ICES-003 Class A (Canada)
- EN55032 : (European Union Class A); CISPR 32 (International Class A)
- EN61000-3-2 : (Harmonics) (European Union)
- EN61000-3-3 : (Flicker) (European Union)
- EN 55024 (European Union, Immunity, Class A); CISPR 24 (International Immunity, Class A)
- AS/NZS CISPR 32, Class A (Australia, New Zealand)
- CNS 13438 Taiwan, Class A (Taiwan)
- KN32 Class A (Emissions Class A); KN35 (Immunity) (S Korea)

### RoHS and WEEE

RoHS-6/6 Compliance, China RoHS, WEEE

### Country Approvals

United States, Australia/New Zealand, Canada, European Union, Japan, South Korea, Taiwan

**Notes:** India and EAC are not covered for TAA compliant MSA Array models.

---



## Summary of Changes

Date	Version History	Action	Description of Change
18-Jan-2021	Version 21	Changed	Removed all mentions of array and expansion enclosure "A" SKUs and added textual updates.
05-Oct-2020	Version 20	Changed	Overview, Standard Features and Configuration Information sections were updated.
03-Aug-2020	Version 19	Changed	Adjusted B SKU regional availability.
04-May-2020	Version 18	Changed	Added MSA Health Check tool.
02-Mar-2020	Version 17	Changed	Added "B" variants for EMEA countries only. Removed EOL SKUs.
07-Oct-2019	Version 16	Changed	Added Arxscan support.
06-May-2019	Version 15	Changed	14TB HDD and Bundle added Max capacity of array increase.
02-Apr-2019	Version 14	Changed	RAID 0 added. Edits made throughout the QuickSpec
04-Mar-2019	Version 13	Changed	Added Drive 6 Pack Options Added Read Intensive SSDs Removed EOL HDDs and Cables Added Window Server 2019 support Overview, Standard Features, Software and Configuration Information sections were updated.
03-Dec-2018	Version 12	Changed	Overview and Configuration Information sections were updated
01-Oct-2018	Version 11	Changed	SKU descriptions in Configuration Information were updated.
04-Sep-2018	Version 10	Added	Added HPE Storage File Controller support. Added HPE Complete/Zerto replication support.
06-Aug-2018	Version 9	Added	Added I/O Workload Functionality.
02-Jul-2018	Version 8	Changed	Added LDAP Support. Standard Features, Software, and Configuration Information were revised.
05-Mar-2018	Version 7	Added	Added End-to-End Performance Metrics.
05-Feb-2018	Version 6	Changed	Overview, Standard Features, and Configuration Information were revised.
06-Nov-2017	Version 5	Changed	Changes made to the document.
02-Oct-2017	Version 4	Changed	Changes made to the Configuration Information section.
25-Sep-2017	Version 3	Changed	Changes made to the QuickSpecs.
11-Jul-2017	Version 2	Changed	Fixed typos.
05-Jun-2017	Version 1	Created	Document Created.



## Copyright

Make the right purchase decision.  
Contact our presales specialists.



Chat



Email



Call



Get updates



© Copyright 2021 Hewlett Packard Enterprise Development LP. The information contained herein is subject to change without notice. The only warranties for Hewlett Packard Enterprise products and services are set forth in the express warranty statements accompanying such products and services. Nothing herein should be construed as constituting an additional warranty. Hewlett Packard Enterprise shall not be liable for technical or editorial errors or omissions contained herein.

Microsoft and Windows NT are US registered trademarks of Microsoft Corporation. Intel is a US registered trademark of Intel Corporation. Unix is a registered trademark of The Open Group.

a00008277enw - 15936 - Worldwide - V21 - 18-January-2021