

FOR THE WINNERS' CIRCLE



KAISER 3 USER MANUAL

L **XL**



PACKAGE CONTENTS

1X Backrest
1X Seatbase
1X Wheel Base
2X Armrests (Pre-installed)
1X Magnetic Head Pillow
1X Accessories Box
1X Multi-Function Tilt Mechanism
2X Magnetic PU Foam Armrest Tops

ACCESSORIES BOX CONTENTS

2X Magnetic Side Covers
5X Casters (Wheels)
6X M8 Screws (2pcs Backup)
1X Long Allen Key
1X Gas Piston+Sleeve
1X Height Adjustment Tilt Lever Handle
1X Tilt Lock Lever Handle
1X Safety Cap

ASSEMBLE GUIDE

1. Install Wheels

Insert 5 casters into the socket bracers.



2. Install Piston and Piston Sleeve

Insert the gas piston and slide the sleeve over piston.



3. Unscrew Backrest

Remove the 4 units pre-installed M8 screws on the backrest.



4. Connect Backrest Right Side

Slide the right side backrest bracket down onto the right recline bracket. Insert M8 screws previously removed from the backrest and screw them in halfway.



5. Connect Backrest Left Side

Push the left recline bracket up to align with the screw holes on the left of the backrest. Insert the M8 screws, then tighten all 4 fully on both sides of the backrest using the Allen key provided.



6. Install Side Covers

Align the magnetic side covers on top of the brackets of backrest and they will snap magnetically in place.

Notice: the one with a gap is the right side cover.



7. Remove Notice Strap and Safety Screw

Remove the notice strap, then take off the red screw on right recline side by hand. This allows the recline to be used.

Note: we'll keep the red screw as it can be re-installed for child safety.



8. Insert the Safety Cap

Cover the safety cap on this hole. This safety cap can be removed with the red screw to push it from the inside.




9. Set the Chair Facing Down

Gently lift the chair and set it facing downwards to prepare for Step 11.



10. Insert Levers

Lever handles to the mechanism Front direction. Line up the grooves on the inside of the lever handles with the notches and insert fully into the shafts.

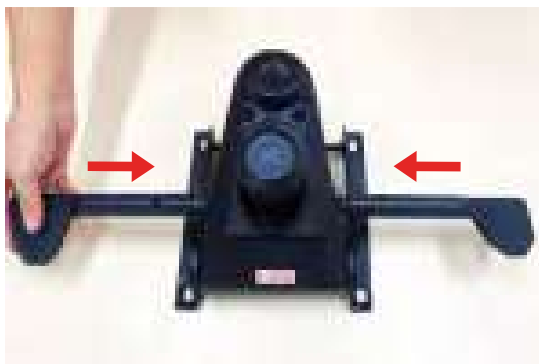

11. Attach Tilt Mechanism

Attach the tilt mechanism to the bottom of seat base with 4 units M8 screws. Make sure the correct FRONT direction. Insert the screws in half and tighten fully after them in place.




12. Connect Base with Chair

Lift the assembled wheelbase and insert the position into the socket of the tilt mechanism.



13. Put the Chair UP

Carefully tilt the chair into an upright position while holding the wheelbase.

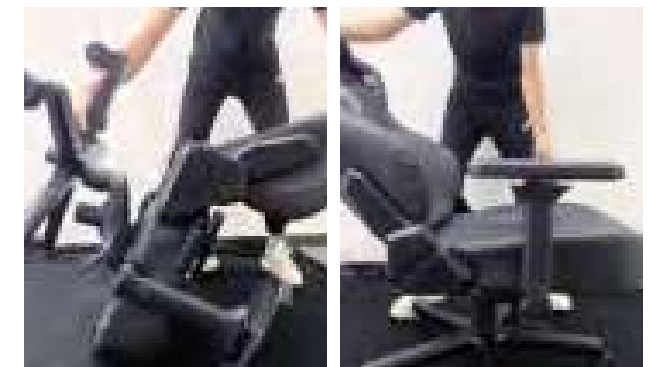

14. Assemble Armrest Tops

Assemble the Magnetic PU Foam Armrest Tops onto the armrest.



15. Assemble Head Pillow

Assemble the magnetic head pillow and move it up and down to your positions.



Congratulations! Your Anda Seat Gaming Chair has been fully assembled.

FUNCTION GUIDE


Backrest Recline

First fully pull up and hold the tilt lever, then lean back slowly until the backrest reaches to your desired angle, then slowly release the tilt lever back to its original position and lock it.




4D Armrests

Press and hold: the 1) front button to move armrest front, back or tilt; the 2) inner side button to move left or right; 3) lever outside to move up and down.

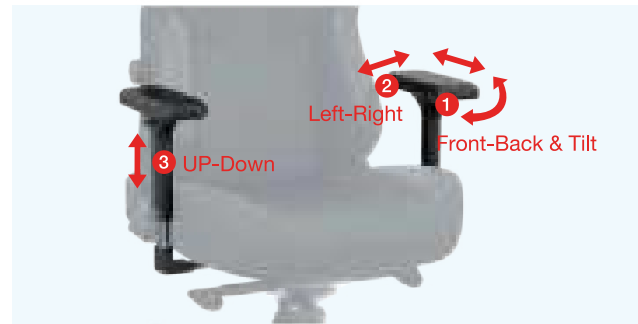

Tilt Tension

Turn the knob clockwise to loosen the rocking tension, anti-clockwise to tighten. Adjust it according to your weight and do not attempt to turn it past its maximum or minimum points.

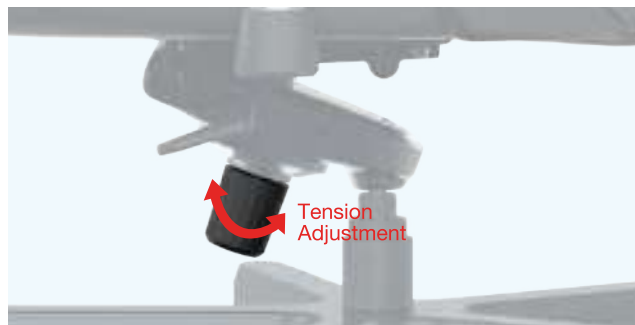

Armrest Adjustment

Loosen the M8 screws at bottom of armrests. Move the armrests to desired position then tighten to secure



Lumbar Adjustment

Left Knob (While Seated): turn the knob clockwise to increase the lumbar support, anti-clockwise to decrease it.
Right Knob (While Seated): turn the knob clockwise to raise the position of lumbar support, anti-clockwise to lower it.



Lumbar Usage

Do not put weight on the backrest while adjusting the lumbar support. Do not attempt to turn either knob past its maximum or minimum points. Do not attempt to turn both knobs at the same time.



Multi-Tilt Mechanism

Right Lever (While Seated): Pull the right lever up to adjust the height of the chair.
Left Lever (While Seated): Push down to lock the tilt mechanism, pull up to unlock.



SAFETY INSTRUCTION

Recommended Size

Chair Size	L	XL
Loading Weight	<120KG(<260LB)	80-180KG(175LB-395LB)
Loading Height	150-190CM(4'11"-6'2")	181-210CM(5'11"-6'8")

Precautions

1. Do not use chair for other purposes other than originally intended by the manufacturer.
2. Do not use the chair as a ladder.
3. We recommend to place chair on soft coverings when used on hard floor to avoid damage.
4. Chair is designed for flat surface use.
5. Chair is designed for single person use.
6. We recommend not to move the chair with objects on it.
7. Do not place the chair near flammables for the risk of fire hazard.
8. Avoid long time direct sunlight.
9. Keep away from fire or water hazards.
10. Use a soft dry cloth for general cleaning and maintenance of the chair. Do not apply corrosive chemicals on the chair.
11. Do not dismantle parts outside of original installation procedures.



Sit in the center of the chair.



Do not stand on the chair.



Do not use the chair with more than one person.



Do not use rocking mode over weight limit.




Do not push the chair around when a person is sitting in it.



Do not push down on the backrest when a person is reclined.



Do not place all your weight on the backrest only.



Do not place your hand or fingers near the recline mechanism.

The chair should only be used as intended and in non-abusive manner.

For warranty information, please visit <https://www.andaseat.com/pages/warranty>

Have any question or need any assistance, please contact: sales-support@andaseat.com