

OptiPlex 7000 Small Form Factor

Setup and Specifications

Notes, cautions, and warnings

 **NOTE:** A NOTE indicates important information that helps you make better use of your product.

 **CAUTION:** A CAUTION indicates either potential damage to hardware or loss of data and tells you how to avoid the problem.


 **WARNING:** A WARNING indicates a potential for property damage, personal injury, or death.

Contents


Chapter 1: Set up your computer	4
Chapter 2: Views of OptiPlex 7000 Small Form Factor	9
Front.....	9
Back.....	10
Inside view of your computer.....	10
Chapter 3: Specifications of OptiPlex 7000 Small Form Factor	11
Dimensions and weight.....	11
Processor.....	11
Chipset.....	12
Operating system.....	12
Memory.....	13
Memory matrix.....	13
External ports.....	14
Internal slots.....	14
Ethernet.....	15
Wireless module.....	15
Audio.....	16
Storage.....	16
RAID (Redundant Array of Independent Disks).....	17
Media-card reader.....	18
Power ratings.....	18
Power supply connector.....	19
GPU—Integrated.....	19
Multiple display support matrix.....	20
GPU—Discrete.....	20
Multiple display support matrix.....	20
Hardware security.....	21
Environmental.....	22
Regulatory compliance.....	22
Operating and storage environment.....	22
Dell Support policy.....	23
Chapter 4: Getting help and contacting Dell	24

Set up your computer

1. Connect the keyboard and mouse.

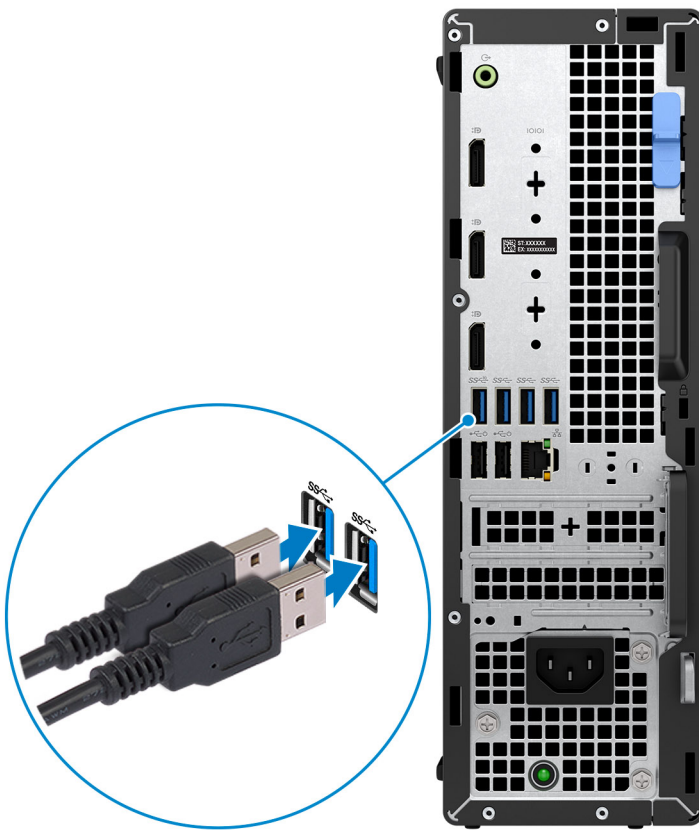


2. Connect to your network using a cable, or connect to a wireless network.

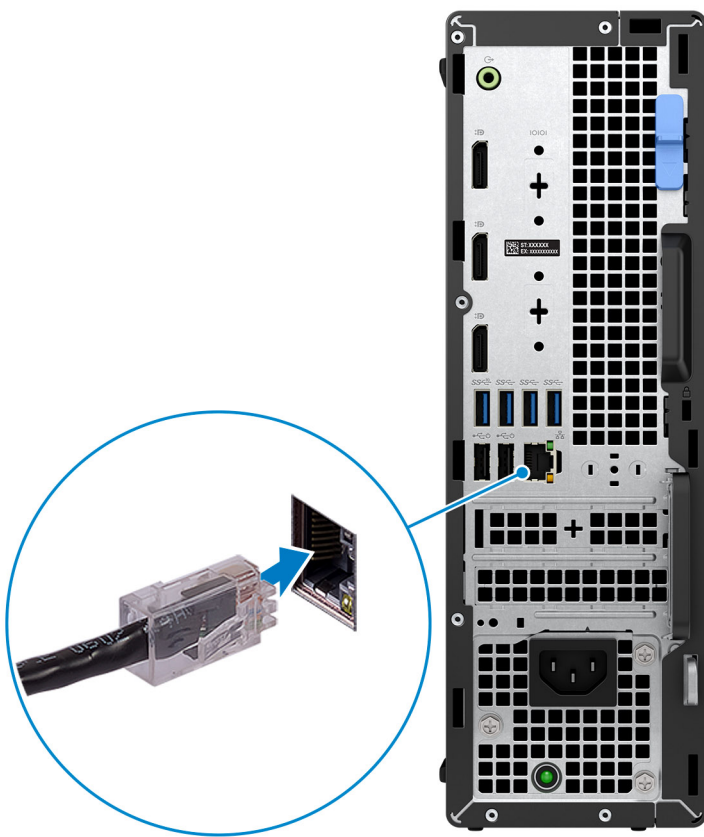

3. Connect the display.



4. Connect the power cable.

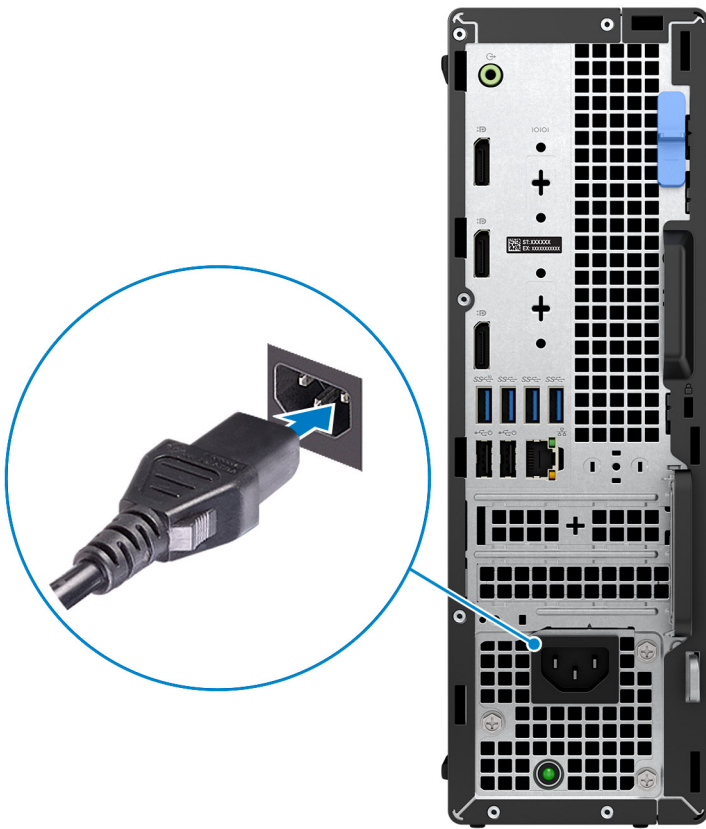

5. Press the power button.



6. Finish operating system setup.

For Ubuntu:

Follow the on-screen instructions to complete the setup. For more information about installing and configuring Ubuntu, see the knowledge base articles [000131655](#) and [000131676](#) at www.dell.com/support.

For Windows:

Follow the on-screen instructions to complete the setup. When setting up, Dell recommends that you:

- Connect to a network for Windows updates.
 - **NOTE:** If connecting to a secured wireless network, enter the password for the wireless network access when prompted.
- If connected to the internet, sign-in with or create a Microsoft account. If not connected to the internet, create an offline account.
- On the **Support and Protection** screen, enter your contact details.

7. Locate and use Dell apps from the Windows Start menu—Recommended

Table 1. Locate Dell apps






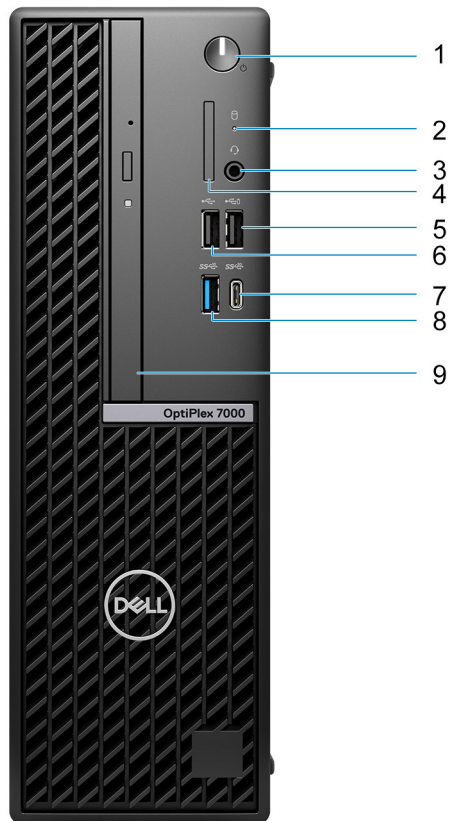
Resources	Description
	<p>My Dell</p> <p>Centralized location for key Dell applications, help articles, and other important information about your computer. It also notifies you about the warranty status, recommended accessories, and software updates if available.</p>

Table 1. Locate Dell apps (continued)

Resources	Description
	<p>SupportAssist</p> <p>SupportAssist proactively and predictively identifies hardware and software issues on your computer and automates the engagement process with Dell Technical support. It addresses performance and stabilization issues, prevents security threats, monitors, and detects hardware failures. For more information, see <i>SupportAssist for Home PCs User's Guide</i> at www.dell.com/serviceabilitytools. Click SupportAssist and then, click SupportAssist for Home PCs.</p> <p> NOTE: In SupportAssist, click the warranty expiry date to renew or upgrade your warranty.</p>
	<p>Dell Update</p> <p>Updates your computer with critical fixes and latest device drivers as they become available. For more information about using Dell Update, see the knowledge base article 000149088 at www.dell.com/support.</p>
	<p>Dell Digital Delivery</p> <p>Download software applications, which are purchased but not preinstalled on your computer. For more information about using Dell Digital Delivery, see the knowledge base article 000129837 at www.dell.com/support.</p>


Views of OptiPlex 7000 Small Form Factor

Front



1. Power button
2. Hard-drive activity light
3. Universal audio port
4. SD-card reader
5. USB 2.0 port with PowerShare
6. USB 2.0 port
7. USB 3.2 Gen 2x2 Type-C port
8. USB 3.2 Gen 2 port
9. Slim optical drive (optional)

Back

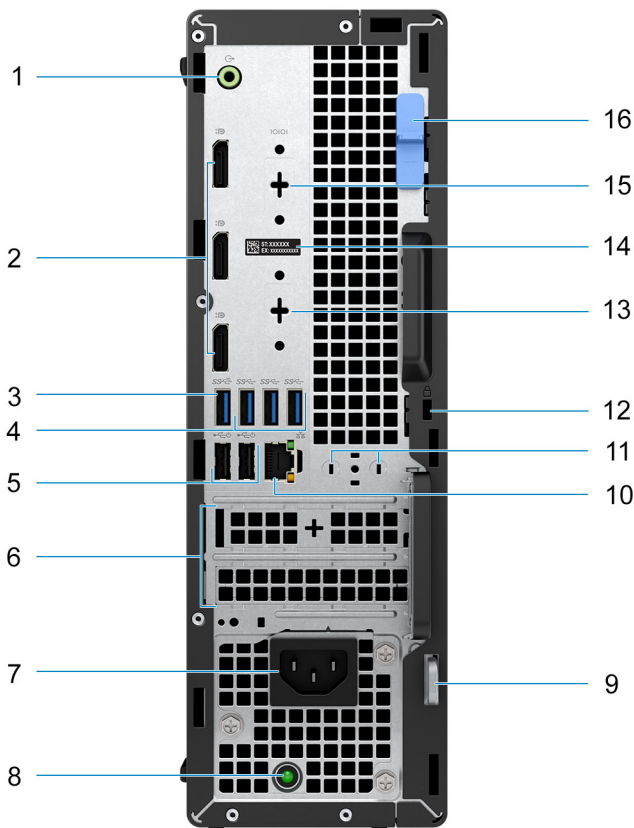

1. Re-tasking line-out/line-in audio port
2. Three DisplayPort 1.4 ports
3. USB 3.2 Gen 2 port
4. Three USB 3.2 Gen 1 ports
5. Two USB 2.0 ports with Smart Power On
6. Two expansion card slots
7. Power port
8. Power-supply diagnostics light
9. Padlock ring
10. RJ45 Ethernet port
11. External antenna slot
12. Kensington security-cable slot
13. HDMI 2.0b/DisplayPort 1.4/VGA/USB 3.2 Gen 2 type-C port with DisplayPort Alt Mode (optional)
14. Service Tag label
15. Serial/PS2 port (optional)
16. Release latch

Inside view of your computer


1.

Specifications of OptiPlex 7000 Small Form Factor

Dimensions and weight

The following table lists the height, width, depth, and weight of your OptiPlex 7000 Small Form Factor.

Table 2. Dimensions and weight

Description	Values
Height	290.00 mm (11.42 in.)
Width	92.60 mm (3.65 in.)
Depth	292.80 mm (11.53 in.)
Weight  NOTE: The weight of your computer depends on the configuration ordered and manufacturing variability.	<ul style="list-style-type: none"> • Minimum: 3.85 kg (8.50 lb) • Maximum: 5.30 kg (11.69 lb)

Processor

The following table lists the details of the processors that are supported by your OptiPlex 7000 Small Form Factor .

Table 3. Processor

Description	Processor type	Processor wattage	Processor core count	Processor thread count	Processor speed	Processor cache	Integrated graphics
Option one	12 th Generation Intel Core i3-12100	60 W	4	8	3.30 GHz to 4.30 GHz	12 MB	Intel UHD Graphics 730
Option two	12 th Generation Intel Core i3-12300	60 W	4	8	3.50 GHz to 4.40 GHz	12 MB	Intel UHD Graphics 730
Option three	12 th Generation Intel Core i5-12400	65 W	6	12	2.50 GHz to 4.40 GHz	18 MB	Intel UHD Graphics 730
Option four	12 th Generation Intel Core i5-12500 vPro	65 W	6	12	3.00 GHz to 4.60 GHz	18 MB	Intel UHD Graphics 770
Option five	12 th Generation	65 W	6	12	3.30 GHz to 4.80 GHz	18 MB	Intel UHD Graphics 770

Table 3. Processor (continued)

Description	Processor type	Processor wattage	Processor core count	Processor thread count	Processor speed	Processor cache	Integrated graphics
	Intel Core i5-12600 vPro						
Option six	12 th Generation Intel Core i7-12700 vPro	65 W	12	20	2.10 GHz to 4.90 GHz	25 MB	Intel UHD Graphics 770
Option seven	12 th Generation Intel Core i9-12900 vPro	65 W	16	24	2.40 GHz to 5.10 GHz	30 MB	Intel UHD Graphics 770

Chipset

The following table lists the details of the chipset supported by your OptiPlex 7000 Small Form Factor.

Table 4. Chipset

Description	Values
Chipset	Intel Q670
Processor	12 th Generation Intel Core i3/i5/i7/i9
DRAM bus width	64-bit, dual-channel
Flash EPROM	32 MB + 16 MB
PCIe bus	Up to Gen 4.0

Operating system

Your OptiPlex 7000 Small Form Factor supports the following operating systems:

- Windows 11 Home, 64-bit
- Windows 11 Pro, 64-bit
- Windows 11 Downgrade (Windows 10 image)
- Windows 11 Pro National Education, 64-bit
- Windows 11 CMIT Government Edition, 64-bit (China only)
- Kylin Linux Desktop version 10.1 (China only)
- Ubuntu Linux 20.04 LTS, 64-bit

Memory

The following table lists the memory specifications of your OptiPlex 7000 Small Form Factor.

Table 5. Memory specifications

Description	Values
Memory slots	Four UDIMM slots
Memory type	Dual-channel, DDR4
Memory speed	3200 MHz
Maximum memory configuration	128 GB
Minimum memory configuration	4 GB
Memory size per slot	4 GB, 8 GB, 16 GB, and 32 GB
Memory configurations supported	<ul style="list-style-type: none"> • 4 GB, 1 x 4 GB, DDR4, 3200 MHz, single-channel • 8 GB, 1 x 8 GB, DDR4, 3200 MHz, single-channel • 8 GB, 2 x 4 GB, DDR4, 3200 MHz, dual-channel • 16 GB, 1 x 16 GB, DDR4, 3200 MHz, single-channel • 16 GB, 2 x 8 GB, DDR4, 3200 MHz, dual-channel • 32 GB, 1 x 32 GB, DDR4, 3200 MHz, single-channel • 32 GB, 2 x 16 GB, DDR4, 3200 MHz, dual-channel • 32 GB, 4 x 8 GB, DDR4, 3200 MHz, dual-channel • 64 GB, 2 x 32 GB, DDR4, 3200 MHz, dual-channel • 64 GB, 4 x 16 GB, DDR4, 3200 MHz, dual-channel • 128 GB, 4 x 32 GB, DDR4, 3200 MHz, dual-channel

Memory matrix

The following table lists the memory configurations supported for your OptiPlex 7000 Small Form Factor.

Table 6. Memory matrix

Configuration	Slot			
	UDIMM1	UDIMM2	UDIMM3	UDIMM4
4 GB DDR4	4G			
8 GB DDR4	4G	4G		
8 GB DDR4	8G			
16 GB DDR4	8G	8G		
16 GB DDR4	16G			
32 GB DDR4	8G	8G	8G	8G
32 GB DDR4	16G	16G		
32 GB DDR4	32G			

Table 6. Memory matrix (continued)

64 GB DDR4	16G	16G	16G	16G
64 GB DDR4	32G	32G		
128 GB DDR4	32G	32G	32G	32G

External ports

The following table lists the external ports of your OptiPlex 7000 Small Form Factor.

Table 7. External ports

Description	Values
Network port	One RJ45 Ethernet port (rear)
USB ports	<ul style="list-style-type: none"> • One USB 2.0 port with PowerShare (front) • One USB 2.0 port (front) • One USB 3.2 Gen 2 port (front) • One USB 3.2 Gen 2x2 Type-C port (front) • Three USB 3.2 Gen 1 ports (rear) • One USB 3.2 Gen 2 port (rear) • Two USB 2.0 ports with Smart Power On (rear)
Audio port	<ul style="list-style-type: none"> • One Universal audio port (front) • One Re-tasking line-out/line-in audio port (rear)
Video port	<ul style="list-style-type: none"> • Three DisplayPort 1.4 ports • One HDMI 2.0b/DisplayPort 1.4/VGA/USB 3.2 Gen 2 type-C port with DisplayPort Alt Mode (optional)
Media-card reader	One SD-card 4.0 slot (front, optional)
Power-adaptor port	Not supported
Security-cable slot	<ul style="list-style-type: none"> • One Kensington lock slot • One Padlock ring


Internal slots

The following table lists the internal slots of your OptiPlex 7000 Small Form Factor.

Table 8. Internal slots

Description	Values
PCIe Expansion	<ul style="list-style-type: none"> • One Half-height Gen4 PCIe x16 slot • One Half-height Gen3 PCIe x4 slot
SATA	<ul style="list-style-type: none"> • Three SATA 3.0 slots for 3.5-inch/2.5-inch hard drive and slim optical drive
M.2	<ul style="list-style-type: none"> • One M.2 2230 slot for WiFi and Bluetooth card • Three M.2 2230/2280 slots for solid-state drives

Table 8. Internal slots (continued)

Description	Values
	 NOTE: To learn more about the features of different types of M.2 cards, see the knowledge base article 000144170 at www.dell.com/support .

Ethernet

The following table lists the wired Ethernet Local Area Network (LAN) specifications of your OptiPlex 7000 Small Form Factor.


Table 9. Ethernet specifications

Description	Values
Model number	Intel I219
Transfer rate	10/100/1000 Mbps

Wireless module

The following table lists the Wireless Local Area Network (WLAN) module specifications of your OptiPlex 7000 Small Form Factor.

Table 10. Wireless module specifications

Description	Option one	Option two	Option three
Model number	Intel AX211	Intel Dual Band Wireless-AC 9462	MediaTek MT7921
Transfer rate	Up to 2400 Mbps	Up to 433 Mbps	Up to 1200 Mbps
Frequency bands supported	2.4 GHz/5/6 GHz  NOTE: The 6 GHz frequency is supported on computers installed with Windows 11 operating system only.	2.4 GHz/5 GHz	2.4 GHz/5 GHz
Wireless standards	<ul style="list-style-type: none"> WiFi 802.11a/b/g Wi-Fi 4 (WiFi 802.11n) Wi-Fi 5 (WiFi 802.11ac) Wi-Fi 6 (WiFi 802.11ax) 	<ul style="list-style-type: none"> WiFi 802.11a/b/g Wi-Fi 4 (WiFi 802.11n) Wi-Fi 5 (WiFi 802.11ac) 	<ul style="list-style-type: none"> WiFi 802.11a/b/g Wi-Fi 4 (WiFi 802.11n) Wi-Fi 5 (WiFi 802.11ac) Wi-Fi 6 (WiFi 802.11ax)
Encryption	<ul style="list-style-type: none"> 64-bit and 128-bit WEP 128-bit AES-CCMP TKIP 256-bit AES-GCMP 	<ul style="list-style-type: none"> 64-bit and 128-bit WEP 128-bit AES-CCMP TKIP 	<ul style="list-style-type: none"> 64-bit and 128-bit WEP 128-bit AES-CCMP TKIP
Bluetooth	5.2	5.1	5.2

Audio

The following table lists the audio specifications of your OptiPlex 7000 Small Form Factor.

Table 11. Audio specifications

Description	Values
Audio type	4 Channel High Definition Audio
Audio controller	Realtek Audio Controller, ALC3246-CG
Internal audio interface	Intel HDA (high-definition audio)
External audio interface	<ul style="list-style-type: none"> • One Universal audio port (front) • One Re-tasking line-out/line-in audio port (rear)

Storage

This section lists the storage options on your OptiPlex 7000 Small Form Factor.

Table 12. Storage matrix

Storage	1 st 2.5-inch hard drive	2 nd 2.5-inch hard drive	3.5-inch hard drive	1 st M.2 socket (2230/2280)	2 nd M.2 socket (2230)	3 rd M.2 socket (2280)	1 st Bootable Device
2.5-inch hard drive	Yes	No	No	No	No	No	2.5-inch hard drive
Dual 2.5-inch hard drive	Yes	Yes	No	No	No	No	2.5-inch hard drive
3.5-inch hard drive	No	No	Yes	No	No	No	3.5-inch hard drive
M.2 solid-state drive	No	No	No	Yes	No	No	1 st M.2 solid-state drive
Dual M.2 solid-state drive	No	No	No	Yes	Yes	No	1 st M.2 solid-state drive
M.2 solid-state drive	3.5-inch hard drive	No	Yes	Yes	No	No	1 st M.2 solid-state drive
M.2 solid-state drive	2.5-inch hard drive/solid-state drive	Yes	No	No	Yes	No	1 st M.2 solid-state drive
M.2 solid-state drive	Dual 2.5-inch hard drive	Yes	Yes	No	Yes	No	1 st M.2 solid-state drive

Table 12. Storage matrix (continued)

Storage		1 st 2.5-inch hard drive	2 nd 2.5-inch hard drive	3.5-inch hard drive	1 st M.2 socket (2230/2280)	2 nd M.2 socket (2230)	3 rd M.2 socket (2280)	1 st Bootable Device
Dual M.2 solid-state drive	2.5-inch hard drive	Yes	No	No	Yes	Yes	No	1 st M.2 solid-state drive
Dual M.2 solid-state drive	3.5-inch hard drive	No	No	Yes	Yes	Yes	No	1 st M.2 solid-state drive
Three M.2 solid-state drive		No	No	No	Yes	Yes	Yes	1 st M.2 solid-state drive
Three M.2 solid-state drive	3.5-inch hard drive	No	No	Yes	Yes	Yes	Yes	1 st M.2 solid-state drive
Three M.2 solid-state drive	2.5-inch hard drive	Yes	No	No	Yes	Yes	Yes	1 st M.2 solid-state drive
Three M.2 solid-state drive	Dual 2.5-inch hard drive	Yes	Yes	No	Yes	Yes	Yes	1 st M.2 solid-state drive

Table 13. Storage specifications

Storage type	Interface type	Capacity
2.5-inch, 5400 RPM, hard-disk drive	SATA 3.0	Up to 2 TB
2.5-inch, 7200 RPM, hard-disk drive	SATA 3.0	Up to 1 TB
2.5-inch, 7200 RPM, Opal Self-Encrypting hard-disk drive	SATA 3.0	500 GB
3.5-inch, 5400 RPM, hard-disk drive	SATA 3.0	4 TB
3.5-inch, 7200 RPM, hard-disk drive	SATA 3.0	Up to 2 TB
M.2 2230, SSD, Class 35	PCIe NVMe Gen3 x4	Up to 1 TB
M.2 2230, SSD, Class 35, Opal Self-Encrypting Opal 2.0, FIPS	PCIe NVMe Gen3 x4	256 GB
M.2 2280, SSD, Class 40	PCIe NVMe Gen4 x4	Up to 2 TB
M.2 2280, SSD Class 40, Self-Encrypting, Opal 2.0, FIPS	PCIe NVMe Gen3 x4	Up to 1 TB

RAID (Redundant Array of Independent Disks)

For optimal performance when configuring drives as a RAID volume, Dell recommends drive models that are identical.

NOTE: RAID is not supported on Intel Optane configurations.

RAID 0 (Striped, Performance) volumes benefit from higher performance when drives are matched because the data is split across multiple drives: any IO operations with block sizes larger than the stripe size will split the IO and become constrained by the slowest of the drives. For RAID 0 IO operations where block sizes are smaller than the stripe size, whichever drive the IO operation targets will determine the performance, which increases variability and results in inconsistent latencies. This variability is particularly pronounced for write operations and it can be problematic for applications that are latency sensitive. One such example of this is any application that performs thousands of random writes per second in very small block sizes.

RAID 1 (Mirrored, Data Protection) volumes benefit from higher performance when drives are matched because the data is mirrored across multiple drives: all IO operations must be performed identically to both drives, thus variations in drive performance when the models are different, results in the IO operations completing only as fast as the slowest drive. While this does not suffer the variable latency issue in small random IO operations as with RAID 0 across heterogeneous drives, the impact is nonetheless large because the higher performing drive becomes limited in all IO types. One of the worst examples of constrained performance here is when using unbuffered IO. To ensure writes are fully committed to non-volatile regions of the RAID volume, unbuffered IO bypasses cache (for example by using the Force Unit Access bit in the NVMe protocol) and the IO operation will not complete until all the drives in the RAID volume have completed the request to commit the data. This kind of IO operation completely negates any advantage of a higher performing drive in the volume.

Care must be taken to match not only the drive vendor, capacity, and class, but also the specific model. Drives from the same vendor, with the same capacity, and even within the same class, can have very different performance characteristics for certain types of IO operations. Thus, matching by model ensures that the RAID volumes is comprised of an homogeneous array of drives that will deliver all the benefits of a RAID volume without incurring the additional penalties when one or more drives in the volume are lower performing.

OptiPlex 7000 Small Form Factor supports RAID with more than one hard drive configuration.

Media-card reader

The following table lists the media cards supported by your OptiPlex 7000 Small Form Factor.

Table 14. Media-card reader specifications

Description	Values
Media-card type	One SD-card 4.0 slot
Media-cards supported	<ul style="list-style-type: none">Secure Digital (mSD)Secure Digital High Capacity(mSDHC)Secure Digital Extended Capacity(mSDXC)
NOTE: The maximum capacity supported by the media-card reader varies depending on the standard of the media card installed in your computer.	

Power ratings

The following table lists the power rating specifications of OptiPlex 7000 Small Form Factor.

Table 15. Power ratings

Description	Option one	Option two	Option three
Type	240 W (85% Efficient, 80 PLUS Bronze)	260 W (85% Efficient, 80 PLUS Bronze)	300 W (92% Efficient, 80 Plus Platinum)
Input voltage	90 VAC-264 VAC	90 VAC-264 VAC	90 VAC-264 VAC
Input frequency	47 Hz-63 Hz	47 Hz to 63 Hz	47 Hz-63 Hz
Input current (maximum)	4.0 A	4.2 A	4.2 A

Table 15. Power ratings (continued)

Description	Option one	Option two	Option three
Output current (continuous)	Operating: <ul style="list-style-type: none"> 12 VA/18 A 12 VB/16 A Standby mode: <ul style="list-style-type: none"> 12 VA/1.5 A 12 VB/3.3 A 	Operating: <ul style="list-style-type: none"> 12 VA/18 A 12 VB/16 A Standby mode: <ul style="list-style-type: none"> 12 VA/1.5 A 12 VB/3.3 A 	<ul style="list-style-type: none"> 12 VA/18 A 12 VB/18 A Standby mode: <ul style="list-style-type: none"> 12 VA/1.5 A 12 VB/3.3 A
Rated output voltage	<ul style="list-style-type: none"> +12 VA +12 VB 	<ul style="list-style-type: none"> +12 VA +12 VB 	<ul style="list-style-type: none"> +12 VA +12 VB
Temperature range:			
Operating	5°C to 45°C (41°F to 113°F)	5°C to 45°C (41°F to 113°F)	5°C to 45°C (41°F to 113°F)
Storage	-40°C to 70°C (-40°F to 158°F)	-40°C to 70°C (-40°F to 158°F)	-40°C to 70°C (-40°F to 158°F)

Power supply connector

The following table lists the Power supply connector specifications of your OptiPlex 7000 Small Form Factor.

Table 16. Power supply connector

240 W (80 PLUS Bronze)	<ul style="list-style-type: none"> Two 4 pin connectors for processor One 8 pin connector for system board
260 W (80 PLUS Bronze)	<ul style="list-style-type: none"> Two 4 pin connectors for processor One 8 pin connector for system board
300 W (80 PLUS Platinum)	<ul style="list-style-type: none"> Two 4 pin connectors for processor One 8 pin connector for system board

GPU—Integrated

The following table lists the specifications of the integrated Graphics Processing Unit (GPU) supported by your OptiPlex 7000 Small Form Factor.

Table 17. GPU—Integrated

Controller	External display support	Memory size	Processor
Intel UHD Graphics 730	<ul style="list-style-type: none"> Three DisplayPort 1.4 ports 	Shared-system memory	12 th Generation Intel Core i3-12100, i3-12300, and i5-12400 processors
Intel UHD Graphics 770	<ul style="list-style-type: none"> Three DisplayPort 1.4 ports 	Shared-system memory	12 th Generation Intel Core i5-12500, i5-12600, i7-12700, and i9-12900 processors

Multiple display support matrix

The following table lists the multiple display support matrix for your OptiPlex 7000 Small Form Factor.

Table 18. Multiple display support matrix

Description	Option 2	Option 3
Integrated Graphics Card	Intel UHD Graphics 730	Intel UHD Graphics 770
Optional Module	Option card with VGA (1920x1200 @ 60 Hz) Option card with DP1.4 (5120x3200 @60 Hz) Option card with HDMI 2.0 (4096x2160 @ 60 Hz) Option card with Type-C (5120x3200 @ 60 Hz)	Option card with VGA (1920x1200 @ 60 Hz) Option card with DP1.4 (5120x3200 @60 Hz) Option card with HDMI 2.0 (4096x2160 @ 60 Hz) Option card with Type-C (5120x3200 @ 60 Hz)
Supported 4K Displays	DP1.4 HBR2, 4096 x 2304 @ 60 Hz	DP1.4 HBR2, 4096 x 2304 @ 60 Hz
Supported 5K Displays	5K tiled resolution (5120x2880) support on DP panels. NOTE: Needs two DP cables driven through two separate DDIs from the source, and using DP-SST (Single Stream Transport) mechanism.	5K tiled resolution (5120x2880) support on DP panels. NOTE: Needs two DP cables driven through two separate DDIs from the source, and using DP-SST (Single Stream Transport) mechanism.

GPU—Discrete

The following table lists the specifications of the discrete Graphics Processing Unit (GPU) supported by your OptiPlex 7000 Small Form Factor.

Table 19. GPU—Discrete

Controller	External display support	Memory size	Memory type
AMD Radeon RX640	<ul style="list-style-type: none"> Two Mini-DisplayPort 1.4 ports One DisplayPort 1.4 port 	4 GB	GDDR5
AMD Radeon 550	Two DisplayPort 1.4 ports	2 GB	GDDR5
AMD Radeon 540	Two DisplayPort 1.4 ports	1 GB	GDDR5

Multiple display support matrix

The following table lists the multiple display support matrix for your OptiPlex 7000 Small Form Factor.

Table 20. Multiple display support matrix

Graphics Card	Radeon RX 640	Radeon 550	Radeon 540
Memory	4 GB	2 GB	1 GB
Ports	<ul style="list-style-type: none"> 2 x Mini-DP 1.4 ports 1 x DP 1.4 port 	<ul style="list-style-type: none"> 2 x DP 1.4 port 	<ul style="list-style-type: none"> 2 x DP 1.4 port
Supported external displays with Direct Connect	3	2	2
Supported external displays with DP Multi-Stream	4	4	4
Supported 4K Displays	DP1.4 HBR2, 4096 x 2304 @ 60 Hz	DP1.4 HBR2, 4096 x 2304 @ 60 Hz	DP1.4 HBR2, 4096 x 2304 @ 60 Hz

Table 20. Multiple display support matrix (continued)

Graphics Card	Radeon RX 640	Radeon 550	Radeon 540
Supported 5K Displays	5K tiled resolution (5120x2880) support on DP panels. NOTE: Needs two DP cables driven through two separate DDIs from the source, and using DP-SST (Single Stream Transport) mechanism.	5K tiled resolution (5120x2880) support on DP panels. NOTE: Needs two DP cables driven through two separate DDIs from the source, and using DP-SST (Single Stream Transport) mechanism.	5K tiled resolution (5120x2880) support on DP panels. NOTE: Needs two DP cables driven through two separate DDIs from the source, and using DP-SST (Single Stream Transport) mechanism.
Resolution	5120 x 2880 @60 Hz	5120 x 2880 @60 Hz	5120 x 2880 @60 Hz
Total Power	50 W	50 W	50 W

Hardware security

The following table lists the hardware security of your OptiPlex 7000 Small Form Factor.

Table 21. Hardware security

Hardware security
Kensington security-cable slot
Padlock ring
Chassis lock slot support
Chassis intrusion switch
Lockable cable covers
Supply chain tamper alerts
SafelD including Trusted Platform Module (TPM) 2.0
Smart card keyboard (FIPS)
Microsoft 10 Device Guard and Credential Guard (Enterprise SKU)
Microsoft Windows Bitlocker
Local hard drive data wipe through BIOS (Secure Erase)
Self-encrypting storage drives (Opal, FIPS)
Trusted Platform Module TPM 2.0
China TPM
Intel Secure Boot
Intel Authenticate
SafeBIOS: includes Dell Off-host BIOS Verification, BIOS Resilience, BIOS Recovery, and additional BIOS Controls

Environmental

The following table lists the environmental specifications of your OptiPlex 7000 Small Form Factor.

Table 22. Environmental

Feature	Values
Recyclable packaging	Yes
BFR/PVC—free chassis	No
Vertical orientation packaging support	Yes
Multi-Pack packaging	Yes
Energy-Efficient Power Supply	Standard
ENV0424 compliant	Yes

NOTE: Wood-based fiber packaging contains a minimum of 35% recycled content by total weight of wood-based fiber. Packaging that contains without wood-based fiber can be claimed as Not Applicable. The anticipated required criteria for EPEAT 2018.

Regulatory compliance

The following table lists the regulatory compliance of your OptiPlex 7000 Small Form Factor.

Table 23. Regulatory compliance

Regulatory compliance
EPEAT registered configurations available
ENERGY STAR compliant configurations available
TCO 8.0 certified configurations available
US CEC MEPS compliant configurations available
Australia and New Zealand MEPS compliant configurations available
CEL
WEEE
Japan Energy Law
South Korea E-standby
EU RoHS
China RoHS

Operating and storage environment


This table lists the operating and storage specifications of your OptiPlex 7000 Small Form Factor.

Airborne contaminant level: G1 as defined by ISA-S71.04-1985

Table 24. Computer environment

Description	Operating	Storage
Temperature range	10°C – 35°C (50°F – 95°F)	-40°C-65°C (-40°F-149°F)

Table 24. Computer environment (continued)

Description	Operating	Storage
Relative humidity (maximum)	20% to 80% (non-condensing, Max dew point temperature = 26°C)	5% to 95% (non-condensing, Max dew point temperature = 33°C)
Vibration (maximum)*	0.26 GRMS random at 5 Hz to 350 Hz	1.37 GRMS random at 5 Hz to 350 Hz
Shock (maximum)	Bottom half-sine pulse with a change in velocity of 40.20 cm/sec (20 in./sec)	105G half-sine pulse with a change in velocity of 105.20 cm/sec (52.5 in./sec)
Altitude range	-15.2 m to 3048 m (-49 ft to 10,000 ft)	-15.2 m to 10,668 m (-49 ft to 35,000 ft)
 CAUTION: Operating and storage temperature ranges may differ among components, so operating or storing the device outside these ranges may impact the performance of specific components.		

* Measured using a random vibration spectrum that simulates user environment.

† Measured using a 2 ms half-sine pulse.

Dell Support policy



For more information on support policy, see the knowledge base articles [000181418](#), [000043920](#) and [000046323](#).

Getting help and contacting Dell

Self-help resources


You can get information and help on Dell products and services using these self-help resources:


Table 25. Self-help resources

Self-help resources	Resource location
Information about Dell products and services	www.dell.com
My Dell app	
Tips	
Contact Support	In Windows search, type <code>Contact Support</code> , and press Enter.
Online help for operating system	www.dell.com/support/windows www.dell.com/support/linux
Access top solutions, diagnostics, drivers and downloads, and learn more about your computer through videos, manuals and documents.	Your Dell computer is uniquely identified by a Service Tag or Express Service Code. To view relevant support resources for your Dell computer, enter the Service Tag or Express Service Code at www.dell.com/support . For more information on how to find the Service Tag for your computer, see Locate the Service Tag on your computer .
Dell knowledge base articles for a variety of computer concerns	<ol style="list-style-type: none"> 1. Go to www.dell.com/support. 2. On the menu bar at the top of the Support page, select Support > Knowledge Base. 3. In the Search field on the Knowledge Base page, type the keyword, topic, or model number, and then click or tap the search icon to view the related articles.

Contacting Dell

To contact Dell for sales, technical support, or customer service issues, see www.dell.com/contactdell.

 **NOTE:** Availability varies by country/region and product, and some services may not be available in your country/region.

 **NOTE:** If you do not have an active Internet connection, you can find contact information about your purchase invoice, packing slip, bill, or Dell product catalog.