



Galaxy VM

The trusted partner for your business continuity
160-200 kVA (400 V)



se.com/ups

Life Is On

Schneider
Electric

High performance, low total cost of ownership

Galaxy VM is a highly efficient, easy-to-deploy, 160-200 kVA (400 V) 3-phase uninterruptible power supply (UPS) that seamlessly integrates into the electrical, physical, and monitoring environments of customers' medium data centers, industrial, or facilities applications.

Galaxy VM lowers your energy costs with up to 99% efficiency in eConversion mode and up to 96.5% efficiency in double conversion mode, and it seamlessly integrates into your electrical network with exceptional electrical performance.

Compliance with smart grid requirements makes Galaxy VM your partner in business profitability. Optimize your return on investment, and increase your UPS and energy storage utilization, with dispatchable operation. Galaxy VM also delivers flexible battery solutions, including modular and classic VRLA batteries as well as compatibility with Lithium-ion and NiCad batteries.

Galaxy VM is EcoStruxure™ enabled, giving you visibility into the health of your UPS and peace of mind by sending real-time status updates directly to your smartphone. Designed for straightforward integration into any electrical network, Galaxy VM is the ideal choice to protect your critical infrastructure and your operating budget.



Key advantages and innovations



99% efficient in patented eConversion mode

Recover your initial investment within two-to-three years through energy savings.



Patented hybrid technology

Provides up to 96.5% efficiency in double conversion mode.



Battery flexibility, including Lithium-ion batteries*

Increase availability and reduce Total Cost of Ownership (TCO) with long-life, intelligent energy storage.



Grid interactive solution

Maximize savings, generate revenue, and improve resiliency by dispatching stored battery capacity or deploying fast frequency reserve support.



Maximum availability thanks to modular architecture

Critical system components built as modules for faster serviceability and fault tolerance. N+1 redundancy and scalability options available.



EcoStruxure IT

Monitor, manage, and model your IT infrastructure, and get service support, anytime, anywhere.*

* Contact your local representative for availability.

Well-suited for a wide range of data center and industrial applications



Information technology and commercial buildings

- Medium and large data centers
- Computer rooms
- Retail/office space
- Manufacturing facilities



Transportation

- Lighting
- Air traffic control
- Security
- Signaling and communication systems



Healthcare

- Radiology and imaging equipment
- Operating rooms and Intensive Care Units
- Emergency power systems



Minerals, Metals & Mining

- Furnace process control
- Glass plants
- Emergency lighting



Oil & gas


- Refining
- Petrochemicals
- Gas processing control
- Well pumps




Power & Grid

- Thermal plants
- Generator protection
- Hydro turbine control
- Wind farm monitoring

Seamless integration and start-up

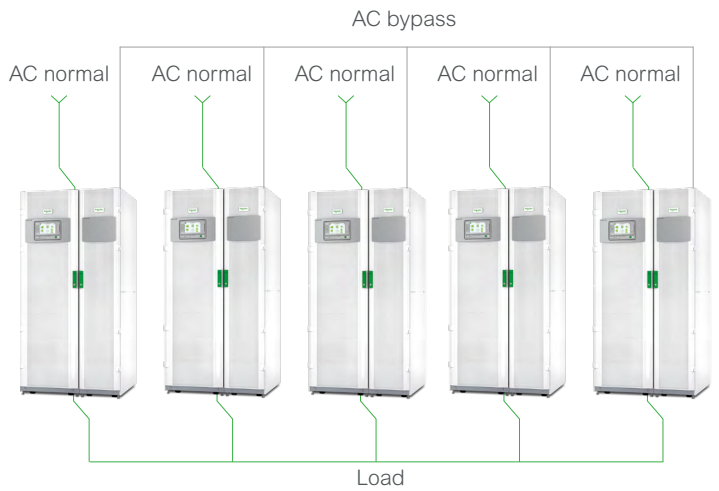

Distributed parallel connection for increased power and redundancy

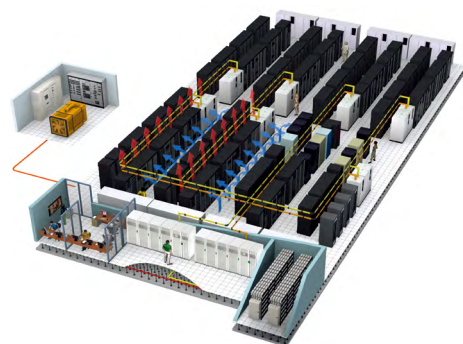

Integration into your electrical network

- Wide input voltage and frequency ranges
- Genset compliant with adaptive ramp-in
- Integrated parallel capability up to four UPS units
- Built-in integrated and tested back-feed protection

Integration with monitoring solutions

- Integrated network management capability for easy access to the network
- EcoStruxure connected; fully integrates into the comprehensive Schneider Electric™ energy management solution for data centers and industrial applications
- Straightforward integration with facility infrastructure monitoring systems, including BMS and Modbus (SCADA and ION-E)

Smart power test


- Ability to test the UPS at full load without the need to rent a load bank and before bringing customers' load online.

Integration into your facility infrastructure

- Compact footprint
- Back-to-the-wall installation
- Operates at 40 °C continuously without de-rating
- Embedded seismic design (OSHPD, IBC2012, and CBC2013 to Sds=2.02 g)
- Low audible noise levels
- Replaceable dust filter for harsh environments
- Configurable input/output relays
- Customizable dry contacts
- 7-inch touch-screen color display
- Top and bottom cable entry
- Parallel capability to increase multiple UPS systems for capacity or redundancy
- Ability to add UPSs in a parallel configuration without the need to transfer the load to bypass
- Cold start: capability to start the UPS on battery without mains power present
- External synchronization capability
- Parallel UPS configurations can be connected to a common battery without the need for a battery coupling cabinet, reducing footprint and increasing cost savings

Premium protection and sustainability


eConversion: an unbeatable combination of power quality and high efficiency

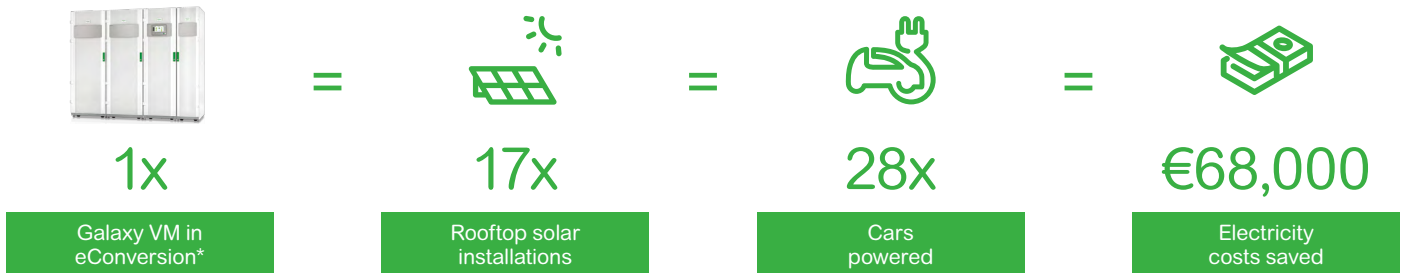

Sustainably reduce your operating costs

Protect power to your load, reduce your total cost of ownership and electricity consumption, and meet your sustainability goals with up to 99% efficient, Class 1-compliant eConversion mode for Galaxy V-series UPSs, the recommended operating mode for your Galaxy V-series UPS.*

- By operating at up to **99% efficiency**, the electricity savings in eConversion within 10 years typically equals **3x the price of the UPS**.
- The inverter operates continuously, protecting the load with **no transfer time**. eConversion performance has been certified with the same IEC 62040-3 **Class 1** rating as double conversion mode.
- eConversion mode recharges batteries and provides power factor correction and harmonics compensation, making it a **versatile solution for IT and non-IT loads**.
- Since its launch in 2014, eConversion has been successfully deployed all over the world. Join thousands of customers who use it daily to protect their critical loads.

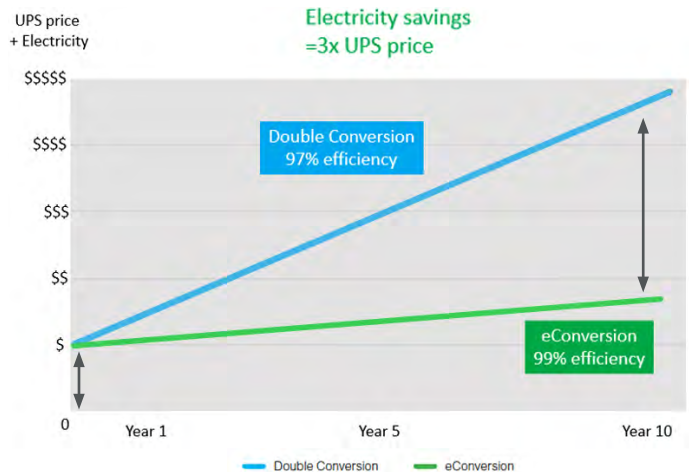


Calculate your savings

Use our eConversion vs. Double Conversion Calculator to quickly assess your potential energy savings, operating cost optimization, and CO₂ emissions reduction by comparing the cost of running your Galaxy V-Series UPS in eConversion mode vs. double conversion mode.




Scan the QR code with your phone camera, or [click here](#) to access the calculator from the Schneider Electric Data Center Trade Off Tools™ Web page.

[Learn more about eConversion](#)

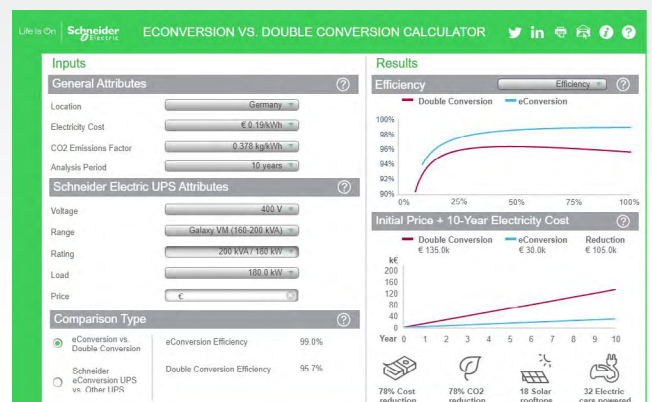

*Model dependent; based on a market electricity price: \$0.15 /kWh. The annual electricity savings are calculated by comparing the UPS efficiency in eConversion mode vs. double conversion mode.

Flexible, intelligent energy storage

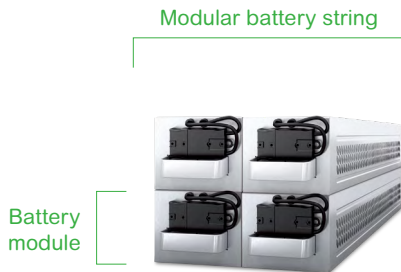

Improved availability, including long-life options

- **Increased availability:** Four battery modules form one modular battery string. All battery modules support the load so no individual battery is a single point of failure
- **Reduced Mean Time To Repair (MTTR):** Replace a battery module in just a few minutes

Accurate anytime replacement

- **Simple:** Push-in and plug; unplug and pull-out
- **Safety first:** Touchproof connectors
- **Self-configuring:** The UPS automatically detects the presence and type of batteries so the battery configuration is updated accurately

Long-life Galaxy Lithium-ion batteries

As a first mover with a vast installed base, Schneider Electric has developed its own Galaxy Lithium-ion battery solution that also delivers these benefits:

- **Double** your battery life compared with any VRLA battery, optimizing TCO and achieving sustainability targets
- Recharge **2–3x faster** than VRLA solutions
- High temperature tolerance
- Simplify and speed up installation with our internal power supply
- Enhance battery safety with three levels of battery management system (BMS)

Battery monitoring included

- **Sensors:** Each battery module contains two temperature sensors and a battery identification device for self-configuration
- **Runtime:** The estimate on the display interface updates when battery modules are removed or installed
- **Quick status on display:** Use the UPS display to quickly identify and replace an inoperative battery module

Flexible, high-density energy storage

- **Right-sizing:** Easily increase runtime by adding battery modules or installing battery cabinets
- **High density:** Integrate batteries in the UPS to reduce footprint. No need for service clearance between battery rows

Classic VRLA batteries

- Quickly install the battery cabinet next to the UPS
- Compact footprint



for Lithium-ion / VRLA
battery comparison

Grid Interactive Solution

Unlock the value of your UPS: Maximize savings, generate revenue, and improve resiliency by dispatching stored battery capacity.

Lithium-ion batteries are increasingly being utilized to provide a variety of valuable grid services and generate steady income streams. With modern data centers leveraging Lithium-ion battery technology, such income streams are also available to data center owners. This added functionality enables quick return on investment while increasing system reliability and providing continuous state of health data.

- Participate in grid frequency stabilization
 - Reduce load on the grid by activating UPS storage
 - This Fast Frequency Reserve (FFR) program is available through the NORDEL grid in Norway, Finland, Sweden, and Denmark
- Increase system reliability
 - Improves overall performance by cycling batteries to validate their state of health
- Generate new revenue streams
 - Create additional revenue by participating in utility programs and electricity markets

Fast Frequency Reserve support

- **Receive compensation** for participating to grid frequency stabilization by discharging the UPS batteries
- **Battery capacity:** any (maximum demand: deliver 10-30 seconds of support)
- **Region:** Norway, Finland, Sweden, Denmark (DK2)
- **Annual earnings:** annual market auction (2021 prices were between 25k€ to 80k€ per MW)
- **Annual full battery cycles (maximum):** 5




To learn more about the Grid Interactive Solutions, contact your Schneider Electric sales representative.



Maximize asset utilization by combining a dispatchable UPS and Lithium-ion batteries with EcoStruxure Microgrid Advisor (EMA)

Reduce risk with the Galaxy VM UPS platform while creating additional value, by dispatching lithium-ion batteries. The cloud-based EMA software platform automatically enables energy savings by optimizing loads with available resources, and can also enable a variety of other types of grid-supporting features, such as frequency support.

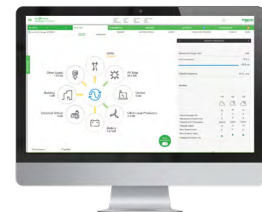

Galaxy VM UPS

- 24x7 power protection for mission-critical applications
- Modular power solutions for maximum flexibility and reliability
- Ultra-high efficiency, with eConversion operating mode to further reduce energy consumption
- Load protection and peace of mind even when dispatch functions are performed

Lithium-ion batteries

- High cycling capability, increased reliability, and longer life vs. lead-acid batteries
- High energy density allows for smaller footprint, translating to space savings
- Improved predictability and manageability via continuous battery monitoring
- Reduced TCO and simplified maintenance

EcoStruxure Microgrid Advisor

- Advanced model predictive control algorithms autonomously enable maximum energy savings while optimizing battery life
- Stay informed of energy usage, savings, and battery reserve via EMA app and Web site
- System reliability via 24-hour advanced automatic default operation schedules
- Cyber-secure platform to protect site and related data from external hacks.
- To learn more about EMA, visit: www.se.com/ema



To learn how much you can save or earn with this Grid Interactive Solution, contact your local Schneider Electric representative.

Options and accessories



Battery cabinets




Classic battery cabinets



Wall-mounted battery breaker box



Modular battery cartridge

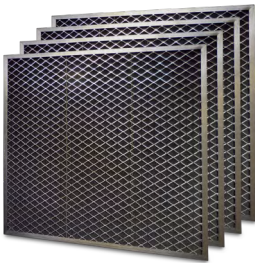

Dust filter kit



Dry contact I/O accessory (AP9810)

Network management	Description	Protocol supported
Included with Galaxy VM	<ul style="list-style-type: none"> • 1 plug: Ethernet SNMP • 1 plug: RS485 modbus RTU • 6 configurable dry contacts IN • 10 configurable dry contacts OUT • 2 free slots for optional communication cards 	<ul style="list-style-type: none"> • HTTP, HTTPS, IPv4, IPv6, NTP, SMTP, SNMP v1, SNMP v3, SSH V1, SSH V2, SSL, TCP/IP, Telnet, and modbus RTU

Visibility and peace of mind

EcoStruxure IT enables resilient, secure, and sustainable data centers and IT environments

Schneider Electric's comprehensive Data Center Infrastructure Management (DCIM) solution, EcoStruxure IT, ensures business continuity by enabling secure monitoring, management, insights, planning, and modeling – whether from a single IT rack to hyper-scale IT – on-premises, in the cloud, and at the edge.



Resilient




Secure




Sustainable

Easy visibility

Monitoring and management software streamlines data center device management:




EcoStruxure IT Expert provides you a hands-on approach with **cloud-based** monitoring software that synthesizes and analyzes performance and alert data into proactive recommendations and enables wherever-you-go visibility from any device. Try it now: www.ecostruxureit.com/ecostruxure-it-expert/#trial



EcoStruxure Data Center Expert is a scalable end-to-end **on-premise** monitoring software that collects, organizes, and distributes critical device information, providing a comprehensive view of your company-wide, multi-vendor physical infrastructure.

24/7 peace of mind

Digital services proactively monitor your critical devices:




EcoStruxure Asset Advisor* for secure power and cooling provides you a hands-off approach with 24/7 remote monitoring service by the Schneider Electric Connected Services Hub experts.

We monitor and troubleshoot, you relax.

Operations, optimized

Planning and modeling software transforms data into performance insights:



EcoStruxure IT Advisor is a data center infrastructure planning and modeling solution that provides Data Center Managers in large enterprises and colocation data centers with full insights into their infrastructure to improve profitability, sustainability, and resiliency.

* Contact your local representative for availability.

Comprehensive on-site services

Start-up service: included with UPS

- Commission the installation in accordance with manufacturer's recommendations. Ensure optimal system performance from Day 1

Schneider Electric-certified installation services

- Expert configuration of your equipment for optimal performance and reliability

Maintenance services

- Ensure proper care of your mission-critical applications
- Preventive maintenance and response time upgrades, where available

Flexible service plans/ on-site extended warranty

- Hassle-free system maintenance
- Improve uptime at a predictable cost

Technical specifications

Rated power (kVA/kW)	160/144				200/180				
Normal AC supply input									
Input voltage (V)	250-600 V								
Normal and bypass AC inputs	Single input or dual input as standard								
Frequency (Hz)	40-70 Hz								
Input power factor	0.99								
THDI	< 3% full load								
Bypass AC input									
Input voltage range	342-457 V								
Frequency	50 Hz or 60 Hz								
Output									
Phase-to-phase output voltage (V)	380/400/415 V								
Load power factor	0.9 (0.7 leading to 0.5 lagging without de-rating)								
Output frequency	50/60 Hz +/- 0.1% (free-running)								
Overload capacity utility operation at 40 °C	150% for 1 minute and 125% for 10 minutes								
Output voltage regulation	+/- 1%								
Total harmonic distortion (THDU)	< 2% at 100% linear load; < 3% at 100% nonlinear load								
Output voltage tolerance	Symmetric load (0 – 100%); +/- 1% static; asymmetric load: +/- 3% static								
Overall efficiency									
eConversion mode (meets EN62040-3 Class 1)	Up to 99% (meets EN62040-3 Class 1)								
Efficiency at full load (AC-AC) at 100% load	Up to 96.5%								
Standard ECO mode	Up to 99%								
Communication and management									
Control panel	Multifunction 7" touch-screen color LCD display with built-in NMC, modbus (SCADA and ION-E), two empty NMC card slots								
Dimensions and weights									
UPS (H x W x D) mm	1970 x 1052 x 854		1970 x 2104 x 854		1970 x 3156 x 854		1970 x 4208 x 854		1970 x 5260 x 854
Weight in kg. (UPS) (total -power cabinet plus I/O cabinet)	699	724	1398	1448	2097	2172	2796	2896	3620
Regulatory									
Safety	IEC 62040-1								
EMC/EMI/RFI	IEC 62040-2								
Markings	CE,C-Tick								
Performance	IEC 62040-3, VFI -SS -111								
Transportation	ISTA 2B								
Seismic zone	IBC Level 2:2006								
Environmental									
Operating temperature	0 to 40 °C								
Storage temperature	-25 to 55 °C without batteries -15 to 40 °C with batteries								
Relative humidity	0-95% non-condensing								
Operating elevation	1,000 m at 100% load								
Storage elevation	0-15,000 m								
Max. audible noise at 1 m from unit	55 dB at 70% load, 65 dB at 100% load								

Life Is On



To learn more about the the Galaxy VM UPS or EcoStruxure IT DCIM, contact your Schneider Electric representative or visit se.com/ups

About Schneider Electric At Schneider Electric, we believe access to energy and digital is a basic human right. We empower all to **make the most of their energy and resources**, ensuring **Life Is On** everywhere, for everyone, at every moment. We provide **energy and automation digital** solutions for **efficiency and sustainability**. We combine world-leading energy technologies, real-time automation, software and services into integrated solutions for Homes, Buildings, Data Centers, Infrastructure and Industries. We are committed to unleash the infinite possibilities of an **open, global, innovative community** that is passionate about our **Meaningful Purpose, Inclusive and Empowered** values.

www.se.com

Schneider Electric SE
35 rue Joseph Monier
92500 Rueil Malmaison – France
se.com