

SolidKVM SK04 DisplayPort 1.4 and USB 3.0 4×1 KVM Switch



User Manual
Y10A327-B1

Important Safety Notice

WARNING: Please follow these safety instructions. Failure to do so may result damages or injury. It is normal that the SolidKVM SK04 unit becomes very warm during use.

Please note that:

Continuous contact with warm surfaces for extended time may cause discomfort or injury. In order to reduce the possibility of overheating or heat-related injuries, always allow needed ventilation around the SolidKVM SK04 unit and use care when handling it. Avoid instances where your skin is in extended contact with the hub when plugged into the host computer. It is not recommended to sleep with the adapter when plugged into a host computer. Avoid placing the hub adapter under a pillow, blanket, or your body when connected to a host computer. If you have a medical condition that affects your ability to detect heat against the body, extra care should be used. Never use the adapter in locations with water, such as a sink, bathtub, or shower stall. Never connect or disconnect the adapter with wet hands.

Introduction

Rocstor introduces a high-performance DP-KVM switcher capable of routing high-definition video (in various resolutions up to 4kx2k@60Hz) and audio from multiple sources to display units. This DP-KVM switcher offers not only key-press switching functionality but also intelligent and hot-pluggable features.

Package Contents

Before utilizing this unit, kindly inspect the packaging to ensure the following items are included:


- Main Unit x1
- 5V/3A Power Adapter x1
- IR Remote Control x1
- IR Extender x1
- USB 3.0-B Male to USB 3.0-A Male Cable x4
- User Manual x1
- Ear Hanger Bracket x2 (Optional)




Features

- Supports resolution up to 4Kx2K@60Hz
- Supports RGB 4:4:4/ YCbCr 4:4:4/ YCbCr 4:2:2/ YCbCr 4:2:0
- Supports KVM function
- Supports a display(Either DP or HDMI) and a set of Keyboard and Mouse to control four PCs with DP ports
- DisplayPort:
 - Supports 8.1Gbps per channel (32.4Gbps all channels) bandwidth
 - Supports 16bit per channel (48bit all channels) deep color
 - Supports HDR
- HDMI:
 - Supports 6Gbps per channel (18Gbps all channels) bandwidth
 - Supports 12bit per channel (36bit all channels) deep color
 - Supports HDCP 2.2/1.4
 - Supports HDR
- Supports infrared remote control function
- Supports for switching LED indications
- Supports Windows 2000/XP/Vista/Win7/Win8/Win10/Linux/Apple Mac OS

Panel Description (Front Panel)

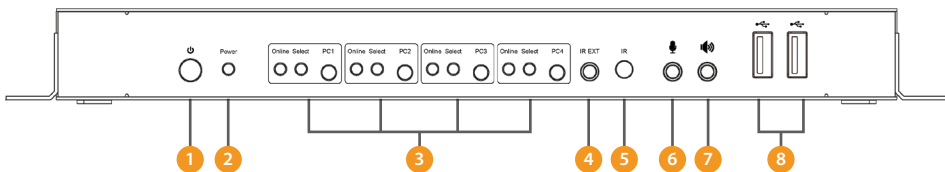
Front Panel







- 1 Power Button: Press to turn on/off the unit.
- 2 Power Indicator: The LED will light up once the DC/5V is provided and the unit is turned on.
- 3 Input Selection: When PC1/PC2/PC3/PC4 is selected, the corresponding "Select" lights up to indicate input selection ("Select" LEDs flash in a loop under automatic switching mode). "Online" LED lights up when the corresponding USB-B port is connected.
- 4 IR EXT: Connect IR Extender to this port for IR signal reception from the remote control.
- 5 IR: For IR signal reception from the remote control.
- 6  3.5mm MIC input port.
- 7  3.5mm stereo output port.
- 8  USB 3.0 ports, mainly used for connecting to printers, scanners, U-disk, etc.

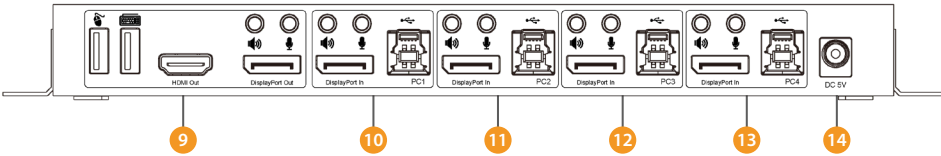Panel Description (Back Panel)

Back Panel



9 Output ports:

- Connect  to a mouse or a keyboard.
- Connect  to a keyboard or a mouse.
- Connect  to an amplifier.
- Connect  to a MIC.
- Connect "HDMI Out" to HDMI display.
- Connect "DisplayPort Out" to DP display.

10 PC1 input ports: Respectively connect to DisplayPort, USB, MIC, stereo ports of PC1.

11 PC2 input ports: Respectively connect to DisplayPort, USB, MIC, stereo ports of PC2.

12 PC3 input ports: Respectively connect to DisplayPort, USB, MIC, stereo ports of PC3.

13 PC4 input ports: Respectively connect to DisplayPort, USB, MIC, stereo ports of PC4.

14 DC 5V: Plug the 5V DC power supply into the unit.

Specifications

Connectors

Console Connectors	USB 2.0-A x2 (Back) DisplayPort Female x1(Back) HDMI Female x1(Back) 3.5mm Stereo Jack x2 (Green, 1 Front, 1 Back) 3.5mm Stereo Jack x2 (Pink, 1 Front, 1 Back)
--------------------	---

KVM Connectors	USB 3.0-B x4 (Back) DisplayPort Female x4(Back) 3.5mm Stereo Jack x4 (Green, Back) 3.5mm Stereo Jack x4 (Pink, Back)
----------------	---

USB HUB Connectors	USB 3.0-A x2 (Front)
--------------------	----------------------

Resolution

Max Resolution	3840x2160@60Hz 4096x2160@60Hz
----------------	----------------------------------

Operating Frequency

HDMI Bandwidth	18G
DisplayPort Bandwidth	32.4G

Mechanical

Material	Metal
Size (L-W-H)	9.5x2.9x1in - (243x75x26mm)
Weight (Net)	17.8lbs - (505.4g)

Warranty

Limited Warranty	1 Year
------------------	--------

Environmental

Operating Temperature	0°C to 45°C (32°F to 113°F)
Operating Humidity	10% to 85% RH (no condensation)
Storage Temperature	-10°C to 80°C (14°F to 176°F)
Storage Humidity	5% to 90 % RH (no condensation)

Power Requirement

External Power Supply	DC 5V
Power Consumption (Max)	12W
ESD Protection	±8kV (air-gap discharge) & ±4kV (contact discharge)

Regulatory Approvals

Certifications	FCC, CE
Power Supply	FCC, CE

Accessories

User Manual	English Version
-------------	-----------------

Installation Procedures

Operation


1) Begin by establishing connections between the Host Computers and the SolidKVM SK04 Switch. Utilize USB cables to connect the Host Computers to the KVM Switch USB-B ports. Subsequently, interlink the MIC and stereo ports of the Host Computers with the corresponding ports located above the "DisplayPort In" of the KVM Switch using 3.5mm audio cables. Conclude this step by connecting the Host Computers to the "DisplayPort In" ports of the KVM Switch using DisplayPort cables.

2) Proceed to connect peripheral devices. Attach the keyboard and mouse to the USB-A ports located on the KVM Switch back panel. Next, connect microphones and amplifiers to either the MIC and stereo ports on the front panel or above the "DisplayPort Out" of the KVM Switch using 3.5mm audio cables. For display connectivity, opt to link a display to the "DisplayPort Out" of the KVM Switch utilizing a DisplayPort cable with a maximum length of 2 meters. Alternatively, connect a display to the KVM Switch "HDMI Out" via an HDMI cable. Note: Video output will automatically switch to the connected port. In the event that both "DisplayPort Out" and "HDMI Out" are connected, video output will prioritize DisplayPort.

3) Power on the KVM Switch by supplying it with DC 5V and pressing the power button. Upon activation, the "Power" indicator will light up, confirming that power is operational. Ensure that the USB-B ports are connected properly, and the "Online" indicators will light up. The "Select" indicator will light up to denote the currently selected Host Computers.

4) Utilize the buttons located on the Switch front panel to select the input source. Upon selection, the corresponding "Select" indicator will light up, and the display will showcase the corresponding image. Subsequently, the selected Host Computers can be controlled using a keyboard and mouse.

5) The remote control functionality mirrors the manual buttons, facilitating input selection and control with equal efficiency and precision.

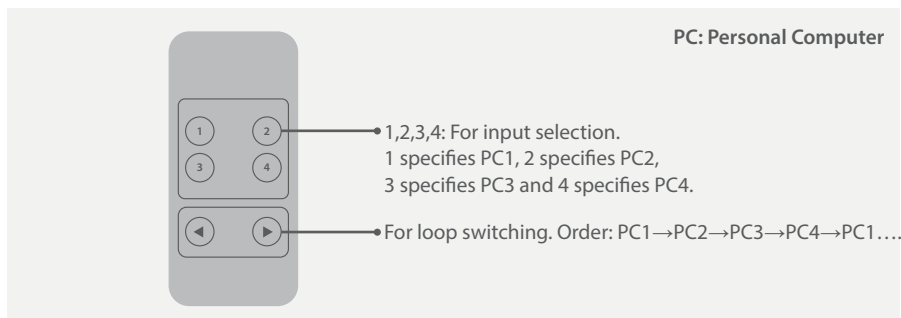

6) For external function, connect printer/scanner/U-disk to the USB-A ports on the Switch front panel.

Installation Procedures

Special Function Operation

1) Mouse Traversal Function:

Place the mouse on the far right side of the display and continue to slide to the right for 2 seconds, the Switch automatically switches to the next port. Switching order is : PC1→PC2→PC3→PC4→PC1...;

2) USB-B detection switching function:

- ① When the KVM Switch detects that a PC is connected to the USB-B port of the Switch, it immediately switches to this PC and the corresponding "Online" and "Select" indicators light up. For instance, if PC1 is already connected and PC3 is subsequently connected to the KVM Switch via the USB-B port, it swiftly switches to PC3.
- ② When the current selected PC is powered off or the USB cable is dialed out, the KVM Switch automatically switches to the next PC with the power on and the USB port connected.

3) Hotkey function (It doesn't work on functional keyboard and only the 2 USB-A ports on the back panel can get access to this function.)


Number	Hotkey Combination	Function Description
1	Scroll Lock++Scroll Lock +→or↓1	Switch to the next port
2	Scroll Lock++ Scroll Lock +←or↑	Switch to the previous port
3	Scroll Lock++ Scroll Lock +[N]	Switch to PC N
4	Scroll Lock++ Scroll Lock +S	Automatic switching function(Default: 15 seconds)
5	Scroll Lock++ Scroll Lock +I+[N]+[Enter]	Set the automatic switching interval (5~999 seconds)
6	Scroll Lock++ Scroll Lock +B+[1/0]	Buzzer on/off (Default: on)
7	Scroll Lock++ Scroll Lock +F+L+A+S+H+[Enter]	All resume hotkey default mode

Note: Hotkeys are not case-sensitive; Buzzer sounds when switching between PC1, PC2, PC3 and PC4.

Connection Diagram (Front Panel)



Connection Diagram (Back Panel)

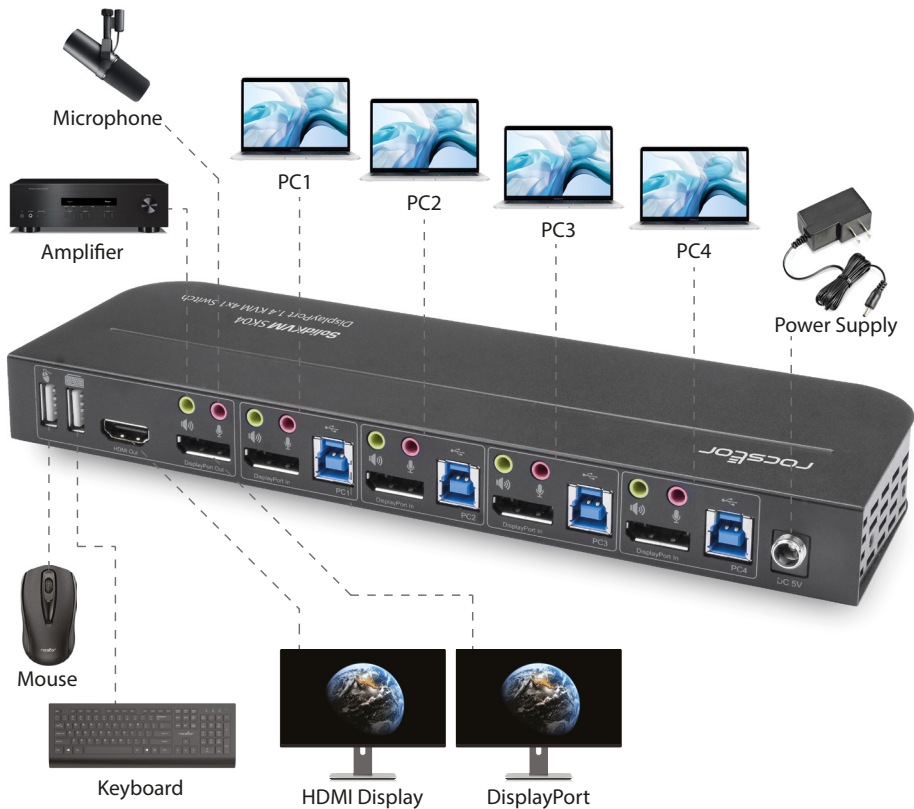

Contact Information

Corporate Headquarters

12979 Arroyo Ave
San Fernando, CA 91340 - USA

Office: +1 (818) 727-7000
Fax: +1 (818) 875-0002
Email: info@rocstor.com

Technical Support / Sales Info / RMA

Hours: 9:00 am - 5:00 pm PST
Mon - Fri (excluding holidays)

Tell: +1 (818) 727-7000 (DOM/INTL)
Fax: +1 (818) 875-0002
Email: support@rocstor.com

Corporate, Government and Academic Customers

Our Corporate Sales Team's goal is to help our U.S.A. and Canadian customers find a storage solution that best serves their needs. We will help you determine your best purchasing options. For more information please contact the appropriate department below or call us at +1 (818) 727-7000.

General Sales Information:

sales@rocstor.com

Corporate sales information:

corporate_sales@rocstor.com

Educational sales information:

academic_sales@rocstor.com

Federal, State & Local government sales information:

government_sales@rocstor.com

Resellers/Business Development/OEM Partners

All Channel National and International Resellers, VARs, Consultants...

Contact Rocstor Channel Sales:

Call: +1 (818) 727-7000
Email: reseller_info@rocstor.com

Disclaimer

©2024 Rocstor, Inc. All rights reserved. Rocstor is registered trademark of Rocstor, Inc. Apple®, the Apple logo, Mac®, MacBook®, MacBook Pro®, MacBook Air®, iPad®, iPad Air®, iPad mini®, iPad Air®, iPhone®, MacOS® are registered trademarks of Apple, Inc. Google® and Chromebook™ are registered trademarks of Google, LLC. Microsoft® is registered trademarks of Microsoft corporation. All other product names and logos mentioned herein may be trademarks of their respective companies. Thunderbolt is a trademark of Intel Corporation or its subsidiaries. USB Type-C® and USB-C® are registered trademark of USB Implementers Forum. The terms HDMI, HDMI High-Definition Multimedia Interface, HDMI Trade dress and the HDMI Logos are trademarks or registered trademarks of HDMI Licensing Administrator, Inc. Feature and specification are subject to change without notice. All trademarks and registered trademarks are the property of their respective. All rights reserved.

