

View 390 Air

User's Manual
Benutzerhandbuch
Mode d'emploi
Manual del usuario
Manuale dell'utente
Manual do Utilizador

安裝說明書
用戶手冊
ユーザーズマニュアル
Руководство пользователя
kullanıcı elkitabı
(EEE Yönetmeliğine Uygundur)
คู่มือการใช



© 2025 Thermaltake Technology Co., Ltd. All Rights Reserved. 2025.05
All other registered trademarks belong to their respective companies. www.thermaltake.com



TT Premium



TT Premium

To continue achieving the corporate mission of delivering the perfect user experience, Thermaltake developed "TT Premium" with the essence of combining supreme quality products with a new logo design. TT Premium is far more than just a guarantee of quality. Behind the name, it represents the passion in DIY, Modding and Thermaltake's desire to be the most innovative brand in the PC hardware market. To satisfy the demand of the high-end PC users, TT Premium follows its core values of Excellent Quality, Unique Design, Diverse Combinations and Boundless Creativity to provide a high performance PC product for every enthusiast. <http://ttpremium.com>

Tt LCS-Liquid Cooling Support Certification



Tt LCS Certified is a Thermaltake exclusive certification applied to only products that pass the design and hardcore enthusiasts standards that a true LCS chassis should be held to. The Tt LCS certification was created so that we at Thermaltake can designate to all power users which chassis have been tested to be best compatible with extreme liquid cooling configurations to ensure you get the best performance from the best features and fitment.

Join Tt Community To Receive Benefits



Dear Valued Customer,
Thank you for choosing Thermaltake.
As a new user we value your thoughts and opinions and your feedback is important to us. We at Thermaltake would like to use this opportunity to invite you to join our Community Forums. Register today to start enjoying the full benefits of our community.



Benefits of being a member:

- Quick and responsive user support
- Receive help and advice with new builds
- Keep up to date with new product releases
- Share your thoughts and builds with the community
- Enter monthly contests and giveaways

Brand official website
<http://www.thermaltake.com/>

Global Facebook
<https://www.facebook.com/ThermaltakeInc>

Taiwan Facebook
<http://www.facebook.com/ThermaltakeTW>

Global community forums
<http://community.thermaltake.com>

CONTENTS














Chapter 1. Product Introduction

1.0	Specification	01
1.1	Accessory	02
1.2	Dimension & Clearance	03


Chapter 2. Installation Guide

2.0	Remove Components	06
2.1	Power Supply Unit (PSU) Installation	08
2.2	Motherboard Installation	09
2.3	HDD Installation	10
2.4	VGA Card Installation	11
2.5	Air Cooling Installation	14
2.6	AIO Liquid Cooling Installation	15
2.7	3.9" & 6" LCD Installation	16
2.8	I/O Connection	17
2.9	Remove Filters	19


Case Type	Mid Tower	
Dimension (H*W*D)	503 x 287 x 485 mm (19.80 x 11.30 x 19.1 inch)	
Panel	Tempered Glass x 1	
Material	SPCC	
Cooling System	Rear (exhaust): 120 x 120 x 25 mm CT120 fan (500 ~ 2000 rpm, 25.8 dBA) x 2	
Drive Bays	2 x 3.5", 1 x 2.5" or 3 x 2.5"	
Expansion Slots	7 (Rotatable Patented Design)	
Motherboards	6.7" x 6.7" (Mini ITX), 9.6" x 9.6" (Micro ATX), 12" x 9.6" (ATX)	
Hidden-Connector Motherboard	9.6" x 9.6" (Micro ATX), 12" x 9.6" (ATX)	
I/O Port	USB 3.2 (Gen 2) Type-C x 1, USB 3.0 x 2, HD Audio x 1	
PSU	Standard PS2 PSU (optional)	
Fan Support	Front	3 x 120 mm, 2 x 140 mm, 2 x 200 mm
	Right	3 x 120 mm
	Rear	2 x 120 mm
	Bottom	3 x 120 mm
Radiator Support	Front (AIO)	1 x 360 mm, 1 x 240 mm, 1 x 120 mm 1 x 280 mm, 1 x 140 mm
	Right (AIO)	1 x 360 mm, 1 x 240 mm, 1 x 120 mm
Clearances	CPU cooler height limitation	160 mm
	VGA length limitation	390 mm (with Radiator) 420 mm (without Radiator)
	PSU length limitation	200 mm (with 2.5" SSD) 260 mm (without 2.5" SSD)

Figure	Parts Name	Q'ty	Used for
	Stand-off #6-32 x 6.5mm	5	Motherboard / VGA Riser Cable
	Screw #6-32 x 6mm	6	Power Supply
	Screw #6-32 x 5mm	10	3.5" HDD
	Screw #6-32 x 3.8mm	2	Rotatable PCIe Panel
	Screw M3 x 5mm	23	Motherboard / 2.5" SSD / HDD / VGA Riser Cable
	Screw T5 x 10mm	8	Case Fan
	Screw #6-32 x 5mm	3	Front Panel & HDD Plate
	Screw #6-32 x 34mm	8	200mm Case Fan
	Zip Ties	10	Cable Management
	Buzzer	1	Motherboard Alarm
	Nut Setter	1	Motherboard Stand-off Installation
	Side Plate Clip	5	Side Panel
	Velcro-1 meter	1	Cable Management


Chassis dimension

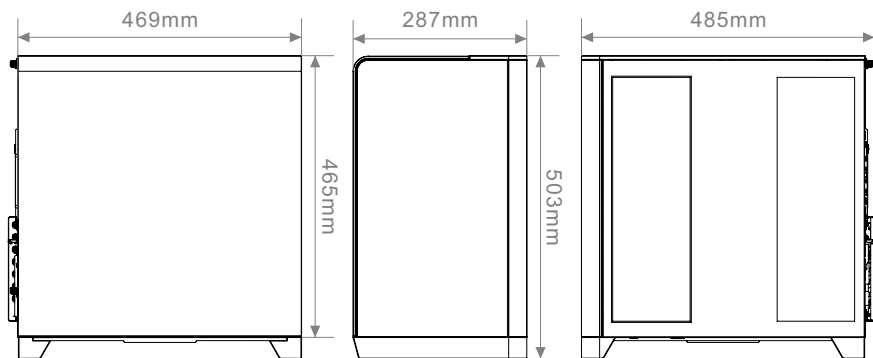


Motherboard Compatibility: ITX / mATX / ATX

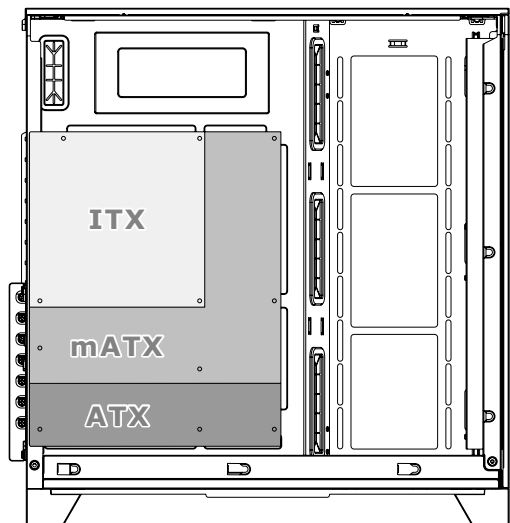



CPU cooler max height: 160mm


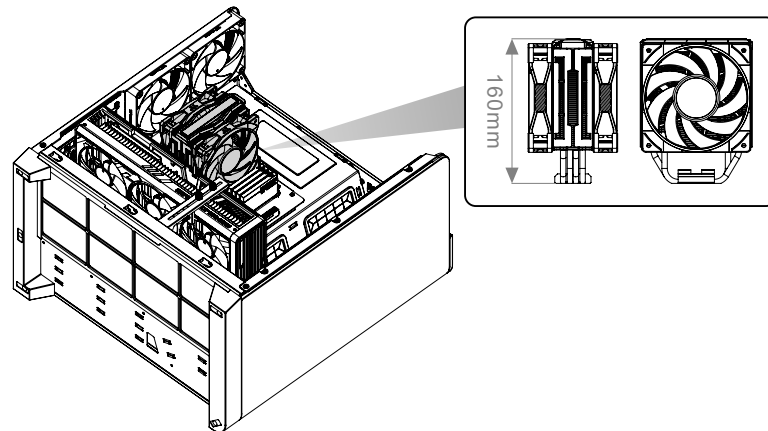



VGA max length: 390mm (with Radiator)
 VGA max length: 420mm (without Radiator)

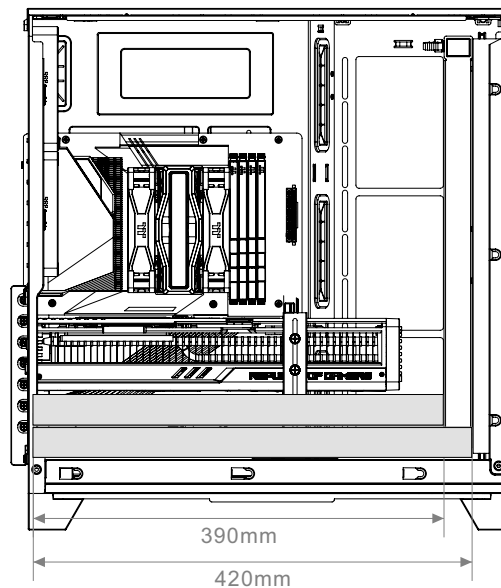


PSU length max length: 200mm (with 2.5" SSD)
PSU length max length: 260mm (without 2.5" SSD)

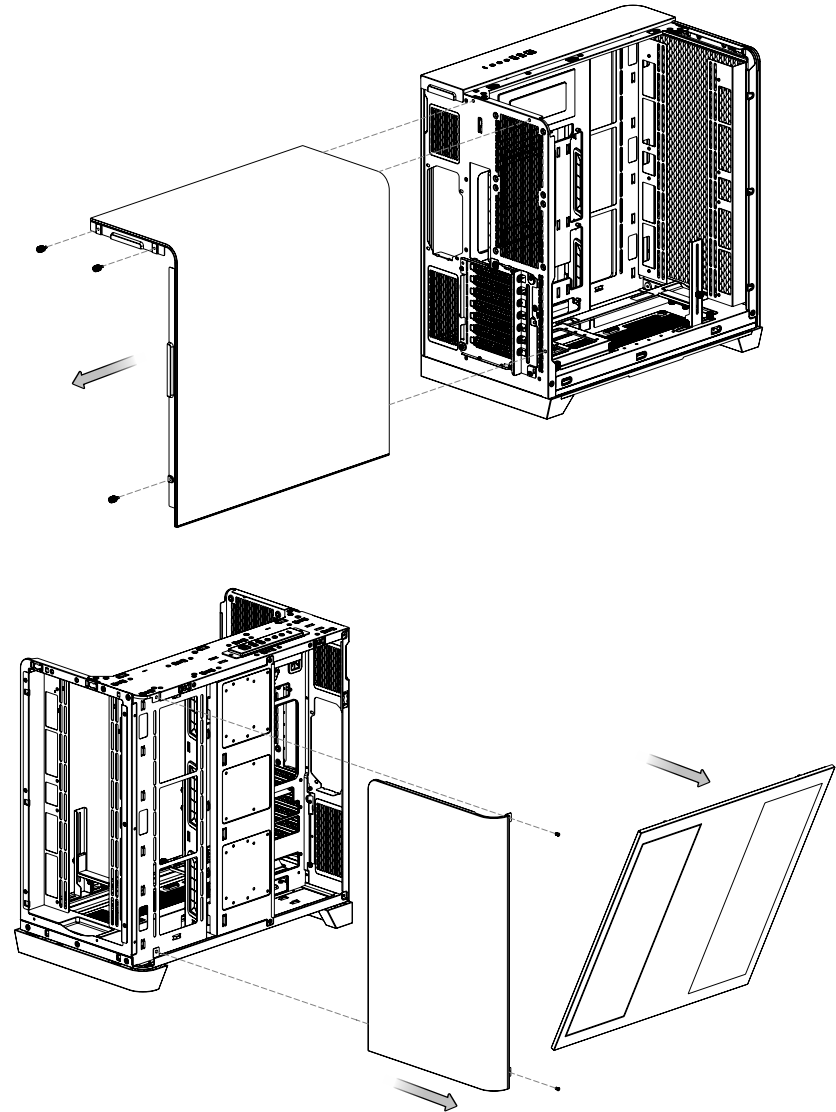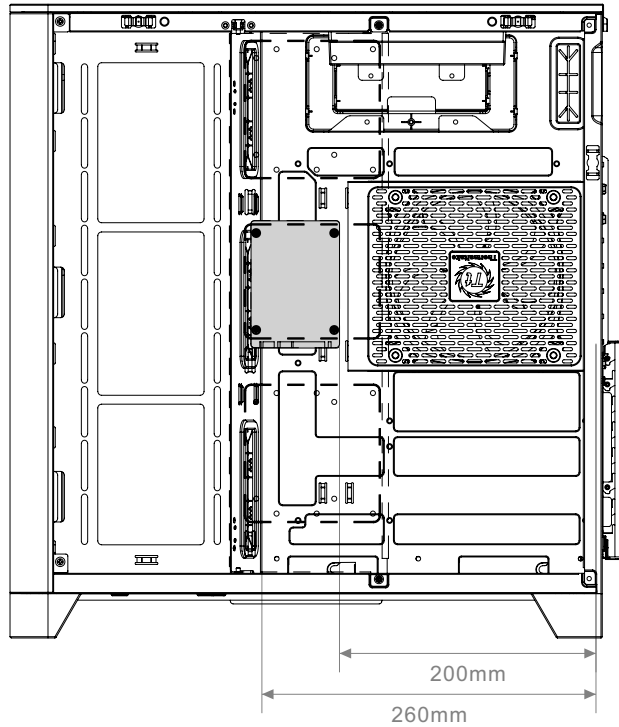

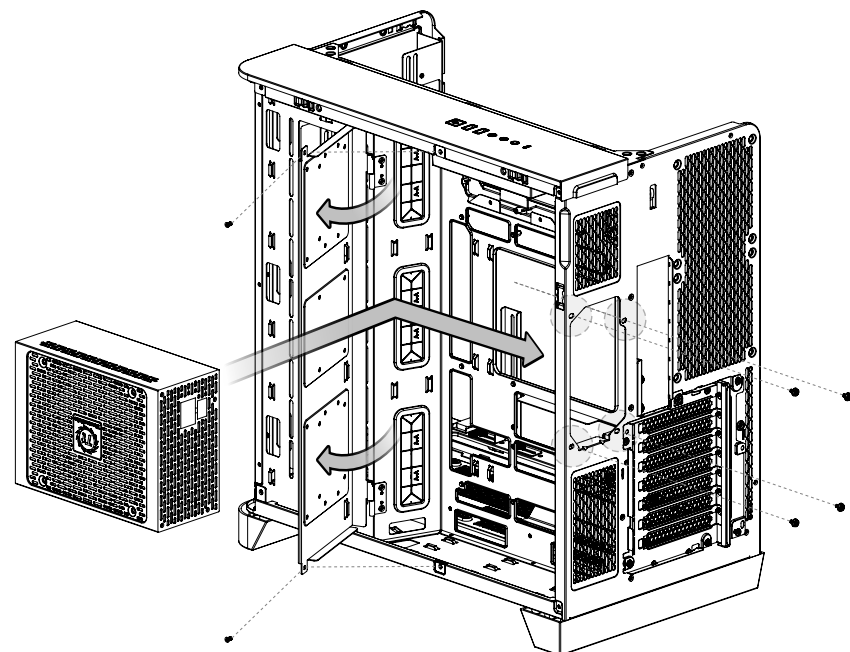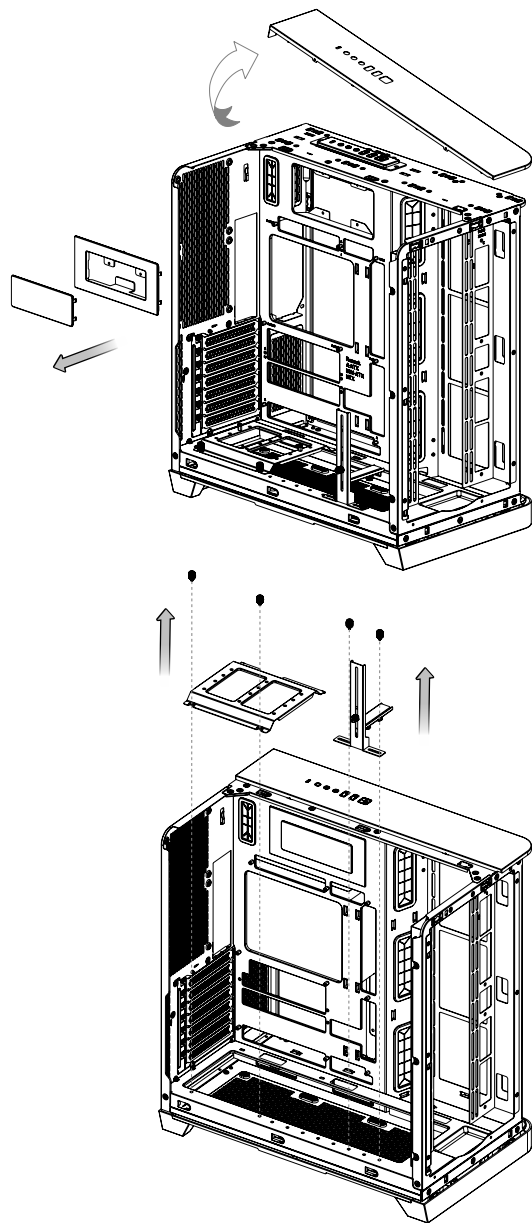



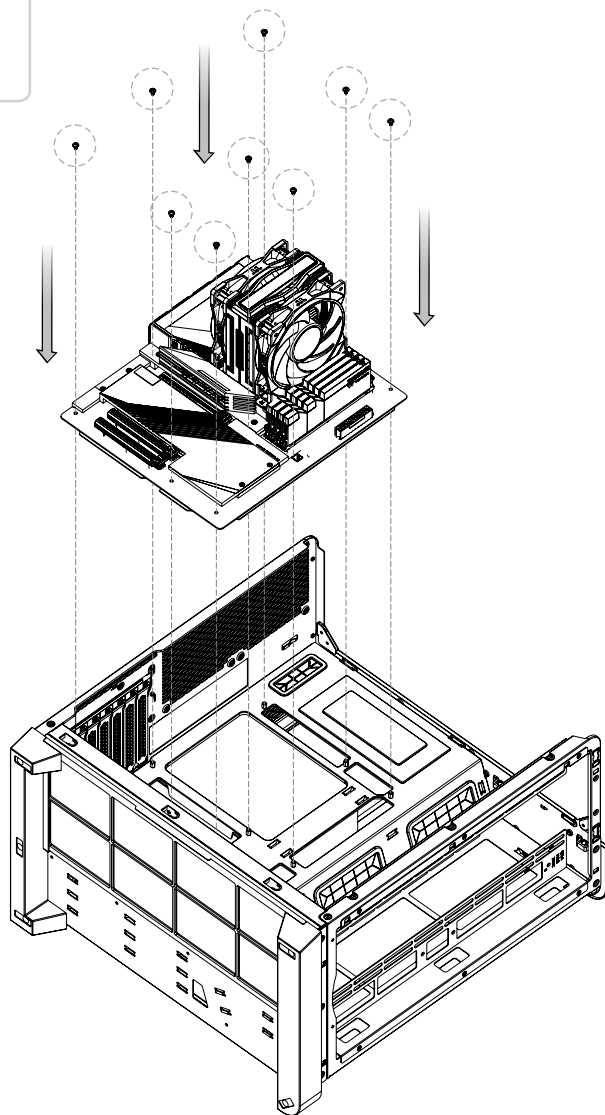



3.5" HDD

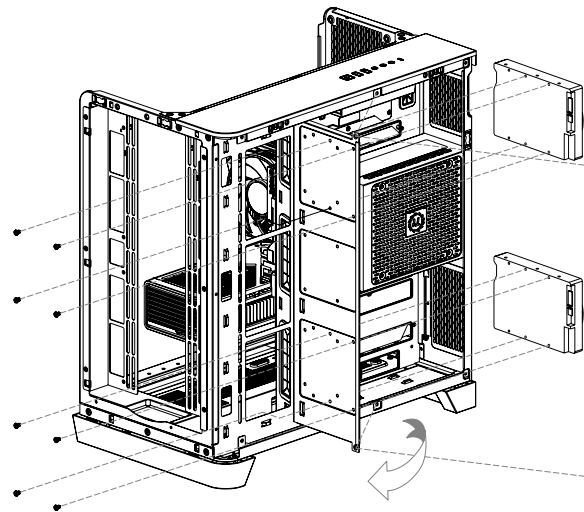

2.5" SSD / HDD

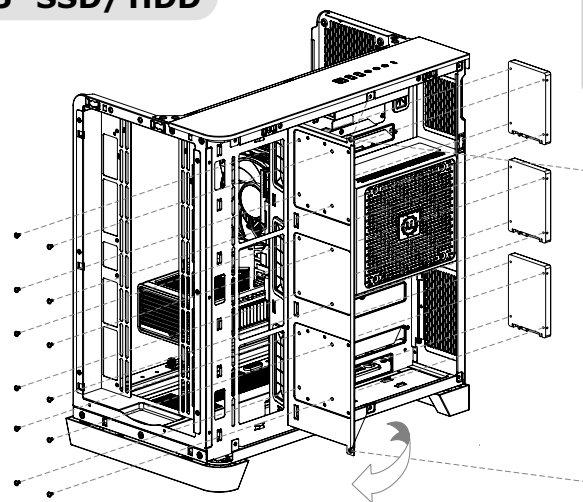

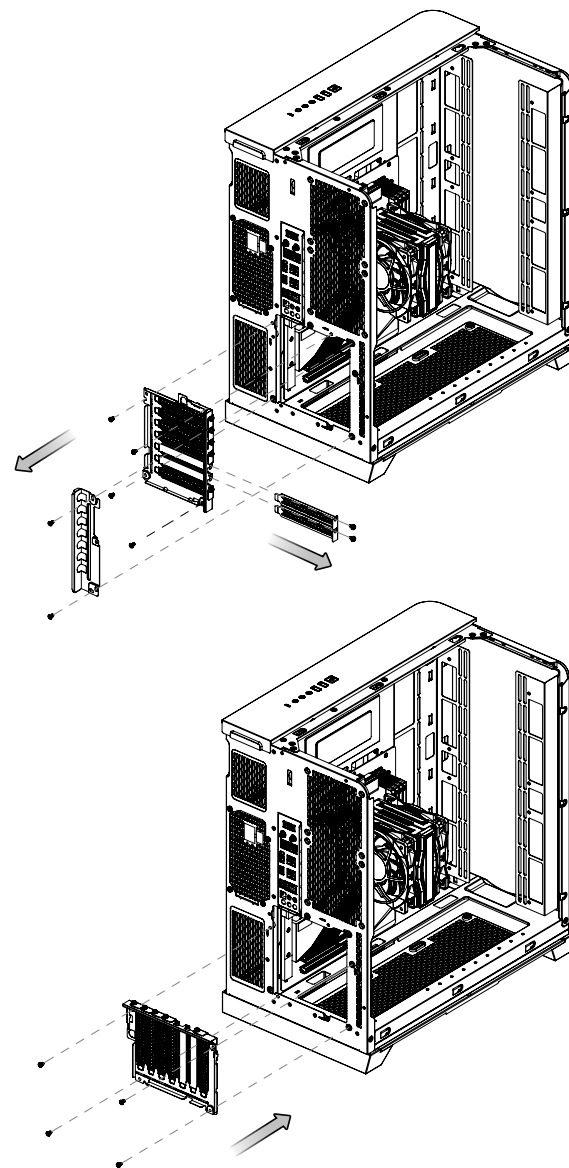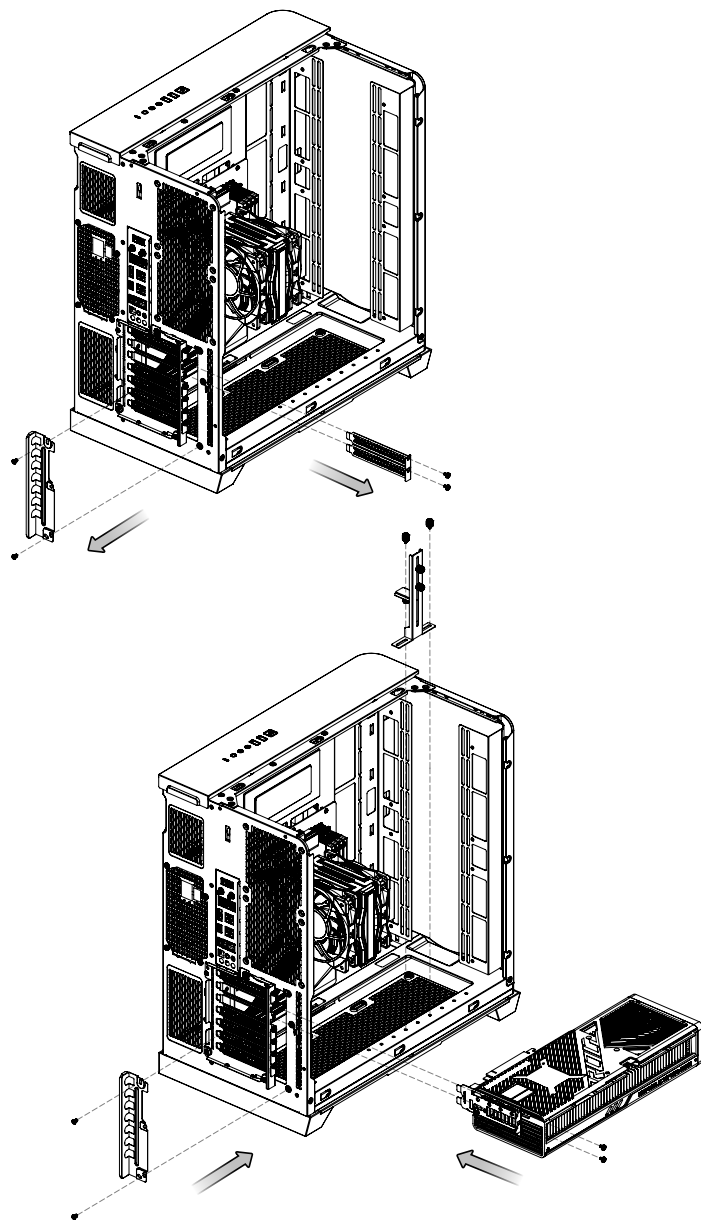

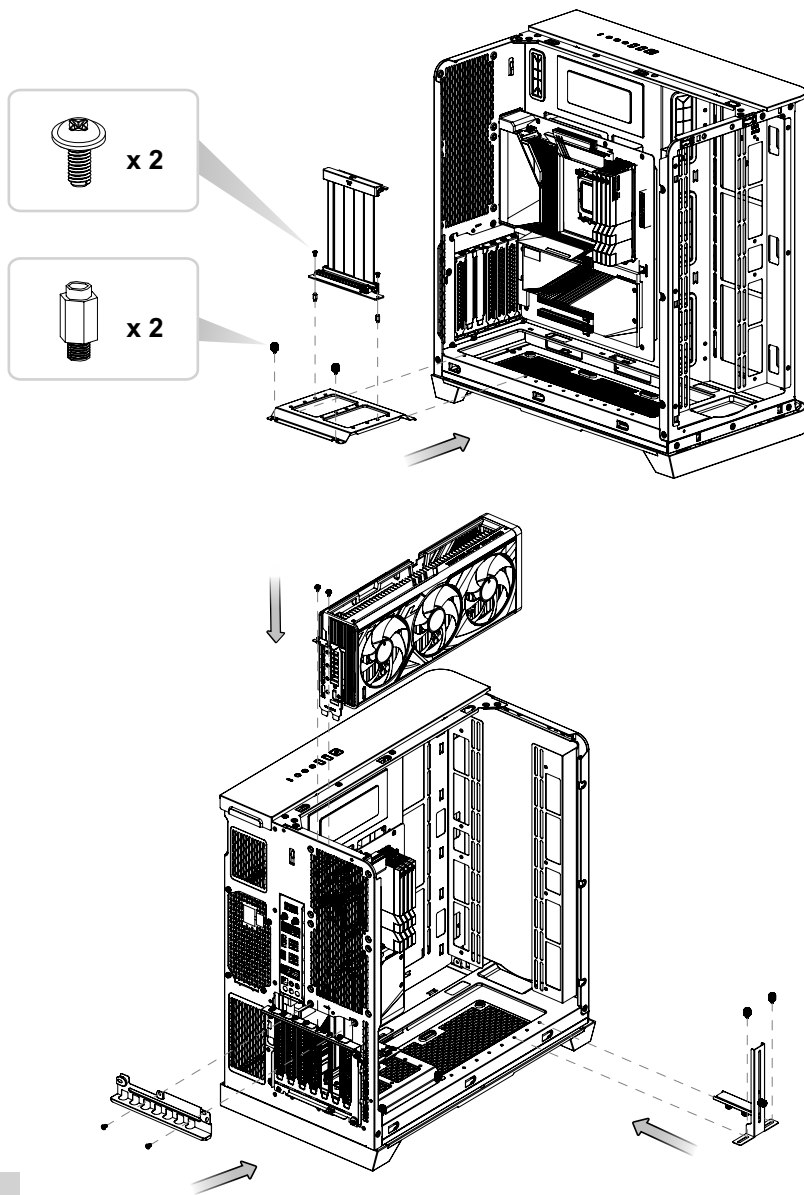**Rear**



120mm x 2

**Bottom**



120mm x 3

Right

120mm x 3


**Front**

120mm x 3
or
140mm x 2
or
200mm x 2

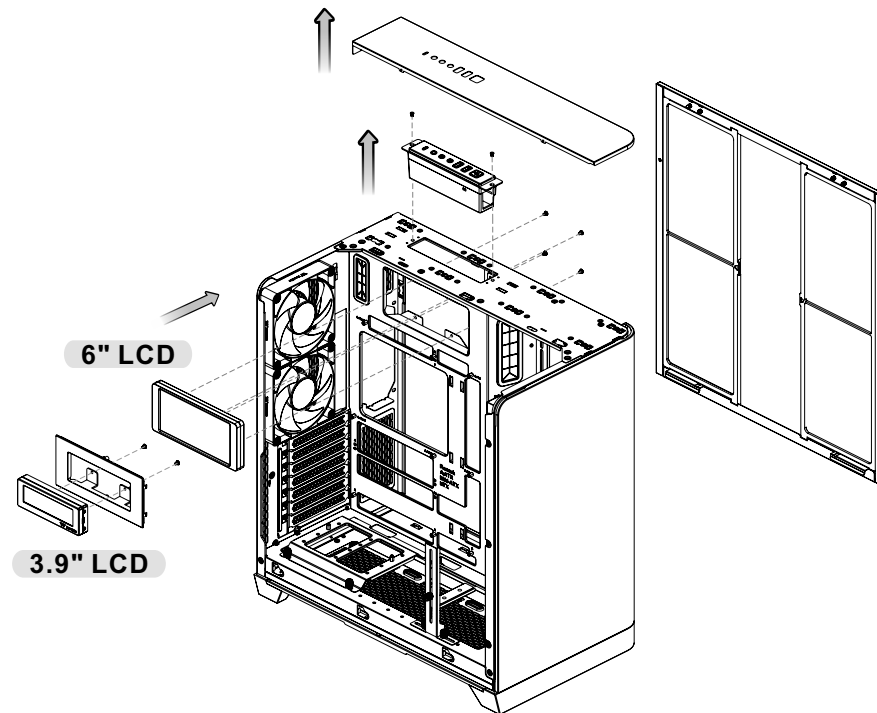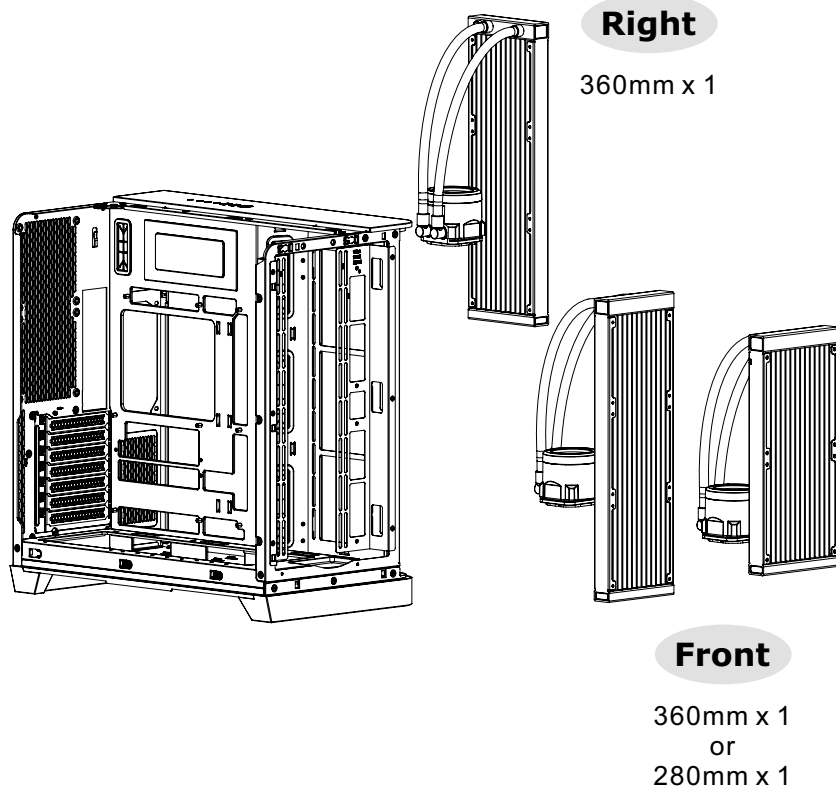

* 3.9" / 6" LCD Screen Kit is not included.

I/O Port

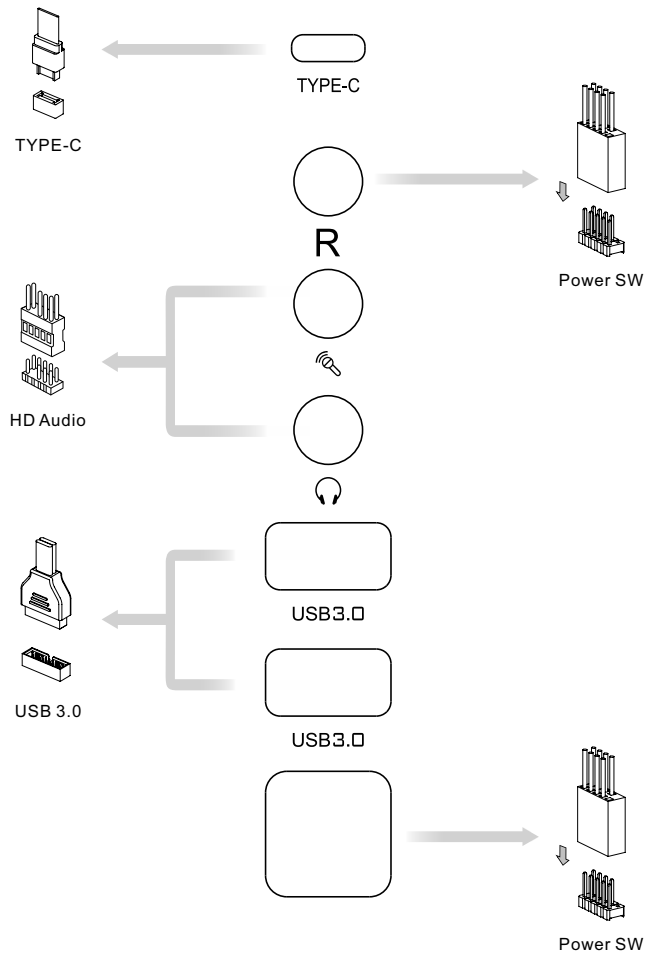

Motherboard Header Diagram

