

USER MANUAL

EMD5004-R, EMD5104-R, EMD5004PE-R, EMD5004SE-R, EMD5004PE-R-R2, EMD5004FPE-R

EMERALD® DESKVUE MULTI-SOURCE, MULTI-VIEW RECEIVER



BLACK BOX®

This page intentionally left blank.



TABLE OF CONTENTS

QUICK START GUIDE	7
SETTING UP AND USING DESKVUE	7
CHAPTER 1: EMD5004-R	9
1.1 INTRODUCTION	9
1.2 FEATURES	10
1.3 WHAT'S INCLUDED	10
1.4 PRODUCT IMAGES	11
1.5 APPLICATION DIAGRAM	12
1.6 SPECIFICATIONS	13
CHAPTER 2: EMD5104-R	14
2.1 INTRODUCTION	14
2.2 FEATURES	15
2.3 WHAT'S INCLUDED	15
2.4 PRODUCT IMAGES	15
2.5 APPLICATION DIAGRAM	17
2.6 SPECIFICATIONS	18
CHAPTER 3: EMD5004PE-R	19
3.1 INTRODUCTION	19
3.2 FEATURES	20
3.3 WHAT'S INCLUDED	20
3.4 PRODUCT IMAGES	20
3.5 APPLICATION DIAGRAM	22
3.6 SPECIFICATIONS	23
CHAPTER 4: EMD5004SE-R	24
4.1 INTRODUCTION	24
4.2 FEATURES	25
4.3 WHAT'S INCLUDED	25
4.4 PRODUCT IMAGES	25
4.5 APPLICATION DIAGRAM	27
4.6 SPECIFICATIONS	27



TABLE OF CONTENTS

CHAPTER 5: EMD5004PE-R-R2	29
5.1 INTRODUCTION	29
5.2 FEATURES	30
5.3 WHAT'S INCLUDED	30
5.4 PRODUCT IMAGES	30
5.5 APPLICATION DIAGRAM.....	32
5.6 SPECIFICATIONS	32
 CHAPTER 6: EMD5004FPE-R.....	 34
6.1 INTRODUCTION	34
6.2 FEATURES	35
6.3 WHAT'S INCLUDED	35
6.4 PRODUCT IMAGES	35
6.5 APPLICATION DIAGRAM	37
6.6 SPECIFICATIONS	37
 CHAPTER 7: APPLICATION	 40
7.1 LOGIN SCREEN	40
7.2 ON SCREEN DISPLAY (OSD).....	43
7.3 NETWORK TAB	46
7.4 DISPLAY TAB	50
7.5 AUDIO SETTINGS TAB.....	52
7.6 SETTINGS TAB	53
7.6.1 Transmitter Settings	54
7.7 CONNECTIONS TAB.....	65
7.7.1 Add New Connection	67
7.8 TEMPLATES TAB.....	76
7.8.1 One Tile on One Display.....	77
7.8.2 Four Tiles on One Display	78
7.8.3 One Tile Across All Displays	79
7.8.4 Four Tiles - PiP Right on One Display	80
7.8.5 Four Tiles - PiP Left on One Display	81
7.8.6 Seven Tiles Across 2 Displays	82
7.8.7 Eight Tiles on One Display.....	83
7.8.8 Two Horizontal Tiles on One Display	84
7.8.9 Two Vertical Tiles on One Display	85
7.8.10 Three Tiles on One Display.....	86
7.8.11 Three Vertical Tiles on One Display.....	87
7.8.12 Six Tiles on One Display.....	88
7.8.13 Sixteen Tiles on One Display.....	89
7.8.14 Thirty Two Tiles on One Display	90



TABLE OF CONTENTS

7.9 WORKSPACES TAB	91
7.9.1 Add New Workspace.....	93
7.10 USERS TAB	99
7.10.1 Add New User.....	100
7.10.2 User Menu Options.....	103
7.11 SYSTEM TAB	107

CHAPTER 8: TROUBLESHOOTING..... 110

APPENDIX A: BOXILLA DISCOVERY 112

A.1 BOXILLA DISCOVERY	112
A.1.1 Discovering and Managing the DESKVUE Unit.....	112

APPENDIX B: WORKSPACE CONFIGURATION 119

B.1 WORKSPACE CREATION/ASSIGNMENT	119
B.1.1 Creating a Workspace.....	119
B.2 CUSTOM WORKSPACE	125
B.2.1 Assigning a user to a workspace.....	126
B.2.2 Editing a Workspace.....	127
B.2.3 Deleting a Workspace.....	128
B.2.4 Workspace Groups.....	128
B.2.5 Additional configuration options.....	130
B.2.6. Configuring User Access through Boxilla®.....	133
B.2.7. API Control.....	133

APPENDIX C: REGULATORY INFORMATION..... 134

C.1 FCC STATEMENT	134
C.2 CE STATEMENT	134
C.3 TSCA STATEMENT	134
C.4 ROHS	134
C.5 REACH	134
C.6 NOM STATEMENT	135

APPENDIX D: TECH SUPPORT/DISCLAIMERS/TRADEMARKS 136

D.1 TECH SUPPORT/CONTACT INFORMATION	136
D.1 DISCLAIMERS	136
D.2 TRADEMARKS USED IN THIS MANUAL	136



TABLE OF CONTENTS

This page intentionally left blank.



QUICK START GUIDE

SETTING UP AND USING DESKVUE

To begin using the Emerald® DESKVUE:

1. Physically connect the monitor(s), keyboard, mouse, and power supply.
2. Turn on the unit and let it boot up.
3. When prompted for a login, enter the default credentials of “admin” (without the quotes) for username, and leave the password blank.

NOTE: This is the default state only; it will change after the password is changed or managed by Boxilla®.

4. Configure the Emerald DESKVUE.

NOTE: If using Boxilla, these settings will be available through the Boxilla administrative web interface. When DESKVUE is managed with Boxilla, the Boxilla global hot keys will be applied to the DESKVUE. Custom Layouts are only supported when using the Boxilla manager.

5. You can now make connection(s) through the Workspace tab by clicking on them.

NOTE: Refer to the corresponding sections of this user manual for detailed instructions for each of the above steps.

NOTE: The images and screenshots referenced in this manual are for general instruction purposes only, and they may not match the latest version of the product's firmware.



QUICK START GUIDE

This page intentionally left blank.



CHAPTER 1: EMD5004-R

1.1 INTRODUCTION

KVM users today need to view, monitor, and interact with multiple computer targets and video streams that can reside on various networks, such as post-production editing, IPTV, live feeds, Command and Control, and rendering jobs.

In a completely new concept in KVM over IP, Emerald® DESKVUE enables these users to arrange their individual workspace for optimal simultaneous interaction with up to 16 different systems when both managed and unmanaged by Boxilla®. It supports connections to physical systems via Emerald transmitters, virtual machines using HTML5, RDP, PCoIP, PCoIP Ultra, and standard H.264/H.265 sources.

The Emerald DESKVUE receiver—as part of the Emerald KVM family and Boxilla KVM Manager—uniquely allows users to tailor their own workspace by connecting a single keyboard, mouse, USB 3/2 devices, audio, and up to four 4K monitors. Each system can be positioned across the screens with pre-defined layouts or freely movable windows. Interacting with each system is as simple as moving the mouse over a window. In this way, each operator has complete situational awareness and full control within easy reach.

Interact with up to 16 systems simultaneously

Connect to physical systems via Emerald transmitters and virtual machines using HTML5, RDP, PCoIP, PCoIP Ultra, and H.264/H.265.

Tailor your individual workspace

Freely place and size your systems across up to four monitors; view and interact with them in the most efficient way.

Up to 4k/5k video resolutions

Attach up to four screens at once, with HDMI resolutions supporting up to 3840x2160 and USB-C (DisplayPort™) resolutions supporting up to 5120x2880.

NOTE: There is a maximum limit of 16,384 pixels across all four monitors in either the horizontal or vertical dimension. Therefore, the maximum “pixel-space” for an individual DESKVUE is 16,384x16,384. For example, when a 5K monitor with a 5120x2880 resolution is connected to a DESKVUE, only two UHD monitors can be supported since you need to stay less than 16,384 pixels in the horizontal dimension.

Highly Secure KVM over IP

Fully integrates with Emerald Unified KVM and the Boxilla KVM Manager for device configuration, monitoring, and authentication.

Design follows User Needs

An extremely small footprint and various mounting options provide a welcoming workspace.

AV WALL Functionality

Enjoy the immersive experience of a 2x2 video wall controller with enhanced video wall functionality, easily controlled via APIs for seamless integration and management.



CHAPTER 1: EMD5004-R

1.2 FEATURES

- ♦ Future-proof KVM, universal access system — Access both physical and virtual machines including Emerald® transmitters, HTML5, PCoIP, PCoIP Ultra, RDP, and H.264/H.265 targets
- ♦ Up to 16 connections over 4 video heads when DESKVUE is both managed and unmanaged by Boxilla®
- ♦ Up to 4 UHD screens, optionally 1 can be 5K (USB-C DisplayPort™ Alt Mode)
- ♦ Supports multi-head applications (for example, extended desktop), 4K deployments
- ♦ Excellent video up to 4K resolutions (dependent upon transmitter type and configuration)
- ♦ AV wall functionality using a 2x2 video wall with one single image scaled across all displays
- ♦ Highly scalable through IP networking/low bandwidth
- ♦ Built for 24/7 operation with no single point of failure: redundant managers/redundant links with local database in receiver in case manager is offline
- ♦ Remote access to KVM systems to allow operation across IP network through software application
- ♦ Compatible with Boxilla managers (for management)
- ♦ Enhanced Leostream broker support for PCoIP Connections
- ♦ Compatible with all Emerald transmitter types, including the 4K transmitter, using our new 4Ko1G scaled or unscaled stream with Emerald 7.0 onward.
- ♦ Connects to virtual machines (RDP, XRDP, and PCoIP)
- ♦ Connects to H.264/H.265 devices, such as IP cameras
- ♦ Supports touchscreen functionality
- ♦ WebLink™ technology: Interact with multiple SCADA and HMI feeds. No jump servers or local installs required.

1.3 WHAT'S INCLUDED

- ♦ (1) Emerald DESKVUE KVM receiver (EMD5004-R)
- ♦ (1) 19 VDC, 3A, desktop power supply
- ♦ (1) Country-specific power cord
- ♦ Screws and jumper

If anything is missing or damaged, contact Black Box Technical Support.



CHAPTER 1: EMD5004-R

1.4 PRODUCT IMAGES



FIGURE 1-1: FRONT VIEW

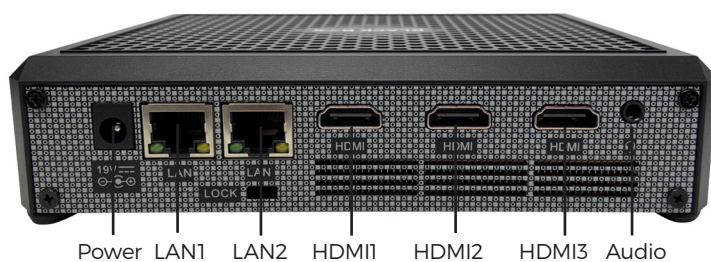


FIGURE 1-2: BACK VIEW


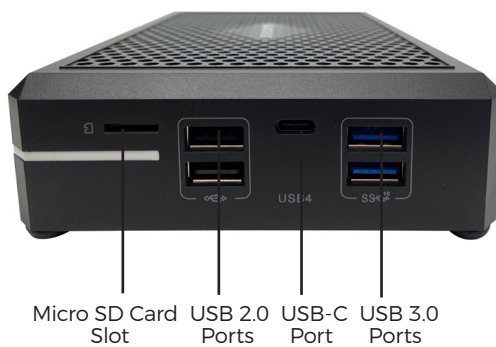


FIGURE 1-3: SIDE VIEW

CHAPTER 1: EMD5004-R

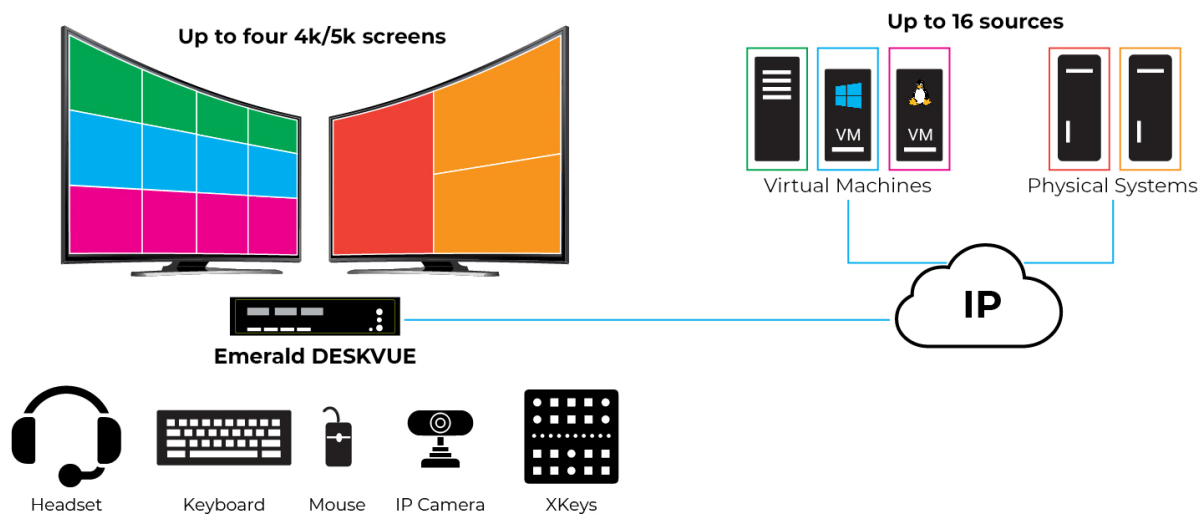1.5 APPLICATION DIAGRAM



CHAPTER 1: EMD5004-R

1.6 SPECIFICATIONS

TABLE 1-1. PRODUCT SPECIFICATIONS

SPECIFICATION	DESCRIPTION
Dimensions	Unit: 1.47" H x 6.61" W x 4.52" D, (37.4 x 168 x 115 mm)
Weight	Product: 1.21 lb. (0.55 kg); Power Supply: 0.56 lb. (0.25 kg); Product and Packaging: 3.10 lb. (1.4 kg)
Connectors	(3) HDMI female; (1) USB C (USB4) for DP output; (1) 3.5mm audio; (4) USB Type A female; (1) Micro SD port; (1) 1G RJ-45 network connection; (1) 2.5G RJ-45 network connection; (1) 19VDC barrel for power
Maximum Distance from Network	328 feet (100 m), network limits, extend with network switches
User Interface	Emerald® On Screen Display (OSD)
Mounting Kits	VESA mount included/Kensington lock support
Power	External desktop power supply
Input Voltage/Volts	100-240VAC, 50/60Hz
Input Current/Amps	1.5 Amps
Output Voltage/Volts	19 VDC
Output Current/Amps	3 Amps
Power Consumption/Watts	57 Watts MAX (Power consumption can vary depending upon the configuration and devices that are being used.)
Heat Dissipation/BTU/h	194.37 BTU/h MAX (Voltage x Nominal Current) * 3.41 = BTU/h
Power Supply Cord Length	4.5 feet (1.37 meters)
Operating Temperature	32 to 104°F (0 to 40°C)
Storage Temperature	-22 to +176°F (-30 to +80°C)
Operating Humidity	10 to 90% non-condensing
Maximum Altitude/Feet	<6,561 feet (2,000 meters)
MTBF	104,000 hours at 25°C
Compatibility	Boxilla® managers, Emerald transmitters, HTML5 sources, H.264/H.265, and virtual machines (RDP, XRDP, and PCoIP)



CHAPTER 2: EMD5104-R

2.1 INTRODUCTION

KVM users today need to view, monitor, and interact with multiple computer targets and video streams that can reside on various networks, such as post-production editing, IPTV, live feeds, Command and Control, and rendering jobs.

In a completely new concept in KVM over IP, Emerald® DESKVUE enables these users to arrange their individual workspace for optimal simultaneous interaction with up to 16 different systems when both managed and unmanaged by Boxilla®. It supports connections to physical systems via Emerald transmitters, virtual machines using RDP, PCoIP, PCoIP Ultra, and standard H.264/265 sources.

The Emerald DESKVUE receiver—as part of the Emerald KVM family and Boxilla KVM Manager—uniquely allows users to tailor their own workspace by connecting a single keyboard, mouse, USB 3/2 devices, audio, and up to four 4K monitors. Each system can be positioned across the screens with pre-defined layouts or freely movable windows. Interacting with each system is as simple as moving the mouse over a window. In this way, each operator has complete situational awareness and full control within easy reach.

Interact with up to 16 systems simultaneously

Connect to physical systems via Emerald transmitters and virtual machines using HTML5, RDP, PCoIP, PCoIP Ultra, and H.264/H.265.

Tailor your individual workspace

Freely place and size your systems across up to four monitors; view and interact with them in the most efficient way.

Up to 4k/5k video resolutions

Attach up to four screens at once, with DisplayPort™ resolutions supporting up to DCI 4K 4096x2160 @ 60 Hz; one DisplayPort output can support 5120x2880 @ 60Hz.

NOTE: There is a maximum limit of 16,384 pixels across all four monitors in either the horizontal or vertical dimension. Therefore, the maximum “pixel-space” for an individual DESKVUE is 16,384x16,384.

Highly Secure KVM over IP

Fully integrates with Emerald Unified KVM and the Boxilla KVM Manager for device configuration, monitoring, and authentication.

Design follows User Needs

An extremely small footprint and various mounting options provide a welcoming workspace.

AV WALL Functionality

Enjoy the immersive experience of a 2x2 video wall controller with enhanced video wall functionality, easily controlled via APIs for seamless integration and management.



CHAPTER 2: EMD5104-R

2.2 FEATURES

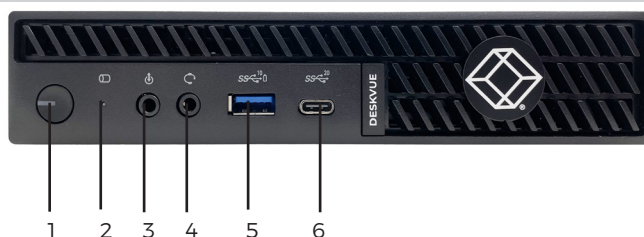
- Future-proof KVM, universal access system — Access both physical and virtual machines including Emerald® transmitters, HTML5, PCoIP, PCoIP Ultra, RDP, and H.264/H.265 targets
- Up to 16 connections over 4 video heads when DESKVUE is both managed and unmanaged by Boxilla®
- Up to 4 UHD screens, optionally 1 can be 5K
- Supports multi-head applications (for example, extended desktop), 4K deployments
- Excellent video up to 4K resolutions (dependent upon transmitter type and configuration)
- AV wall functionality using a 2x2 video wall with one single image scaled across all displays
- Highly scalable through IP networking/low bandwidth
- Built for 24/7 operation with no single point of failure: redundant managers/redundant links with local database in receiver in case manager is offline
- Remote access to KVM systems to allow operation across IP network through software application
- Compatible with Boxilla managers (for management)
- Enhanced Leostream broker support for PCoIP Connections
- Compatible with all Emerald transmitter types, including the 4K transmitter, using our new 4Ko1G scaled or unscaled stream with Emerald 7.0 onward.
- Connects to virtual machines (RDP, XRDP, and PCoIP)
- Connects to H.264/H.265 devices, such as IP cameras
- TAA compliant
- WebLink™ technology: Interact with multiple SCADA and HMI feeds. No jump servers or local installs required.

2.3 WHAT'S INCLUDED

- (1) Emerald DESKVUE multi-source TAA receiver
- (1) 19.5VDC, 9.23A, desktop power supply
- (1) Country-specific power cord

If anything is missing or damaged, contact Black Box Technical Support.

2.4 PRODUCT IMAGES



CHAPTER 2: EMD5104-R

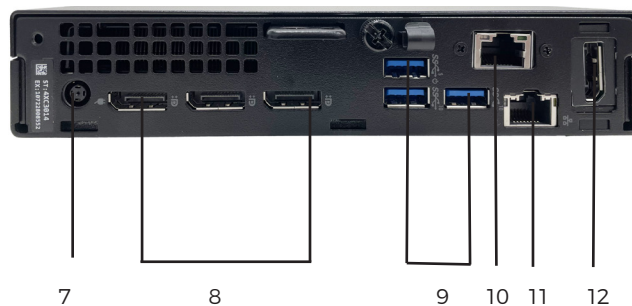



FIGURE 2-2: REAR VIEWVIEW

TABLE 2-1. EMERALD 5104-R COMPONENTS

NUMBER IN FIGURES 2-1 THROUGH 2-2	COMPONENT	DESCRIPTION
1	(1) Power Button	Use to turn the unit on or off.
2	(1) SSD Activity LED	Illuminates to indicate Solid State Drive (SSD) activity
3	(1) 3.5-mm jack (MIC)	Connects to analog microphone
4	(1) 3.5-mm jack (SPK)	Connects to analog speaker
5	(1) USB 3.2 Gen 1x1, Type A Port	Connects to USB peripherals
6	(1) USB-C, USB 3.2 Gen 2x2 Port	Connects to USB peripherals
7	(1) Power Input	Connects to external power supply
8	(3) DisplayPort™ Outputs (4K)	Connects to DisplayPort™ output(s) up to DCI 4K 4096x2160 @ 60 Hz
9	(3) USB 3.2 Gen 2x1, Type A Ports	Connects to USB peripherals
10	(1) ETH0	Connects to secondary network port to provide either failover or additional bandwidth via LACP/LAG
11	(1) ETH1	Connects to Network Interface Card (NIC)
12	(1) DisplayPort Output (5K)	Connects to 5K DisplayPort output (5120x2880 @ 60Hz)

CHAPTER 2: EMD5104-R

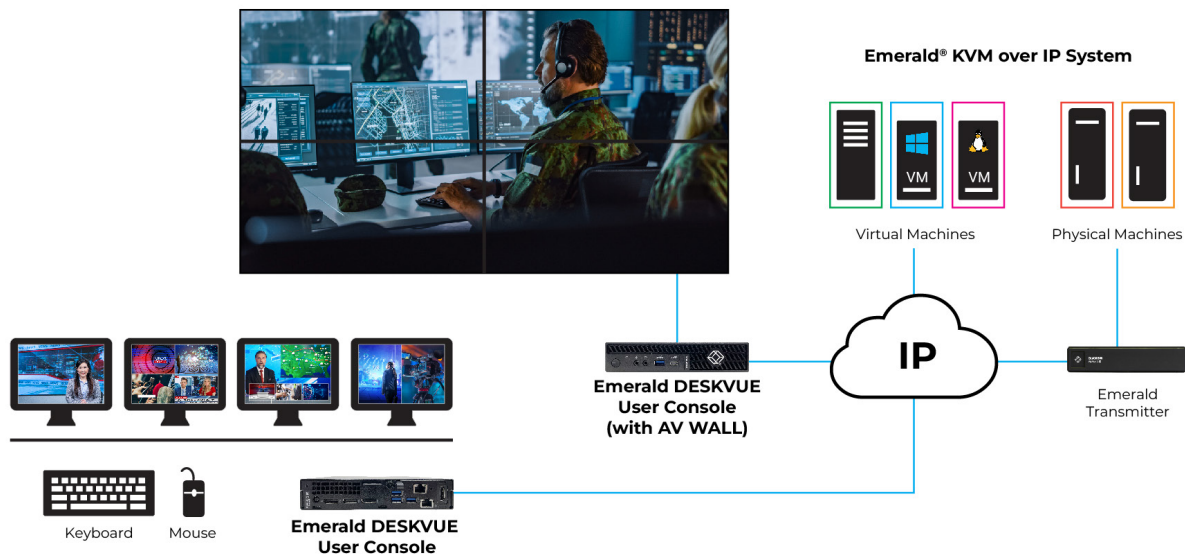2.5 APPLICATION DIAGRAM



2.6 SPECIFICATIONS

TABLE 2-2. PRODUCT SPECIFICATIONS

SPECIFICATION	DESCRIPTION
Dimensions	Unit: 7.17" H x 1.42" W x 7.01" D (182 x 36 x 178 mm)
Weight	2.91 lb. (1.32 kg)
Processor	Intel Core i9 processor 14900 vPro (36 MB cache, 24 cores, 32 threads, up to 5.4 GHz Turbo, 65W)
Memory	16GB DDR5 Memory, 2X8GB, 5600, Non-ECC, SoDIMM
Storage	M.2 2230, 256GB PCIe NVMe SSD Class 35
Connectors	(4) DisplayPort™ outputs: (3) 4K and (1) 5K; (3) USB 3.2 Gen 2x1, Type A (SuperSpeed USB); (1) USB 3.2 Gen 1x1, Type A (SuperSpeed USB); (1) USB-C, USB 3.2 Gen 2x2 (SuperSpeed USB); (1) 3.5mm Analog Audio Output; (1) 3.5mm Analog Microphone Input; (2) RJ-45 1Gbps Network Ports; (1) Power Input
Maximum Distance from Network	328 feet (100 m) using CATx cabling
User Interface	Emerald® On Screen Display (OSD)
Mounting	None
Power	180 Watt AC adapter, 4.5 mm barrel
Input Voltage/Volts	100-240VAC, 50/60Hz
Input Current/Amps	2.34 Amps
Output Voltage/Volts	19.5VDC
Output Current/Amps	9.23 Amp
Power Consumption/Watts	180 Watt maximum
Heat Dissipation/BTU/h	613.8 BTU/h
Temperature Range	Operating: 50 to 95°F (10 to 35°C); Storage: -40 to +149°F (-40 to +65°C)
Relative Humidity (Maximum)	Operating: 20 to 80% (non-condensing); Storage: 5 to 95% (non-condensing)
Vibration (Maximum)	Operating: 0.26 GRMS; Storage: 1.37 GRMS
Shock (Maximum)	Operating: 40 G; Storage: 105 G
Altitude Range	Operating: <5,518 ft. (1,681 m); Storage: <19,234 ft. (5,862 m)
MTBF	125,000 hours at 25°C
Compatibility	Boxilla® managers, Emerald transmitters, HTML5 sources, H.264/H.265, and virtual machines (RDP, XRDP, and PCoIP)



CHAPTER 3: EMD5004PE-R

3.1 INTRODUCTION

KVM users today need to view, monitor, and interact with multiple clients that can reside on various networks with different work information, such as post-production editing, IPTV, live feeds, email, and rendering jobs. The PE (Professional Edition) of DESKVUE is designed for the user actively working on applications on 4K monitors with extremely low latency.

In a completely new concept in KVM over IP, Emerald® DESKVUE enables these users to arrange their individual workspace for optimal simultaneous interaction with up to 16 different systems when managed by Boxilla®, or 32 systems when not managed. It supports connections to physical systems via Emerald transmitters, Virtual Machines using HTML5, RDP, PCoIP, PCoIP ultra, and H.264/H.265.

The Emerald DESKVUE receiver—as part of the Emerald KVM family and Boxilla KVM Manager—uniquely allows users to tailor their own workspace by connecting a single keyboard, mouse, audio, and up to four 4K monitors.

Each system can be positioned across the screens with pre-defined layouts or freely movable tiles. Interacting with each system is as simple as moving the mouse over a tile. In this way, each operator has complete situational awareness and full control within easy reach.

Interact with up to 16 systems simultaneously when managed by Boxilla (32 systems when unmanaged)

Connect to physical systems via Emerald transmitters and Virtual Machines using HTML5, RDP, PCoIP (Ultra), and H.264/H.265.

Tailor your individual workspace

Freely place and size your systems across up to four monitors; view and interact with them in the most efficient way.

Up to 4K/5K video resolutions

Attach up to four screens at once, with DisplayPort™ resolutions supporting up to 5120x2880.

Highly Secure KVM over IP

Fully integrates with Emerald Unified KVM and the Boxilla KVM manager for device configuration, monitoring, and authentication.

Design follows User Needs

Quiet operation, an extremely small footprint, and various mounting options provide a welcoming workspace.



CHAPTER 3: EMD5004PE-R

3.2 FEATURES

- ♦ Future Proof KVM, Universal Access System — Access both physical and virtual machines including Emerald® Transmitters, HTML5, PCoIP, and RDP Targets
- ♦ Up to 16 connections over 4 Video Heads when DESKVUE is managed by Boxilla®, or 32 connections when not managed
- ♦ Up to 4 UHD Screens
- ♦ Option for ‘Dual-Head’ 4K deployments outside Post-Production
- ♦ Up to 4K video (dependent upon transmitter type and configuration)
- ♦ Highly scalable through IP Networking/Low Bandwidth
- ♦ Remote access to KVM systems to allow operation across IP Network through Software Application
- ♦ Compatible with Boxilla Managers (for management)
- ♦ Enhanced Leostream broker support for PCoIP connections
- ♦ Compatible with all Emerald transmitter types, including the 4K transmitter, using our new 4Ko1G scaled or unscaled stream with Emerald 7.0 onward.
- ♦ Connects to Virtual Machines (RDP, XRDP, and PCoIP)
- ♦ Can also be used as a 2x2 video wall product
- ♦ WebLink™ technology: Interact with multiple SCADA and HMI feeds. No jump servers or local installs required.

3.3 WHAT'S INCLUDED

- ♦ (1) Emerald DESKVUE KVM receiver
- ♦ (1) Country-specific power cord

If anything is missing or damaged, contact Black Box Technical Support.

3.4 PRODUCT IMAGES



FIGURE 3-1: FRONT VIEW

CHAPTER 3: EMD5004PE-R

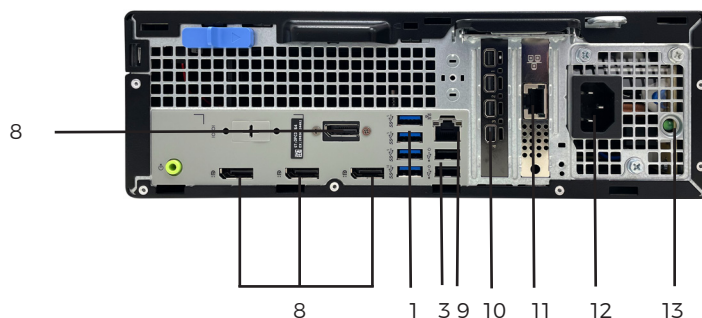



FIGURE 3-2: REAR VIEWVIEW

TABLE 3-1. EMERALD 5104-R COMPONENTS

NUMBER IN FIGURES 3-1 THROUGH 3-2	COMPONENT	DESCRIPTION
1	(5) USB 3.2 Gen 1x1, Type A Port	Connects to USB peripherals
2	(1) USB-C, USB 3.2 Gen 2x2 Port	Connects to USB peripherals
3	(4) USB, Type A	Connects to USB peripherals
4	(1) 3.5-mm jack (SPK)	Connects to analog speaker
5	(1) Micro SD port	Disabled
6	(1) SSD Activity LED	Illuminates to indicate Solid State Drive (SSD) activity
7	(1) Power Button	Use to turn the unit on or off.
8	DisplayPort™ Outputs	Disabled
9	(1) ETH0	Connects to secondary network port to provide either failover or additional bandwidth via LACP/LAG
10	(4) Mini DP Connectors	Connects to DisplayPort™ output(s) up to DCI 4K 4096x2160 @ 60 Hz; Connects to 5K DisplayPort output (5120x2880 @ 60Hz)
11	(1) ETH1	Connects to Network Interface Card (NIC)
12	(1) IEC320 C14	Connects to external power supply
13	(1) Power Status LED	LED is illuminated when power is applied to the input

CHAPTER 3: EMD5004PE-R

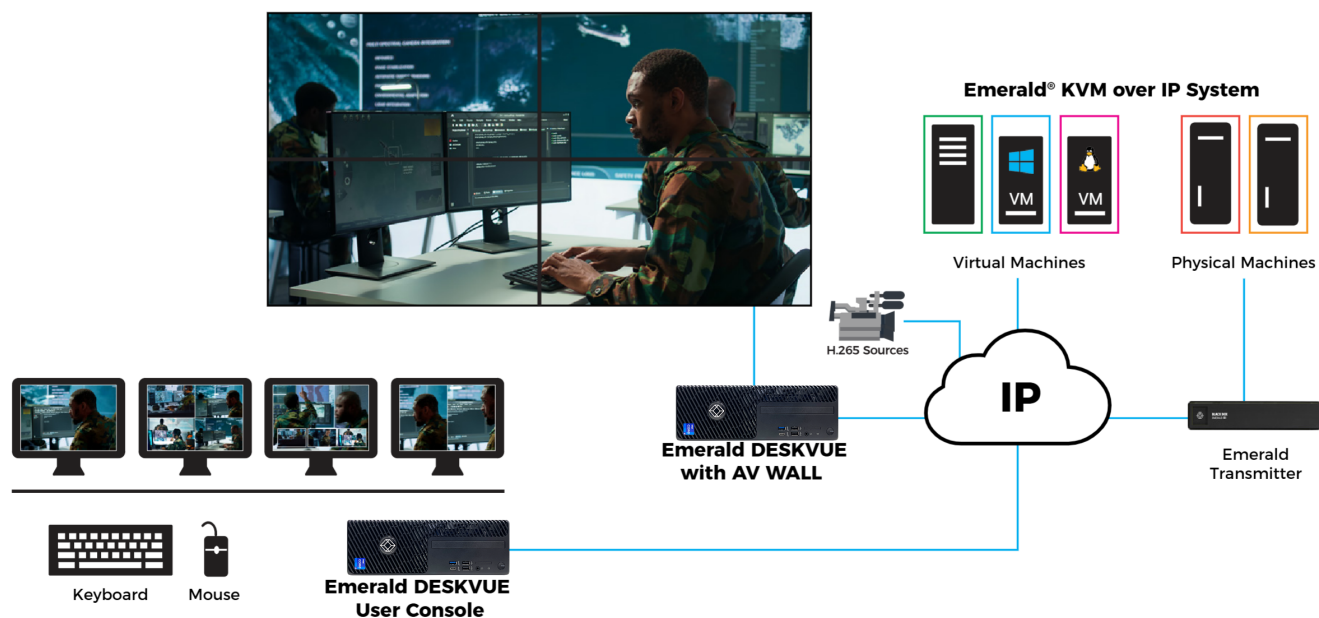3.5 APPLICATION DIAGRAM



CHAPTER 3: EMD5004PE-R

3.6 SPECIFICATIONS

TABLE 3-2. PRODUCT SPECIFICATIONS

SPECIFICATION	DESCRIPTION
Dimensions	Unit: 11.42" H x 3.65" W x 11.53" D (290 x 92.6 x 292.8 mm)
Weight	8.52 lb. (3.87 kg)
Connectors	(4) Mini DP connectors (mini DP to DP adapters included); (4) Female DP connectors (not active); (1) 3.5 mm Audio; (9) USB Type A Female; (1) Micro SD port (disabled); (1) 1G RJ-45 Network Connection; (1) 2.5G RJ-45 Network Connection; (1) USB-C port; (1) IEC320 C14 for power
Maximum Distance from Network	328 feet (100 m), all IP rules apply
User Interface	Emerald® On Screen Display (OSD)
Power	Internal Power Supply;
Input Voltage/Volts	100-240VAC, 50/60Hz
Power Consumption/Watts	300 Watts maximum
BTU	1,023 BTU/h maximum
Power Supply Cord Length	4.5 feet (1.37 m)
Temperature Range	Operating: 32 to 104°F (0 to 40°C) Storage: -22 to +176°F (-30 to +80°C)
Relative Humidity (Maximum)	Operating: 10 to 90% (non-condensing);
Maximum Altitude/Feet	<6,561 feet (2,000 m)
Compatibility	Boxilla® managers, Emerald transmitters, HTML5 sources, H.264/H.265 and virtual machines (RDP, XRDP, and PCoIP)



CHAPTER 4: EMD5004SE-R

4.1 INTRODUCTION

KVM users today need to view, monitor, and interact with multiple computer targets and video streams that can reside on various networks, such as post-production editing, IPTV, live feeds, Command and Control, and rendering jobs.

In a completely new concept in KVM over IP, Emerald® DESKVUE enables these users to arrange their individual workspace for optimal simultaneous interaction with up to 8 different systems when both managed and unmanaged by Boxilla®. It supports connections to physical systems via Emerald transmitters and virtual machines using RDP.

The Emerald DESKVUE SE Multi-Source Receiver—as part of the Emerald KVM family and Boxilla KVM Manager—uniquely allows users to tailor their own workspace by connecting a single keyboard, mouse, USB 3/2 devices, audio, and up to four 4K monitors. Each system can be positioned across the screens with pre-defined layouts or freely movable windows. Interacting with each system is as simple as moving the mouse over a window. In this way, each operator has complete situational awareness and full control within easy reach.

Interact with up to 8 systems simultaneously

Connect to physical systems via Emerald transmitters and virtual machines using HTML5 and RDP.

Tailor your individual workspace

Freely place and size your systems across up to two monitors; view and interact with them in the most efficient way.

Up to 4k/5k video resolutions

Attach up to two screens at once, both with supported DisplayPort™ resolutions up to 5120x2880 @ 60Hz.

Highly Secure KVM over IP

Fully integrates with Emerald Unified KVM and the Boxilla KVM Manager for device configuration, monitoring, and authentication.

Design follows User Needs

A small footprint and various mounting options provide a welcoming workspace.



CHAPTER 4: EMD5004SE-R

4.2 FEATURES

- ◆ Future-proof KVM, universal access system — Access both physical and virtual machines, including Emerald® transmitters, HTML5, and RDP
- ◆ Up to 8 connections over 2 video heads when DESKVUE is both managed and unmanaged by Boxilla®
- ◆ Up to 2 UHD screens; both can be 5K
- ◆ Supports multi-head applications (for example, extended desktop), 4K deployments
- ◆ Excellent video up to 4K resolutions (dependent upon transmitter type and configuration)
- ◆ Highly scalable through IP networking/low bandwidth
- ◆ Built for 24/7 operation with no single point of failure: redundant managers/redundant links with local database in receiver in case manager is offline
- ◆ Remote access to KVM systems to allow operation across IP network through software application
- ◆ Compatible with Boxilla managers (for management)
- ◆ Compatible with all Emerald transmitter types, including the 4K transmitter, using our new 4Ko1G scaled or unscaled stream with Emerald 7.0 onward
- ◆ Connects to virtual machines (RDP)
- ◆ TAA compliant
- ◆ WebLink™ technology: Interact with multiple SCADA and HMI feeds. No jump servers or local installs required.

4.3 WHAT'S INCLUDED

- ◆ (1) Emerald DESKVUE multi-source TAA receiver
- ◆ (1) 19.5VDC, 9.23A, desktop power supply
- ◆ (1) Country-specific power cord

If anything is missing or damaged, contact Black Box Technical Support.

4.4 PRODUCT IMAGES



FIGURE 4-1: FRONT VIEW

CHAPTER 4: EMD5004SE-R

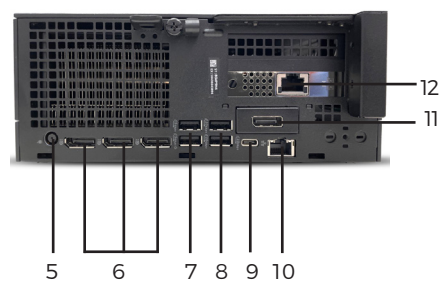



FIGURE 4-2: REAR VIEWVIEW

TABLE 4-1. EMERALD 5004SE-R COMPONENTS

NUMBER IN FIGURES 4-1 THROUGH 4-2	COMPONENT	DESCRIPTION
1	(1) Power button	Use to turn the unit on or off.
2	(1) 3.5-mm jack (SPK)	Connects to analog speaker
3	(2) USB 10Gbps type A ports	Connects to USB peripherals
4	(1) USB-C 20Gbps port	Connects to USB peripherals
5	(1) Power input	Connects to external power supply
6	(3) DisplayPort™ Outputs (4K)	Connects to DisplayPort™ output(s) up to DCI 4K 4096x2160 @ 60 Hz
7	(2) USB 5Gbps type A ports	Connects to USB peripherals
8	(2) USB 10Gbps type A ports	Connects to USB peripherals
9	(1) USB 10Gbps type C port	Connects to USB peripherals
10	(1) ETH1	Connects to RJ-45 1G or 2.5G Network Interface Card (NIC)
11	(1) DisplayPort Output (5K)	Connects to 5K DisplayPort output (5120x2880 @ 60Hz)
12	(1) ETH0	Connects to RJ-45 1G or 2.5G (NIC); Provides failover or additional bandwidth via LACP/LAG

CHAPTER 4: EMD5004SE-R

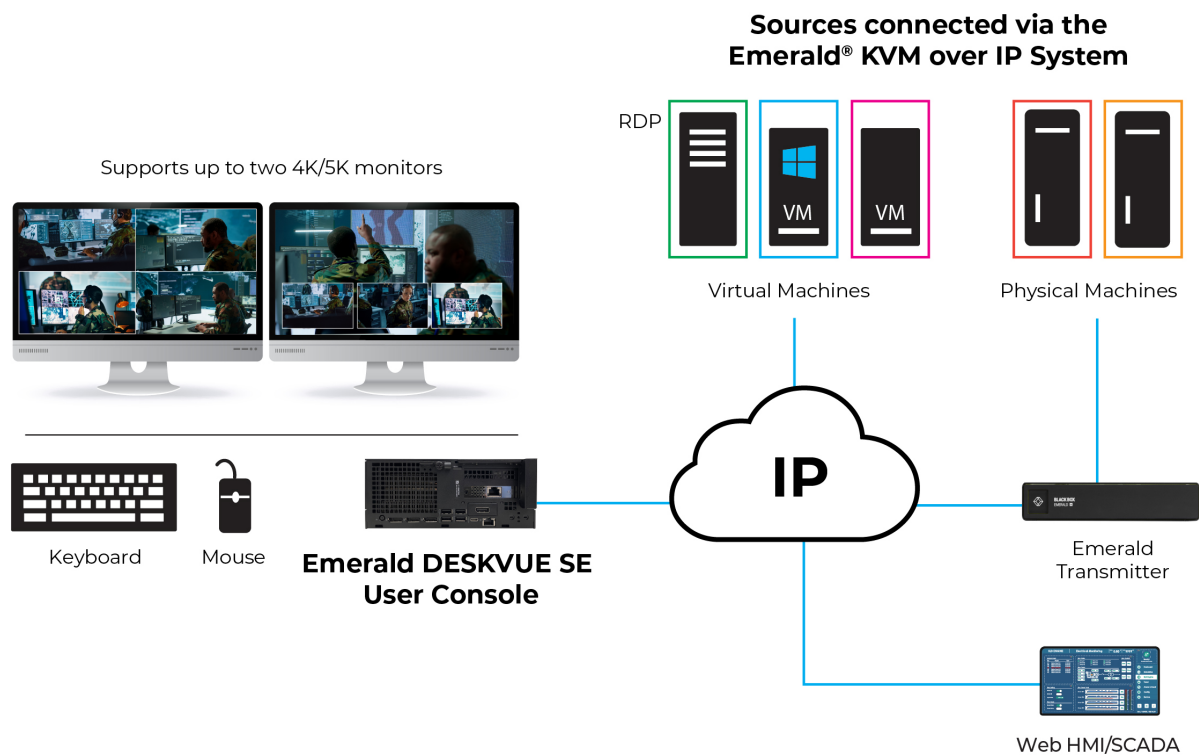4.5 APPLICATION DIAGRAM



4.6 SPECIFICATIONS

TABLE 4-2. PRODUCT SPECIFICATIONS

SPECIFICATION	DESCRIPTION
Black Box Product SKU	EMD5004SE-R
Black Box Product Name	Emerald® DESKVUE SE Multi-Source Receiver - Dual-Monitor, CATx
Product Type	Emerald DESKVUE
Dimensions (HxWxD)	8.11" x 3.12" x 7" (206 x 79.3 x 178 mm)
Weight	5.15 lb. (2.34 kg)
Processor	Intel Core i9 processor
Memory	16GB DDR5 Memory, (2) 8GB, 5600, Non-ECC, SoDIMM
Storage	M.2 2230, 256GB PCIe NVMe SSD Class 35

CHAPTER 4: EMD5004SE-R

TABLE 4-2. PRODUCT SPECIFICATIONS (CONTINUED)

SPECIFICATION	DESCRIPTION
Connectors	(4) DisplayPort™ 1.4a outputs (2 in use); (3) USB 3.2 Gen 2x1, Type A (SuperSpeed USB); (1) USB 3.2 Gen 1x1, Type A (SuperSpeed USB); (1) USB-C, USB 3.2 Gen 2x2 (SuperSpeed USB); (1) 3.5mm Analog Audio Output; (2) RJ-45 2.5Gbps Network Ports; (1) 4.5mm Power Input
Compatibility	Boxilla® managers, Emerald transmitters, HTML5 sources and virtual machines (RDP)
Density	Access to infinite number of systems and control and view up to 8 simultaneously
Mounting	Can be rack mounted with EMD5000-RMK2-SLIM
MTBF	125,000 hours at 25°C
Maximum Distance from Network	328 ft. (100 m) using CATx cabling
User Interface	Emerald® On Screen Display (OSD)
Power Source	External DC PSU adapter
Power	180 Watt AC adapter, 4.5 mm barrel
Input Voltage/Volts	100-240VAC, 50/60Hz
Input Current/Amps	2.34 Amps
Output Voltage/Volts	19.5VDC
Output Current/Amps	9.23 Amps
Power Consumption	180 Watts maximum
BTU (British Thermal Units)	614 BTU/h
Operating Temperature	50 to 95°F (10 to 35°C);
Storage Temperature	-40 to +149°F (-40 to +65°C)
Humidity Operating	10 to 90% (non-condensing)
Humidity Storage	0 to 95% (non-condensing)
Vibration (Maximum)	Operating: 0.66 GRMS; Storage: 1.3 GRMS
Shock (Maximum)	Operating: 110 G; Storage: 160 G
Altitude Range	Operating: -49.87 ft. to 10,000 ft. (-15.2 m to 3,048 m); Storage: ~-50 ft. to 35,000 ft. (-15.2 m to 10,668 m)
Approvals/Certifications	FCC, CE, RoHS, UL
Country of Origin	Poland
Standard Warranty	2-year standard warranty
Warranty Options	Extension by 1 or 3 years available



CHAPTER 5: EMD5004PE-R-R2

5.1 INTRODUCTION

KVM users today need to view, monitor, and interact with multiple clients that can reside on various networks with different work information, such as post-production editing, IPTV, live feeds, email, and rendering jobs. The PE (Professional Edition) of DESKVUE is designed for the user actively working on applications on 4K monitors with extremely low latency.

In a completely new concept in KVM over IP, Emerald® DESKVUE enables these users to arrange their individual workspace for optimal simultaneous interaction with up to 16 different systems when managed by Boxilla®, or 32 systems when not managed. It supports connections to physical systems via Emerald transmitters, Virtual Machines using HTML5, RDP, PCoIP, PCoIP ultra, and H.264/H.265.

The Emerald DESKVUE PE Multi-Source Receiver—as part of the Emerald KVM family and Boxilla KVM Manager—uniquely allows users to tailor their own workspace by connecting a single keyboard, mouse, audio, and up to four 4K monitors.

Each system can be positioned across the screens with pre-defined layouts or freely movable tiles. Interacting with each system is as simple as moving the mouse over a tile. In this way, each operator has complete situational awareness and full control within easy reach.

Interact with up to 16 systems simultaneously

Connect to physical systems via Emerald transmitters and Virtual Machines using HTML5, RDP, PCOIP (Ultra), and H.264/H.265.

Tailor your individual workspace

Freely place and size your systems across up to four monitors; view and interact with them in the most efficient way.

Up to 4K/5K video resolutions

Attach up to four screens at once, with DisplayPort™ resolutions supporting up to 5120x2880.

Highly Secure KVM over IP

Fully integrates with Emerald Unified KVM and the Boxilla KVM manager for device configuration, monitoring, and authentication.

Design follows User Needs

Quiet operation, an extremely small footprint, and various mounting options provide a welcoming workspace.



CHAPTER 5: EMD5004PE-R-R2

5.2 FEATURES

- ♦ Future Proof KVM, Universal Access System — Access both physical and virtual machines, including Emerald® Transmitters, HTML5, PCoIP, and RDP Targets
- ♦ Up to 16 connections over 4 Video Heads when DESKVUE is managed by Boxilla®, or 32 connections when not managed
- ♦ Up to 4 UHD Screens
- ♦ Option for “Dual-Head” 4K deployments outside Post-Production
- ♦ Up to 4K video (dependent upon transmitter type and configuration)
- ♦ Highly scalable through IP Networking/Low Bandwidth
- ♦ Remote access to KVM systems to allow operation across IP Network through Software Application
- ♦ Compatible with Boxilla Managers (for management)
- ♦ Enhanced Leostream broker support for PCoIP connections
- ♦ Compatible with all Emerald transmitter types, including the 4K transmitter, using our new 4Ko1G scaled or unscaled stream with Emerald 7.0 onward.
- ♦ Connects to Virtual Machines (RDP, XRDP, and PCoIP)
- ♦ Can also be used as a 2x2 video wall product
- ♦ WebLink™ technology: Interact with multiple SCADA and HMI feeds. No jump servers or local installs required.

5.3 WHAT'S INCLUDED

- ♦ (1) Emerald DESKVUE PE multi-source receiver
- ♦ (1) Power supply
- ♦ (1) Country-specific power cord
- ♦ (1) 4 mini DP to DP adapter

If anything is missing or damaged, contact Black Box Technical Support.

5.4 PRODUCT IMAGES



FIGURE 5-1: FRONT VIEW

CHAPTER 5: EMD5004PE-R-R2

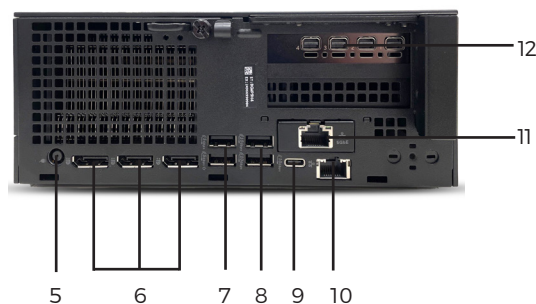



FIGURE 5-2: REAR VIEWVIEW

TABLE 5-1. EMERALD EMD5004PE-R-R2 COMPONENTS

NUMBER IN FIGURES 5-1 THROUGH 5-2	COMPONENT	DESCRIPTION
1	(1) Power button	Use to turn the unit on or off.
2	(1) 3.5-mm jack (SPK)	Connects to analog speaker
3	(2) USB 10Gbps type A ports	Connects to USB peripherals
4	(1) USB-C 20Gbps port	Connects to USB peripherals
5	(1) IEC320 C14 Power input	Connects to external power supply
6	DisplayPort™ Outputs	Disabled
7	(2) USB 5Gbps type A ports	Connects to USB peripherals
8	(2) USB 10GBPS type A ports	Connects to USB peripherals
9	(1) USB-C 10Gbps port	Connects to USB peripherals
10	(1) ETH1	Connects to Network Interface Card (NIC)
11	(1) ETH0	Connects to secondary network port to provide either failover or additional bandwidth via LACP/LAG (5GbE)
12	(4) Mini DP Connectors	Connects to DisplayPort™ output(s) up to DCI 4K 4096x2160 @ 60 Hz; Connects to 5K DisplayPort output (5120x2880 @ 60Hz)

CHAPTER 5: EMD5004PE-R-R2

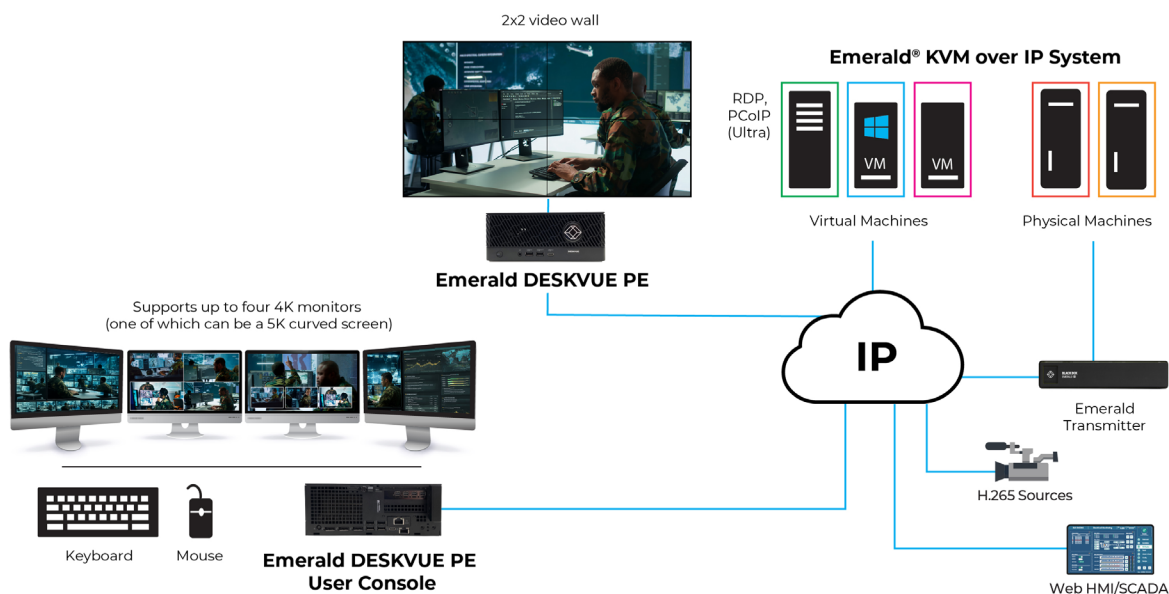5.5 APPLICATION DIAGRAM



5.6 SPECIFICATIONS

TABLE 5-2. PRODUCT SPECIFICATIONS

SPECIFICATION	DESCRIPTION
Black Box Product SKU	EMD5004PE-R-R2
Black Box Product Name	Emerald® DESKVUE PE Multi-Source Receiver - Quad-Monitor, CATx
Product Type	Emerald DESKVUE
Dimensions (HxWxD)	8.11" x 3.12" x 7" (206 x 79.3 x 178 mm)
Weight	5.46 lb. (2.48 kg)
Processor	Intel Core i9 processor
Memory	16GB DDR5 Memory, (2) 8GB, 5600, Non-ECC, SoDIMM
Storage	M.2 2230, 256GB PCIe NVMe SSD Class 35

CHAPTER 5: EMD5004PE-R-R2

TABLE 5-2. PRODUCT SPECIFICATIONS (CONTINUED)

SPECIFICATION	DESCRIPTION
Connectors	(4) Mini DP connectors (1x4 mini DP to DP adapter included); (4) Female DP 1.4a connectors (not active); (1) 3.5 mm Audio; (9) USB Type A Female; (1) Micro SD port (disabled); (2) 1G/2.5G RJ-45 Network Connection; (1) USB-C port; (1) Power Connector: 4.5mm DC External PSU
Density	Access to infinite number of systems and control and view up to 16 simultaneously
Compatibility	Boxilla® managers, Emerald transmitters, HTML5 sources, H.264/H.265 and virtual machines (RDP, XRDP, and PCoIP) .
Mounting	Can be rack mounted with EMD5000-RMK2-SLIM
Maximum Distance from Network	328 feet (100 m), all IP rules apply.
User Interface	Emerald® On Screen Display (OSD)
Power Source	External DC PSU adapter
Power	180 Watt AC adapter, 4.5 mm barrel.
Input Voltage/Volts	19.5 VDC
Input Current/Amps	9.23 Amps
Power Consumption	180 Watts maximum
BTU (British Thermal Units)	614 BTU/h maximum
Power Supply Cord Length	4.5 ft. (1.37 m)
Operating Temperature	32 to 104°F (0 to 40°C)
Storage Temperature	-22 to +176°F (-30 to +80°C)
Humidity Operating	10 to 90% (non-condensing);
Humidity Storage	0 to 95% (non-condensing)
Maximum Altitude/Feet	<6,561 ft. (2,000 m)
Approvals/Certifications	FCC, CE, RoHS, UL
Country of Origin	Poland
Standard Warranty	2 Year standard warranty
Warranty Options	Extension by 1 or 3 years available



CHAPTER 6: EMD5004FPE-R

6.1 INTRODUCTION

KVM users today need to view, monitor, and interact with multiple clients that can reside on various networks with different work information, such as post-production editing, IPTV, live feeds, email, and rendering jobs. The DESKVUE PE+ also incorporates fiber connectivity and is designed for the user actively working on applications on 4K monitors with extremely low latency.

In a completely new concept in KVM over IP, Emerald® DESKVUE enables these users to arrange their individual workspace for optimal simultaneous interaction with up to 16 different systems when managed by Boxilla®, or 32 systems when not managed. It supports connections to physical systems via Emerald transmitters, Virtual Machines using HTML5, RDP, PCoIP, PCoIP ultra, and H.264/H.265.

The Emerald DESKVUE PE Multi-Source Receiver—as part of the Emerald KVM family and Boxilla KVM Manager—uniquely allows users to tailor their own workspace by connecting a single keyboard, mouse, audio, and up to four 4K monitors.

Each system can be positioned across the screens with pre-defined layouts or freely movable tiles. Interacting with each system is as simple as moving the mouse over a tile. In this way, each operator has complete situational awareness and full control within easy reach.

Interact with up to 16 systems simultaneously

Connect to physical systems via Emerald transmitters and Virtual Machines using HTML5, RDP, PCOIP (Ultra), and H.264/H.265.

Tailor your individual workspace

Freely place and size your systems across up to four monitors; view and interact with them in the most efficient way.

Up to 4K/5K video resolutions

Attach up to four screens at once, with DisplayPort™ resolutions supporting up to 5120x2880.

Highly Secure KVM over IP

Fully integrates with Emerald Unified KVM and the Boxilla KVM manager for device configuration, monitoring, and authentication.

Design follows User Needs

Quiet operation, an extremely small footprint, and various mounting options provide a welcoming workspace.



CHAPTER 6: EMD5004FPE-R

6.2 FEATURES

- ♦ Future Proof KVM, Universal Access System — Access both physical and virtual machines including Emerald® Transmitters, HTML5, PCoIP, and RDP Targets
- ♦ Up to 16 connections over 4 Video Heads when DESKVUE is managed by Boxilla®, or 32 connections when not managed
- ♦ Up to 4 UHD Screens
- ♦ Option for “Dual-Head” 4K deployments outside Post-Production
- ♦ Up to 4K video (dependent upon transmitter type and configuration)
- ♦ Highly scalable through IP Networking/Low Bandwidth
- ♦ Remote access to KVM systems to allow operation across IP Network through Software Application
- ♦ Compatible with Boxilla Managers (for management)
- ♦ Enhanced Leostream broker support for PCoIP connections
- ♦ Compatible with all Emerald transmitter types, including the 4K transmitter, using our new 4Ko1G scaled or unscaled stream with Emerald 7.0 onward.
- ♦ Connects to Virtual Machines (RDP, XRDP, and PCoIP)
- ♦ Can also be used as a 2x2 video wall product
- ♦ WebLink™ technology: Interact with multiple SCADA and HMI feeds. No jump servers or local installs required.
- ♦ Secure, fiber connectivity (no EMI/RFI emissions)

6.3 WHAT'S INCLUDED

- ♦ (1) Emerald DESKVUE KVM receiver
- ♦ (1) Country-specific power cord
- ♦ (1) 4 mini DP to DP adapter

If anything is missing or damaged, contact Black Box Technical Support.

6.4 PRODUCT IMAGES



FIGURE 6-1: FRONT VIEW

CHAPTER 6: EMD5004FPE-R

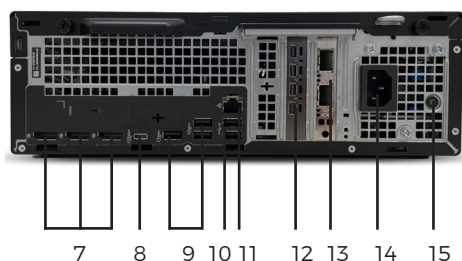



FIGURE 6-2: REAR VIEWVIEW

TABLE 5-1. EMERALD 5004FPE-R COMPONENTS

NUMBER IN FIGURES 5-1 THROUGH 5-2	COMPONENT	DESCRIPTION
1	(1) USB 10Gbps type A port	Connects to USB peripherals
2	(1) USB-C 20Gbps port	not in use
3	(2) USB type A ports	Connects to USB peripherals
4	(1) 3.5-mm jack (SPK)	Connects to analog speaker
5	Memory card slot	not in use
6	(1) Power button	Use to turn the unit on or off.
7	DisplayPort™ Outputs	Disabled
8	(1) USB-C 10Gbps port	not in use
9	(3) USB 5Gbps type A ports	Connects to USB peripherals
10	(2) USB type A ports	Connects to USB peripherals
11	(1) ETH0	Connects to Network Interface Card (NIC)
12	(4) Mini DP Connectors	Connects to DisplayPort™ output(s) up to DCI 4K 4096x2160 @ 60 Hz; Connects to 5K DisplayPort output (5120x2880 @ 60Hz)
13	(2) SFP+ Cages	1G/10G network interfaces NOTE: Use only with SFP EMD-LSP-5000 (multimode) or EMD-LSP-5001 (singlemode).
14	(1) IEC320 C14 Power input	Connects to external power supply
15	(1) Power Status LED	LED is illuminated when power is applied to the input

CHAPTER 6: EMD5004FPE-R

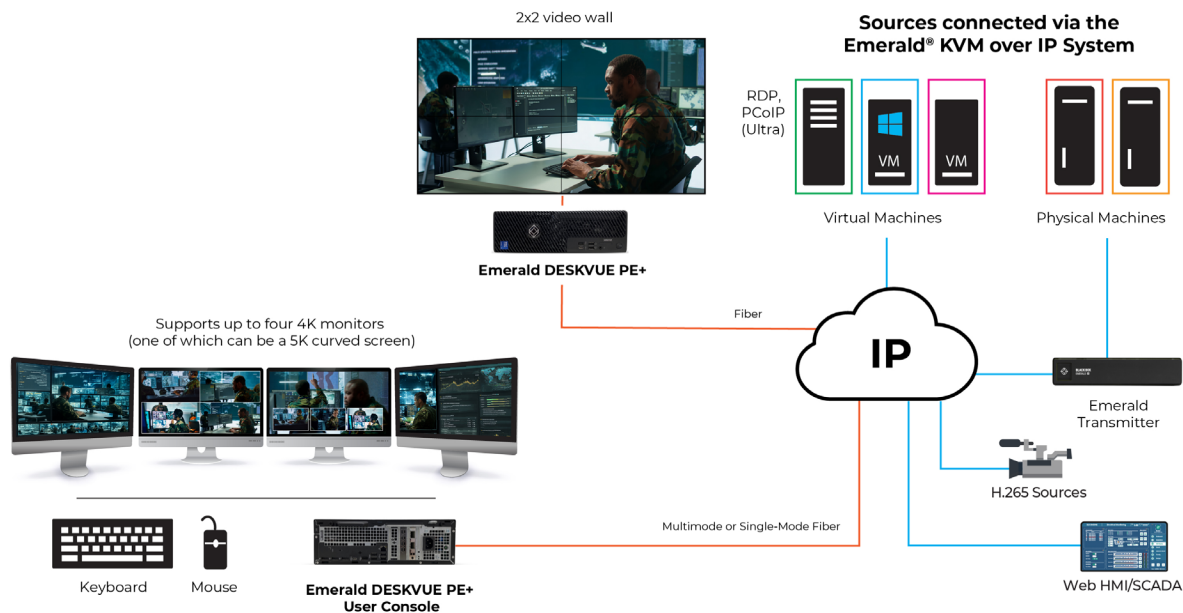6.5 APPLICATION DIAGRAM



6.6 SPECIFICATIONS

TABLE 6-2. PRODUCT SPECIFICATIONS

SPECIFICATION	DESCRIPTION
Black Box Product SKU	EMD5004FPE-R
Black Box Product Name	Emerald® DESKVUE PE Multi-Source Receiver - Quad-Monitor, Fiber
Product Type	Emerald DESKVUE
Dimensions (HxWxD)	11.42" x 3.65" x 11.53" (290 x 92.6 x 292.8 mm)
Weight	8.52 lb. (3.87 kg)
Processor	Intel Core i9 processor
Memory	16GB DDR5 Memory, (2) 8GB, 5600, Non-ECC, SoDIMM
Storage	M.2 2230, 256GB PCIe NVMe SSD Class 35

CHAPTER 6: EMD5004FPE-R

TABLE 6-2. PRODUCT SPECIFICATIONS (CONTINUED)

SPECIFICATION	DESCRIPTION
Connectors	(4) Mini DP connectors (1x4 mini DP to DP adapter included); (4) Female DP 1.4a connectors (not active); (1) 3.5 mm Audio; (9) USB Type A Female; (1) Micro SD port (disabled); (2) SFP+ Cages (SFPs not included); (1) USB-C port; (1) IEC320 C14 for power
Density	Access to infinite number of systems and control and view up to 16 simultaneously
Compatibility	Boxilla® managers, Emerald transmitters, HTML5 sources, H.264/H.265 and virtual machines (RDP, XRDP, and PCoIP) NOTE: ♦ Use only with SFP transceiver; ♦ Use only with SFP EMD-LSP-5000 (multimode) or EMD-LSP-5001 (singlemode)
Mounting	Desktop device
Maximum Distance from Network	328 ft. (100 m), all IP rules apply
User Interface	Emerald® On Screen Display (OSD)
Power Source	Internal PSU with C13 connector
Power	IC13 mains connector
Input Voltage/Volts	100-240VAC, 50/60Hz
Output Current/Amps	9.23 Amps
Power Consumption	300 Watts maximum
BTU (British Thermal Units)	1,230 BTU/h maximum
Power Supply Cord Length	4.5 ft. (1.37 m)
Operating Temperature	32 to 104°F (0 to 40°C)
Storage Temperature	-22 to +176°F (-30 to +80°C)
Humidity Operating	10 to 90% (non-condensing)
Humidity Storage	0 to 95% (non-condensing)
Maximum Altitude/Feet	<6,561 feet (2,000 m)
Approvals/Certifications	FCC, CE, RoHS, UL
Country of Origin	Poland
Standard Warranty	2 Year standard warranty
Warranty Options	Extension by 1 or 3 years available



CHAPTER 6: EMD5004FPE-R

This page intentionally left blank.



CHAPTER 7: APPLICATION

7.1 LOGIN SCREEN

Upon startup, you will be prompted to log in if the unit is not configured for Auto Login, as shown in Figure 7-1. below:

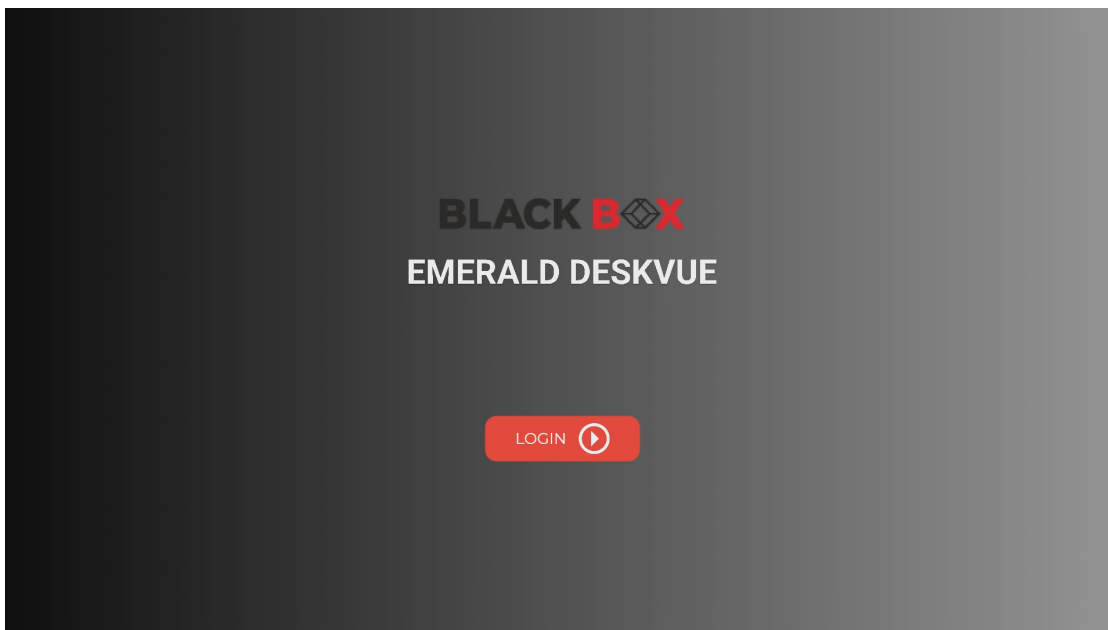



FIGURE 7-1: LOGIN SCREEN

To log into DESKVUE, click on the “Login” button, as shown in Figure 7-1 above.



CHAPTER 7: APPLICATION

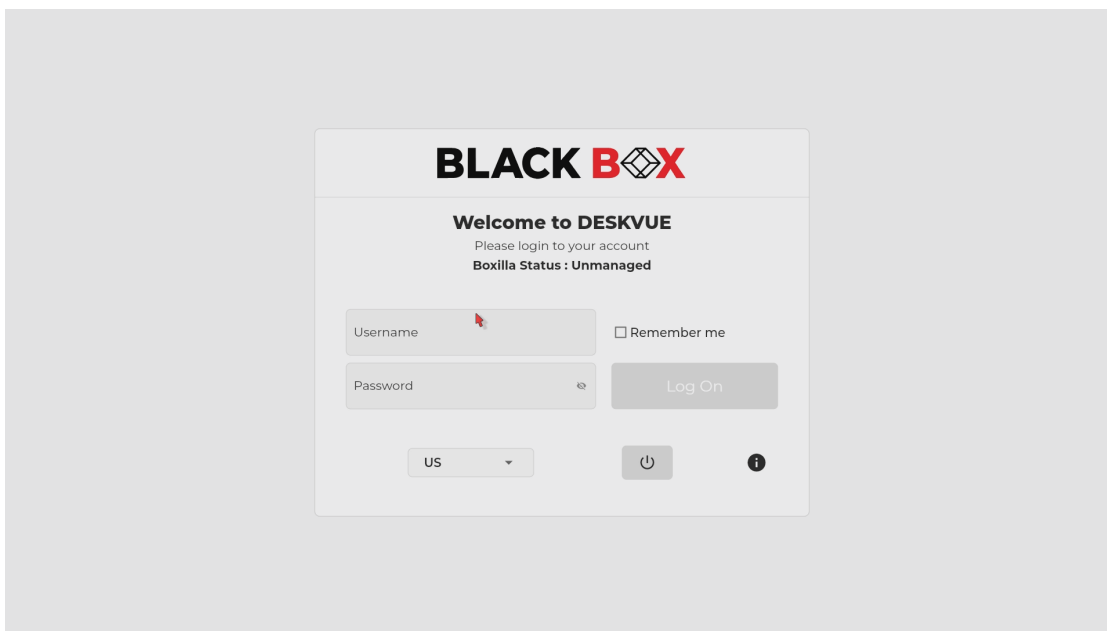After you click on the “Login” button, the system displays the Username and Password screen, as shown in Figure 7-2 below:




The screenshot shows a login interface for 'BLACK BOX DESKVIEW'. At the top, the logo 'BLACK BOX' is displayed in bold black and red text. Below it, the text 'Welcome to DESKVIEW' is shown, followed by 'Please login to your account' and 'Boxilla Status : Unmanaged'. The login form consists of two input fields: 'Username' and 'Password'. To the right of the 'Username' field is a checkbox labeled 'Remember me'. Below the 'Password' field is a 'Log On' button. At the bottom left, there is a language dropdown menu currently set to 'US'. To the right of the dropdown are two icons: a power button and an information icon.

FIGURE 7-2: USERNAME AND PASSWORD SCREEN

CHAPTER 7: APPLICATION

Table 7-1 explains the options on the Username and Password screen.

TABLE 7-1. USERNAME AND PASSWORD SCREEN

FIELD/ITEM	DESCRIPTION
Username	Enter the username. The default username is "admin" (without the quotes). You can change the username, which is a unique name that uses 1–32 characters. The username can be any valid username for a Microsoft® operating system. This means the username cannot contain " / \ [] ; = + * ? < > `
Password	Enter the password. The password is blank (no password) unless changed or managed by Boxilla®. You can view the password that you entered by clicking on the View symbol that is located to the right of the password entry area, as shown in Figure 7-3 below:  FIGURE 7-3: VIEW ICON The password can contain a minimum of 0 characters (blank) and a maximum of 32 characters. It can be any valid password for a Microsoft operating system. The user password MAY contain the following special characters , ~ : ! @ # \$ % ^ & ' { } which means the password cannot contain " / \ [] ; = , + * ? < > `
Remember me checkbox	Click in the check box if you want the system to remember the last username that you entered. A check mark will appear in the checkbox to indicate that the credentials will be remembered. If you don't want the system to remember the last username and password that you entered, leave the check box empty. If a check mark appears in the box, click on the check box again to remove it.
Keyboard type drop-down list box	Click on the drop-down menu symbol in the keyboard selection box and then select the appropriate keyboard type. The drop-down menu displays available options, as shown in Figure 7-4 below:  FIGURE 7-4: KEYBOARD SELECTION BOX
Log On button	After you enter the username and password, and (optionally) click in the "Remember me" check box, click on the "Login" button to log into the system.
Power button	Click on this button to turn off the system.

CHAPTER 7: APPLICATION

TABLE 7-1. USERNAME AND PASSWORD SCREEN (CONTINUED)


FIELD/ITEM	DESCRIPTION
Information button	This button displays the firmware version, IP Address, Managed state, and the date/time in a pop-up window, as shown in Figure 7-5 below:  The screenshot shows a pop-up window with the following text: Software Version : V1.4.1_r375, IP Address : 192.168.1.21, Manager IP : Deskvue is currently not managed, and Date & Time : 27/02/2025 22:17:32.

FIGURE 7-5: INFORMATION BUTTON, INCLUDING RESULTS

7.2 ON SCREEN DISPLAY (OSD)

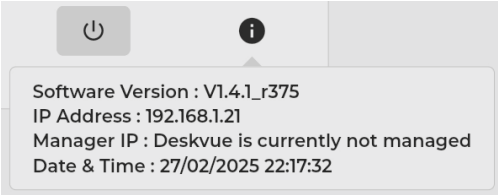NOTE: The screenshots and settings shown throughout this manual reference the administrative pages when logged in as an admin user type. If you are logged in as a power user or user, certain pages and options will not be available, since they are only available within the administrator account. If you do not see all of the pages and options this user manual describes, verify that you are logged into an administrator account. When DESKVUE is managed, some pages will be displayed differently since certain options are being managed by Boxilla®.

After you log in, the system displays the OSD (On Screen Display), as shown in Figure 7-6 below:

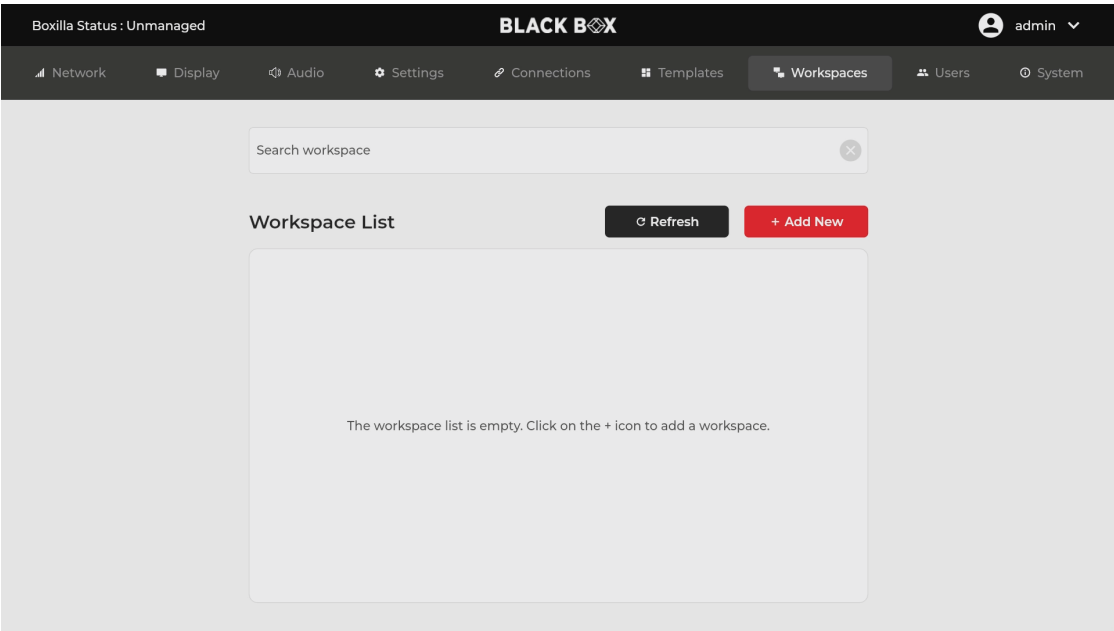


FIGURE 7-6: ON SCREEN DISPLAY

CHAPTER 7: APPLICATION

Table 7-2 explains the information and options on the OSD screen.

TABLE 7-2. OSD

ITEM	DESCRIPTION
	In the top left corner of the screen, the system will display “Unmanaged” when the device is not managed by a Boxilla® unit. It will display “Managed” when the device is managed by a Boxilla unit. For security reasons, an unmanaged DESKVUE receiver cannot establish connections to managed Emerald transmitters. An unmanaged unit, as indicated in Figure 7-7 below, can only connect to unmanaged transmitters and both RDP and PColP virtual machines, along with H.264 streams. When the Boxilla Operation Mode is “Managed,” you can hover your mouse over the “Boxilla Operation Mode” text to see the device’s IP address, which is shown in Figure 7-8 below:

Boxilla Operation Mode




FIGURE 7-7: BOXILLA OPERATION MODE SHOWN AS UNMANAGED

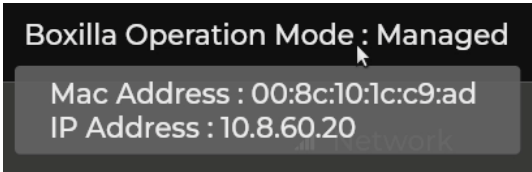


FIGURE 7-8: BOXILLA OPERATION MODE WITH IP ADDRESS

NOTE: To connect to managed transmitters that are part of a KVM domain, your device must be managed by the same Boxilla that manages the other parts of the KVM domain.

User

In the top right corner of the screen, the system will show the user that is logged into the DESKVUE unit. It will also show that user’s access level.

The “admin” user can also log out, shut down, or restart the system by clicking on the drop-down menu symbol to the right of “admin” and then clicking on the corresponding option from the drop-down menu. The options are shown in Figure 7-9 below:

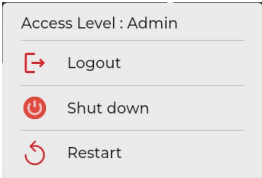


FIGURE 7-9: ADDITIONAL ADMIN OPTIONS

TABLE 7-2. OSD (CONTINUED)

ITEM	DESCRIPTION
Tabs	Network: This tab allows you to enter network settings.
	Display: This tab shows you what monitors are connected to the device. The monitors can be checked to find the display's manufacturer. There are also options to set output to landscape or portrait modes, as well as both resolution and refresh settings.
	Audio: This tab contains options to change and adjust the audio.
	Settings: This tab allows you to customize settings.
	Connections: This tab allows you to set up device connections. Connections can be created for transmitters, RDP, PCoIP, and H.264/5 targets. These connections can be edited and tested.
	Templates (unmanaged only): This tab allows you to view and test different video output templates.
	Workspaces: This tab allows you to configure the templates. Workspaces that are assigned to the active user account will be displayed on the page. Each workspace can be initiated by clicking on the "Connect" button.
	Users: This tab allows you to create admin users, power users, and regular users. The administrator or user can configure which user automatically logs in, if any.
	System: This tab allows you to set system parameters.
	NOTE: Standard users and power users will not have access to any options that conflict with the rights granted to that group of users.



CHAPTER 7: APPLICATION

7.3 NETWORK TAB

When the “Network” tab is selected, the system displays the “Network Settings” screen, as shown in Figure 7-10 below:

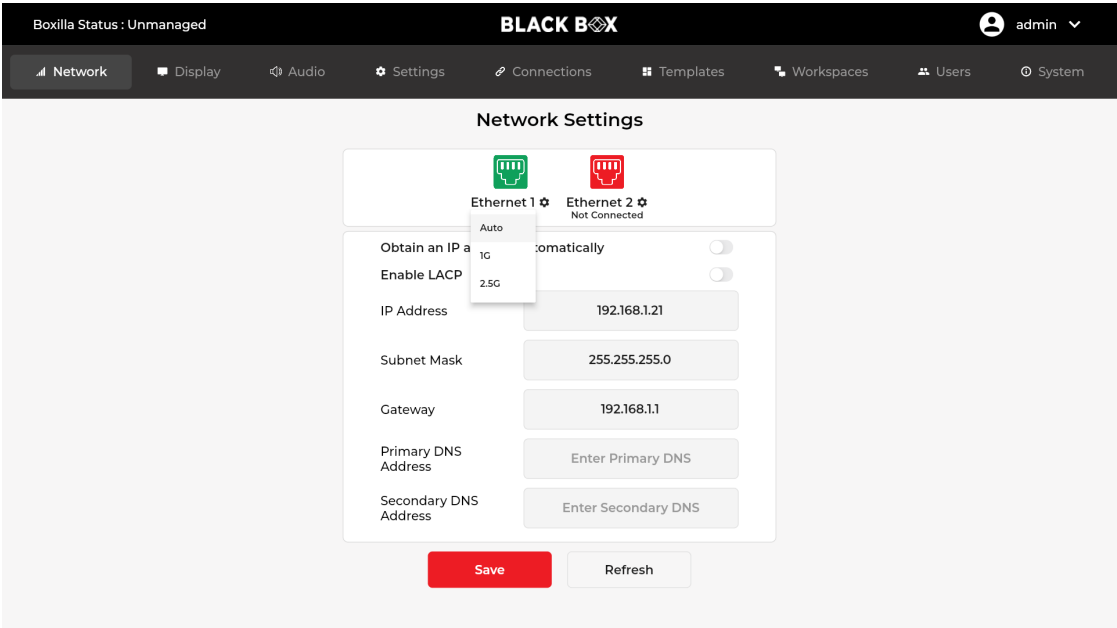


FIGURE 7-10: NETWORK SETTINGS SCREEN

The Ethernet icons at the top of the page show the current status of the network interfaces. A green Ethernet icon indicates that the network is detected, and a red Ethernet icon indicates that the network is not detected.

NOTE: You can use either network port or both at the same time. Using both ports at the same time will automatically provide failover without any additional configuration. Both ports use the same IP address.

Table 7-3 explains the options on the “Network Settings” screen.

CHAPTER 7: APPLICATION

TABLE 7-3. NETWORK SETTINGS

ITEM	DESCRIPTION
Obtain an IP address automatically (DHCP Slider Bar)	When you set this DHCP Slider Bar to the "ON" position by dragging it to the right and then click on the "Save" button, the system tries to obtain an IP address automatically. If successful, it displays a message stating that the IP address was saved successfully, as shown in Figure 7-11 below: FIGURE 7-11: SUCCESSFUL IP SAVE MESSAGE Click on the message's "Close" button to exit the message screen.
Enable LACP	Enable or disable network bonding for the two Ethernet interfaces. NOTE: Both switch ports must also be configured for LACP/LAG and set for the same connection speed.
Port Speed	By default, the Ethernet port speed will be set to auto. However, by clicking on the gear icon next to the port, you can manually set the port speed.
IP Address	By default, the IP address is set to 192.168.1.21. You can keep this IP address, edit it, or use the DHCP slider bar to obtain an IP address automatically.
Subnet Mask	Configure the Subnet Mask to meet your network requirements.
Gateway	By default, the Gateway address is 192.168.1.1. Configure the Gateway to meet your network requirements.
Primary DNS Address	(optional) You can enter the Primary DNS address in this field.
Secondary DNS Address	(optional) You can enter the Secondary IP address in this field.
Save/Cancel buttons	Click on the "Save" button to save information that you entered. Click on the "Cancel" button to discard information that you entered. The "Save" and "Cancel" buttons are shown in Figure 7-12 below: FIGURE 7-12: SAVE AND CANCEL BUTTONS After you click on the "Save" button, the system shows the message shown in Figure 7-11 after it successfully saves the IP address.

CHAPTER 7: APPLICATION

Network redundancy is available on DESKVUE firmware version 1.4.1 and later, and earlier firmware versions can only operate using their primary network interface. With network redundancy and bonding, DESKVUE can utilize both available network ports.

DESKVUE's firmware version 1.4.1 and later offers two modes:

1. Network Redundancy - Active Standby (Default)

This mode ensures high availability by using one active link while keeping the other as standby. If the active link fails, traffic automatically switches to the backup link.

2. LACP Bonding Mode

This mode allows both network ports to be bonded together to create a higher bandwidth link (2Gbps), but it also provides failover to a single active port in the event of a failure. LACP works in combination with the attached switch ports.

In both modes, a single IP address will be used on the DESKVUE.

By default, DESKVUE will operate in the Active Standby mode and provide network redundancy. This is equivalent to the physical switchover mode that is used in the 4K and PE units. When the active port has failed (detected within 100ms), the system automatically switches to the Standby port. If the original network port becomes active again, it becomes the standby port and does not automatically switch back.

Table 7-4 summarizes the status indications for the Ethernet ports for active backup bonding mode.

TABLE 7-4. DESKVUE NETWORK CHART

OSD Status Ethernet 1	OSD Status Ethernet 2	Physical status Ethernet 1	Physical status Ethernet 2	Bond status Ethernet 1	Bond status Ethernet 2
Green	Orange	Connected	Connected	Active	Standby
Green	Red	Connected	Disconnected	Active	--
Red	Green	Disconnected	Connected	--	Active
Orange	Green	Connected	Connected	Standby	Active
Red	Red	Disconnected	Disconnected	--	--



CHAPTER 7: APPLICATION

If the LACP option is enabled, the DESKVUE bonding mode will switch to the 802.3ad LACP mode with the following parameters:

LACP mode = Active

LACP rate = Fast

After turning on the LACP in DESKVUE, both Ethernet interfaces start sending the LACP PDU. Both network ports should be the same network speed as what is typical for LACP bonding.

Table 7-5 summaries the status indications for the Ethernet ports for LACP.

TABLE 7-5. LACP NETWORK CHART

OSD Status Ethernet 1	OSD Status Ethernet 2	Physical status Ethernet 1	Physical status Ethernet 2	LACP status Ethernet 1	LACP status Ethernet 2
Green	Green	Connected	Connected	Active	Active
Green	Red	Connected	Disconnected	Active	N/A
Red	Green	Disconnected	Connected	N/A	Active
Red	Red	Disconnected	Disconnected	N/A	N/A

When both the switch side ports are bonded together in a single Link Aggregation Group, the configuration supports both LACP aggregation and switchover.



CHAPTER 7: APPLICATION

7.4 DISPLAY TAB

When the “Display” tab is selected, the system displays the details and configuration options for the monitors actively attached to the DESKVUE unit, as shown in Figure 7-13 below:

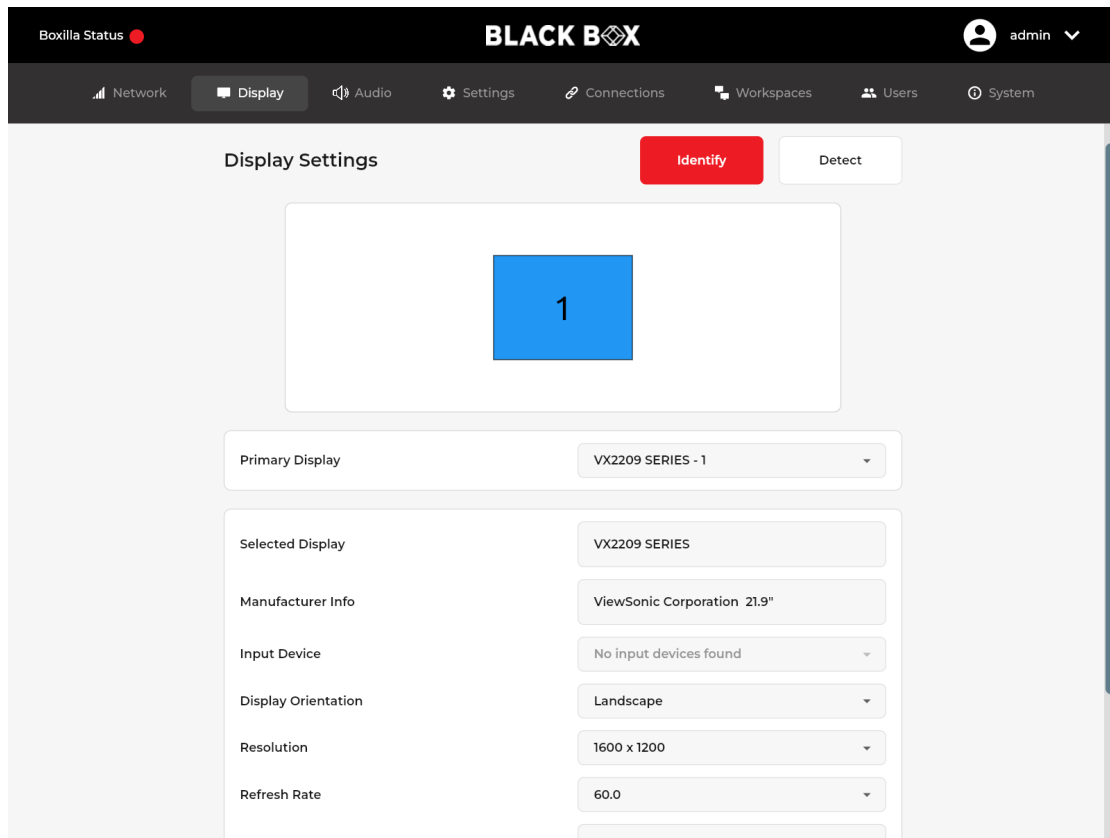


FIGURE 7-13: DISPLAY SETTINGS SCREEN

This screen shows the monitor(s) that are connected to the DESKVUE unit along with the settings for the selected monitor.

NOTE: The system displays a number on each monitor icon to identify it within the DESKVUE system.



CHAPTER 7: APPLICATION

Table 7-6 explains the options on the “Display Settings” screen.

TABLE 7-6. DISPLAY SETTINGS



ITEM	DESCRIPTION
Identify	The “Identify” function places numbers on each connected display to show the orientation/order that the system is using. An example is shown in Figure 7-14 below: 
Detect	Use the “Detect” button to determine what displays are connected to the DESKVUE unit. This function is best used when new displays were added or switched around after the unit has been powered on. There will not be a confirmation message,
Primary Display	Choose the primary display from the option(s) in the drop-down list box.
Selected Display	This is a read-only field that shows which monitor is currently selected, and the settings below this relate to this monitor only.
Manufacturer Info	This is the name of attached display provided by its EDID table.
Input Device	This allows you to map a touchscreen controller to your selected screen; this will generate a confirmation pop-up on the targeted screen, as shown in Figure 7-15 below: 
Display Orientation	Use this option to choose the selected display's orientation to best fit the application.
Resolution	Choose the desired screen resolution for the selected display from the drop-down list box. Resolutions that are displayed in the list are provided by the display's EDID table and can vary depending on the type of display used. The display's preferred resolution includes an asterisk to the right of the resolution name.
Refresh Rate	Choose the desired refresh rate for the selected display from the drop-down list box. Refresh rates are defined by the type of monitor that is used, and the information is derived from the attached display's EDID table.
Connected Interface	This is the label that DESKVUE applies to the display's physical interface. Refer to the Product Images in chapters 1-6 to identify the interfaces.
Save/Cancel buttons	Click on the “Save” button to save information that you entered. Click on the “Cancel” button to discard information that you entered. The “Save” and “Cancel” buttons are shown in Figure 7-16 below: 

FIGURE 7-16. SAVE AND CANCEL BUTTONS

CHAPTER 7: APPLICATION

7.5 AUDIO SETTINGS TAB

When the Audio” tab is selected, the administrator can configure the audio output as shown in Figure 7-17 below:

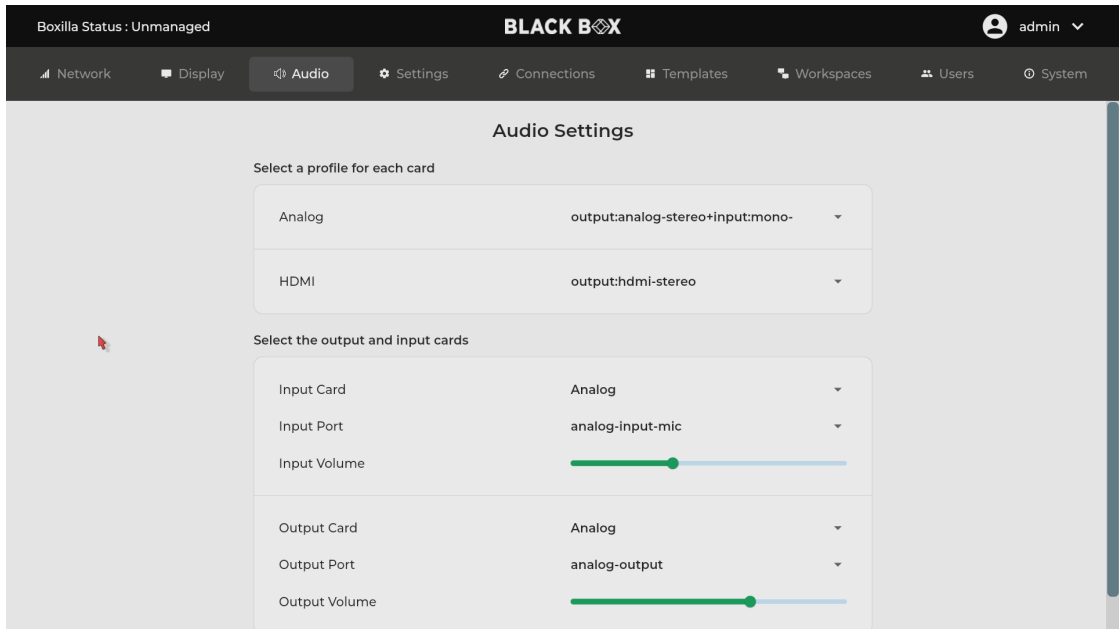


FIGURE 7-17: AUDIO SETTINGS PAGE

Table 7-7 explains the options on the “Audio Settings” page.

TABLE 7-7. AUDIO SETTINGS

ITEM	DESCRIPTION
Analog	Configure the analog audio output by choosing an option from the drop-down list box. The example in Figure 7-18, below, may differ from the options shown on your screen.
HDMI	Configure the embedded HDMI audio output.
Input Card	Configure the microphone input card type (may vary between models).
Input Port	Configure the input port based upon the input card selection (may vary between models).
Input Volume	Configure the microphone input volume.
Output Card	Configure the output audio channel that will be used.
Output Port	Configure the output port based upon the output card selection.
Output Volume	Configure the volume of the audio output.

FIGURE 7-18: ANALOG AUDIO SETTINGS DROP-DOWN BOX

CHAPTER 7: APPLICATION

7.6 SETTINGS TAB

When the “Settings” tab is selected, the system displays the options to configure the hot keys, audio interface, system volume, and overlays, as shown in Figure 7-19 below:

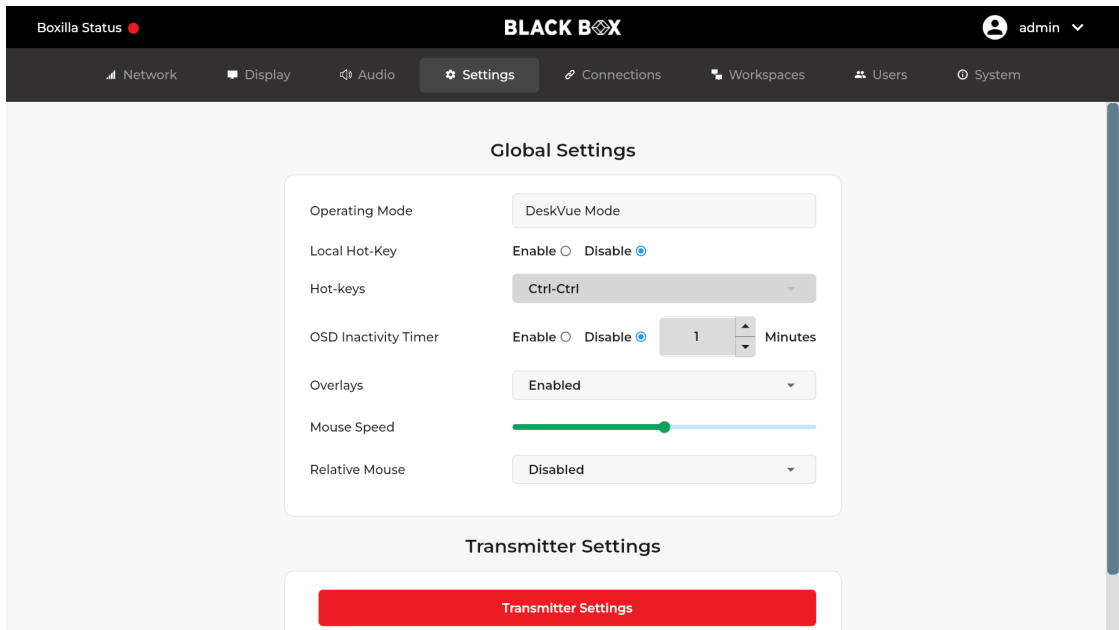


FIGURE 7-19: GLOBAL SETTINGS PAGE

Table 7-8 explains the options on the “Global Settings” page.

TABLE 7-8. GLOBAL SETTINGS

ITEM	DESCRIPTION
Local Hot Key	When logged in as an admin level user to DESKVUE in a Boxilla® managed environment, you can define if the DESKVUE should take on the global hotkey set by the Boxilla or if you would like to set a locally defined hotkey.
Hot keys	Select the desired hot key from the drop-down list box. When the DESKVUE is managed by Boxilla, the hot keys will be configured in the Boxilla web interface.
OSD Inactivity Timer	Set the option to disable the OSD and logout after a certain period of time in minutes. This is disabled by default, but when enabled and an integer value in minutes (between 1 and 999) is configured, the DESKVUE will log out and show the login screen when the time limit has been met without any keyboard or mouse activity.
Overlays	Use this option to configure if the DESKVUE unit shows overlays by either enabling or disabling overlays via the drop-down menu. These options are shown in Figure 7-20 below:




FIGURE 7-20: OVERLAY OPTIONS

TABLE 7-8. GLOBAL SETTINGS (CONTINUED)

ITEM	DESCRIPTION
Mouse Speed	The DESKVUE unit can now manage the mouse speed when the absolute mouse mode is used. Under normal circumstances, the target computer mouse speed settings do not work when absolute mouse mode is enabled. Therefore, this option will allow better control of the mouse speed. Move the slider to the right to increase mouse speed and to the left to decrease it.
Relative Mouse	This option changes how HID interaction through DESKVUE behaves. Relative Mouse is disabled by default. When the Relative Mouse is disabled, the DESKVUE receiver will use Absolute Mouse mode. When enabled and you click onto a KVM tile to control a target machine, your HID control will be locked into only that machine. This also makes it possible to support extended desktop for macOS® and other operating systems which may not be able to install absolute mouse drivers. Relative mouse mode is a global setting for use in an unmanaged DESKVUE. However, within a Boxilla® managed environment it is configured per workspace tile attributes on the Boxilla. When working with a target tile in relative mouse mode, to escape control of that machine, the default hotkey sequence would be <CTRL> <CTRL> <E>.

7.6.1 TRANSMITTER SETTINGS

The DESKVUE unit is capable of discovering and configuring Emerald® transmitters when no Emerald receiver or Boxilla® is being used. Enter the IP address of a known configured transmitter, or alternatively use the “Discover” button to find the device’s IP address. If a transmitter is managed by Boxilla, the DESKVUE unit won’t be able to configure or connect to it unless DESKVUE is part of the same Boxilla network. The transmitter can be in its default state or already have a configured IP address assigned to it. As long as it is not managed, the DESKVUE unit will be able to establish a connection to the transmitter and configure it.

The Transmitter Settings page, shown in Figure 7-21, allows the administrator to view and set configuration parameters for the transmitter. By default, this page shows most buttons grayed out, except for the “Discover” button. If you know the transmitter’s IP address, enter it at the top of the screen, and then click “Apply.” If the transmitter’s IP address is unknown, use the Discover process and follow the on-screen instructions.

CHAPTER 7: APPLICATION

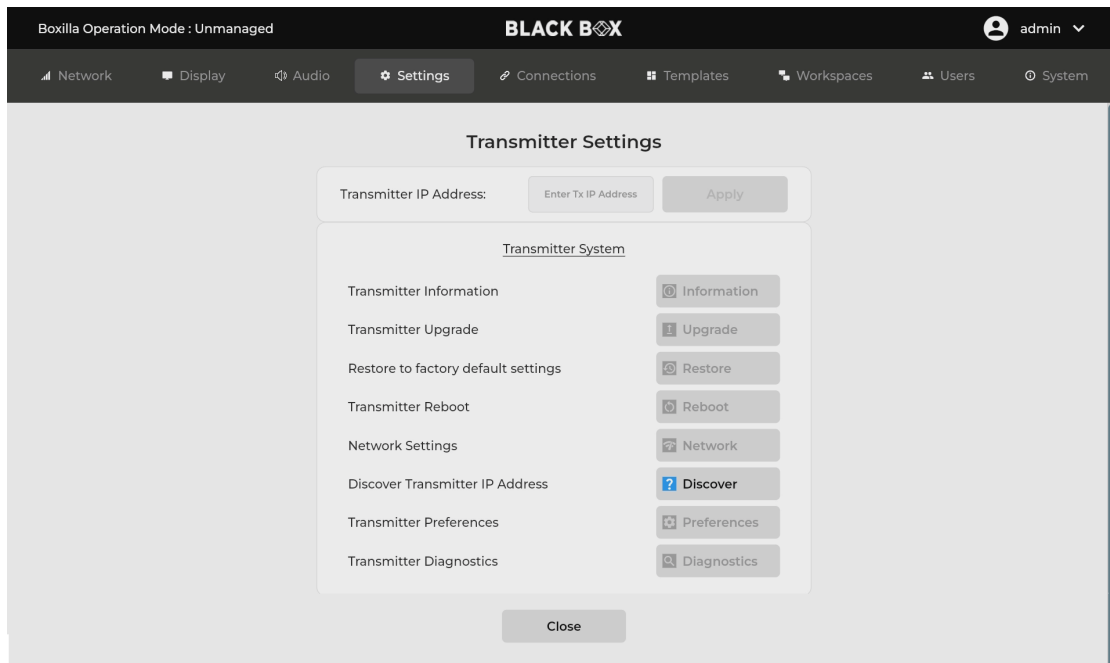


FIGURE 7-21: TRANSMITTER SETTINGS PAGE

The DESKVUE unit is capable of discovering any transmitter device even if it does not match the DESKVUE Network Subnet. The transmitter must be connected to the same physical network or directly connected to the DESKVUE in order to be discovered. Connecting directly to the DESKVUE may be required if it cannot be discovered over the network.

The DESKVUE will need to be on the same IP scheme and subnet as the transmitter before any configuration can be completed, so, once you discover a transmitter and know the IP address, verify that the DESKVUE IP schemes matches that of the transmitter.

NOTE: Make sure no device on the network is using 192.168.1.1 or Discovery will not work properly.

CHAPTER 7: APPLICATION

Table 7-9 explains the options on the “Transmitter Settings” page.

TABLE 7-9. TRANSMITTER SETTINGS

ITEM	DESCRIPTION
Transmitter IP Address	If the IP address is known for the transmitter that needs accessed/configured, enter it into this field and then press the “Apply” button to establish an initial connection. Once the connection is established, the remaining buttons on the page will be activated. If the IP address of the transmitter is not known, use the “Discover” button to detect it. Figure 7-22 below shows the transmitter settings field.

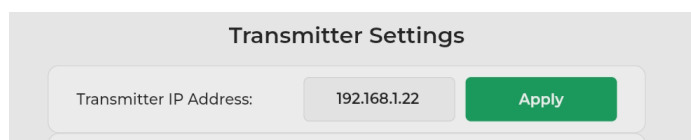


FIGURE 7-22: TRANSMITTER IP ADDRESS SETTING

This page will display the transmitter’s MPN (Manufacturing Part Number), serial number, MAC Address, and firmware version. An example is shown in Figure 7-23 below:

Transmitter Information

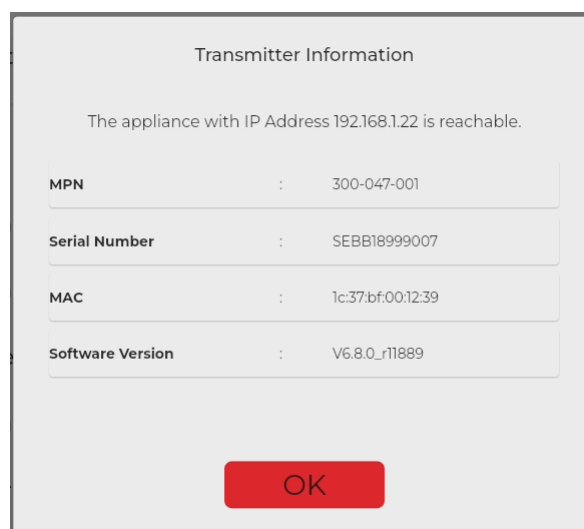


FIGURE 7-23: TRANSMITTER INFORMATION SCREEN



CHAPTER 7: APPLICATION

TABLE 7-9. TRANSMITTER SETTINGS (CONTINUED)

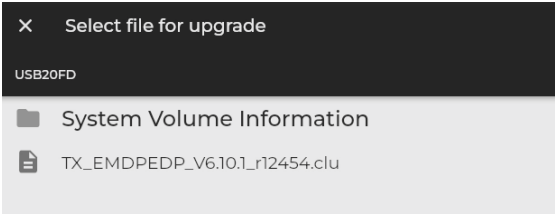
ITEM	DESCRIPTION
Transmitter Upgrade	Use this option to update the Emerald® Transmitter unit's firmware. Place the firmware file on a FAT or FAT32 formatted flash drive, and then select the file to process the upgrade. An example containing a firmware file is shown in Figure 7-24 below: 
Restore	Use this option to perform a factory reset to restore the transmitter back to its default state. The default IP for transmitters is 192.168.1.22. You will need to confirm the action by clicking on the "YES" button or cancel the action by clicking on the "NO" button.

FIGURE 7-24: TRANSMITTER UPGRADE SCREEN

NOTE: Plug the Flash Drive into the USB 2.0 ports, not the USB 3.0 ports. Otherwise, the drive may not be detected. The USB 3.0 ports are blue, and the USB 2.0 ports are black.

TABLE 7-9. TRANSMITTER SETTINGS (CONTINUED)

ITEM	DESCRIPTION
	You can power cycle the transmitter by using the “Reboot” button. You will need to confirm the action by clicking on the “YES” button or cancel the action by clicking on the “NO” button, as shown in Figure 7-25 below:

Reboot

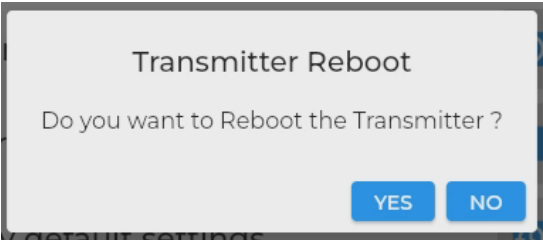


FIGURE 7-25: TRANSMITTER REBOOT SCREEN

Use the options shown in Figure 7-26 below to change the transmitter’s IP address, Network Mask, and/or Default Gateway and to configure LACP, if needed.

Network

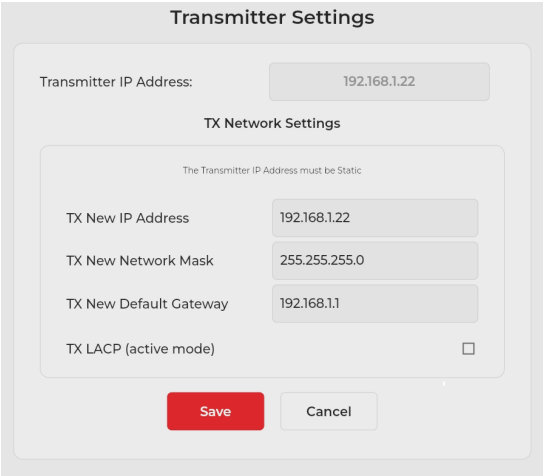


FIGURE 7-26: NETWORK SETTINGS OPTIONS

TABLE 7-9. TRANSMITTER SETTINGS (CONTINUED)

ITEM	DESCRIPTION
	The DESKVUE can discover transmitters that are on the network when the IP address is not known. In order to discover a transmitter, first be sure that the transmitter is connected to the network or directly connected to the DESKVUE using the Ethernet port closest to the power input. Then click on the “Discover” button and follow the on-screen directions. If the transmitter IP address is unknown, use the Discover feature to find it. Connect the transmitter to the same network or directly to the DESKVUE, and, when prompted to reboot the transmitter, click on the “Next” button. Follow the on-screen instructions to find the device’s IP address. Figures 7-27, 7-28, 7-29, and 7-30 below show the sequence of discovery.

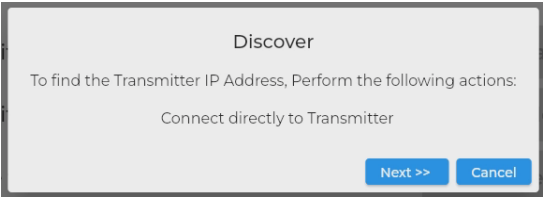


FIGURE 7-27: DISCOVERY STEP 1

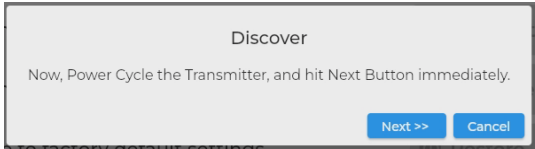


FIGURE 7-28: DISCOVERY STEP 2

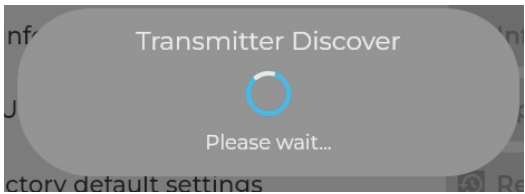


FIGURE 7-29: DISCOVERY IN PROCESS

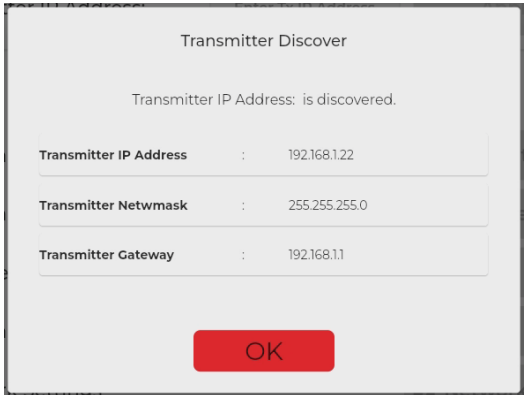


FIGURE 7-30: DISCOVERY RESULTS

Discover

TABLE 7-9. TRANSMITTER SETTINGS (CONTINUED)

ITEM	DESCRIPTION
	Configure the transmitter video and USB settings. Configure the video quality, video optimization, USB HID configuration, and EDID (video resolution) as shown in Figure 7-31.

Transmitter Settings

Transmitter IP Address:

192.168.1.22

Transmitter Preferences

Video Quality

3. Default

Video Source Optimization

Off

HID Configurations

Default

EDID HD 1

1. 1920 X 1080

EDID HD 2

1. 1920 X 1080

Save

Cancel

Preferences

FIGURE 7-31: TRANSMITTER SETTINGS SCREEN

NOTE: Settings that are grayed out are not available for that transmitter model. For example, dual-head transmitters do not support Video Source Optimization, and single-head transmitters do not support EDID HD 2.

Video Quality:

Transmitter settings use a progressive compression algorithm with five stages to reduce the bandwidth and increase the frame rate while sacrificing quality. At stage five, which uses the best compression, you may achieve a higher frame rate and lower bandwidth, but the video output may show blocks of pixilation or screen artifacts as those parts of the screen are not being repainted because they didn't update. At the highest setting of stage one, which is best quality, you will not see these screen artifacts as much, but you will use a higher bandwidth with reduced frames potentially based upon your application. Frames are not always reduced; it just depends on the source and network.

Options:

- 1. Best Quality Video – lossless compression, pixel-perfect mode of operation. This generally needs a dedicated network to ensure no frame loss.

TABLE 7-9. TRANSMITTER SETTINGS (CONTINUED)

ITEM	DESCRIPTION
	2. Visually Lossless Compression – high quality visual image. There is some compression on stream to reduce bandwidth to allow operation on standard corporate networks. Compression does not vary based on available network bandwidth, so it may lead to some dropped frames during network congestion periods.
	3. Default – system tuned to maintain visually lossless compression while increasing the compression level during periods of network congestion to reduce frame loss. This balances visual quality with frame loss in periods of congestion (for example, attempts to reduce/eliminate frame loss).
	4. Optimized Bandwidth – system tuned to maintain visually lossless compression but increased levels of compression level during periods of network congestion to reduce frame loss. This is optimized towards lower bandwidth during congestion periods compared to level three.
	5. Best Compression – high level of compression to minimize average network bandwidth. There is no dynamic change to compression levels – always seeking to reduce bandwidth.

These options are shown below in Figure 7-32:



FIGURE 7-32: TRANSMITTER QUALITY OPTIONS

TABLE 7-9. TRANSMITTER SETTINGS (CONTINUED)

ITEM	DESCRIPTION
Video Source Optimization	This is a progressive algorithm which helps to reduce unwanted noise coming from a GPU or video converters. The transmitter can be configured to handle different applications by changing the way it handles the video signal if it natively has embedded noise, such as from a VGA to DVI converter. You can choose to use “DVI optimized,” “VGA high performance,” “VGA optimized,” or “VGA low bandwidth” settings. You may change these options to get the best performance out of the transmitter. When the option is “OFF,” no dithering/noise techniques are enabled. DVI optimized: This is the least aggressive technique, and it uses a digital anti-dithering/anti-noise technique to reduce the extra noise, which will allow the transmitter to operate at a normal pace and have better network performance. High performance: This is best used when there is an analog-to-digital video converter between the GPU and transmitter. It uses a low-level technique. VGA optimized: This is best used when there is an analog-to-digital video converter between the GPU and transmitter. It uses a medium-level technique. VGA low bandwidth: This is best used when there is an analog-to-digital video converter between the GPU and transmitter. It uses a high-level technique. This would be considered the most aggressive technique to handle video dithering/noise. NOTE: VGA Optimization is only supported on single-head transmitters; the dual-head transmitters and Emerald® 4K do not support it. The dual-head Emerald SE/PE may not be the best option for sources that use video dithering technology. Video Source Optimization options are shown below in Figure 7-33:

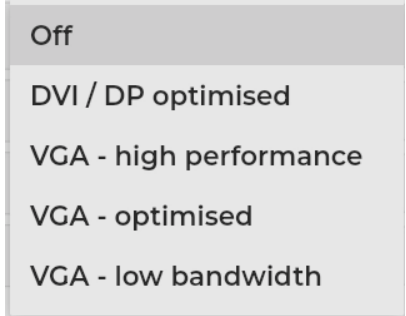


FIGURE 7-33: VIDEO SOURCE OPTIMIZATION OPTIONS

TABLE 7-9. TRANSMITTER SETTINGS (CONTINUED)

ITEM	DESCRIPTION
	This setting applies to all transmitters. It changes the USB communication between the Emerald® transmitter and the target computer/device. Default: This sets the transmitter to emulate a generic PC keyboard, a relative coordinate mouse, and a USB-Audio interface, which will present itself as "AC Interface" to the target machine. Basic: This will emulate only a generic PC keyboard and relative coordinate mouse to the target machine; it will no longer emulate the USB audio interface. MAC: This setting will emulate a generic Apple Mac keyboard, a relative coordinate mouse to the target machine, and the USB audio interface. Absolute: This will emulate a generic keyboard, an absolute coordinates mouse, and a USB-Audio interface to the target machine. NOTE: Absolute mouse HID on transmitters is required by DESKVUE when not using DESKVUE tiles in "Relative Mouse Mode." Absolute MAC: This emulates a generic Mac keyboard and an absolute coordinates Mac mouse. NOTE: macOS® does not support extended desktop for "absolute" pointing devices. Absolute Basic: This emulates only the generic keyboard and absolute mouse; it removes the USB audio interface. HID configuration options are shown below in Figure 7-34: Default Basic MAC Absolute Absolute MAC Absolute Basic

FIGURE 7-34: HD CONFIGURATION OPTIONS

TABLE 7-9. TRANSMITTER SETTINGS (CONTINUED)

ITEM	DESCRIPTION
	The transmitter can support native EDID options, including 1920x1080, 1920x1200, 1680x1050, 1280x1024, or 1024x768. This information is then shared with the computer's GPU so that it sends the correct resolution and refresh rate.
	NOTE: The computer may need to be restarted in order for the settings to work. If you find that changing the EDID settings makes the monitor blank out, you may need to select a different option to correct the issue.

EDID options are shown below in Figure 7-35:

EDID HD1/EDID HD2



FIGURE 7-35: EDID OPTIONS

When issues arise or support asks for additional information, running this diagnostics function allows the DESKVUE to save all Emerald transmitter log information onto a flash drive that is connected to the unit. Plug a FAT- or FAT-32-formatted flash drive into the DESKVUE, and run diagnostics to save all the information. The diagnostics file is encrypted to protect your information, and only authorized Black Box personnel are able to view the log file. An example containing a diagnostic file is shown in Figure 7-36.

NOTE: There is an option below the save button to create a new subfolder, if needed.

Diagnostics

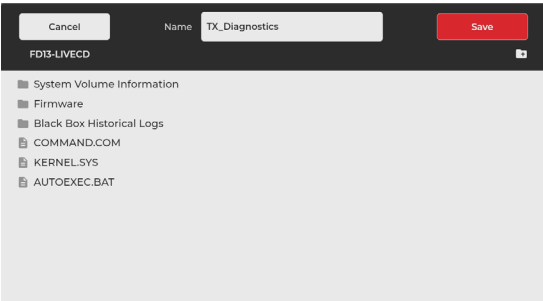


FIGURE 7-36: DIAGNOSTIC FILE EXAMPLE

CHAPTER 7: APPLICATION

7.7 CONNECTIONS TAB

When the “Connections” tab is selected, the system displays the “Connections List” screen, as shown in Figure 7-37 below:

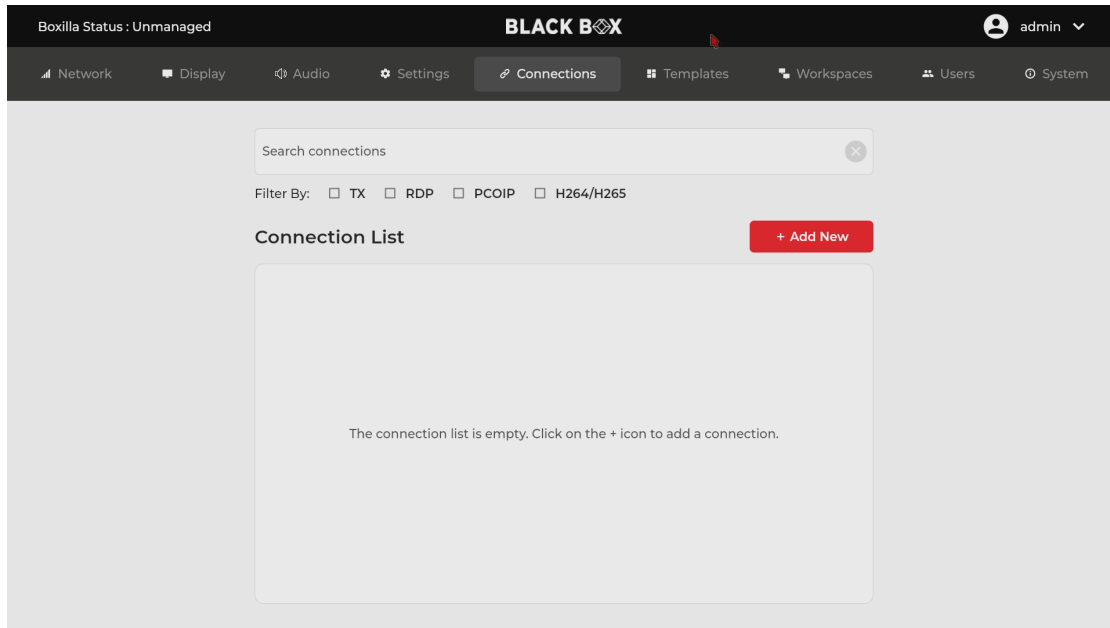


FIGURE 7-37: CONNECTIONS LIST SCREEN

When at least one connection has been added, the page will show the available connection(s), as shown in Figure 7-38 below:

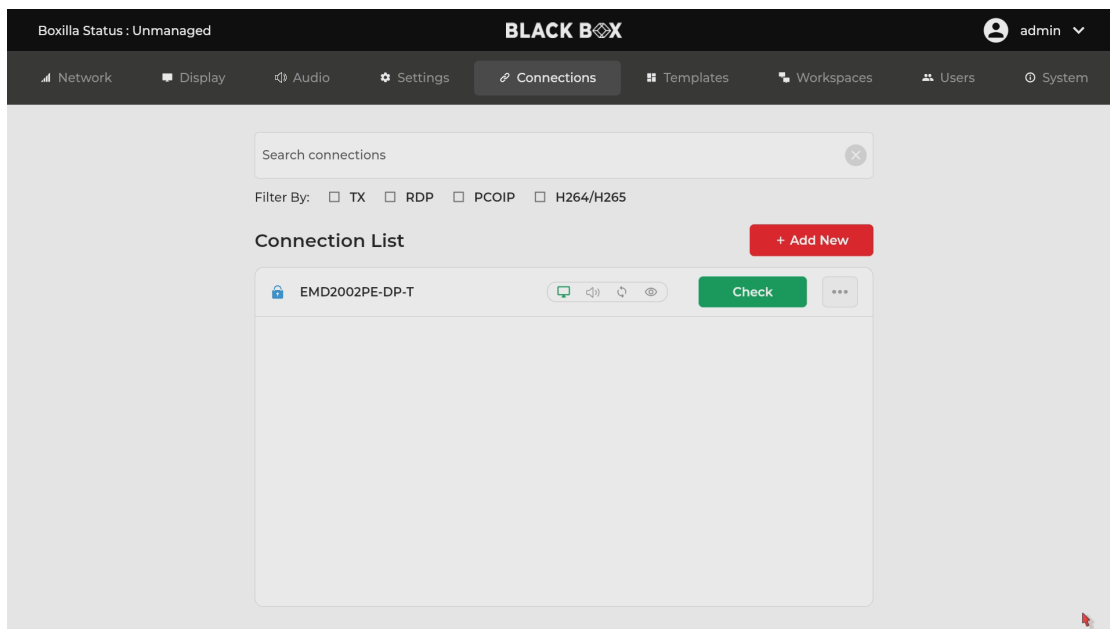


FIGURE 7-38: AVAILABLE CONNECTIONS EXAMPLE

CHAPTER 7: APPLICATION

NOTE: The items shown in the connection list are provided for example only; the list shown on your screen is dependent upon connections made with your DESKVUE unit or connections configured in Boxilla® if the DESKVUE unit is managed. When DESKVUE is not managed and is in a factory default state, no connections will be shown by default.

Table 7-10 explains the options on the “Connections List” screen.

TABLE 7-10. CONNECTION LIST OPTIONS

ITEM	DESCRIPTION
Search connections box	Type in this search box to customize the items shown in the connection list. When you type in this box, all connections containing that search term will be displayed, as shown in the example in Figure 7-39 below:

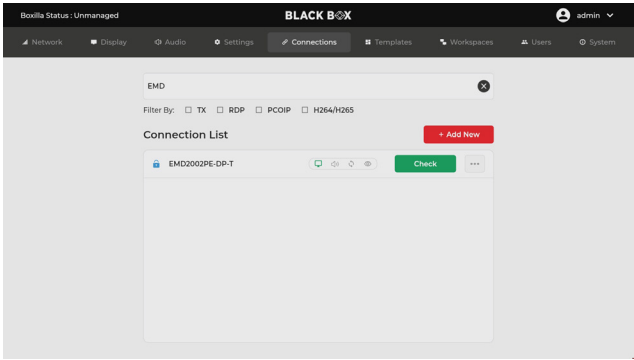


FIGURE 7-39: CONNECTION SEARCH BOX RESULTS

Filter By	Click in the appropriate check box(es) if you want to filter your results by a specific connection type: transmitter, RDP, PCoIP, or H.264/H.265.
Add New	Click on this button to manually add a new transmitter (TX), RDP, PCoIP, or H.264/H.265 Stream Connection connection.
Check Button	Click on the “Check” button to test the connection. When you click on this button, the system attempts to reach the connection and displays a connection status message, as shown in Figure 7-40 below:




FIGURE 7-40: CONNECTION STATUS SCREEN.

NOTE: When using the “Check” button, press the default hot keys + X to close the window and return to the Connections tab. If the connection window is closed using the “x” button in the top right of view, the hot key + X still needs to be used to return to the Connections tab on the OSD. By default, the hot keys are CTRL, CTRL, X would break this connection. When managed by Boxilla, use the hot keys assigned within the Boxilla manager.

CHAPTER 7: APPLICATION

Each connection type is indicated by an icon, as shown in Figure 7-41 below:


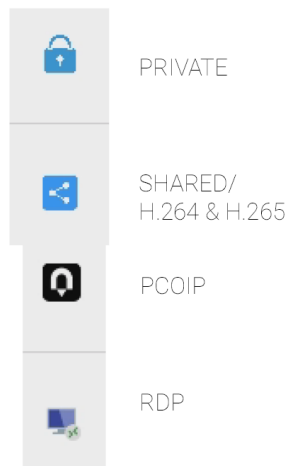


FIGURE 7-41 ICONS FOR DIFFERENT CONNECTION TYPES

7.7.1 ADD NEW CONNECTION

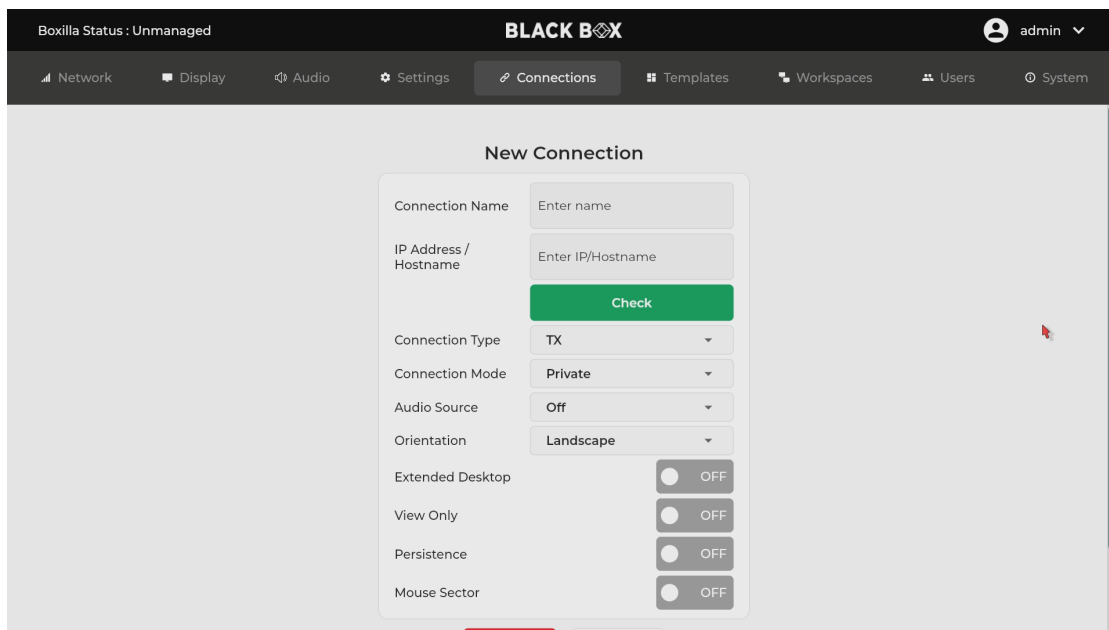After you click on the “Add New” button, the system displays a configuration screen. The configuration screen shown will depend upon the connection type selected, as shown in Figures 7-42, 7-43, 7-44, 7-45, and 7-46 starting below:



Boxilla Status : Unmanaged

BLACK BOX

admin

Network Display Audio Settings Connections Templates Workspaces Users System

New Connection

Connection Name: Enter name

IP Address / Hostname: Enter IP/Hostname

Check

Connection Type: TX

Connection Mode: Private

Audio Source: Off

Orientation: Landscape

Extended Desktop: OFF

View Only: OFF

Persistence: OFF

Mouse Sector: OFF

FIGURE 7-42: NEW CONNECTION SCREEN FOR TX (TRANSMITTER) CONNECTION TYPE

CHAPTER 7: APPLICATION

The screenshot shows the 'New Connection' form in the BLACK BOX application. The interface has a dark header with 'Boxilla Status : Unmanaged' on the left, 'BLACK BOX' in the center, and a user profile 'admin' on the right. Below the header is a navigation bar with icons and labels for Network, Display, Audio, Settings, Connections (active), Templates, Workspaces, Users, and System. The main content area is titled 'New Connection' and contains a form with the following fields and controls:

- Connection Name: Text input with placeholder 'Enter name'.
- IP Address / Hostname: Text input with placeholder 'Enter IP/Hostname'.
- Check: A green button to verify the IP address.
- Connection Type: A dropdown menu currently set to 'RDP'.
- Port: Text input with the value '3389'.
- User Name: Text input with placeholder 'Enter name'.
- Password: Text input with placeholder 'Enter password' and a toggle icon.
- Domain: Text input with placeholder 'Enter domain'.
- Audio Source: A dropdown menu currently set to 'Off'.
- Extended Desktop: A toggle switch currently set to 'OFF'.
- View Only: A toggle switch currently set to 'OFF'.
- Persistence: A toggle switch currently set to 'OFF'.

At the bottom of the form are two buttons: a red 'Save' button and a grey 'Cancel' button.

FIGURE 7-43: NEW CONNECTION SCREEN FOR RDP CONNECTION TYPE



CHAPTER 7: APPLICATION

The screenshot shows the 'New Connection' form for a PCOIP connection type. The interface has a dark header with 'Boxilla Operation Mode : Unmanaged' and 'BLACK BOX' logo. A navigation bar includes 'Network', 'Display', 'Audio', 'Settings', 'Connections' (active), 'Templates', 'Workspaces', 'Users', and 'System'. The user 'admin' is logged in. The form fields are: 'Connection Name' (text input), 'IP Address / Hostname' (text input), a green 'Check' button, 'Connection Type' (dropdown menu showing 'PCOIP'), 'User Name' (text input), 'Password' (password input), 'Domain' (text input), 'Audio Source' (dropdown menu showing 'Off'), 'Extended Desktop' (toggle switch showing 'OFF'), and 'View Only' (toggle switch showing 'OFF'). At the bottom are 'Save' and 'Cancel' buttons.

FIGURE 7-44: NEW CONNECTION SCREEN FOR PCOIP CONNECTION TYPE

The screenshot shows the 'New Connection' form for an H.264 connection type. The interface is similar to the previous one, but the 'Boxilla Status' is 'Unmanaged'. The 'Connections' tab is active. The form fields are: 'Connection Name' (text input), 'URL' (text input), a green 'Check' button, 'Connection Type' (dropdown menu showing 'H264/H265'), 'Port' (text input showing '554'), 'User Name' (text input), 'Password' (password input), 'Audio Source' (dropdown menu showing 'Off'), and 'Transport Option' (dropdown menu showing 'TCP'). At the bottom are 'Save' and 'Cancel' buttons.

FIGURE 7-45: NEW CONNECTION SCREEN FOR H.264 CONNECTION TYPE

CHAPTER 7: APPLICATION

Boxilla Status : Unmanaged

BLACK BOX

admin

Network

Display

Audio

Settings

Connections

Templates

Workspaces

Users

System

New Connection

Connection Name

WebUI of XYZ

URL

192.168.1.254

Check

Connection Type

Web-Link

Port

443

User Name

Enter name

Password

Enter password

Audio Source

Off

View Only

OFF

Persistence

OFF

Save

Cancel

FIGURE 7-46: NEW CONNECTION SCREEN FOR WEBLINK CONNECTION TYPE

Table 7-11 explains the options on the “New Connection” screen.

TABLE 7-11. NEW CONNECTION OPTIONS

ITEM	DESCRIPTION
Connection Name	Enter a name for the connection. The Emerald® DESKVUE unit will use this connection name on all screens that show the connection.

CHAPTER 7: APPLICATION

TABLE 7-11. NEW CONNECTION OPTIONS (CONTINUED)

ITEM	DESCRIPTION
IP Address	Enter the IP address for the connection. You can click on the "Check" button to verify that the IP address entered is valid. After DESKVUE uses this check to verify the validity of the connection, it displays the message shown in Figure 7-47 when the IP address is able to be reached or the message shown in Figure 7-48 when the IP address is not able to be reached.

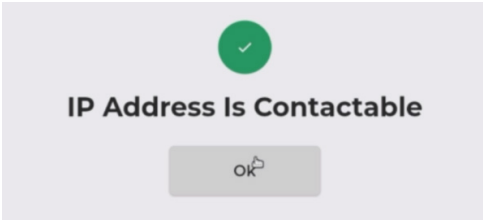


FIGURE 7-47: IP ADDRESS VERIFICATION MESSAGE WHEN CONTACTABLE

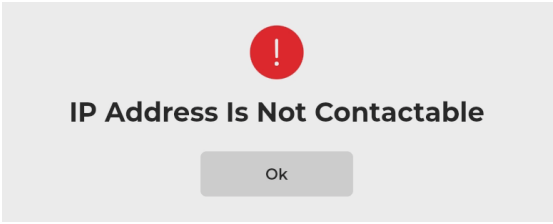


FIGURE 7-48: IP ADDRESS VERIFICATION MESSAGE WHEN NOT CONTACTABLE

URL (H.264 Option)	Enter the URL or hyperlink of the H.264 stream.
Connection Type	Choose the connection type from the drop-down list box. You can choose TX (for transmitter), RDP, PCOIP, or H.264/H.265 and Weblink HTML from version 1.6 onward, as shown in Figure 7-49 below: Connection Type Connection Mode Audio Source Orientation TX Target TX RDP PCOIP H264/H265 Web-Link Windows

FIGURE 7-49: CONNECTION TYPE OPTIONS

Connection Mode (TX option)	Choose the connection type from the drop-down list box. You can choose "private" or "shared," as shown in Figure 7-50 below. Connection Mode Audio Source Private Shared On
-----------------------------	--

FIGURE 7-50: CONNECTION MODE OPTIONS

If set to "private," only one person can be connected to the transmitter. If set to "shared," multiple people can connect to the same transmitter.

CHAPTER 7: APPLICATION

TABLE 7-11. NEW CONNECTION OPTIONS (CONTINUED)

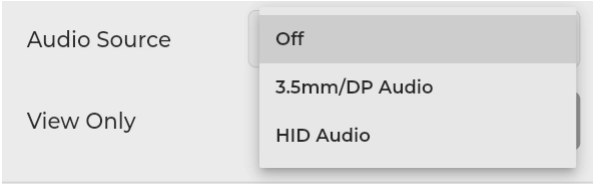




ITEM	DESCRIPTION
Audio Source	Use this drop-down list box to select the audio source. You can choose "OFF," "3.5mm/DP Audio," or "HID Audio" from the list, as shown in Figure 7-51 below. "OFF" disables audio for the device, and "3.5MM/DP audio" enables audio. HID Audio is model dependent. When supported, it enables audio to be sent over the USB channel to a USB speaker. 
Orientation (Transmitter option)	Set the video orientation for the connection. You can select between landscape and portrait modes, as shown in Figure 7-52 below: 
Port (RDP and H.264/H.265 options)	Enter the port for the RDP or H.264/H.265 target device. 3389 is the standard RDP protocol, while port 554 is the default H.264/H.265 port.
User Name (RDP, PCoIP, and H.264/H.265 options)	Enter the username for the connection.
Password (RDP, PCoIP, and H.264/H.265 options)	Enter the password for the desired RDP user that was entered in the previous section. If you leave the password field blank, the Emerald® DESKVUE unit will not be able to automatically log in, and it will display the login screen.
Domain (RDP and PCoIP options)	Enter the device's domain, if applicable.
Extended Desktop (Transmitter, RDP, and PCoIP options)	When the target has two video heads or extended desktop, set the Extended Desktop option to "ON," as shown in Figure 7-53 below. If using single monitors/single video head, leave this setting "OFF," as shown in Figure 7-54 below:  

TABLE 7-11. NEW CONNECTION OPTIONS (CONTINUED)

ITEM	DESCRIPTION
View Only	When the slider bar is in the "ON" position, the connection will be in view only mode, which means that keyboard and mouse activity will not be passed to the target device. The end user can only see the video and hear the audio (when audio is enabled). When the slider bar is in the "OFF" position, the connection will connect the keyboard and mouse, and the end user can control the remote target. Click on the right side of the slider bar to turn it "ON," and click on the left side of the slider bar to turn it off. The slider is shown below in the "OFF" position in Figure 7-55 and in the "ON" position in Figure 7-56:  FIGURE 7-55: ON/OFF SLIDER WITH OPTION OFF  FIGURE 7-56: ON/OFF SLIDER WITH OPTION ON
Persistence	The persistence setting will make the DESKVUE receiver connect to the target repeatedly when the connection drops so that it will automatically be restored when the target comes back online. When set to off, if the connection is dropped for whatever reason, it will require intervention to restore the connection. When set to on, the reconnection is automatic whenever it is available. This is useful for video walls where there is no user sitting at the DESKVUE receiver to make the connection if it drops.

CHAPTER 7: APPLICATION

Number of sectors:

Mouse sectors are only required for machines which have more than 1 video head (extended desktops). Select 2, 3, or 4 based upon the total amount of transmitters which you will connect to the target machine.

Sector position:

You will see a visual representation of the total amount of heads that are connected to this target machine.

Move the green square that represents this KVM connection to a position with a click and drag in this GUI to match the position this video head on the target OS believes that head is in.

See Figures 7-57, 7-58, and 7-59 below for examples:

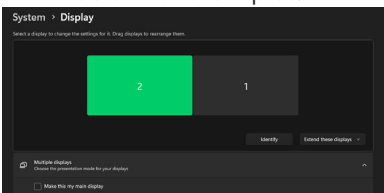


FIGURE 7-57: MOUSE SECTOR EXAMPLE

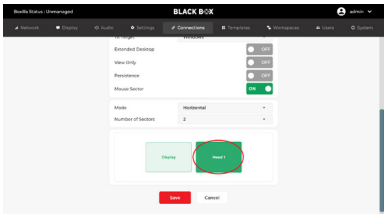


FIGURE 7-58: MOUSE SECTOR EXAMPLE

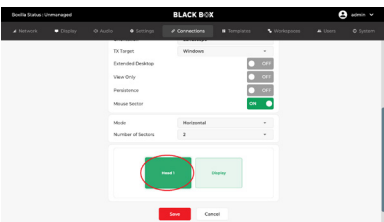


FIGURE 7-59: MOUSE SECTOR EXAMPLE

You can also use a dual head transmitter with sectors, as shown in Figure 7-60:

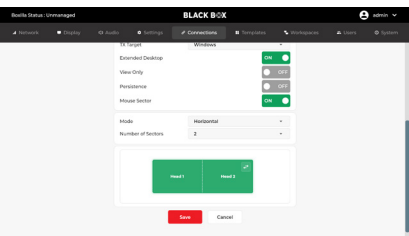
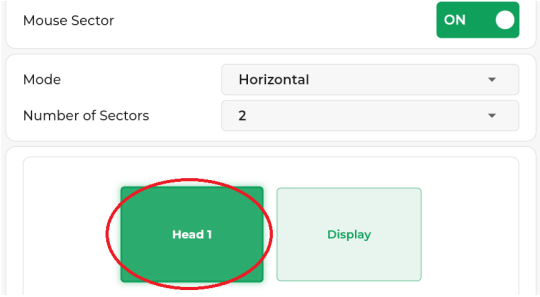



FIGURE 7-60: MOUSE SECTOR EXAMPLE

Mouse Sector
(Transmitter Options)

CHAPTER 7: APPLICATION

TABLE 7-11. NEW CONNECTION OPTIONS (CONTINUED)

ITEM	DESCRIPTION
Mouse Sector (Transmitter Options) (Continued)	NOTE: We recommend connecting one transmitter at a time to a multi-head machine when configuring mouse sectors as a reliable way to avoid mixing up sectors. It is possible to reconfigure them retrospectively, if required. The slider is shown below in the “ON” position in Figure 7-61 and in the “OFF” position in Figure 7-62:  FIGURE 7-61: ON/OFF SLIDER WITH OPTION ON AND OTHER OPTIONS DISPLAYED  FIGURE 7-62: ON/OFF SLIDER WITH OPTION OFF
Transport Option (H.264/H.265 option)	Choose the transport layer for the H.264 stream between TCP and UDP.
Weblink Connections	“Weblink” is a new connection type from DESKVUE version 1.6 onward. It supports HTML sources, such as web pages and potentially other HTML5-based content. The HTML viewer within DESKVUE is intentionally restrictive in its functionality to reduce security risk while implementing the ability to deliver HTML content relevant for your KVM user’s workflow directly to their receiver without tying up a computer or VM resource to do so.
Save/Cancel buttons	Click on the “Save” button to save information that you entered. Click on the “Cancel” button to discard information that you entered. The “Save” and “Cancel” buttons are shown in Figure 7-63 below:  FIGURE 7-63: SAVE AND CANCEL BUTTONS After you click on the “Save” button to save the new connection, the connection appears in the connection list.

After a connection has been added, use the “Check” button to verify the connection by attempting to connect to it.

CHAPTER 7: APPLICATION

7.8 TEMPLATES TAB

When the “Templates” tab is selected, the system displays the “Templates List” screen, as shown in Figure 7-64 below:

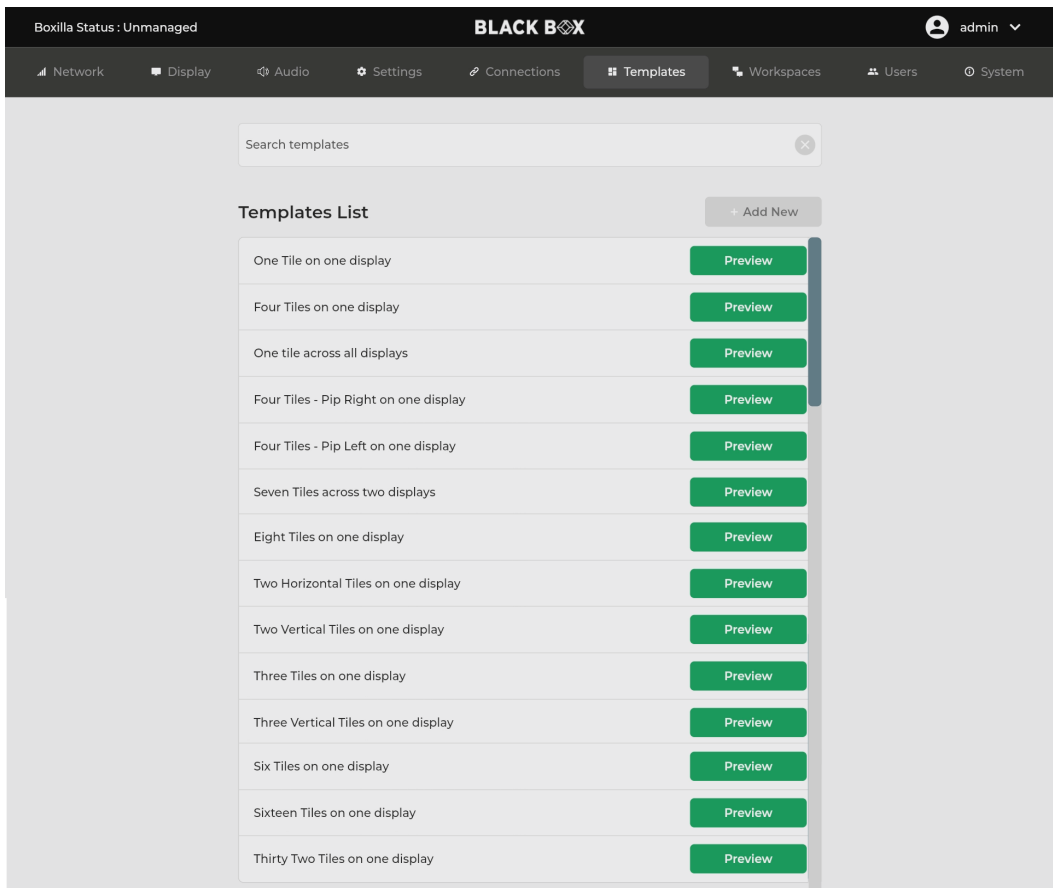


FIGURE 7-64: TEMPLATES LIST SCREEN

This screen displays 14 predefined layout templates. Custom templates can be used when DESKVUE is managed by a Boxilla® manager.

CHAPTER 7: APPLICATION

7.8.1 ONE TILE ON ONE DISPLAY

The “One Tile on one display” template contains one tile, which represents one connection, on one display unit. That connection uses the entire screen. When you click on the “Preview” button for this option, the system displays an example of the template, as shown in Figure 7-65 below:

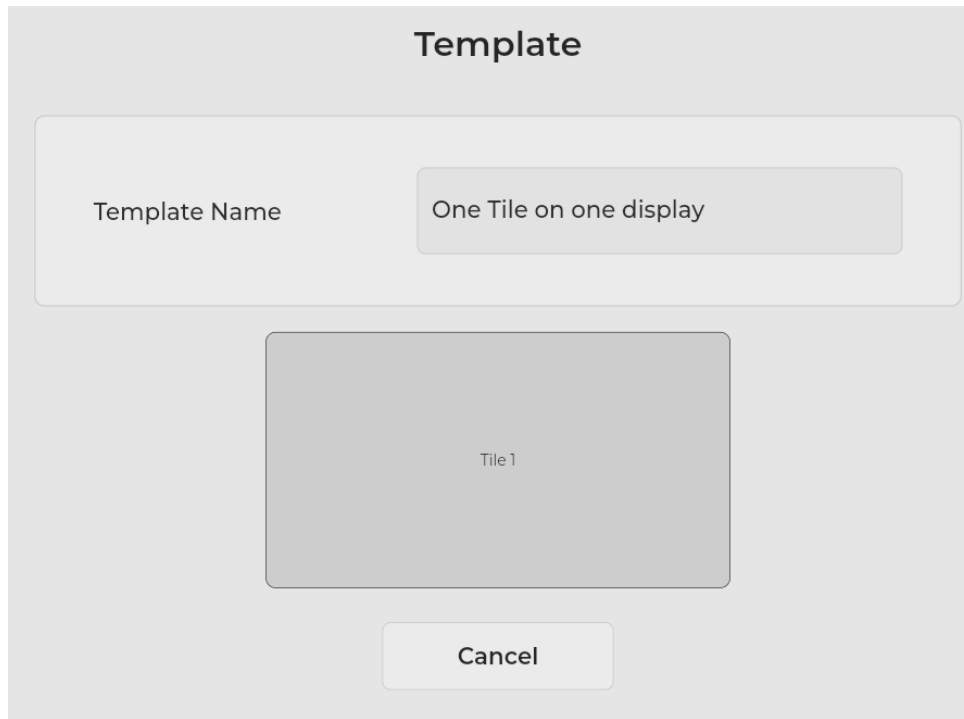


FIGURE 7-65: ONE TILE ON ONE DISPLAY TEMPLATE

NOTE: If you have a multi-head device, you can map the assignment of the tile to a specific display.

CHAPTER 7: APPLICATION

7.8.2 FOUR TILES ON ONE DISPLAY

The “Four Tiles on one display” template contains four tiles, which each represent one connection, on one display unit. Each tile fills 1/4 of the screen.

NOTE: The tile numbers shown in the template are important, since you map a connection to a specific tile location when you create a workspace.

When you click on the “Preview” button for this option, the system displays an example of the template, as shown in Figure 7-66 below:

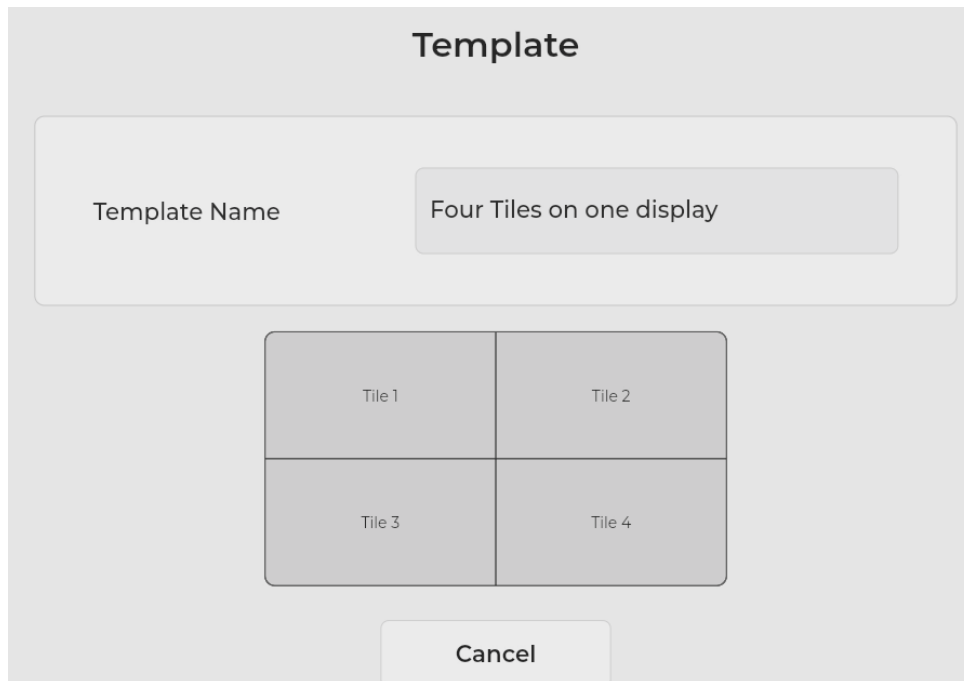


FIGURE 7-66: FOUR TILES ON ONE DISPLAY TEMPLATE



CHAPTER 7: APPLICATION

7.8.3 ONE TILE ACROSS ALL DISPLAYS

The “One tile across all displays” template displays a single target across all screens of the DESKVUE output.

This mode is similar to the AV video wall functions when using the Boxilla® manager. This template will take a single video signal and stretch/scale it across all connected displays.

When you click on the “Preview” button for this option, the system displays an example of the template, as shown in Figure 7-67 below:

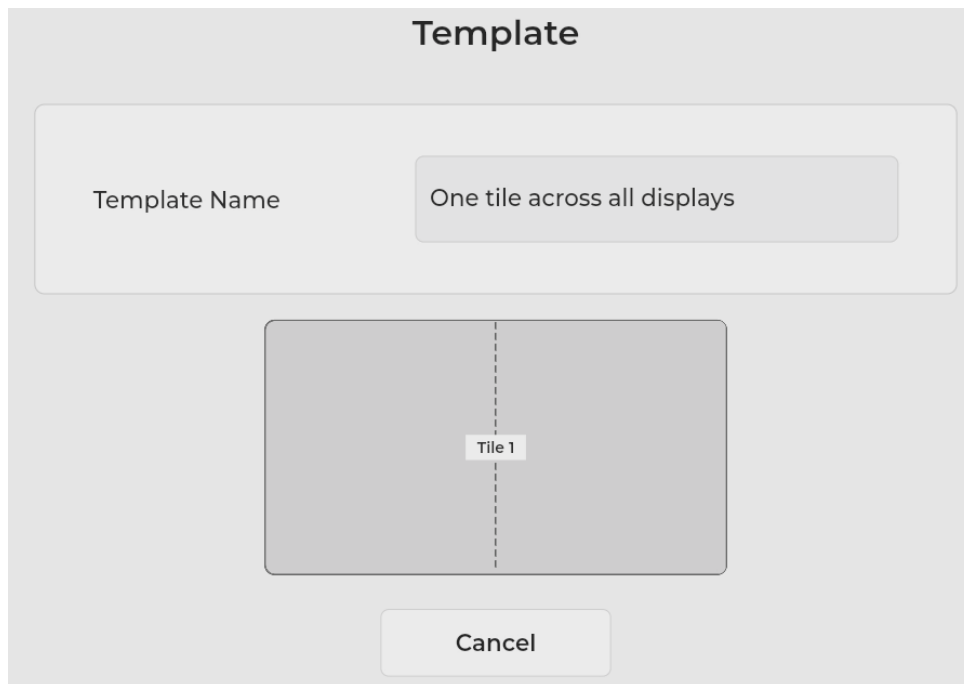


FIGURE 7-67: ONE TILE ACROSS ALL DISPLAYS TEMPLATE

CHAPTER 7: APPLICATION

7.8.4 FOUR TILES - PIP RIGHT ON ONE DISPLAY

The “Four Tiles - Pip Right on one display” template contains four tiles, which each represent one connection, on one display unit. There is one large tile, which occupies $\frac{2}{3}$ of the screen distance, and three smaller Picture-in-Picture (PiP) tiles to the right of that tile, each of which occupies $\frac{1}{3}$ of the remaining screen area.

NOTE: The tile numbers shown in the template are important, since you map a connection to a specific tile location when you create a workspace.

When you click on the “Preview” button for this option, the system displays an example of the template, as shown in Figure 7-68 below:

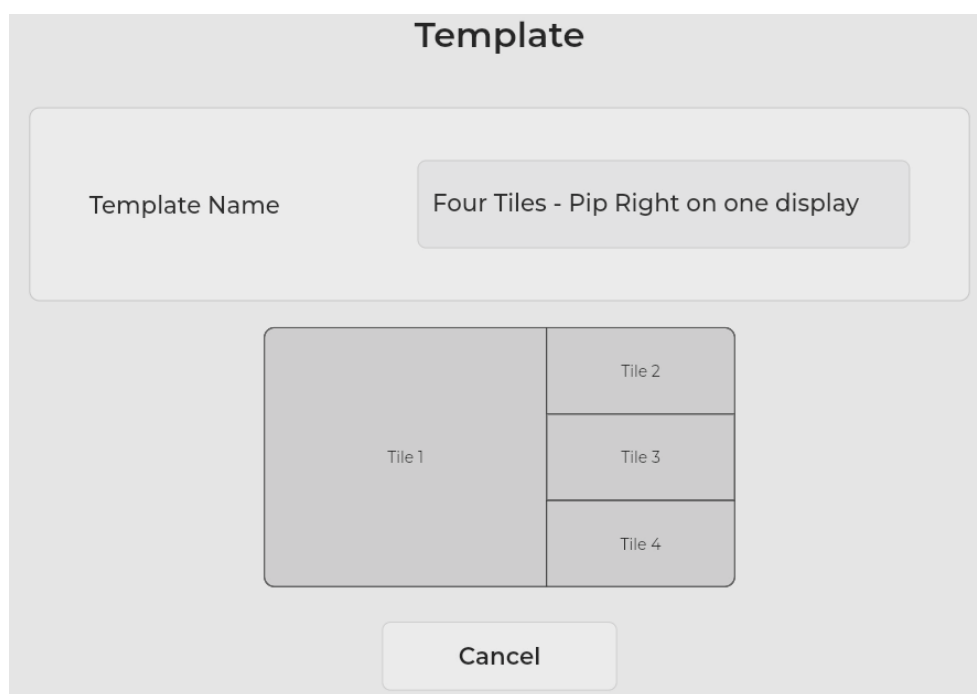


FIGURE 7-68: FOUR TILES - PIP RIGHT ON ONE DISPLAY TEMPLATE

CHAPTER 7: APPLICATION

7.8.5 FOUR TILES - PIP LEFT ON ONE DISPLAY

The “Four Tiles - Pip Left on one display” template contains four tiles, which each represent one connection, on one display unit. There is one large tile, which occupies $\frac{2}{3}$ of the screen distance, and three smaller Picture-in-Picture (PiP) tiles to the left of that tile, each of which occupies $\frac{1}{3}$ of the remaining screen area.

NOTE: The tile numbers shown in the template are important, since you map a connection to a specific tile location when you create a workspace.

When you click on the “Preview” button for this option, the system displays an example of the template, as shown in Figure 7-69 below:

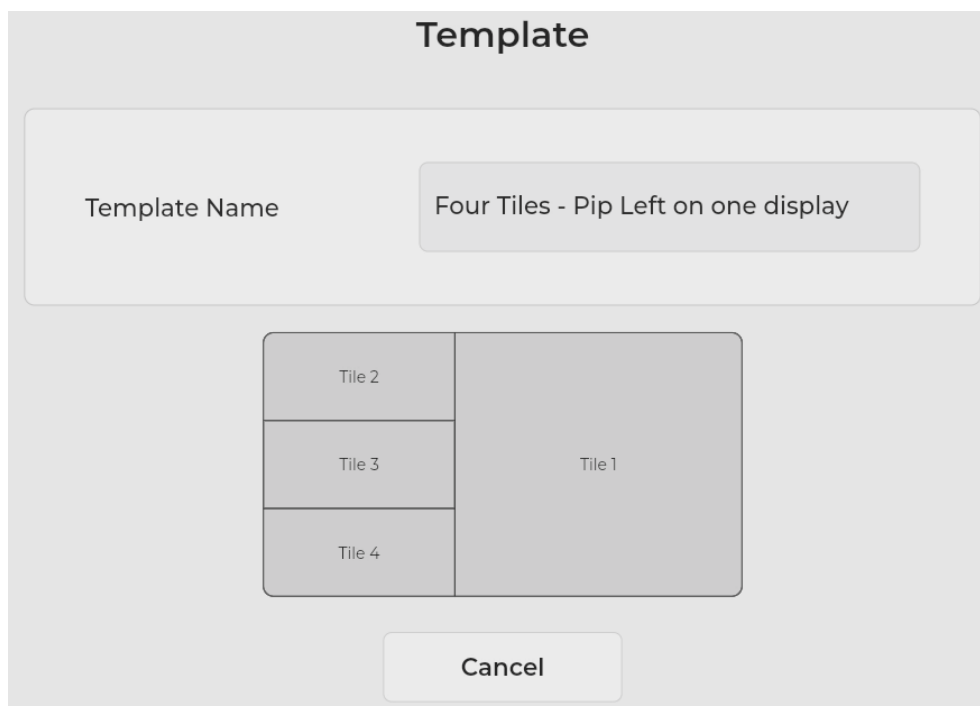


FIGURE 7-69: FOUR TILES - PIP LEFT ON ONE DISPLAY TEMPLATE

CHAPTER 7: APPLICATION

7.8.6 SEVEN TILES ACROSS 2 DISPLAYS

The “Seven Tiles Across 2 Displays” template enables you to use multiple screens with Picture-in-Picture options spread across two displays.

When you click on the “Preview” button for this option, the system displays an example of the template, as shown in Figure 7-70 below:

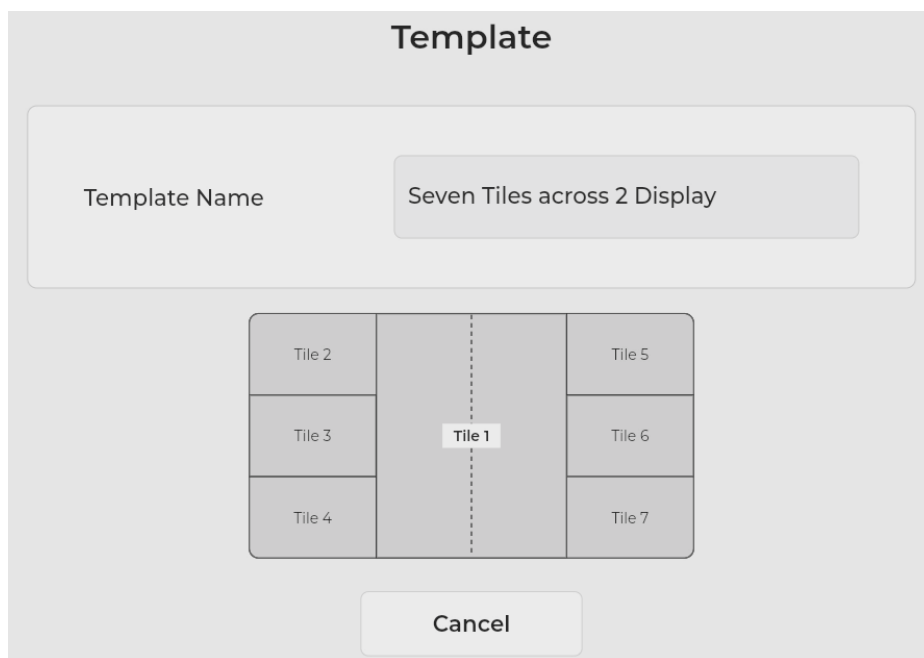


FIGURE 7-70: SEVEN TILES ACROSS 2 DISPLAYS TEMPLATE

CHAPTER 7: APPLICATION

7.8.7 EIGHT TILES ON ONE DISPLAY

The “Eight Tiles on one display” template contains eight tiles, which each represent one connection, on one display unit. Each tile fills 1/8 of the screen.

NOTE: The tile numbers shown in the template are important, since you map a connection to a specific tile location when you create a workspace.

When you click on the “Preview” button for this option, the system displays an example of the template, as shown in Figure 7-71 below:

The screenshot shows a window titled "Template". Inside, there is a section for "Template Name" with a text input field containing "Eight Tiles on one display". Below this is a 2x4 grid of eight tiles, labeled "Tile 1" through "Tile 8". At the bottom of the window is a "Cancel" button.

Template			
Template Name: Eight Tiles on one display			
Tile 1	Tile 2	Tile 3	Tile 4
Tile 5	Tile 6	Tile 7	Tile 8
Cancel			

FIGURE 7-71: EIGHT TILES ON ONE DISPLAY TEMPLATE

CHAPTER 7: APPLICATION

7.8.8 TWO HORIZONTAL TILES ON ONE DISPLAY

The “Two Horizontal Tiles on one display” template takes two targets and stacks them on top of each other.

When you click on the “Preview” button for this option, the system displays an example of the template, as shown in Figure 7-72 below:



FIGURE 7-72: TWO HORIZONTAL TILES ON ONE DISPLAY TEMPLATE



CHAPTER 7: APPLICATION

7.8.9 TWO VERTICAL TILES ON ONE DISPLAY

The “Two Vertical Tiles on one display” template takes two targets and places them side-by-side on one screen.

When you click on the “Preview” button for this option, the system displays an example of the template, as shown in Figure 7-73 below:

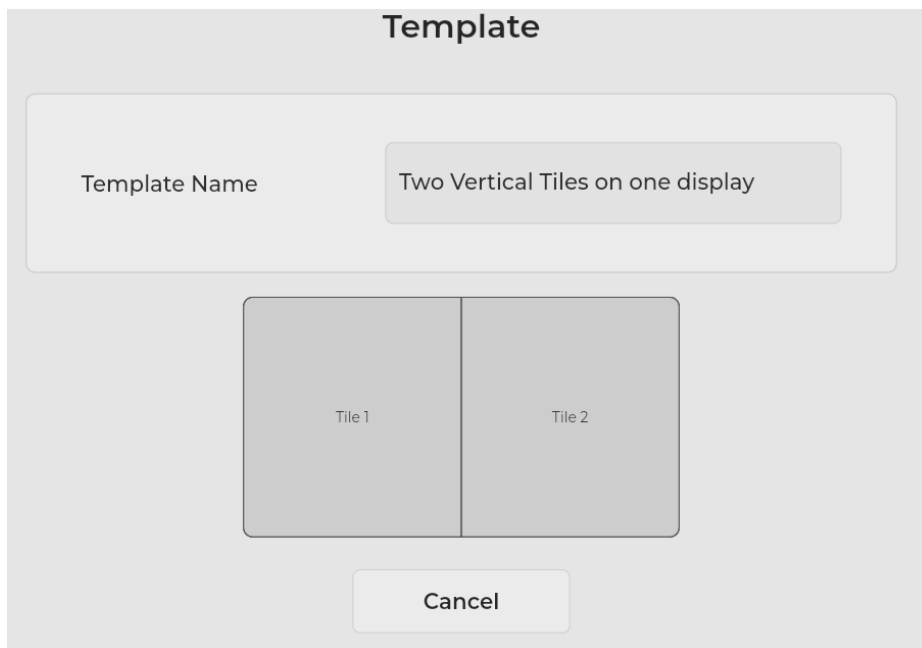


FIGURE 7-73: TWO VERTICAL TILES ON ONE DISPLAY TEMPLATE

CHAPTER 7: APPLICATION

7.8.10 THREE TILES ON ONE DISPLAY

The “Three Tiles on one display” template shows three targets on a single screen using the layout displayed in the template.

When you click on the “Preview” button for this option, the system displays an example of the template, as shown in Figure 7-74 below:

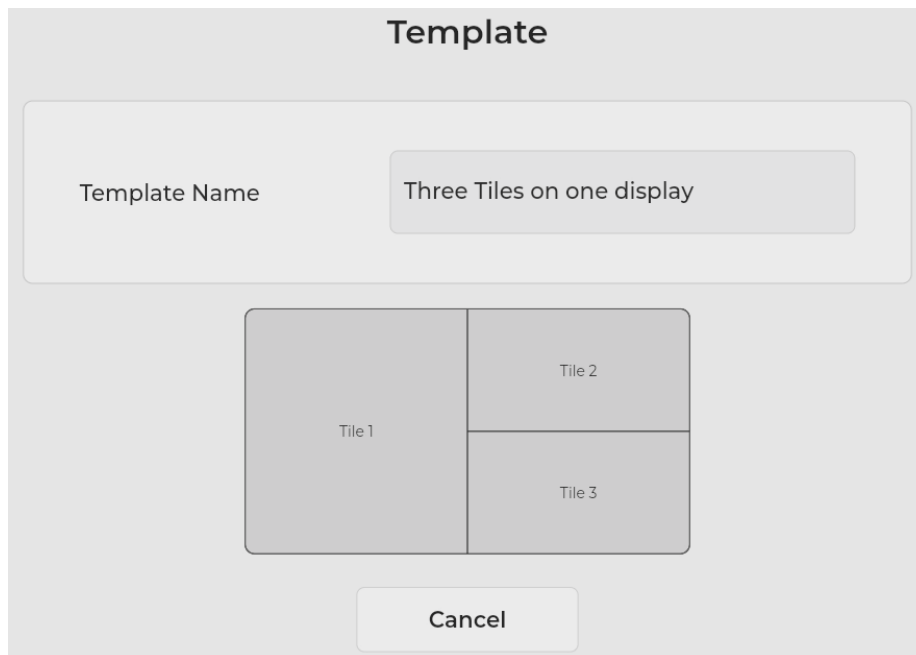


FIGURE 7-74: THREE TILES ON ONE DISPLAY TEMPLATE



CHAPTER 7: APPLICATION

7.8.11 THREE VERTICAL TILES ON ONE DISPLAY

The “Three Vertical Tiles on one display” template shows three targets on a single display in a vertical view.

When you click on the “Preview” button for this option, the system displays an example of the template, as shown in Figure 7-75 below:

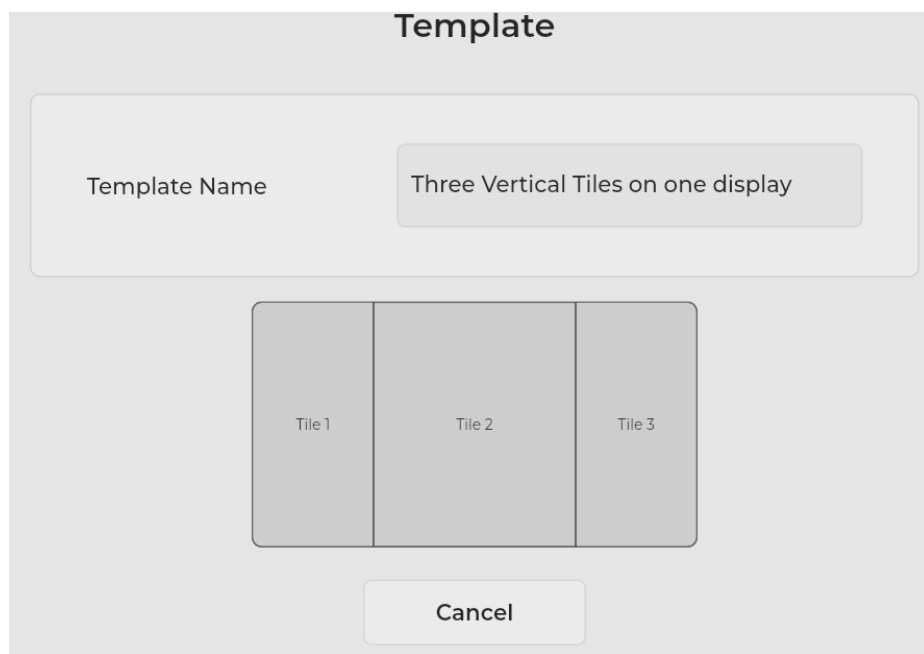


FIGURE 7-75: THREE VERTICAL TILES ON ONE DISPLAY TEMPLATE

CHAPTER 7: APPLICATION

7.8.12 SIX TILES ON ONE DISPLAY

The “Six Tiles on one display” template shows up to six targets on a single display with two rows and three columns.

When you click on the “Preview” button for this option, the system displays an example of the template, as shown in Figure 7-76 below:

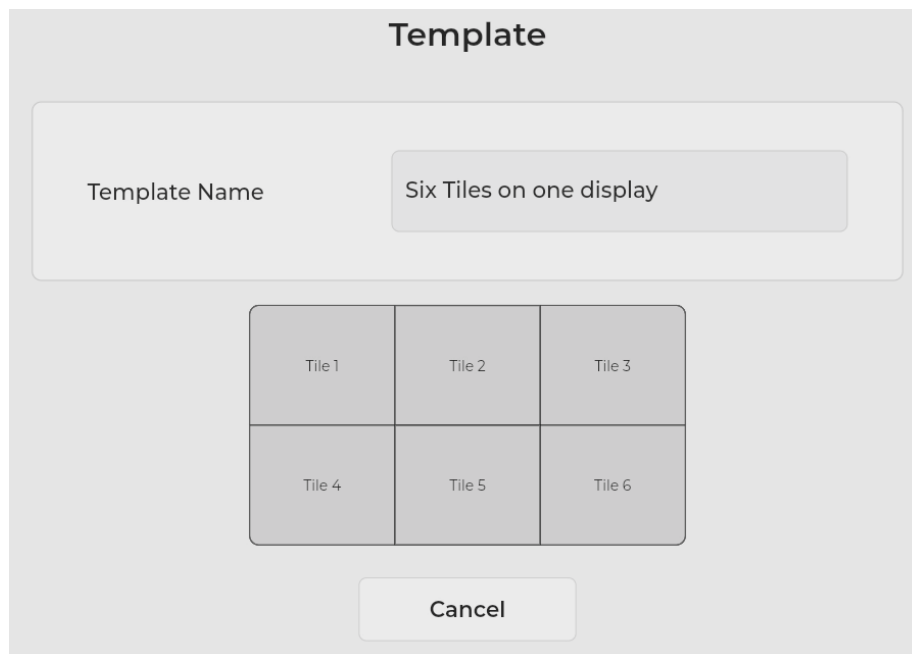


FIGURE 7-76: SIX TILES ON ONE DISPLAY TEMPLATE



CHAPTER 7: APPLICATION

7.8.13 SIXTEEN TILES ON ONE DISPLAY

The “Sixteen Tiles on one display” template shows up to 16 targets on a single display with 4 rows and 4 columns.

When you click on the “Preview” button for this option, the system displays an example of the template, as shown in Figure 7-77 below:

The screenshot shows a dialog box titled "Template". Inside, there is a "Template Name" label followed by a text input field containing "Sixteen Tiles on one display". Below this is a 4x4 grid of 16 tiles, each labeled "Tile 1" through "Tile 16". At the bottom of the dialog is a "Cancel" button.

Tile 1	Tile 2	Tile 3	Tile 4
Tile 5	Tile 6	Tile 7	Tile 8
Tile 9	Tile 10	Tile 11	Tile 12
Tile 13	Tile 14	Tile 15	Tile 16

FIGURE 7-77: SIXTEEN TILES ON ONE DISPLAY TEMPLATE

CHAPTER 7: APPLICATION

7.8.14 THIRTY TWO TILES ON ONE DISPLAY

The “Thirty Two Tiles on one display” template shows up to 32 targets on a single display with 8 rows and 4 columns.

NOTE: This option is intended to be used with the DESKVUE PE variant.

When you click on the “Preview” button for this option, the system displays an example of the template, as shown in Figure 7-78 below:

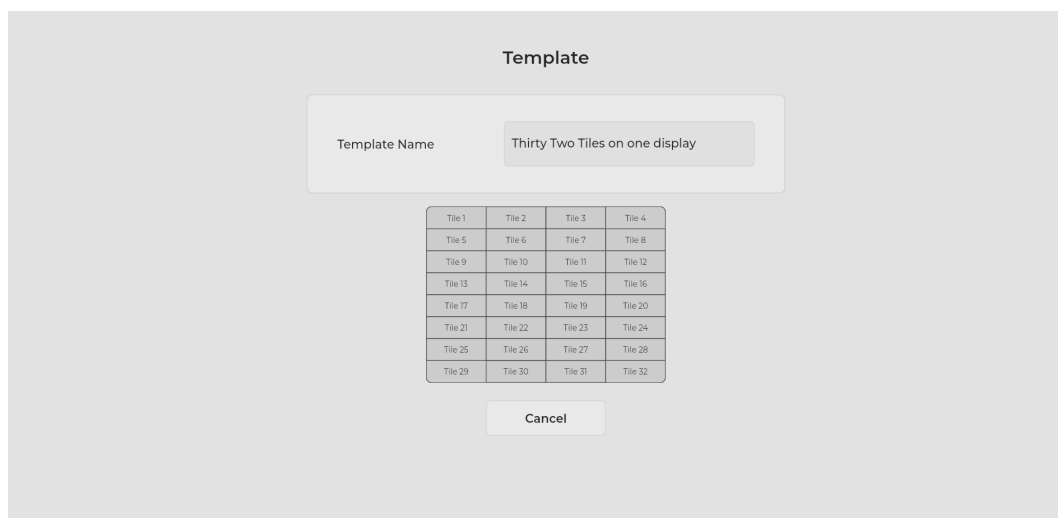


FIGURE 7-78: THIRTY TWO TILES ON ONE DISPLAY TEMPLATE



CHAPTER 7: APPLICATION

7.9 WORKSPACES TAB

When the “Workspaces” tab is selected, the system displays the “Workspace List” screen, as shown in Figure 7-79 below:

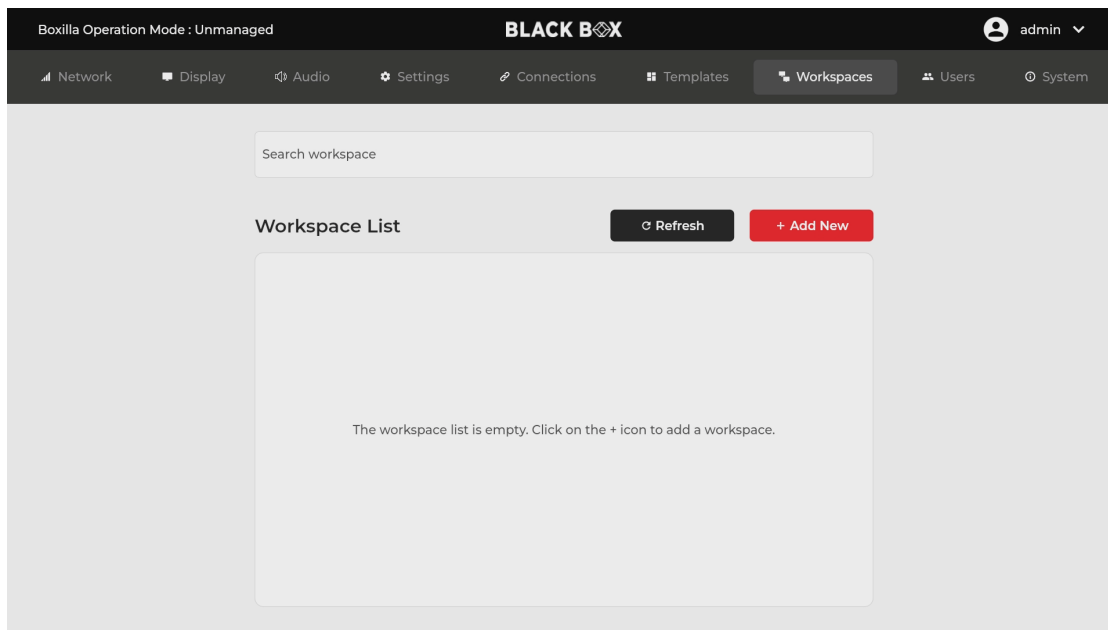


FIGURE 7-79: WORKSPACES TAB

CHAPTER 7: APPLICATION

Table 7-12 explains the initial options on the “Workspaces” tab.

TABLE 7-12. WORKSPACES TAB OPTIONS

ITEM	DESCRIPTION
	Type in this search box to customize the items shown in the workspace list. When you type in this box, all workspaces containing that search term will be displayed. In the example in Figure 7-80 below, “ws” was typed in the search box, so the only workspaces that appear in the workspace list contain those series of letters.

Search workspace box

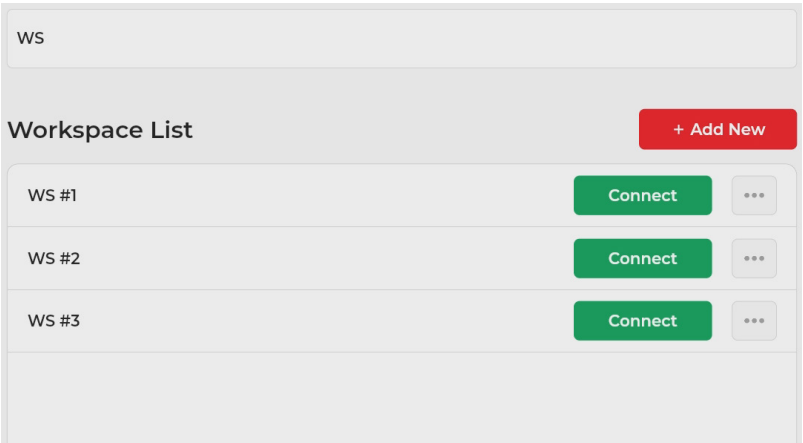


FIGURE 7-80: WORKSPACE SEARCH BOX RESULTS

Add New button

Click on this button to define and configure a new workspace.

Each workspace has additional options to edit, clone, or remove that instance. To access these options, click on the ellipsis (...) button next to the workspace.

CHAPTER 7: APPLICATION

7.9.1 ADD NEW WORKSPACE

After you click on the “Add New” button, the system displays a configuration screen, as shown in Figure 7-81 below:

The screenshot shows the 'Add New Workspace' configuration screen in the BLACK BOX application. The interface has a dark header with the status 'Boxilla Status : Unmanaged' and the application name 'BLACK BOX'. A navigation bar includes links for Network, Display, Audio, Settings, Connections, Templates, Workspaces (active), Users, and System. The user is logged in as 'admin'. The main content area is titled 'New workspaces' and contains three sections: 1. 'Workspace Name' and 'Workspace Description' fields, with 'WS #2' entered in the name field and a placeholder 'Enter description' in the description field. 2. 'Display Layout' section showing a single tile labeled 'Tile 1' on an 'Elgato *' display, with a note '* = Primary'. 3. 'Select Templates' section with a dropdown menu set to 'One Tile on one display' and a 'Select Connection' button. At the bottom are 'Save' and 'Cancel' buttons.

FIGURE 7-81: ADD NEW WORKSPACE SCREEN

CHAPTER 7: APPLICATION

Table 7-13 explains the options on the “New workspace” screen.

TABLE 7.13. ADD NEW WORKSPACE SCREEN OPTIONS

ITEM	DESCRIPTION
Workspace Name	Enter a name for the workspace. The Emerald® DESKVUE unit will use this name to identify the workspace.
Workspace Description	Enter a description for the workspace.
Display Layout	This area shows the detected displays.

Select the templates for the display(s) and connection(s) using the drop-down list boxes provided. Use the drop-down list box selections to map the desired connection to the tile(s). You can map the same connection to multiple tiles, if desired, assuming that the connection is set to “shared” mode.

NOTE: Templates created on the Templates tab appear in the drop-down list box. An example appears in Figure 7-82 below:

Select templates



FIGURE 7-82: EXAMPLE OF A TEMPLATE SELECTION DROP-DOWN LIST BOX

NOTE: Since virtual machines don't have a set display resolution, you can choose any of the options from the drop-down list box.

Save/Cancel buttons

Click on the “Save” button to save information that you entered. Click on the “Cancel” button to discard information that you entered. The “Save” and “Cancel” buttons are shown in Figure 7-83 below:



FIGURE 7-83: SAVE AND CANCEL BUTTON

CHAPTER 7: APPLICATION

Every connection under Workspace will have additional options to manipulate the video signal, as shown in Figure 7-84 below:

Select connection on Tile 1

Graphics #1

Decorations

Fixed Position

Always on Top

Aspect Ratio

Resizable

Select connection on Tile 2

RDP Connection

Resolution

Decorations

Fixed Position

Always on Top

FIGURE 7-84: WORKSPACE CONNECTION OPTIONS

Table 7-14 explains the workspace connection options.

TABLE 7-14. TARGET PROPERTIES

ITEM	DESCRIPTION
Resolution (RDP and PCoIP options)	Choose the resolution that the target should use.
Decorations	Options are "True" or "False." If set to "True," the tile/viewport options will be displayed. If set to "False," the tile/viewport options will not be visible.
Fixed Position	Options are "True" or "False." If set to "True," the tile/viewport cannot be moved or resized. If set to "False," the tile can be freely moved around and scaled.
Always on Top	Options are "True" or "False." If set to "True," the connection window will always appear on top. If set to "False," the connection window will not always appear on top.
Aspect Ratio	Options are "Fit" or "Maintain." If set to "Fit," the input is stretched to fit the viewable window. If set to "Maintain," the original aspect ratio is maintained, which may cause blank borders.
Resizable	Options are "True" or "False." If set to "True," the viewable window can be scaled and resized. If set to "False," the viewable window cannot be scaled and resized.

CHAPTER 7: APPLICATION

When the “Save” button is pressed, the newly added workspace appears in the workspace List. In our example, the workspace was named “Quad Screen, 2 x 2,” as shown in Figure 7-85 below:

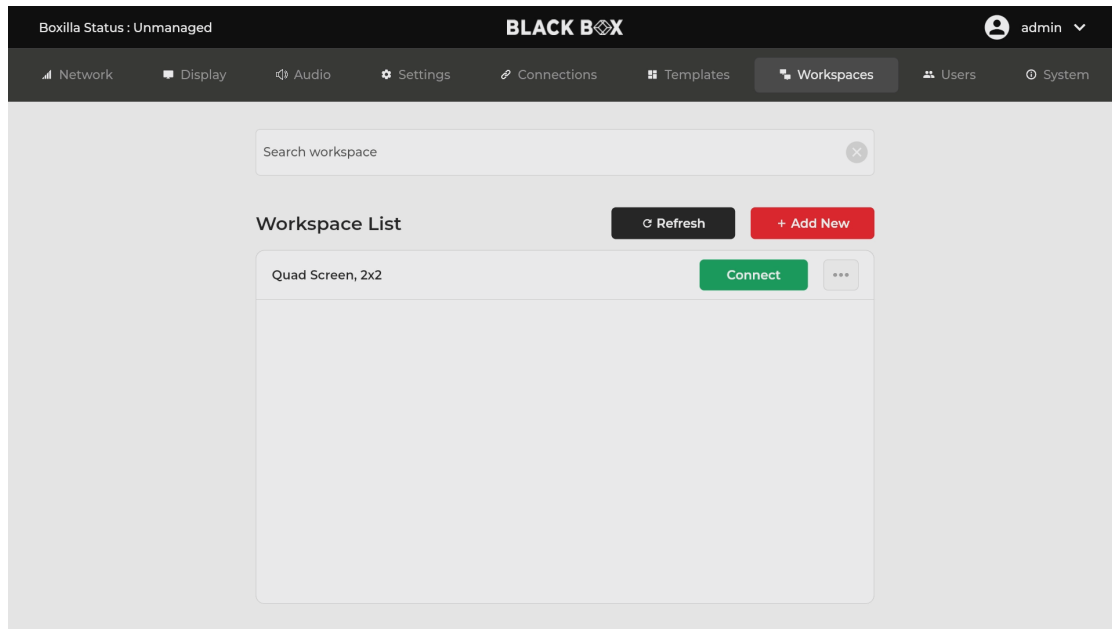


FIGURE 7-85: SAMPLE UPDATED WORKSPACE LIST SCREEN



CHAPTER 7: APPLICATION

Table 7-15 explains options for items in the Workspace List.

TABLE 7-15. UPDATED WORKSPACE SCREEN OPTIONS

ITEM	DESCRIPTION
Add New button	Click on this button to define and configure a new workspace. This button was explained in “7.9.1: Add New Workspace.”
Connect/Terminate button	Click on the “Connect” button to connect to the workspace. The “Connect” button changes to a “Terminate” button after the connection is established. Click on the “Terminate” button to end the established connection. NOTE: In newer firmware, the “Terminate” button cannot be easily seen as it is behind the top-level window. Using hot key, X will disconnect the workspace and display the workspace page once again.

NOTE: After you connect to the workspace, when you hover over a tile, a thin green border appears around the tile to show that the tile is active.

You can also hover the mouse pointer over the top right corner of a tile right below the close button to obtain access to additional options, shown in Figure 7-86 below:

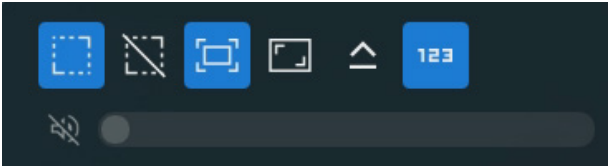


FIGURE 7-86: ADDITIONAL TILE OPTIONS

NOTE: Active options are shaded in blue. If an option is not active, click on the button to make it active.

CHAPTER 7: APPLICATION

Table 7-16 explains these additional options:

TABLE 7-16. ADDITIONAL TILE OPTIONS

ITEM	DESCRIPTION
Resize button	When this option is active, the tile can be moved and resized.
Resizing restricted button	When this option is active, the tile cannot be moved or resized.
Snap Video Aspect button	When this option is active, the Emerald® DESKVUE unit adjusts a modified screen to the appropriate aspect ratio so the video doesn't appear to be modified in the horizontal/vertical directions.
Make full screen button	This option makes the connection fill the entire screen.
Audio button	You can click on the audio button to mute or unmute sound for the tile. A diagonal line appears across the audio icon when the audio is muted.
Audio slider bar	You can drag the slider to the desired audio volume.
CAPS LOCK	This option shows if the CAPS LOCK is ON or OFF for the target.
NUM LOCK	This option shows if the NUM LOCK is ON or OFF for the target.

TIPS:

- To make a tile full screen, double click on the label on the top of the tile. To return it to its previous size, double click on the label again.
- Use hot keys to increase your workspace efficiency. For more information about hotkeys, see “Hot Key Actions” under the user’s setting options.



CHAPTER 7: APPLICATION

Workspace and Connection Folders

When DESKVUE is managed by Boxilla®, it is possible to create Workspace and Connection folders, which can aid in organizing the workspaces and connections into a directory like structure within the DESKVUE OSD, as shown in Figure 7-87 below.

Refer to the Boxilla manual for more detail.

Clicking on the “Flat view” option reverts the view to displaying all workspace names or connection names in one long list.

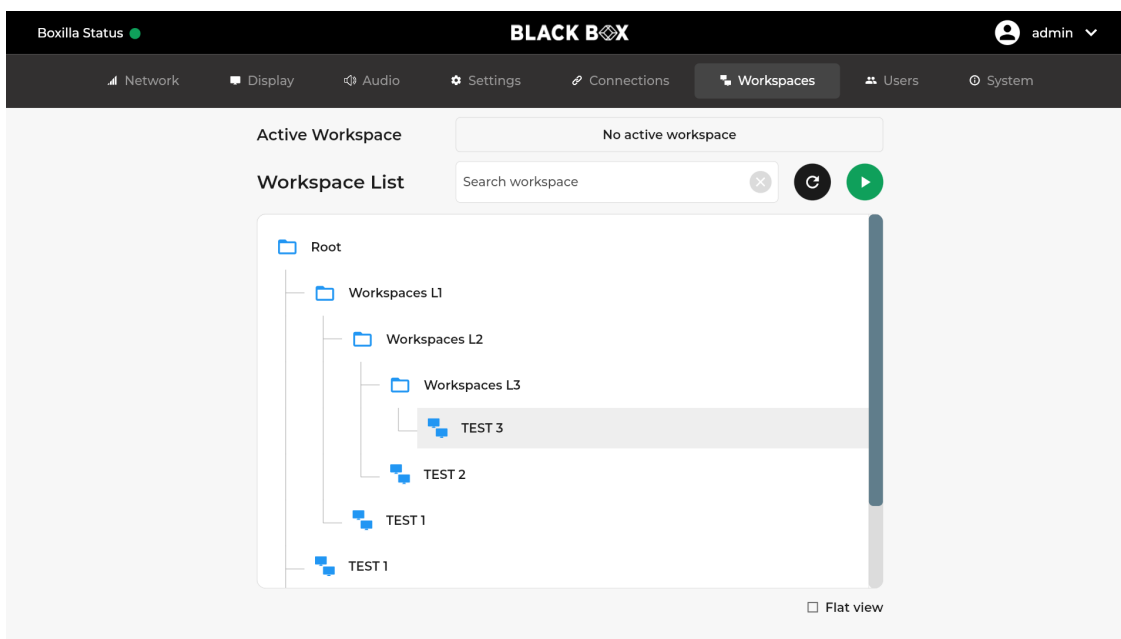


FIGURE 7-87: WORKSPACE AND CONNECTION FOLDERS

7.10 USERS TAB

When the “Users” tab is selected, the system displays the “User List” screen, as shown in Figure 7-88 below:

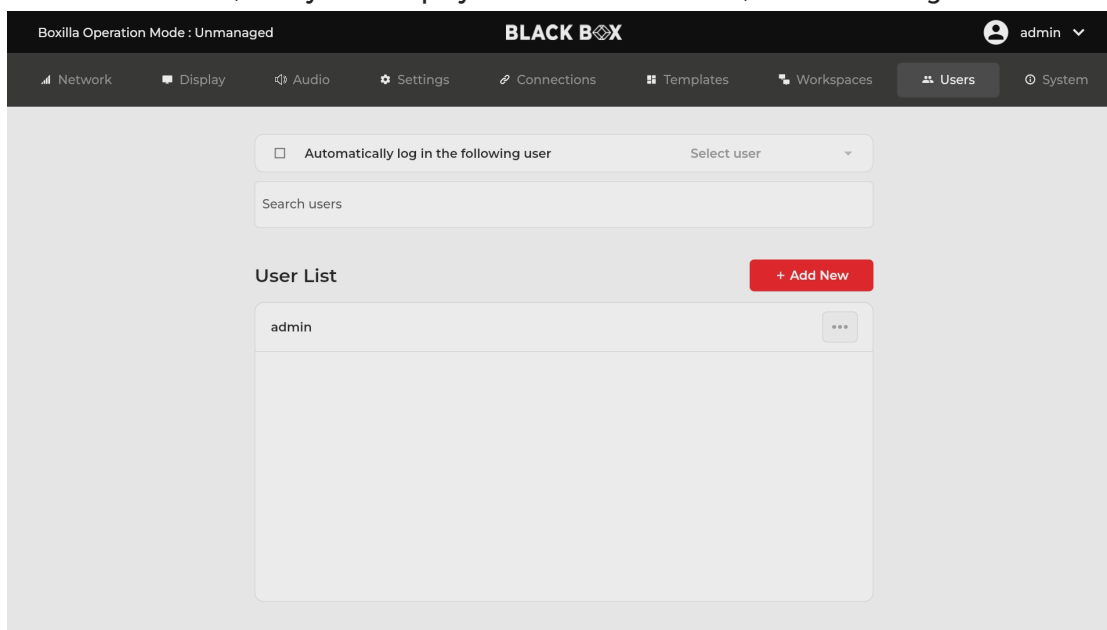


FIGURE 7-88: USERS TAB


CHAPTER 7: APPLICATION

NOTE: If the DESKVUE unit is managed by Boxilla®, the “Add New” button is not displayed. In this case, any new user must be configured within Boxilla.

NOTE: When DESKVUE is managed by Boxilla, Active Directory users may log into the DESKVUE if LDAP is properly configured.

7.10.1 ADD NEW USER

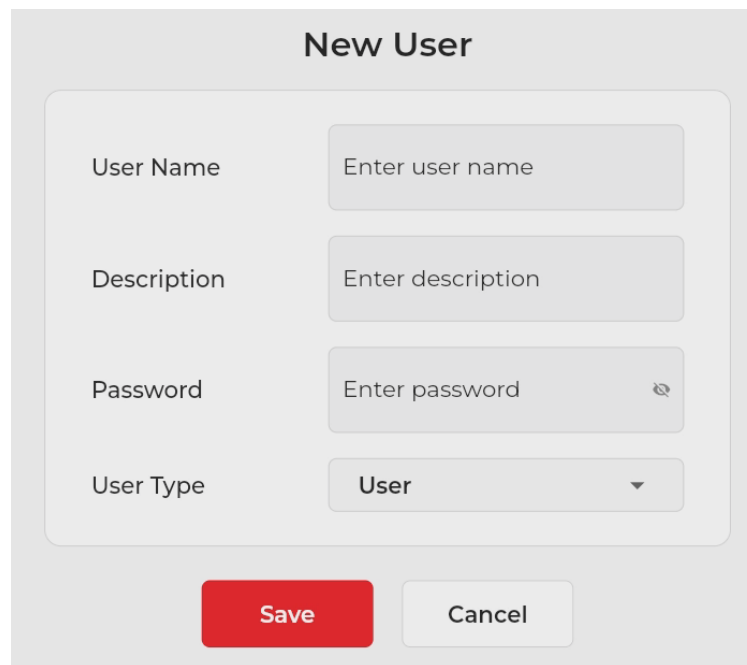When you click on the “Add New” button, the system displays the “New User” screen, as shown in Figure 7-89 below:

The image shows a web form titled "New User" in a light gray box. Inside the box is a white rounded rectangle containing four input fields. The first field is labeled "User Name" and has a placeholder "Enter user name". The second field is labeled "Description" and has a placeholder "Enter description". The third field is labeled "Password" and has a placeholder "Enter password" with a small eye icon to its right. The fourth field is labeled "User Type" and is a dropdown menu with "User" selected. Below these fields are two buttons: a red "Save" button and a gray "Cancel" button.

New User	
User Name	Enter user name
Description	Enter description
Password	Enter password 
User Type	User ▼
Save Cancel	

FIGURE 7-89: NEW USER SCREEN

CHAPTER 7: APPLICATION

Table 7-17 explains the options on the “New User” screen.

TABLE 7-17. NEW USER OPTIONS

ITEM	DESCRIPTION
User Name	Enter the name for the user. It should be between 1 and 32 characters and can be any valid username for a Microsoft O/S. This means the username MAY NOT contain <code>"/\ [] = , + * ? < > `</code> .
Description	Enter a description for the user.
Password	Enter a password for the user, up to 32 characters. It can be any valid password for a Microsoft O/S. The password MAY contain <code>, ~ : ; ! @ # \$ % ^ & ' { }</code> but MAY NOT contain <code>"/\ [] = , + * ? < > `</code> .

Select the user type from the drop-down list. You can choose “User,” “Admin,” or “Power,” as shown in Figure 7-90 below:

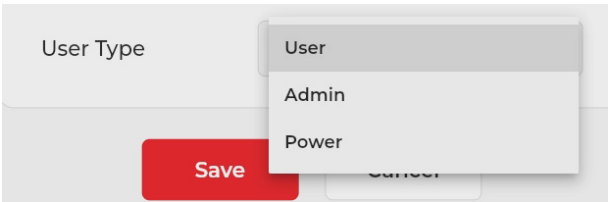


FIGURE 7-90: USER TYPE OPTIONS

User Type

User: Users of this class can only select from a list of pre-defined connections to access and view system information. They cannot change any configuration settings. They can change their password. A standard user can only view the network address for the Emerald® DESKVUE unit being used, the workspace(s) allocated to the user by the admin, and the system firmware version.

Admin: Admins of this class have full rights to configure the system, including creating/modifying/deleting new users and connections, changing network settings, and adjusting system settings.

Power: Power users of this class can modify connection resolutions and change their password.

Click on the “Save” button to save information that you entered. Click on the “Cancel” button to discard information that you entered. The “Save” and “Cancel” buttons are shown in Figure 7-91 below:

Save/Cancel buttons



FIGURE 7-91: SAVE AND CANCEL BUTTONS

CHAPTER 7: APPLICATION

To add connections to a new user, use the elipsis button (...) next to the user and select “Connections and Workspaces.” On this page, which is shown in Figure 7-92 below, add the targets to the right-side window to add that connection to the user list. Targets on the left side window will not be able to be accessed by this user.

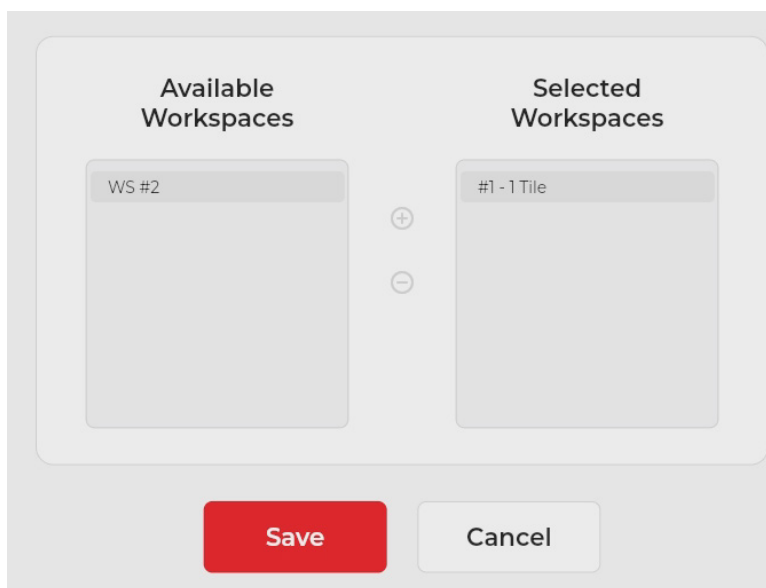


FIGURE 7-92: AVAILABLE AND SELECTED WORKSPACES SCREEN

NOTE: Admin users will not have the “Connections and Workspaces” option in the drop-down list, because, by default, they have access to all systems. This option is only available to users and power users.



CHAPTER 7: APPLICATION

7.10.2 USER MENU OPTIONS

When you click on the three dots to the right of a user name, another menu appears, as shown in Figure 7-93 below:

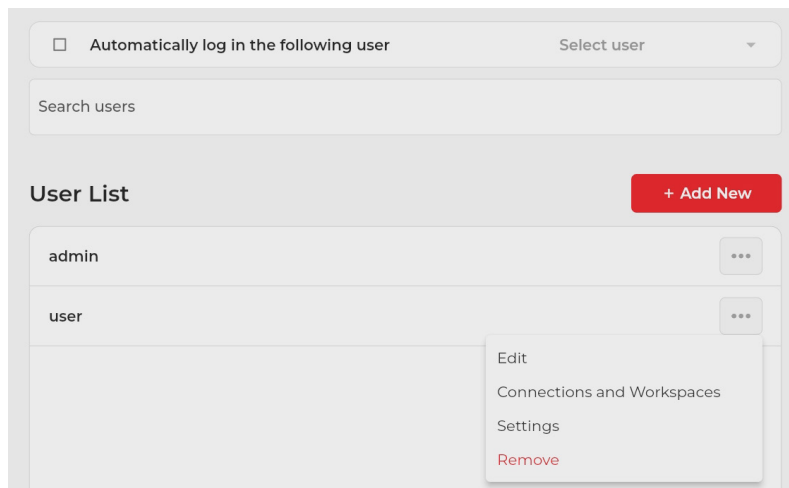



FIGURE 7-93: USER LIST ADMIN MENU OPTIONS

NOTE: The default admin account cannot be removed.

CHAPTER 7: APPLICATION

7.10.2.1 EDIT OPTIONS

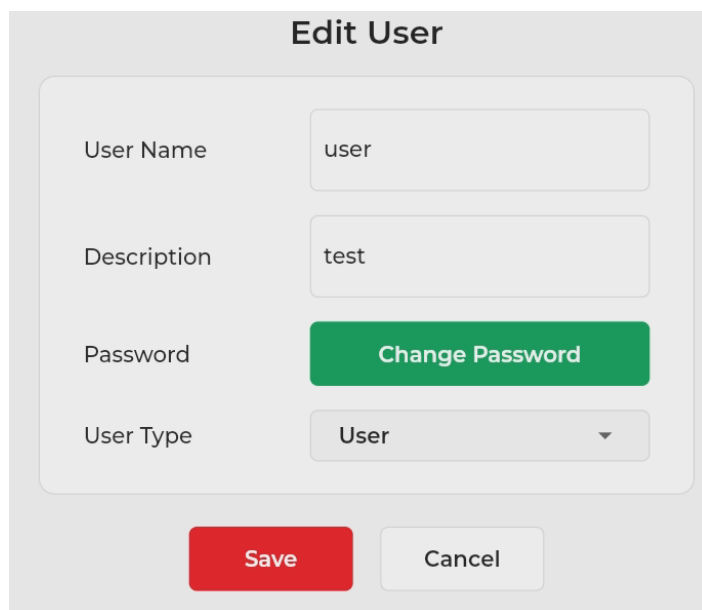When you choose the “Edit” option for a user, the system displays the “Edit User” screen, as shown in Figure 7-94 below. This screen enables you to edit information associated with the user, including changing the user’s password and changing a user’s description.



The screenshot shows a web form titled "Edit User". It contains four input fields: "User Name" with the value "user", "Description" with the value "test", "Password" with a green "Change Password" button, and "User Type" with a dropdown menu showing "User". At the bottom are two buttons: a red "Save" button and a grey "Cancel" button.

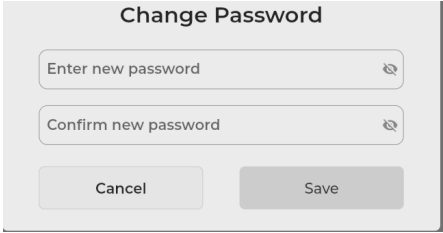
Field	Value
User Name	user
Description	test
Password	Change Password
User Type	User

FIGURE 7-94: EDIT USER OPTIONS

CHAPTER 7: APPLICATION

Table 7-18 explains the options on the “Edit User” screen.

TABLE 7-18. EDIT USER OPTIONS

ITEM	DESCRIPTION
	Click on the “Change Password” button to change the user’s password. The system will then display the “Change Password” screen, as shown in Figure 7-95 below:
Change Password button	 A screenshot of the 'Change Password' screen. It has a title 'Change Password' at the top. Below the title are two input fields: 'Enter new password' and 'Confirm new password'. Each field has a small eye icon on the right side. At the bottom of the screen are two buttons: 'Cancel' and 'Save'.
	FIGURE 7-95: CHANGE PASSWORD SCREEN
	The new password needs to be entered twice to confirm it. Then click on the “Authenticate” button to change the password or the “Cancel” button to discard information that you entered.
User Type	This field displays the account type.
	Click on the “Save” button to save information that you entered. Click on the “Cancel” button to discard information that you entered. The “Save” and “Cancel” buttons are shown in Figure 7-96 below:
Save/Cancel buttons	 A screenshot showing two buttons side-by-side. The 'Save' button is red with white text. The 'Cancel' button is light gray with dark gray text.
	FIGURE 7-96: SAVE AND CANCEL BUTTONS

CHAPTER 7: APPLICATION

After saving the user account, the hot keys can be configured by clicking on the ellipsis (...) button next to the user account and selecting “Settings.” When the “Settings” page is displayed, several hot key options will be available to view and edit, as shown in Figure 7-97 below:

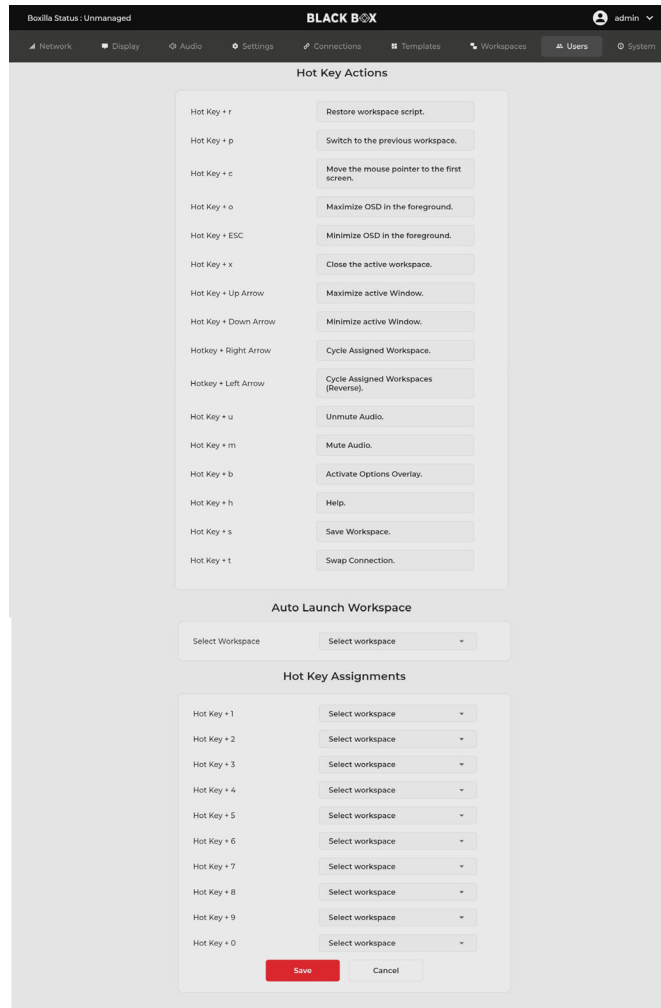


FIGURE 7-97: USER WORKSPACE AND HOT KEY SELECTION SCREEN

Use the drop-down list boxes to assign hot keys to tiles.

NOTE: If DESKVUE is managed by Boxilla® and the global hot key of Mouse Left+Right is set for active hot key, the DESKVUE user must use CTRL-CTRL instead.

CHAPTER 7: APPLICATION

7.11 SYSTEM TAB

When the “System” tab is selected by a user classified as admin, the system displays the “System Settings” screen, as shown in Figure 7-98 below:

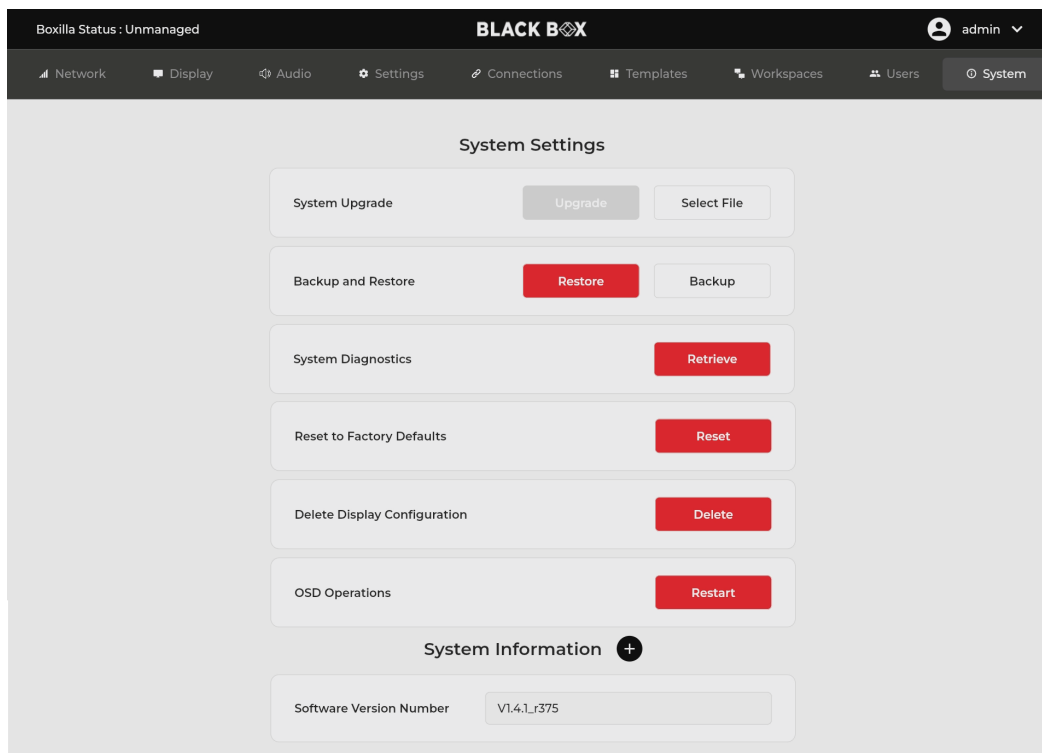


FIGURE 7-98: SYSTEM SETTINGS SCREEN

CHAPTER 7: APPLICATION

Table 7-19 explains the options on the “System Settings” screen.

TABLE 7-19. SYSTEM SETTING OPTIONS

ITEM	DESCRIPTION
	When a system update is available, click on the “Select File” button and follow the on-screen directions to complete the update using a file stored on a removable USB drive using a FAT/FAT32 format. Available upgrade files will appear in a pop-up window, as shown in Figure 7-99 below:

System Upgrade




FIGURE 7-99: UPGRADE FILE SELECTION SCREEN

Backup: Click on this button to back up system settings to a removable drive, such as a USB flash drive. When you choose this option, the system will display a screen showing the backup name and offering you the option to save the file by clicking on the “Save” button or cancelling the backup by clicking on the “Cancel” button.

The backup confirmation screen is shown in Figure 7-100 below:



FIGURE 7-100: BACKUP CONFIRMATION SCREEN

Backup and Restore

Restore: Click on this button to restore system settings from the backup that you previously saved to a removable USB drive. The saved settings can be used to restore multiple DESKVUE units.

When you click on this option, you will be prompted to choose the file to use for the restore, as shown in Figure 7-101 below:



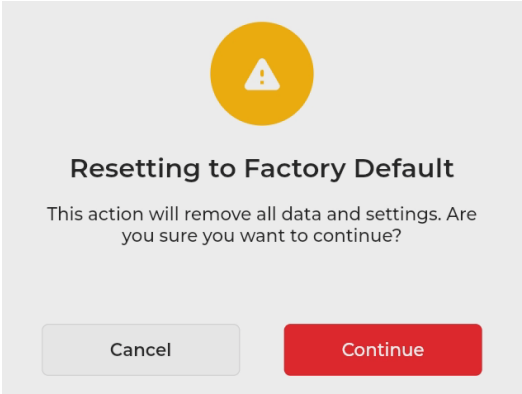


FIGURE 7-101: FILE RESTORE SELECTION SCREEN

CHAPTER 7: APPLICATION

TABLE 7-19. SYSTEM SETTING OPTIONS (CONTINUED)

ITEM	DESCRIPTION
System Diagnostics	Click on this button to perform system diagnostics to help troubleshoot a system problem. You typically use this option when working with a technical support team member to resolve an issue. It will export log files to an attached USB drive.
	When you choose this option, the system will display a screen showing the filename for the system diagnostics log file and offering you the option to save the file by clicking on the “Save” button or cancel the file save by clicking on the “Cancel” button.
	The diagnostic log confirmation screen is shown in Figure 7-102 below:
	
	FIGURE 7-102: SYSTEM DIAGNOSTICS CONFIRMATION SCREEN
Reset to factory defaults	Click on the “Reset” button to reset the system to the settings that shipped with the product. When you click on this button, the system will display a confirmation message as shown in Figure 7-103 below:
	
	FIGURE 7-103: RESET TO FACTORY DEFAULT CONFIRMATION MESSAGE
	To reset to factory defaults, click on the “Continue” button. This removes the unit configuration, and makes it an unmanaged unit. All settings are restored to the settings supplied with the shipped DESKVUE unit. To cancel the action, click on the “Cancel” button.
Delete Display Configuration	Use this option to remove any preconfigured monitor layouts.
OSD Operations	When clicked, this option will restart the GUI, log out the user, and display the login screen.
Software Version Number	The Emerald® DESKVUE unit displays its software version in this area.

CHAPTER 8: TROUBLESHOOTING

TABLE 8-1. TROUBLESHOOTING

ISSUE	RESOLUTION
The network cable is attached to a non-supported interface port. Please switch connections.	To resolve this issue: 1. Remove the network cable and attach it to a different network switch. 2. Refresh the page to remove the error message. 3. Hot plug the network cable back to the original switch. 4. Update your network settings. 5. Apply. Alternatively, you can perform a factory reset on the DESKVUE unit immediately after configuring the network port.
Unable to connect to <network address> Please confirm connection details and target is powered up and connected to the network.	Using a different system, use the PING function to verify that the network address is responding. If the target is responding to PING requests, check the connection parameters and firmware.
The mouse left+right hot key combination doesn't work on DESKVUE.	Use the Ctrl-Ctrl hot keys instead.
Flash drive is not recognized	Verify that you are using the USB 2.0 ports and not USB 3.0 ports. Also, try a different flash drive and verify that it is formatted to FAT or FAT32



APPENDIX A: BOXILLA DISCOVERY

A.1 BOXILLA DISCOVERY

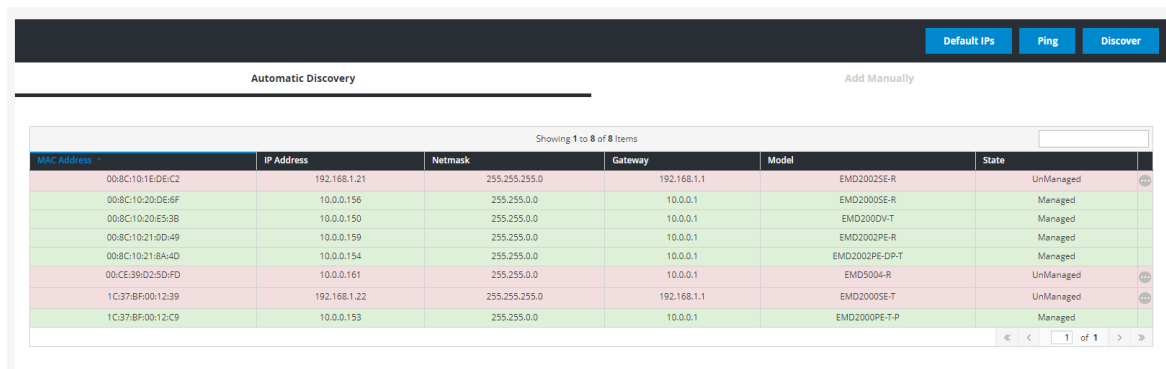
The Emerald® DESKVUE unit can be discovered and managed by the Boxilla® manager as long as it is using the DESKVUE firmware version 1.1.0.r94 or later **and** the Boxilla unit is using firmware version 4.7.0 or later. Older firmware versions do not support integrating DESKVUE and Boxilla.

NOTE: If the DESKVUE unit is managed by another Boxilla Manager, it will need to be factory reset prior to performing the Boxilla Discovery process.

A.1.1 DISCOVERING AND MANAGING THE DESKVUE UNIT

To discover and manage the DESKVUE unit through the Boxilla Manager:

1. Verify that the DESKVUE unit is turned on.
2. Verify that the the DESKVUE unit is connected to the network so that Boxilla can detect it.
3. Verify that the IP Address (192.168.1.1) is not in use. Otherwise, the Boxilla discovery process will not work.
4. In the Boxilla administrative interface, go to Discovery and press the “Discovery” button. The DESKVUE unit should then be discovered and show as Unmanaged under model EMD5004-R, as shown in Figure A-1 below:



MAC Address	IP Address	Netmask	Gateway	Model	State
00:8C:10:1E:DE:C2	192.168.1.21	255.255.255.0	192.168.1.1	EMD2002SE-R	UnManaged
00:8C:10:20:DE:6F	10.0.0.156	255.255.0.0	10.0.0.1	EMD2000SE-R	Managed
00:8C:10:20:E5:38	10.0.0.150	255.255.0.0	10.0.0.1	EMD2000DV-T	Managed
00:8C:10:21:00:49	10.0.0.159	255.255.0.0	10.0.0.1	EMD2002PE-R	Managed
00:8C:10:21:8A:4D	10.0.0.154	255.255.0.0	10.0.0.1	EMD2002PE-OP-T	Managed
00:CE:39:D2:5D:FD	10.0.0.161	255.255.0.0	10.0.0.1	EMD5004-R	UnManaged
1C:37:BF:00:12:39	192.168.1.22	255.255.255.0	192.168.1.1	EMD2000SE-T	UnManaged
1C:37:BF:00:12:C9	10.0.0.153	255.255.0.0	10.0.0.1	EMD2000PE-T-P	Managed

FIGURE A-1: DETECTED DESKVUE UNIT SHOWING AS UNMANAGED



APPENDIX A: BOXILLA DISCOVERY

5. Change the Emerald® DESKVUE network settings, if necessary, through the Boxilla® web interface by selecting “Edit” from the drop-down menu shown in Figure A-2 below:


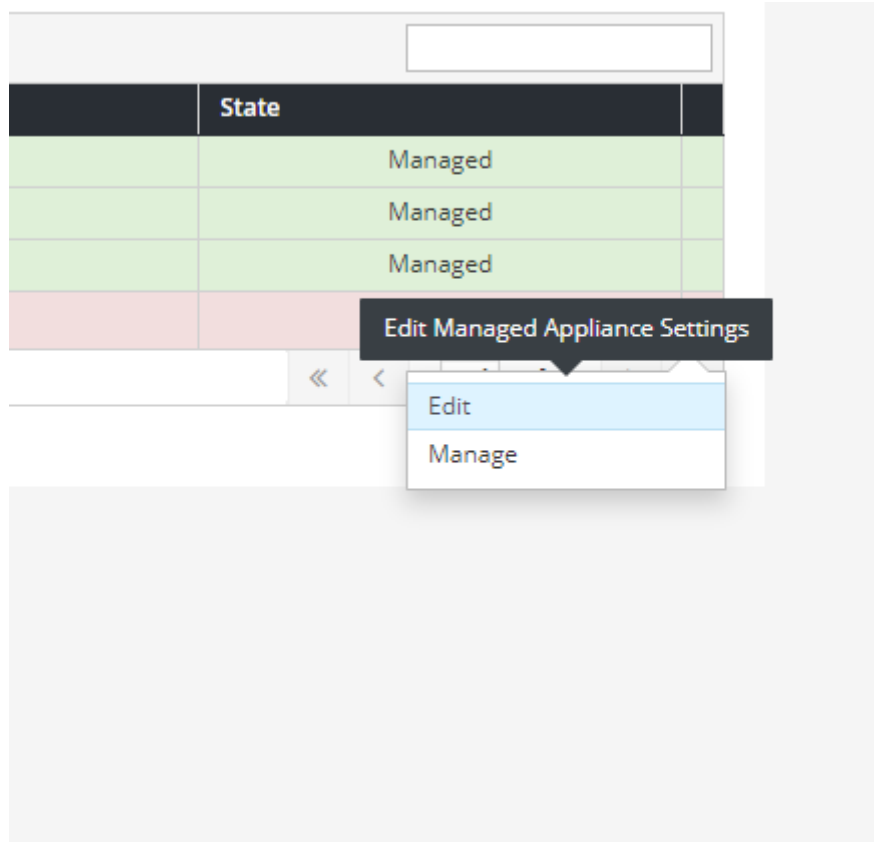


FIGURE A-2: EDIT OPTION

APPENDIX A: BOXILLA DISCOVERY

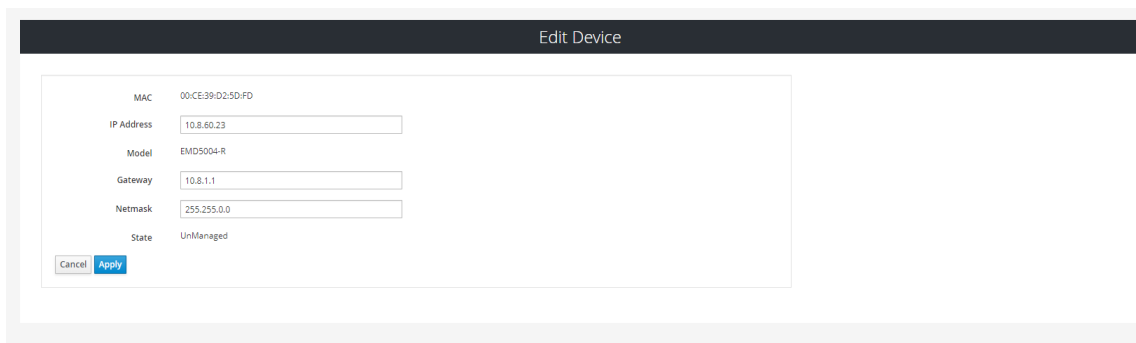6. Configure the network settings for the Emerald® DESKVUE unit using the “Edit Device” screen, shown in Figure A-3 below:



MAC	00:CE:39:02:5D:FD
IP Address	10.8.60.23
Model	EMD5004-R
Gateway	10.8.1.1
Netmask	255.255.0.0
State	UnManaged

FIGURE A-3: EDIT DEVICE SCREEN

NOTE: Use network settings that allow the DESKVUE unit and Boxilla® Manager to be on the same subnet/network.

7. Click on the “Apply” button to accept your changes.



APPENDIX A: BOXILLA DISCOVERY

- After the system returns to the Discovery page in the Boxilla® Manager, manage the Emerald® DESKVUE unit by using the “Manage” option in the drop-down menu, as shown in Figure A-4 below:

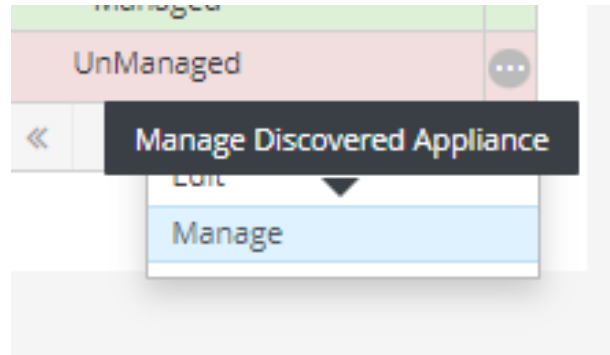


FIGURE A-4: EDIT AND MANAGE OPTIONS ON DROP-DOWN MENU

Before the DESKVUE can be managed, a managed name must be assigned to it so it can be referenced. This name is visible in the Boxilla interface only, and it is not the name of the connection. Optionally, the zone can be configured if the application requires it. Once done configuring the zone and managed name, click on the “Apply” button, as shown in Figure A-5 below:

A screenshot of the 'Manage Device' form. The form has a dark header bar with the text 'Manage Device'. Below the header, there are several fields: 'MAC' with the value '00:CE:39:D2:5D:FD', 'IP Address' with the value '10.8.60.23', 'Model' with the value 'EMD5004-R', 'Zone' with a dropdown menu, and 'Managed Name' with the value 'DeskVue'. At the bottom left of the form, there are two buttons: 'Cancel' and 'Apply'. The 'Apply' button is highlighted in blue.

FIGURE A-5: APPLY BUTTON

After you click on the “Apply” button, the system may display a confirmation message, as shown in Figure A-6 below:

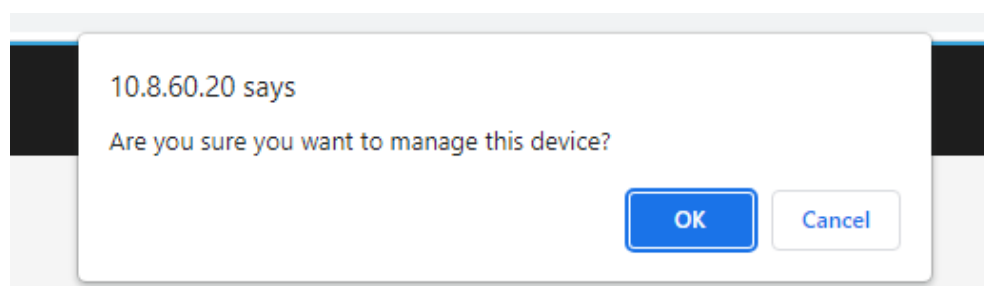


FIGURE A-6: DEVICE MANAGEMENT CONFIRMATION MESSAGE

APPENDIX A: BOXILLA DISCOVERY

- Click on the “OK” button shown in Figure A-6 above to enable Boxilla® to manage the Emerald® DESKVUE unit. The system should display a confirmation message stating that the operation was successful, as shown in Figure A-7 below:



FIGURE A-7: OPERATION SUCCESSFUL CONFIRMATION MESSAGE

NOTE: When the DESKVUE unit is on the same network/subnet as the Boxilla Manager, the operation should be successful. If the operation fails, verify that the DESKVUE unit and the Boxilla Manager are on the same network/subnet and that supported firmware is being used, per information specified in “A1: Boxilla Discovery.”



APPENDIX A: BOXILLA DISCOVERY

The Emerald® DESKVUE unit may initially show up in the device list as “Offline” with a “Waiting” status, as shown in Figure A-8 below;

Devices | Settings

Bulk Update

System Properties

- Template

Edit Template

+ Add Template

Devices Settings

3

On-Line Devices

0

Active Connections

0

Device Alerts

Video Settings

Misc Settings

LACP Info

Showing 1 to 5 Results out of 5

Device Name	Zone	Configuration	Public IP Address	Private IP Address	Static NAT	Connections	Model	State	Status	Bonded Group	Video Quality	Video Source Opt	EDID Settings DVI 1	Cloned Receiver	EDID Settings DVI 2	Cloned Receiver	Options
TX3 - EMD2002PE-DP-T	-	Unique	10.8.60.27	10.8.60.27	-	TX3: EMD2002PE-DP-T	EMD2002PE-DP-T	OnLine	Configured	-	Default	-	1920x1080	-	1920x1080	-	
TX1 - EMD2000PE-T-P	-	Unique	10.8.60.24	10.8.60.24	-	TX1: EMD2000PE-T-P	EMD2000PE-T-P	OnLine	Configured	-	Best Quality	Off	1920x1080	-	-	-	
RX2 - EMD4000R	-	System	10.8.60.26	10.8.60.26	-		EMD4000R	OffLine	Retrieving	-	-	-	-	-	-	-	
RX1 - EMD2002PE-R	-	Unique	10.8.60.25	10.8.60.25	-		EMD2002PE-R	OnLine	Configured	-	-	-	-	-	-	-	
DeskVue	-	Unique	10.8.60.23	10.8.60.23	-		EMD5004-R	OffLine	Waiting	-	-	-	-	-	-	-	

<<

<

1

>

>>

FIGURE A-8: DESKVUE UNIT SHOWN AS OFFLINE WITH WAITING STATUS

The operation will finish in a few minutes, and the system will update the status to “Online” as shown in Figure A-9 below:

Devices | Settings

Bulk Update

System Properties

- Template

Edit Template

+ Add Template

Devices Settings

4

On-Line Devices

0

Active Connections

0

Device Alerts

Video Settings

Misc Settings

LACP Info

Showing 1 to 5 Results out of 5

Device Name	Zone	Configuration	Public IP Address	Private IP Address	Static NAT	Connections	Model	State	Status	Bonded Group	Video Quality	Video Source Opt	EDID Settings DVI 1	Cloned Receiver	EDID Settings DVI 2	Cloned Receiver	Options
TX3 - EMD2002PE-DP-T	-	Unique	10.8.60.27	10.8.60.27	-	TX3: EMD2002PE-DP-T	EMD2002PE-DP-T	Online	Configured	-	Default	-	1920x1080	-	1920x1080	-	
TX1 - EMD2000PE-T-P	-	Unique	10.8.60.24	10.8.60.24	-	TX1: EMD2000PE-T-P	EMD2000PE-T-P	Online	Configured	-	Best Quality	Off	1920x1080	-	-	-	
RX2 - EMD4000R	-	System	10.8.60.26	10.8.60.26	-		EMD4000R	Offline	Retrieving	-	-	-	-	-	-	-	
RX1 - EMD2002PE-R	-	Unique	10.8.60.25	10.8.60.25	-		EMD2002PE-R	Online	Configured	-	-	-	-	-	-	-	
DeskVue	-	Unique	10.8.60.23	10.8.60.23	-		EMD5004-R	Online	Waiting	-	-	-	-	-	-	-	

<<

<

1 of 1

>

>>

FIGURE A-9: STATUS CHANGED TO ONLINE

APPENDIX A: BOXILLA DISCOVERY

Although the status is updated to online, the system is still updating. Once the operation is complete, the unit's status will be updated to "Online" and "Configured," as shown in Figure A-10 below:

Devices | Settings

Bulk Update

System Properties

Template

Edit Template

+ Add Template

Devices Settings

4

On-Line Devices

0

Active Connections

0

Device Alerts

Video Settings

Misc Settings

LACP Info

Showing 1 to 5 Results out of 5

Device Name	Zone	Configuration	Public IP Address	Private IP Address	Static NAT	Connections	Model	State	Status	Bonded Group	Video Quality	Video Source Opt	EDID Settings DVI 1	Cloned Receiver	EDID Settings DVI 2	Cloned Receiver	Options
TX3 - EMD2002PE-DP-T	-	Unique	10.8.60.27	10.8.60.27	-	TX3 : EMD2002PE-DP-T	EMD2002PE-DP-T	OnLine	Configured	-	Default	-	1920x1080	-	1920x1080	-	
TX1 - EMD2000PE-T-P	-	Unique	10.8.60.24	10.8.60.24	-	TX1 : EMD2000PE-T-P	EMD2000PE-T-P	OnLine	Configured	-	Best Quality	Off	1920x1080	-	-	-	
RX2 - EMD4000R	-	System	10.8.60.26	10.8.60.26	-		EMD4000R	OffLine	Retrieving	-	-	-	-	-	-	-	
RX1 - EMD2002PE-R	-	Unique	10.8.60.25	10.8.60.25	-		EMD2002PE-R	OnLine	Configured	-	-	-	-	-	-	-	
DeskVue	-	Unique	10.8.60.23	10.8.60.23	-		EMD5004-R	OnLine	Configured	-	-	-	-	-	-	-	

<<

<

1 of 1

>

>>

FIGURE A-10: STATUS UPDATED TO ONLINE AND CONFIGURED

APPENDIX B: WORKSPACE CONFIGURATION

B.1 WORKSPACE CREATION/ASSIGNMENT

When the Emerald® DESKVUE unit is managed by a Boxilla® Manager, a workspace can be created and assigned to one or multiple users.

B.1.1 CREATING A WORKSPACE

To create a workspace:

1. In the Boxilla web interface, navigate to Workspaces --> Manage. The workspace screen is shown in Figure B-1 below:

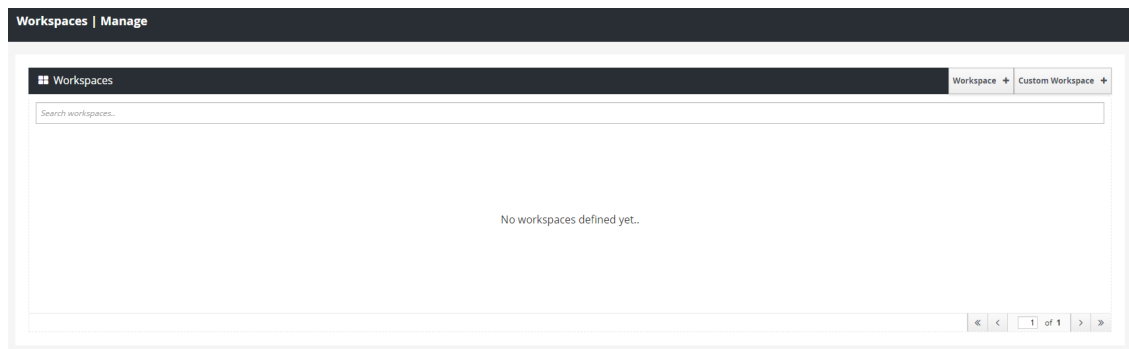


FIGURE B-1: WORKSPACE SCREEN

2. Click on the “Add Workspace +” button to create a new workspace. Then enter both a name and description for the workspace in the appropriate fields shown in Figure B-2. If zoning is required and already set up, the DESKVUE can also be assigned into a zone.

FIGURE B-2: ADD WORKSPACE SCREEN

3. Click on the “Save” button shown in Figure B-2 above.

APPENDIX B: WORKSPACE CONFIGURATION

If the workspace was configured properly, the system will display a success notification in the top right corner of the screen, as shown in Figure B-3 below:

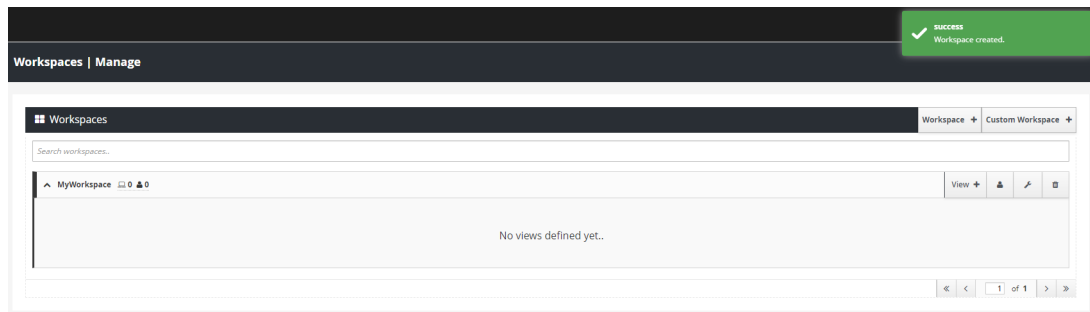


FIGURE B-3: SUCCESS MESSAGE

NOTE: If an error occurs, review the error message for information about the problem.

4. Add a View by clicking on the "View +" button next to the workspace that was just created. The "Add View" screen will appear, as shown in Figure B-4 below:

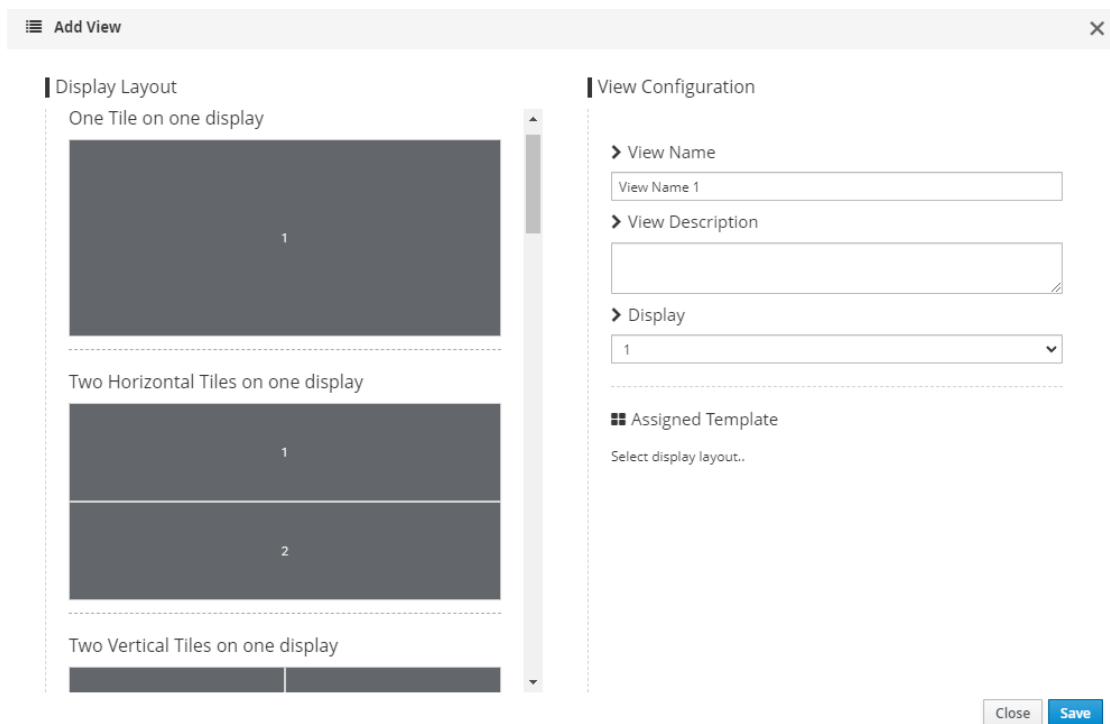


FIGURE B-4: ADD VIEW SCREEN

APPENDIX B: WORKSPACE CONFIGURATION

5. Select a Display Layout Format. Choose from these options:

- One Tile on one display
- Two Horizontal Tiles on one display
- Two Vertical Tiles on one display
- Three Tiles on one display
- Three Vertical Tiles on one display
- Four Tiles on one display
- Four Tiles - PIP Right on one display
- Four Tiles - PIP Left on one display
- Six Tiles on one display
- Eight Tiles on one display
- One Tile on 4 - displays 2x2 (This template can be used for 2x2 video walls.)
- Sixteen Tiles on one display

Figure B-5 shows available display layout options:

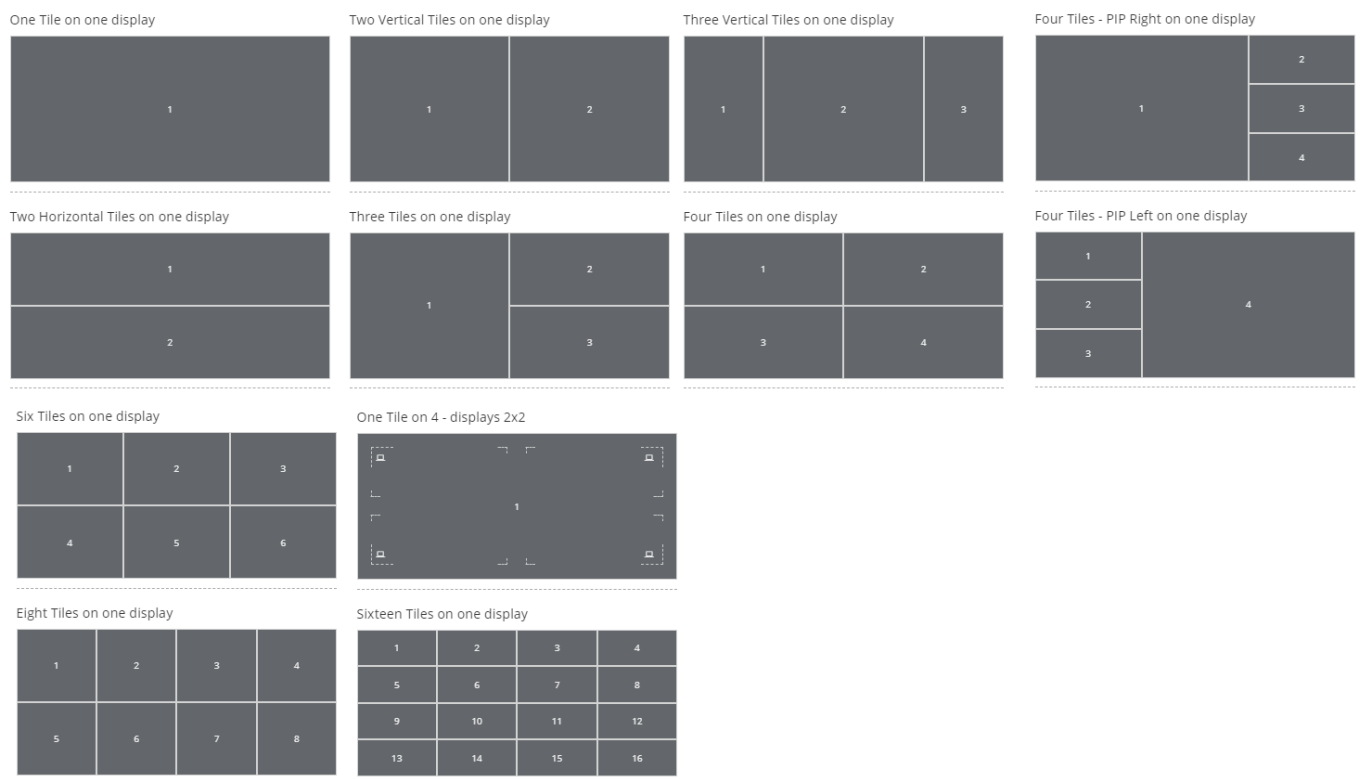


FIGURE B-5: DISPLAY LAYOUT OPTIONS

NOTE: The 32-tile layout is only available on unmanaged DESKVUE receivers; It is not available when managed by the Boxilla® manager.

APPENDIX B: WORKSPACE CONFIGURATION

6. Enter a Name for the View in the appropriate field.
7. Enter a Description for the View in the appropriate field.
8. Select which display should be used.

An example using “Four Tiles on One Display” with completed fields appears in Figure B-6 below:

The screenshot shows the 'Add View' dialog box with two main sections: 'Display Layout' and 'View Configuration'.

Display Layout:

- Four Tiles on one display:** A 2x2 grid of green tiles. Tile 1 (top-left) is labeled 'TX1 - EMD200DV-T'. Tile 2 (top-right) is labeled 'TX4 - EMD200DP-T'. Tile 3 (bottom-left) is labeled 'TX5 - EMD2002PE-DP-T'. Tile 4 (bottom-right) is labeled 'Ubuntu VM'.
- Four Tiles - PIP Right on one display:** A large gray tile labeled '1' on the left, and three smaller gray tiles labeled '2', '3', and '4' stacked vertically on the right.

View Configuration:

- View Name:** QuadViewer
- View Description:** Show 4 targets on one monitor
- Display:** 1
- Assigned Template - Four Tiles on one display:**
 - 1 TX1 - EMD200DV-T:** Fixed position ☐, Always on top ☒, Resizable ☒, Decorations ☒, Aspect Ratio: Fit to Desktop.
 - 2 TX4 - EMD200DP-T:** Fixed position ☒, Always on top ☒, Resizable ☒, Decorations ☐, Aspect Ratio: Fit to Desktop.
 - 3 TX5 - EMD2002PE-DP-T:** Fixed position ☒, Always on top ☐, Resizable ☐, Decorations ☐, Aspect Ratio: Maintain Aspect Ratio.
 - 4 Ubuntu VM:** Fixed position ☐, Always on top ☐, Resizable ☐, Decorations ☐, Resolution: 1920x1080, Aspect Ratio: Fit to Desktop.

At the bottom right of the dialog are 'Close' and 'Save' buttons.

FIGURE B-6: EXAMPLE WITH DISPLAY SELECTED AND COMPLETED FIELDS



APPENDIX B: WORKSPACE CONFIGURATION

9. Click on the “Save” button.

If the workspace and view were configured properly without any errors, the system will display a success notification in the top right corner of the screen, as shown in Figure B-7 below:

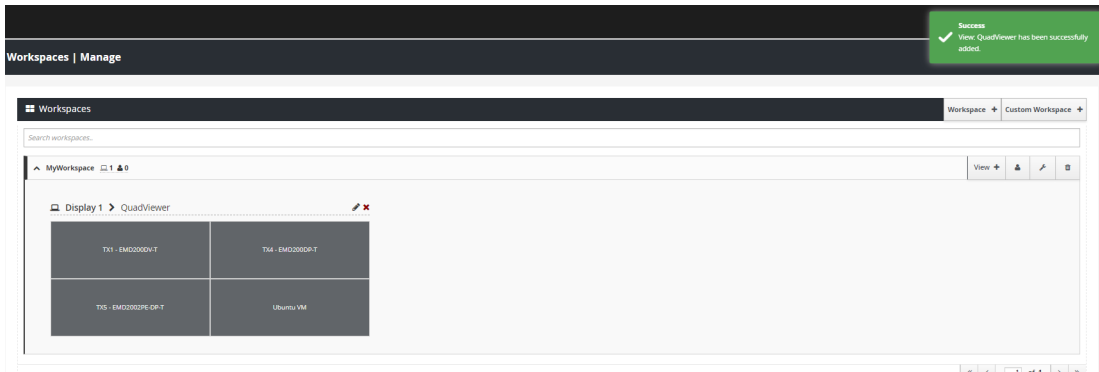


FIGURE B-7: SUCCESS MESSAGE

NOTE: If there was an error, such as a missing view name, it will be displayed in the top right corner of the screen.

Each target in the workspace will have additional parameters to configure as seen in Figure B-8 below.

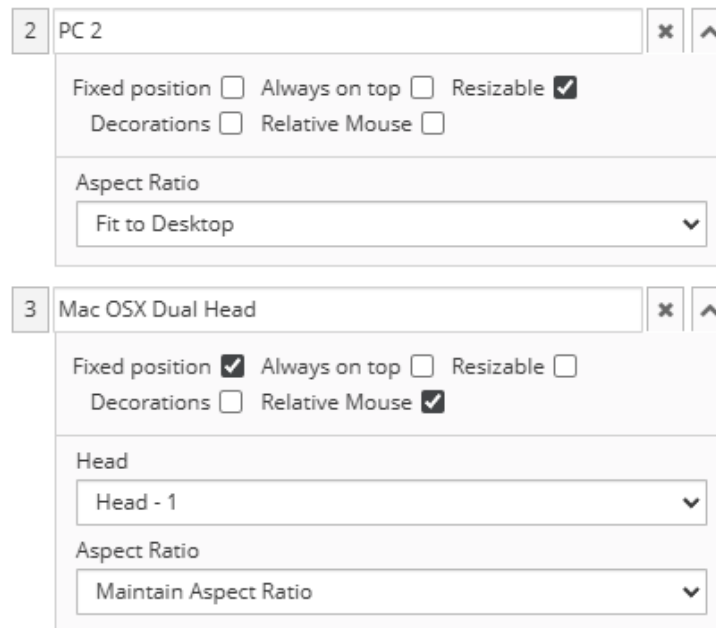


FIGURE B-8: CONFIGURATION SCREEN

APPENDIX B: WORKSPACE CONFIGURATION

Every connection under Workspace will have additional options to manipulate the video signal, as shown in Table B-1 below.

TABLE B-1. TARGET PROPERTIES

ITEM	DESCRIPTION
Resolution (RDP and PCoIP options)	Choose the resolution that the target should use.
Decoration	Options are "True" or "False." If set to "True," the tile/viewport options will be displayed. If set to "False," the tile/viewport options will not be visible.
Fixed Position	Options are "True" or "False." If set to "True," the tile/viewport cannot be moved or resized. If set to "False," the tile can be freely moved around and scaled.
Always on Top	Options are "True" or "False." If set to "True," the connection window will always appear on top. If set to "False," the connection window will not always appear on top.
Aspect Ratio	Options are "Fit" or "Maintain." If set to "Fit," the input is stretched to fit the viewable window. If set to "Maintain," the original aspect ratio is maintained, which may cause blank borders.
Resizable	Options are "True" or "False." If set to "True," the viewable window can be scaled and resized. If set to "False," the viewable window cannot be scaled and resized.
Relative Mouse	This option is configurable per tile to define if the tile should use "Relative Mouse Mode," which locks HID control into the target machine until the default hotkey sequence of <CTRL> <CTRL> <E> is entered. Relative mouse mode can provide extended desktop mouse movement for operating systems that do not support absolute mouse for extended desktop, such as macOS®.

If DESKVUE has more than one monitor, simply click on the "View +" button. Then configure another Layout and select another monitor. Do this for each additional display until each one has been configured.



APPENDIX B: WORKSPACE CONFIGURATION

B.2 CUSTOM WORKSPACE

Custom workspaces can be configured by clicking on the “Custom Workspace” button located on the workspaces main page, as shown in Figure B-9 below. Custom workspaces are user generated templates that can be configured. Since most of the options for custom templates are explained in the previous steps, only the additional buttons are described in this section.

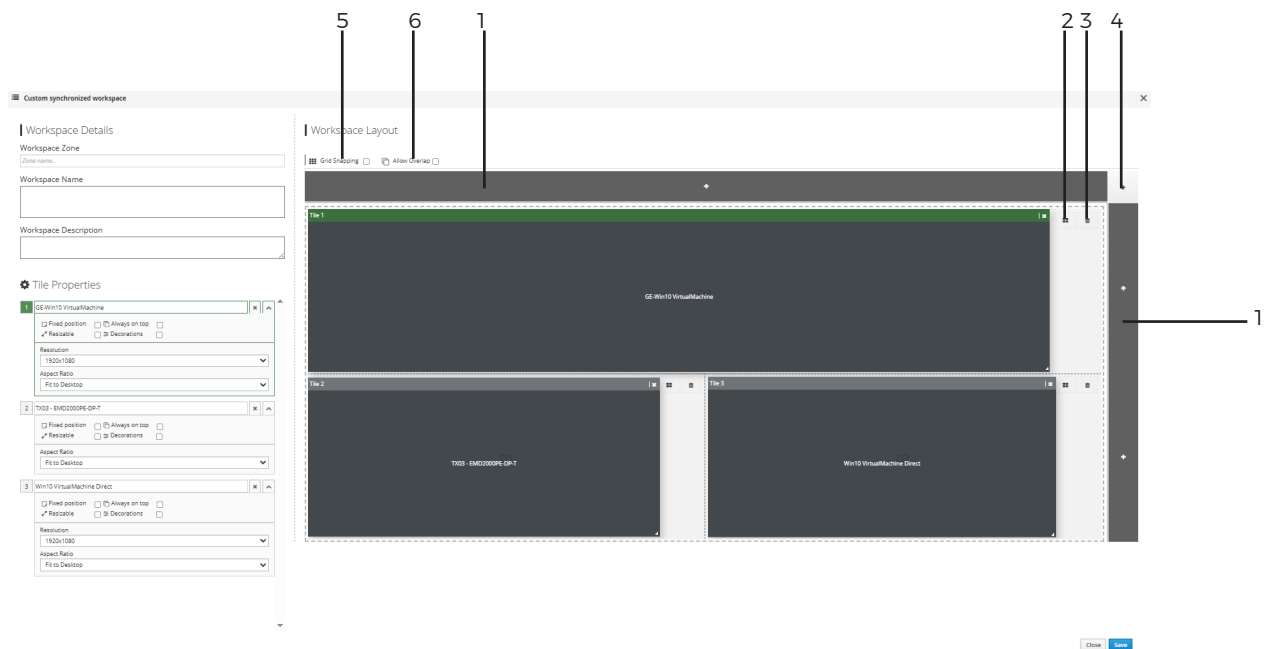


FIGURE B-9: CUSTOM WORKSPACE SCREEN

TABLE B-2. CUSTOM WORKSPACE SCREEN COMPONENTS

NUMBER IN FIGURE B-8	COMPONENT	DESCRIPTION
1	Add new monitor	Use this option to add an additional display to the vertical or horizontal viewing plane.
2	Start with template	Use this option to create a custom workspace based upon an existing template. When you click on this button, use the additional options displayed to select the desired template.
3	Delete current workspace	Use the trash can icon to delete the current display layout. NOTE: When you only have one display layout, it cannot be deleted.
4	Add New Title/View	Use this option to create a new window in which to view a target. When adding a new tile, it can be moved or resized, as needed.

APPENDIX B: WORKSPACE CONFIGURATION

TABLE B-2. CUSTOM WORKSPACE SCREEN COMPONENTS (CONTINUED)

NUMBER IN FIGURE B-8	COMPONENT	DESCRIPTION
5	Grid snapping	The grid system utilizes a dynamic snapping mechanism designed to accommodate tiles of varying sizes. Unlike fixed-grid snapping, this system analyzes the positions of existing tiles to ensure consistent and proportional tile alignment during drag and resize operations. Dynamic Alignment: When grid snapping is enabled, tiles snap to intervals relative to the positions of other tiles, preventing overlaps and undesirable gaps. Resize Constraints: When resizing tiles to the left, the system highlights the minimum allowable size increase. This constraint prevents resizing that would violate grid spacing and alignment rules.
6	Allow overlap	The Allow Overlap checkbox provides flexible tile placement within the grid by disabling the automatic vertical compaction and displacement of tiles. When enabled: Tiles can be positioned to overlap existing tiles. Automatic vertical alignment of tiles is deactivated. NOTE: While overlap is permitted, grid snapping functionality remains active, ensuring tile positioning and resizing are still proportional to the grid layout. This allows for precise, yet overlapping, tile arrangement.

B.2.1 ASSIGNING A USER TO A WORKSPACE

After the workspace and views are configured, a user must be assigned so that the user can access the workspace and views when logging into the Emerald® DESKVUE unit.

To assign users to a workspace:

1. Click on the user icon.



APPENDIX B: WORKSPACE CONFIGURATION

- Assign which users have access to the workspace using the “Manage Workspace Users” screen, as shown in Figure B-10 below:

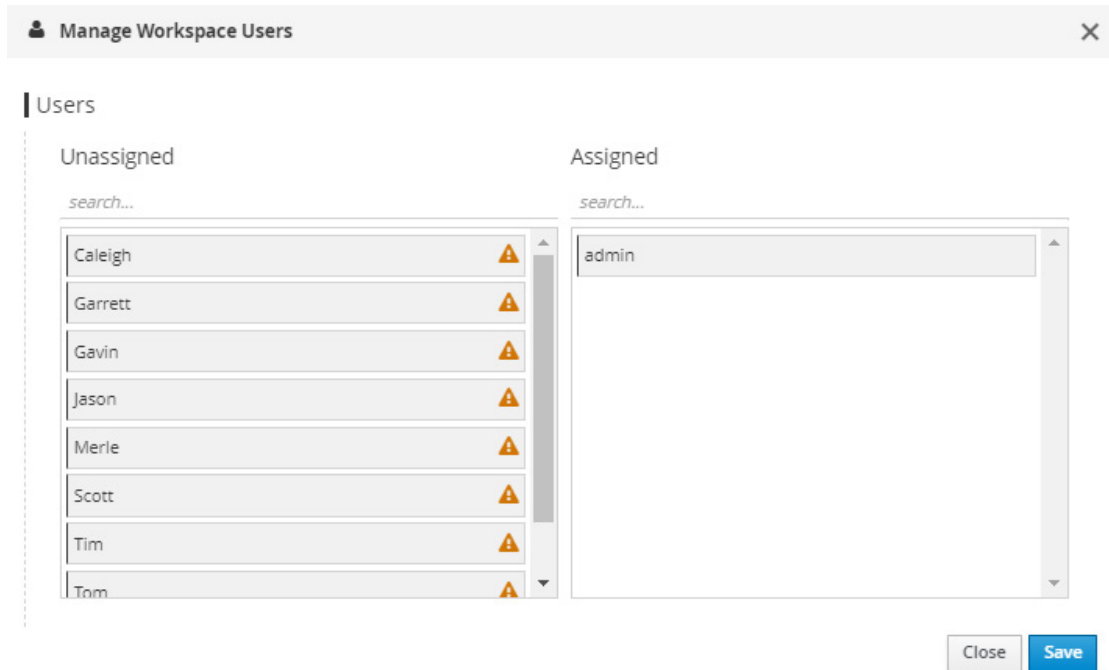


FIGURE B-10: MANAGE WORKSPACE USERS SCREEN

NOTE: Unassigned and assigned targets that have the warning icon next to them confirms what connections are not yet assigned to a user account. In order for a workspace to work properly, the user must have access to all connections that are part of that workspace.

- Click on the “Save” button to save the assignments.

B.2.2 EDITING A WORKSPACE

Once the workspace is created, the Boxilla® administrator can edit it at any time by using the edit (wrench) icon. The “Edit Workspace” screen is shown in Figure B-11 below:

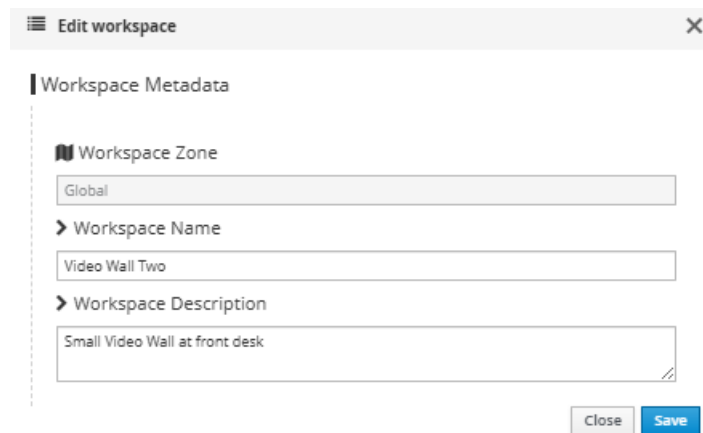


FIGURE B-11: EDIT WORKSPACE SCREEN

APPENDIX B: WORKSPACE CONFIGURATION

B.2.3 DELETING A WORKSPACE

To delete a workspace, click on the delete workspace icon (trash can), as shown in Figure B-12 below:

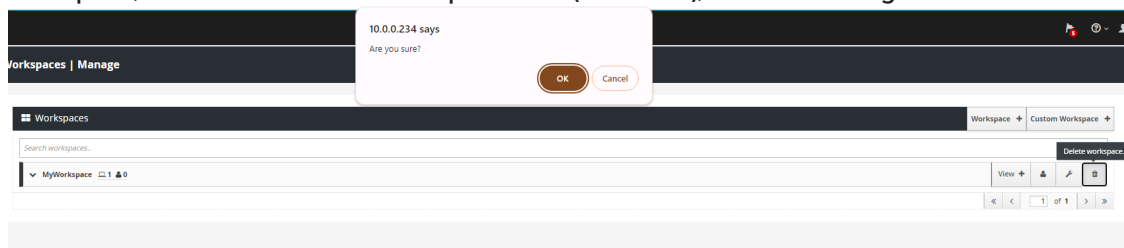


FIGURE B-12: WORKSPACE SHOWING DELETE WORKSPACE

B.2.4 WORKSPACE GROUPS

To make workspace access easier, a Workspace group can be configured to add multiple workspaces to a group which then could be assigned to a user. The alternative is managing the individual Workspaces for each user.

The Workspaces Groups page will show a summary of all groups that have been configured as referenced in Figure B13 below:

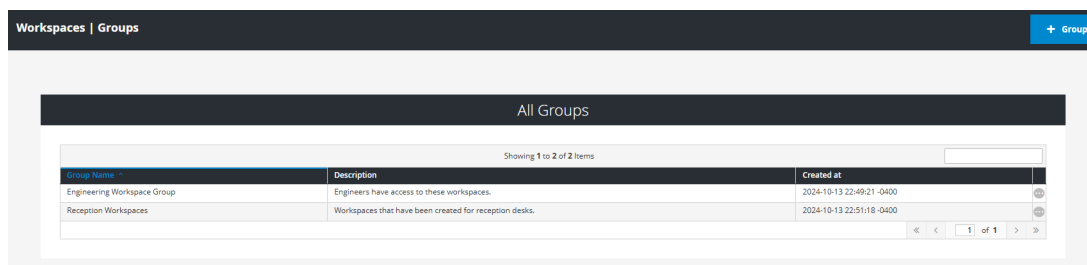


FIGURE B-13: WORKSPACES GROUP PAGE

When you create a new group by clicking on the “+ Group” button in the top right hand corner of the page, the New Group screen appears, as shown in Figure B-14 below:

The screenshot shows the 'New Group' form. It has a title bar with a close button. The form contains two input fields: 'Group Name' and 'Description'. At the bottom right, there are two buttons: 'Cancel' and 'Add >'.

Group Name	Description

FIGURE B-14: NEW GROUP SCREEN

Enter the Group Name and Description. Then click on the “Add” button. Clicking on the “Cancel” button will not create the Workspace group and return back to the Workspaces Groups home page.



APPENDIX B: WORKSPACE CONFIGURATION

Once a group has been created, additional options can be accessed using the ellipsis “...” icon next to the workspace group, as shown in Figure B-15 below:

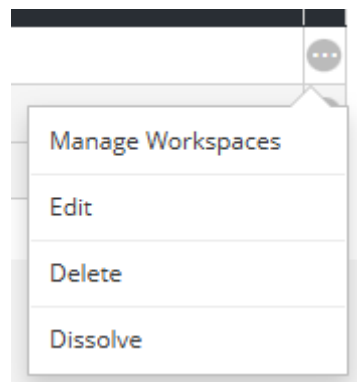


FIGURE B-15: ADDITIONAL OPTIONS

Table B-3 explains the options available through the drop-down menu.

TABLE B-3. ADDITIONAL OPTIONS

ITEM	DESCRIPTION
Manage Workspaces	Allows the assignment of any existing workspaces to be assigned to the group, as shown in Figure B-16 below: Group Workspace Allocation for group Engineering Workspace Group Workspace List Showing all 1 Filter →→ → Video Wall Two Belongs to group Empty list Filter ← ←← Cancel Save

FIGURE B-16: ASSIGNING WORKSPACES TO A GROUP

Edit	Use this option to edit the Group Name and Description.
Delete	Use this option to delete the workspace group from the system and from all active connections for users that are currently logged in.
Dissolve	Use this option to dissolve a workspace group. Dissolving a workspace group will remove the group from the web configuration options. The workspace groups will be retained with users who are currently logged in, however.

APPENDIX B: WORKSPACE CONFIGURATION

B.2.5 ADDITIONAL CONFIGURATION OPTIONS

Within the Boxilla® web interface in the “Users” section, additional parameters can be configured for each user. “Manage Workspaces,” “Manage Workspace Groups,” and “Manage Workspace Favorites” are available through the ellipsis icon next to a user name, and these options can be used to adjust user configurations. Configuration options can be accessed through the resulting drop-down menu shown in Figure B-17 below:

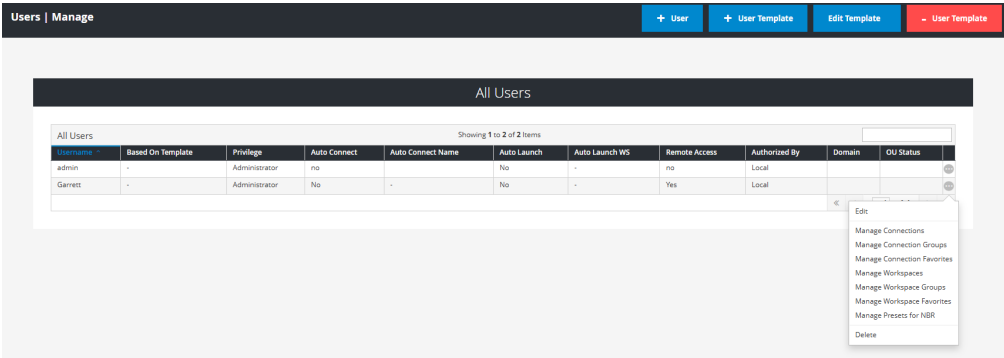


FIGURE B-17: DROP-DOWN MENU LIST

APPENDIX B: WORKSPACE CONFIGURATION

To change Workspace favorites, click in the empty text box for a hotkey that needs to be configured and link the workspace to the corresponding hotkey using the screen shown in Figure B-18 below:

User Workspace Favorites

X

Hotkey + 0	unallocated
Hotkey + 1	unallocated
Hotkey + 2	unallocated
Hotkey + 3	unallocated
Hotkey + 4	unallocated
Hotkey + 5	unallocated
Hotkey + 6	unallocated
Hotkey + 7	unallocated
Hotkey + 8	unallocated
Hotkey + 9	unallocated

Close

Save


FIGURE B-18: HOTKEY CONFIGURATION SCREEN

TIP: When configuring user workspace favorites, use the “User Manage Workspaces” option to verify that the user has access to the workspace.

APPENDIX B: WORKSPACE CONFIGURATION

Click on the “Save” button when finished.

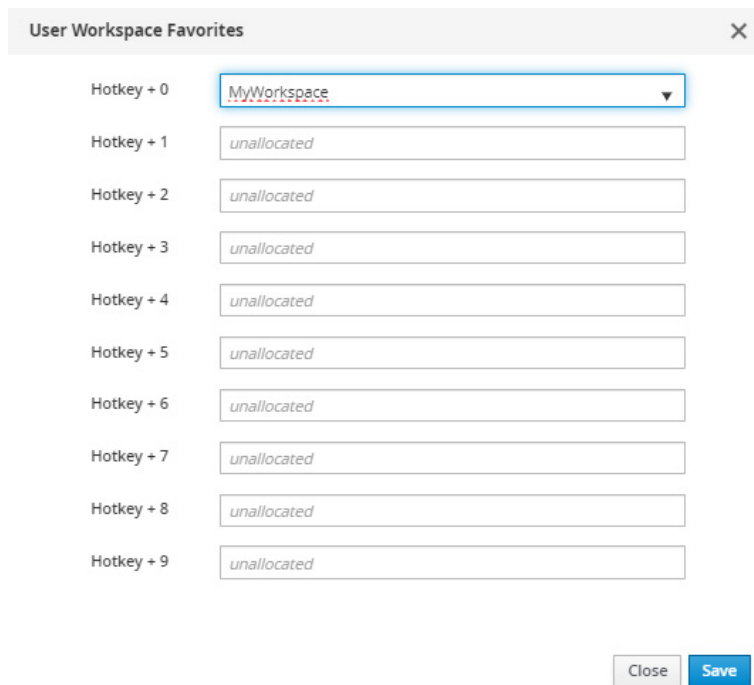An example of assigning the first hotkey to a workspace appears in Figure B-19 below:



The screenshot shows a dialog box titled "User Workspace Favorites" with a close button (X) in the top right corner. The dialog contains a list of hotkeys from "Hotkey + 0" to "Hotkey + 9". The first hotkey, "Hotkey + 0", is assigned to "MyWorkspace" and is highlighted with a blue border. The remaining hotkeys, "Hotkey + 1" through "Hotkey + 9", are currently "unallocated". At the bottom right of the dialog, there are two buttons: "Close" and "Save".

Hotkey	Assignment
Hotkey + 0	MyWorkspace
Hotkey + 1	unallocated
Hotkey + 2	unallocated
Hotkey + 3	unallocated
Hotkey + 4	unallocated
Hotkey + 5	unallocated
Hotkey + 6	unallocated
Hotkey + 7	unallocated
Hotkey + 8	unallocated
Hotkey + 9	unallocated

FIGURE B-19: EXAMPLE OF HOTKEY ASSIGNMENT



APPENDIX B: WORKSPACE CONFIGURATION

B.2.6. CONFIGURING USER ACCESS THROUGH BOXILLA

User access to a Workspace can also be configured under the Boxilla® Users Management page by selecting “Manage Workspaces” from the drop-down list. The Boxilla “Manage Workspaces” screen appears in Figure B-20 below:

Manage Workspaces [X]

Non-selected	Selected
Showing all 1	Empty list
Filter	Filter
→ → →	← ← ←
Video Wall Two	

[Cancel] [Save]

FIGURE B-20: BOXILLA MANAGE WORKSPACES SCREEN

The user may be assigned to a group in order to access the individual workspaces found within that group. This option allows the user to be assigned to these groups to gain access to them.

User Workspace Group Allocation [X]

Group List	User belongs to group
Showing all 2	Empty list
Filter	Filter
→ → →	← ← ←
Engineering Workspace Group Reception Workspaces	

[Cancel] [Save]

FIGURE B-21: MANAGE WORKSPACES GROUP UNDER USERS SCREEN

B.2.7. API CONTROL

Refer to the DESKVUE API Control Manual for details on how to externally control DESKVUE switching and other functions.

APPENDIX C: REGULATORY INFORMATION

C.1 FCC STATEMENT

This equipment has been tested and found to comply with the regulations for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with this Quick Installation Guide, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case, the user will be required to correct the interference at his/her own expense.

C.2 CE STATEMENT

This is a Class B product in a domestic environment, this product may cause radio interference, in which case the user may be required to take adequate measures.

C.3 TSCA STATEMENT

This product is in compliance with the TSCA Toxic Substances Control Act.

C.4 ROHS

This product is RoHS compliant.

C.5 REACH

This product is in compliance with the Reach / SCIP Regulations.



APPENDIX C: REGULATORY INFORMATION

C.6 NOM STATEMENT

1. Todas las instrucciones de seguridad y operación deberán ser leídas antes de que el aparato eléctrico sea operado.
2. Las instrucciones de seguridad y operación deberán ser guardadas para referencia futura.
3. Todas las advertencias en el aparato eléctrico y en sus instrucciones de operación deben ser respetadas.
4. Todas las instrucciones de operación y uso deben ser seguidas.
5. El aparato eléctrico no deberá ser usado cerca del agua—por ejemplo, cerca de la tina de baño, lavabo, sótano mojado o cerca de una alberca, etc.
6. El aparato eléctrico debe ser usado únicamente con carritos o pedestales que sean recomendados por el fabricante.
7. El aparato eléctrico debe ser montado a la pared o al techo sólo como sea recomendado por el fabricante.
8. Servicio—El usuario no debe intentar dar servicio al equipo eléctrico más allá de lo descrito en las instrucciones de operación. Todo otro servicio deberá ser referido a personal de servicio calificado.
9. El aparato eléctrico debe ser situado de tal manera que su posición no interfiera su uso. La colocación del aparato eléctrico sobre una cama, sofá, alfombra o superficie similar puede bloquea la ventilación, no se debe colocar en libreros o gabinetes que impidan el flujo de aire por los orificios de ventilación.
10. El equipo eléctrico debe ser situado fuera del alcance de fuentes de calor como radiadores, registros de calor, estufas u otros aparatos (incluyendo amplificadores) que producen calor.
11. El aparato eléctrico deberá ser conectado a una fuente de poder sólo del tipo descrito en el instructivo de operación, o como se indique en el aparato.
12. Precaución debe ser tomada de tal manera que la tierra física y la polarización del equipo no sea eliminada.
13. Los cables de la fuente de poder deben ser guiados de tal manera que no sean pisados ni pellizcados por objetos colocados sobre o contra ellos, poniendo particular atención a los contactos y receptáculos donde salen del aparato.
14. El equipo eléctrico debe ser limpiado únicamente de acuerdo a las recomendaciones del fabricante.
15. En caso de existir, una antena externa deberá ser localizada lejos de las líneas de energía.
16. El cable de corriente deberá ser desconectado del cuando el equipo no sea usado por un largo periodo de tiempo.
17. Cuidado debe ser tomado de tal manera que objetos líquidos no sean derramados sobre la cubierta u orificios de ventilación.
18. Servicio por personal calificado deberá ser provisto cuando:
 - A: El cable de poder o el contacto ha sido dañado; u
 - B: Objetos han caído o líquido ha sido derramado dentro del aparato; o
 - C: El aparato ha sido expuesto a la lluvia; o
 - D: El aparato parece no operar normalmente o muestra un cambio en su desempeño; o
 - E: El aparato ha sido tirado o su cubierta ha sido dañada.



APPENDIX D: TECH SUPPORT/DISCLAIMERS/TRADEMARKS

D.1 TECH SUPPORT/CONTACT INFORMATION

Visit blackbox.com/discover-bb/global-presence for regional technical support and contact information.



D.2 DISCLAIMERS

Black Box Corporation shall not be liable for damages of any kind, including, but not limited to, punitive, consequential or cost of cover damages, resulting from any errors in the product information or specifications set forth in this document and Black Box Corporation may revise this document at any time without notice.

Images contained in this document are included solely to illustrate how to use the product. Since the product can be customized and/or undergo periodic updates, images in this manual will be representative of, although not necessary identical to, the ones displayed on your screen.

D.3 TRADEMARKS USED IN THIS MANUAL

Black Box and the Black Box logo type and mark are registered trademarks of BB Technologies, Inc.

Any other trademarks mentioned in this manual are acknowledged to be the property of the trademark owners.



NOTES



