


SolidConnect

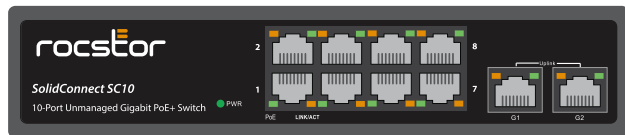

User Manual

SolidConnect SC10
Y10S006-B1

10-Port Unmanaged Gigabit PoE+ Switch
8-Port Gigabit PoE+ , 2-Port Gigabit RJ45 Uplinks - Black

Package Content


Please check the following items before installation. If any items are missing, please contact Rocstor or the installing company.

- 1x SolidConnect SC10
- 1x AC power cable
- 1x User manual



Application

The SolidConnect SC10 is an 8 PoE Gigabit Ethernet Switch specially designed for security monitoring purposes and Ethernet HD monitor security systems. This product is fully integrated with security monitoring features, offering fast packet forwarding capability and gigabit transfer rates, ensuring clear images and smooth transmission. It provides ample bandwidth to meet the demands of high-definition video.

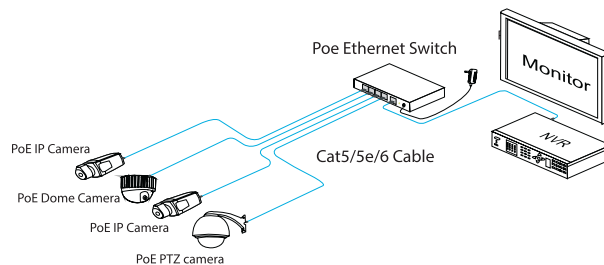


Features

- Conforms to IEEE802.3, IEEE 802.3u, IEEE 802.3ab, IEEE802.3af, IEEE802.3at
- 10 10/100/1000Base-T ports
- Provides 8 PoE injector and 120W Built-in power supply
- High back-plane bandwidth 20Gbps
- IEEE802.3x Flow control

Board Diagram

SolidConnect SC10

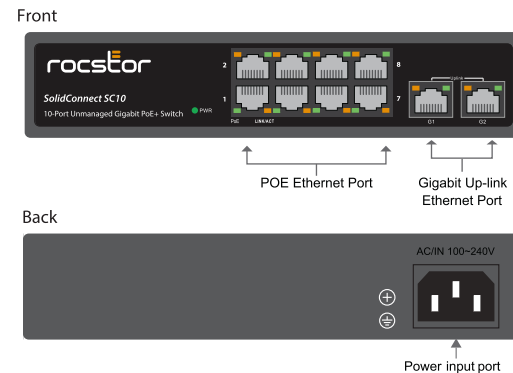

Installation Steps

- 1- For a safe installation, make sure to turn off both the signal power and the power of the display devices. Installation with power may harm the transmission equipment.
- 2- Use network cables to connect the PoE IP camera to the appropriate downlink port (1-8) on the product.
- 3- Connect the equipment's uplink port to the NVR or computer using a network cable.
- 4- Plug in the AC power cable to provide power.
- 5- Verify that the installation is correct, the equipment is in good condition, and all connections are stable before powering on the system.
- 6- Ensure the Ethernet equipment is powered on and functions properly.

By following these steps, you can perform a safe and effective installation of your equipment. Remember to exercise caution when dealing with electrical connections and refer to the manufacturer's instructions for specific details related to your product.

Troubleshooting


- Ensure the equipment is installed following the manufacturer's installation guide.
- Verify that the RJ45 cable order adheres to the EIA/TIA 568A or 568B standard.
- Each PoE port supports a maximum power of less than 30W. Avoid connecting PoE equipment with power requirements over 30W.
- To check for equipment damage, consider replacing it with a fully functional 10-port PoE Ethernet Switch.
- If issues persist, please contact your vendor for further assistance.

Plug Producing Method

Required Tools: Wire crimper, network tester, and RJ45 plug with wire sequence conforming to EIA/TIA568A or 568B.

Instructions:

- 1- Strip off 2cm of the insulating layer to expose the 8 pairs of UTP cable.
- 2- Separate and straighten the 8 pairs of UTP cable.
- 3- Arrange the 8 cables according to EIA/TIA568A or 568B standard.
- 4- Trim the cables, leaving 1.5cm of bare wire exposed.
- 5- Insert each cable into the appropriate pin of the RJ45 plug.
- 6- Utilize the wire crimper to securely crimp the RJ45 plug.
- 7- Repeat the process to create additional ends as needed.
- 8- Use the network tester to verify the cable's functionality.

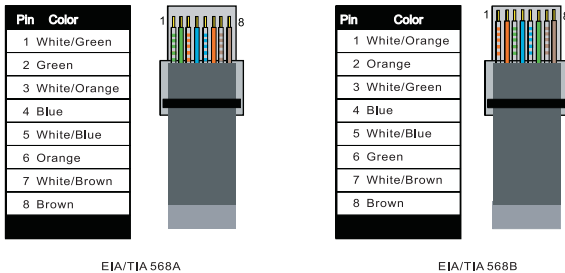

! When choosing an RJ45, ensure that if one end is EIA/TIA568A, the other end is also EIA/TIA568A.
When choosing an RJ45, ensure that if one end is EIA/TIA568B, the other end is also EIA/TIA568B.

Specification

Item		Description	
Power	Power supply	Built-in power supply	
	Voltage Range	100~240VAC	
	Switch Consumption	<15W	
Ethernet	Speed	1-8 Port: 10/100/1000Mbps	
		2 TP UPLINK:1000Mbps	
Network Switch	Ethernet Standard	IEEE 802.3x / IEEE 802.3 / 802.3u / 802.3ab / 802.3af/at	
	Switching capacity	20G	
	Transfer Rate	14,880pps for 10Mbps	
		148,800pps for 100Mbps	
		1,488,000pps for 1000Mbps	
MAC Address	4K MAC address table		
LINK / ACT	On	Green	The port is connecting
	Blinks	-	The port is receiving or transmitting data
	Off	-	The port is not linked successfully with the device
PoE	On	Orange	PD is connected
	Off	-	No PD is connected or power forwarding fails
	Capacity	105W	
	PoE pin assignmnet	V+(RJ45 Pin 1,2), V-(RJ45 Pin 3,6)	
Environment	Working Temperature	0°C~40°C (32°F~104°F)	
	Storage Temperature	-40°C~70°C (-40°F~158°F)	
Mechanical	Dimension	200mm x 118mm x 44mm	
	Color	Black	

Specifications are subject to change without prior notice.

Warranty Information

This product is backed by a (5) five-year warranty. Rocstor warrants its products against defects in materials and workmanship for the periods noted, following the initial date of purchase. During this period, the products may be returned for repair, or replacement with equivalent products at our discretion. The warranty covers parts and labor costs only. Rocstor does not warrant its products from defects or damages arising from misuse, abuse, alteration, or normal wear and tear.

Limitation of Liability

In no event shall the liability of Rocstor, Inc. and Rocstor (or their officers, directors, employees or agents) for any damages (whether direct or indirect, special, punitive, incidental, consequential, or otherwise), loss of profits, loss of business, or any pecuniary loss, arising out of or related to the use of the product exceed the actual price paid for the product. Some states do not allow the exclusion or limitation of incidental or consequential damages. If such laws apply, the limitations or exclusions contained in this statement may not apply to you.

Support

Technical support is available to all the registered users of Rocstor products.

Technical Support / RMA

Hours: 9:00 am - 5:00 pm PST
Monday to Friday (except holidays)

Tell: +1 (818) 727-7000 (National and international)

Fax: +1 (818) 875-0002

Email: support@Rocstor.com

Copyrights

©2023 Rocstor, Inc. All rights reserved. Rocstor is registered trademark of Rocstor, Inc. Feature and specification are subject to change without notice. All trademarks and registered trademarks are the property of their respective. All rights reserved.