


M.2 to Quad SATA Drive Adapter

Product ID

4P-SATA-M2-ADAPTER

Top View

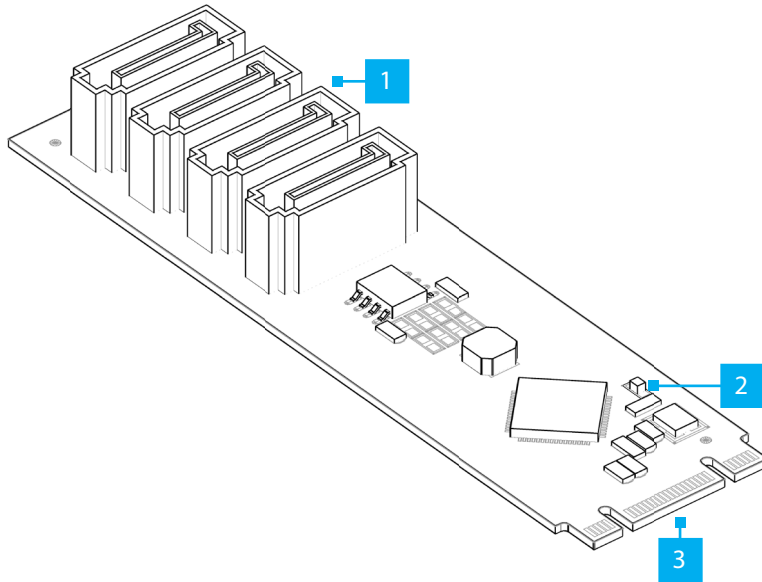

Component	Function
1 SATA Drive Ports 1 - 4	<ul style="list-style-type: none"> Connect a SATA HDD/SSD Supports SATA I/II/III
2 LED Indicator	<ul style="list-style-type: none"> Solid Green: Power On Off: Power Off
3 M.2 Host Connector	<ul style="list-style-type: none"> Install the M.2 Adapter into a M.2 Drive Slot on the Host Computer Size of the M.2 Adapter is 2280 Compatible with PCIe-based B or M key M.2 slots

Product Information

For the latest product information, technical specifications, and declarations of conformance, please visit: www.StarTech.com/4P-SATA-M2-ADAPTER

Requirements

- Computer with M.2 Drive Slot x 1
- SATA HDD/SSD x 4

Package Contents

- M.2 to Quad SATA Drive Adapter x 1
- SATA Cables x 4
- Quick-Start Guide x 1

Installation

Install the M.2 to Quad SATA Drive Adapter

Warning: M.2 Adapter Cards can be damaged by static electricity. Ensure that the Installer is properly grounded before they open the Computer Case or touch the M.2 to Quad SATA Adapter. The Installer should wear an Anti-Static Strap when installing any computer component. If an Anti-Static Strap is not available, discharge any built-up static electricity by touching a large Grounded Metal Surface for several seconds. Only handle the M.2 Adapter Card by its edges and do not touch the gold connectors.

1. Turn off the **Computer** and disconnect the **Power Cable** and any **Peripheral Devices** that are connected (e.g. printers, external hard drives, etc.).
2. Remove the **Cover** from the **Computer Case**.

Note: Consult the documentation that came with the Computer for details about how to do this safely.

3. Locate an available **M.2 Drive Slot** on the **Host Computer's Motherboard**. If the **M.2 Drive Slot** has a **Cover** or **Heatsink**, remove the corresponding **Slot Cover/Heatsink**.
4. Gently insert the **M.2 Adapter** into the open **M.2 Drive Slot**. Secure it using a **Phillips Head Screwdriver** and the **Screw** that was removed in **Step 3**.
5. Connect a **SATA Drive** to the **M.2 Drive Adapter** using one of the included **SATA Cables**.
6. Repeat **Step 5** for the remaining **SATA Drives**.
7. Re-install the **Cover** of the **Computer Case** that was removed in **Step 2**.
8. Reconnect the **Power Cable** and **Peripheral Devices** that were disconnected in **Step 1**.
9. Power on the **Computer**.

Regulatory Compliance

FCC Compliance Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment to an outlet on a different circuit than the receiver.
- Consult the dealer or an experienced radio/TV technician for help.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the device. If shielded interface cables are included with the product, or if additional components or accessories are designated for use with the installation, they must be used to ensure compliance with FCC regulations.

ISED Statement / Déclaration d'ISED

CAN ICES-003(B) / NMB-003(B)

This Class B digital apparatus complies with Canadian ICES-003.

This device complies with ISED Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Cet appareil numérique de la classe B est conforme à la norme NMB-003 du Canada.

Le présent appareil est conforme aux CNR d'ISED Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.


Warranty Information

This product is backed by a two-year warranty.

For further information on product warranty terms and conditions, please refer to www.startech.com/warranty.

Limitation of Liability

In no event shall the liability of StarTech.com Ltd. and StarTech.com USA LLP (or their officers, directors, employees or agents) for any damages (whether direct or indirect, special, punitive, incidental, consequential, or otherwise), loss of profits, loss of business, or any pecuniary loss, arising out of or related to the use of the product exceed the actual price paid for the product. Some states do not allow the exclusion or limitation of incidental or consequential damages. If such laws apply, the limitations or exclusions contained in this statement may not apply to you.

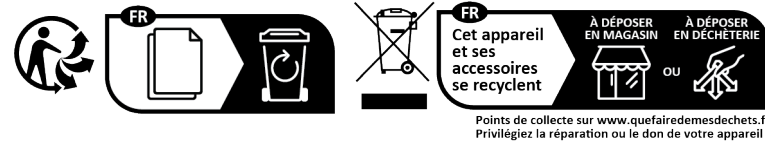

StarTech.com Ltd.
45 Artisans Cres
London, Ontario
N5V 5E9
Canada

StarTech.com LLP
4490 South Hamilton
Road
Groveport, Ohio
43125
U.S.A.

StarTech.com Ltd.
Unit B, Pinnacle 15
Gowerton Rd,
Brackmills
Northampton
NN4 7BW
United Kingdom

StarTech.com Ltd.
Siriusdreef 17-27
2132 WT Hoofddorp
The Netherlands

FR: startech.com/fr
DE: startech.com/de
ES: startech.com/es
NL: startech.com/nl
IT: startech.com/it
JP: startech.com/jp