

# Dell Chromebook 3100 2-in-1

Setup and Specifications



## Notes, cautions, and warnings

 | **NOTE:** A NOTE indicates important information that helps you make better use of your product.

 | **CAUTION:** A CAUTION indicates either potential damage to hardware or loss of data and tells you how to avoid the problem.

 | **WARNING:** A WARNING indicates a potential for property damage, personal injury, or death.

© 2019 Dell Inc. or its subsidiaries. All rights reserved. Dell, EMC, and other trademarks are trademarks of Dell Inc. or its subsidiaries. Other trademarks may be trademarks of their respective owners.


<b>1 Chassis overview.....</b>	<b>4</b>
Front.....	4
Left.....	5
Right.....	5
Palmrest.....	6
Bottom.....	7
<b>2 System information.....</b>	<b>8</b>
System specifications.....	8
System information.....	8
Processor.....	8
Memory.....	9
Media card-reader.....	9
Audio.....	9
Video card.....	10
Camera.....	10
World facing camera.....	11
Wireless.....	11
Ports and connectors.....	11
Display.....	12
Keyboard.....	12
Touchpad.....	13
Operating system.....	13
Battery.....	13
Power adapter.....	14
Dimensions and weight.....	14
Computer environment.....	15
Security.....	15
Services and support.....	15
<b>3 Software.....</b>	<b>16</b>
Operating system.....	16
Chrome OS.....	16
Verified Boot.....	18
Disk Partition Map.....	19
Developer and Recovery mode.....	20
Coreboot and U-boot Custom Firmware.....	20
Chrome vs Chromium OS.....	21
View system information.....	21
<b>4 Getting help.....</b>	<b>25</b>
Contacting Dell.....	25

# Chassis overview

Topics:

- Front
- Left
- Right
- Palmrest
- Bottom


## Front

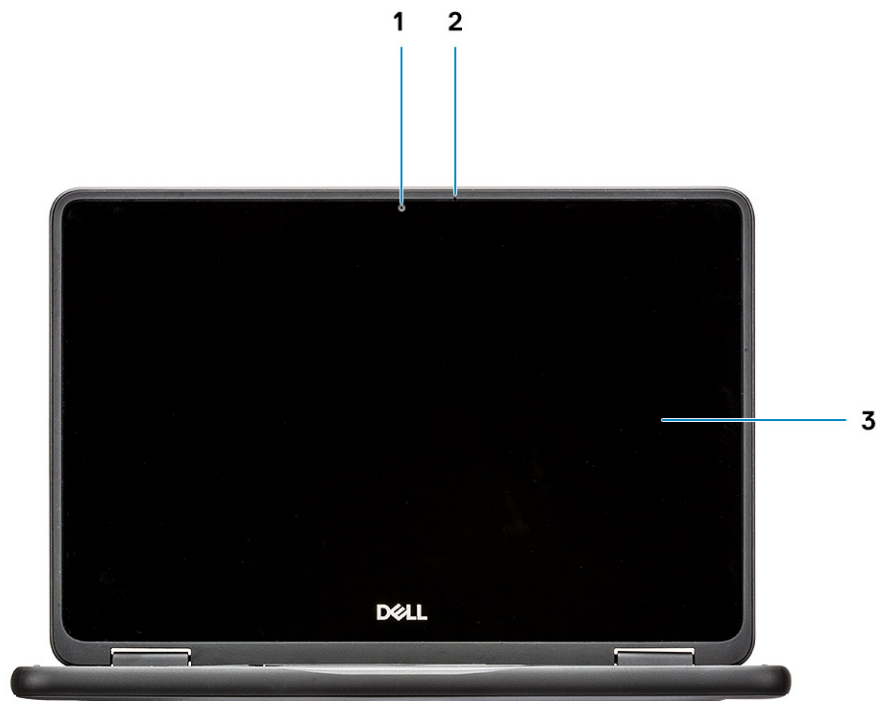

- 1 Camera
- 3 Display panel


- 2 Microphone

# Left

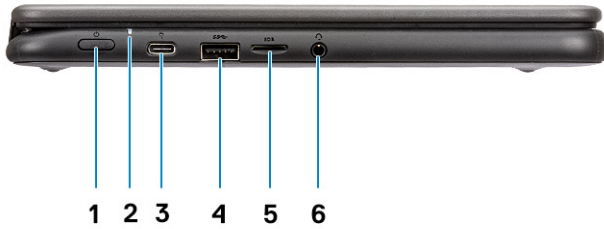

- 1 Power button
- 2 Power/Battery status indicator
- 3 USB Type-C port with Power delivery
- 4 USB 3.1 Gen 1 port with Powershare
- 5 microSD card
- 6 Headset port

# Right

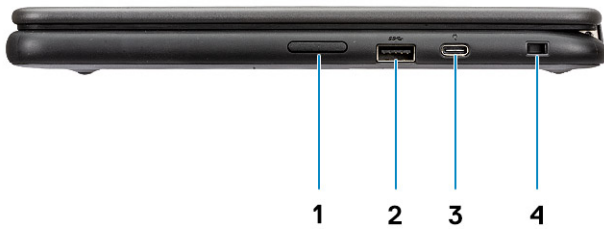


- 1 Volume button
- 2 USB 3.1 Gen 1 port
- 3 USB Type-C port with Power delivery
- 4 Wedge-shaped cable lock slot

# Palmrest



- |   |                       |   |                                |
|---|-----------------------|---|--------------------------------|
| 1 | Microphone (Optional) | 2 | Camera status light (Optional) |
| 3 | Camera (Optional)     | 4 | Keyboard                       |
| 5 | Touchpad              |   |                                |

# Bottom

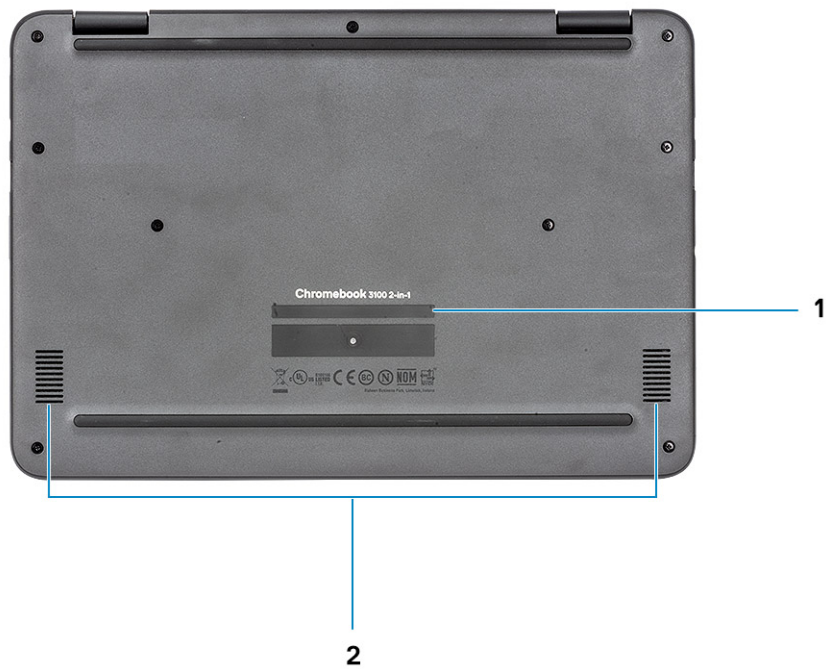

1 Service Tag label

2 Speaker

# System information

The system information chapter provides detailed information of your computer.

## System specifications

**NOTE:** Offerings may vary by region. The following specifications are only those required by law to ship with your computer. For more information about the configuration of your computer, go to Help and Support in your Windows operating system and select the option to view information about your computer.

## System information

**Table 1. System information**

Feature	Specifications
Chipset	Integrated in the processor (6 W/4.5 W SDP Gemini Lake - Celeron)
DRAM bus width	64-bit
FLASH EPROM	16 MB
PCIe bus	Internal PCIe

## Processor

**NOTE:** Processor numbers are not a measure of performance. Processor availability is subject to change and may vary by region/country.

**Table 2. Processor specifications**

Type	UMA Graphics	Discrete Graphics
Intel Celeron N4000 Dual core Processor (6 W TDP, 2 core count/ 2 threads, 4 MB cache, 2.6 GHz)	Intel UHD Graphics 600	No



# Memory

**Table 3. Memory specifications**

Feature	Specifications
Minimum memory configuration	4 GB
Maximum memory configuration	8 GB
Type	LPDDR4 (On-board memory)
Speed	2400 MHz

# Storage

**Table 4. Storage specifications**

Type	Capacity	MMC Interface	Voltage
eMMC	32 GB	eMMC V5.1	3.3 V
eMMC	64 GB	eMMC V5.1	3.3 V

# Media card-reader

**Table 5. Media-card reader specifications**

Feature	Specifications
Type	One microSD card slot

# Audio

**Table 6. Audio specifications**

Feature	Specifications
Controller	Dialog DA7219
Stereo conversion	Supported
Type	High Definition Audio
Speakers	2
Interface	12S
External Interface	Digital microphone input on camera module

Feature	Specifications
	Headset combo jack (stereo headphone/microphone-in)
Internal speaker amplifier	Supported
External speaker amplifier	MAX98357A
External volume controls	Supported
Speaker output	<ul style="list-style-type: none"> <li>• Average - 2 W</li> <li>• Peak - 2.5 W</li> </ul>
Subwoofer output	Not supported
Microphone	Supported

## Video card

Table 7. Video card specifications

Controller	Type	CPU Dependency	Graphics memory type	Capacity	External display support	Maximum resolution
Intel UHD Graphics 600	UMA	Intel Celeron N4000 Dual core CPU	Integrated	Shared system memory	Supported via USB Type-C port	3840 x 2160 @ 60Hz

## Camera

Table 8. Camera specifications

Feature	Specifications
Camera type	HD fixed focus
Resolution	<p>Still image: HD resolution 1280 x 720 (1MP)</p> <p>Video: HD resolution 1280 x 720 (1MP)</p>
Imaging rate	Up to 30 frames per second
Sensor type	CMOS sensor technology

# World facing camera

Table 9. Camera specifications

Feature	Specifications
Camera type	HD fixed focus
Resolution	Still image: HD resolution 1280 x 720 (8MP) Video: HD resolution 1080 (8MP)
Imaging rate	Up to 30 frames per second
Sensor type	CMOS sensor technology
Diagonal viewing angle	77.3 degrees

# Wireless

Table 10. Wireless specifications

Specifications
Intel Jefferson Peak 2 CNVi (Integrated Connectivity) M.2 1216 Solder Down Module

# Ports and connectors

Table 11. Ports and connectors

Feature	Specifications
Memory card reader	One microSD card reader
USB	<ul style="list-style-type: none"><li>Two USB 3.1 Gen 1 ports</li><li>Two USB Type-C port with Power delivery</li></ul>
Security	Noble wedge lock slot
Audio	One Universal Jack (Global Headset Jack + microphone + line in support) port
Video	Supported via USB Type C

# Display

**Table 12. Display specifications**

<b>Feature</b>	<b>Specifications</b>
Type	HD IPS Touchscreen, Wide Viewing Angle, and 187nits min, Gorilla Glass.
Height (Active area)	144.00 mm
Width (Active area)	256.125 mm
Diagonal	293.83 mm
Pixels Per Inch (PPI)	135
Contrast ratio (Typical)	800:1
Luminance/Brightness (typical)	220 nits
Refresh rate	60 Hz
Horizontal viewing angle (min)	HD +80/- 80 degrees
Vertical viewing angle (min)	HD +80/- 80 degrees
Power consumption (max)	3.1W

# Keyboard

**Table 13. Keyboard specifications**

<b>Feature</b>	<b>Specifications</b>
Number of keys	<ul style="list-style-type: none"><li>• 74 (U.S. and Canada)</li><li>• 75 (UK)</li><li>• 76 (Brazil)</li><li>• 78 (Japan)</li></ul>
Size	Full sized <ul style="list-style-type: none"><li>• X= 19.05 mm (0.75 inches) key pitch</li><li>• Y= 18.05 mm (0.71 inches) key pitch</li></ul>
Backlit keyboard	No
Layout	QWERTY

# Touchpad

**Table 14. Touchpad specifications**

Feature	Specifications
Resolution	1229 x 749
Dimensions	<ul style="list-style-type: none"><li>• X-axis: 99.4 mm (3.91 inches)</li><li>• Y-axis: 54.4 mm (2.14 inches)</li></ul>
Multi-touch	Supports five fingers

# Operating system

**Table 15. Operating system**

Feature	Specifications
Operating systems supported	Google Chrome operating system

# Battery

**Table 16. Battery**

Feature	Specifications
Type	3-cell lithium-ion (42 WHr)
Dimension	Width 97.15 mm (3.82 inches) Depth 184.15 mm (7.25 inches) Height 5.90 mm (0.23 inches)
Weight (maximum)	0.2 kg (0.44 lb)
Voltage	11.40 VDC
Life span	300 discharge / charge cycles
Operating time	Varies depending on operating conditions and can significantly reduce under certain power-intensive conditions
Temperature range: Operating	0°C to 35°C (32°F to 95°F)
Temperature range: Storage	-20°C to 60°C (-4°F to 140°F)

# Power adapter

**Table 17. Power adapter specifications**

<b>Feature</b>	<b>Specifications (Pecos Type-C 65 W)</b>
Type	65 W
Input Voltage	100 VAC - 240 VAC
Input current (maximum)	1.7 A
Adapter size	Dimensions In Inches: 1.1 x 2.01 x 4.41 In mm: 28 x 51 x 112
Weight	0.20 kg (0.44 lbs)
Input frequency	50 Hz to 60 Hz
Output current	<ul style="list-style-type: none"><li>• 20 V/3.25 A (continuous)</li><li>• 15 V/3 A (continuous)</li><li>• 9.0 V/3 A (continuous)</li><li>• 5.0 V/3 A (continuous)</li></ul>
Rated output voltage	<ul style="list-style-type: none"><li>• 20 VDC</li><li>• 15 VDC</li><li>• 9 VDC</li><li>• 5 VDC</li></ul>
Temperature range (Operating)	0°C to 40° C (32°F to 104°F)
Temperature range (Non-Operating)	-40°C to 70°C (-40°F to 158°F)

# Dimensions and weight

**Table 18. Dimensions and weight**

<b>Feature</b>	<b>Specifications</b>
Height	Front: 21.5 mm (0.85 inches) Rear: 21.5 mm (0.85 inches)
Width	303.9 mm (11.96 inches)
Depth	207.9 mm (8.19 inches)
Weight	1.41 kg (3.10 lbs)

# Computer environment

**Table 19. Computer environment**

	Operating	Storage
Temperature range	0°C to 35°C (32°F to 95°F)	-40°C to 65°C (-40°F to 149°F)
Relative humidity (maximum)	10% to 90% (non-condensing) <b>i</b>   <b>NOTE: Maximum dew point temperature = 26°C</b>	0% to 95% (non-condensing) <b>i</b>   <b>NOTE: Maximum dew point temperature = 33°C</b>
Vibration (maximum)	2 to 600 Hz at 0.66 Grms	2 to 600 Hz at 1.33 Grms
Shock (maximum)	160 G with pulse duration of 2 ms ( equivalent to 80 in/sec)	160 G with pulse duration of 2 ms ( equivalent to 80 in/sec)
Altitude (maximum)	0 m to 3048 m (0 ft to 10,000 ft)	0 m to 10668 m (0 ft to 35,000 ft)

# Security

**Table 20. Security**

Feature	Specifications
Trusted Platform Module (TPM) 2.0	No
Firmware TPM	NA
Cable lock	Wedge-shaped lock slot

# Services and support

**Table 21. Services and support specifications**

Feature	Specifications
1-Year Mail-In Service	Standard
Onsite NBD	Yes
<b>i</b>   <b>NOTE: Service may be provided by third party. Technician will be dispatched if necessary following phone-based troubleshooting, subject to parts availability, and other terms of service contract.</b>	
Warranty Extensions	Up to 4 years
ProSupport	Optional

# Software

This chapter details the supported operating systems along with instructions on how to install the drivers.


Topics:

- [Operating system](#)
- [View system information](#)

## Operating system

This page contains information about the operating system used by the Dell Chromebook 11 (3189)Chromebook 11 (3180)Chromebook 5190Chromebook 5190 2-in-1.

## Chrome OS

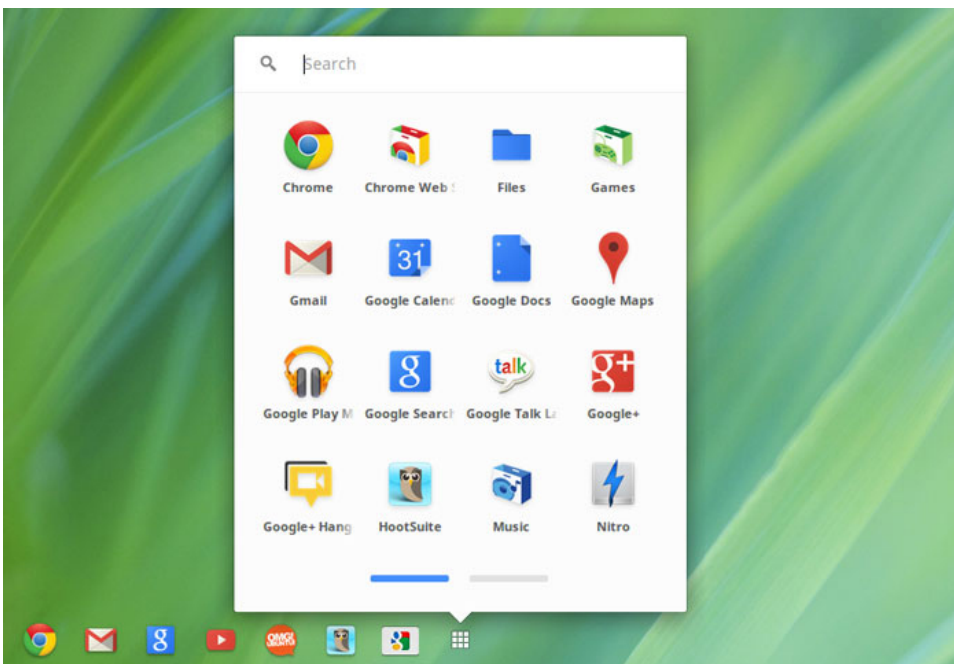

Chromebooks are powered by the Google Chrome operating system, based on Google's popular Chrome browser. It has been developed to provide a fast, simple, and more secure computing experience for users who spend most of their time online.

### Key Benefits


- Speed
- Simplicity
- Security
- Updatability
- Synchronisability
- High power at low cost



- Easy to learn and use
- Documents, calendar, e-mail, contacts, and tasks available online and offline, and all securely backed-up and synchronised in the cloud.
- Access to the Chrome web app store
- Killer web apps
- The latest Intel Core processors
- Fun games
- Built-in support for popular file types and external devices

For more information about the Chrome OS, please visit the [Chrome OS training page](#).

# Verified Boot

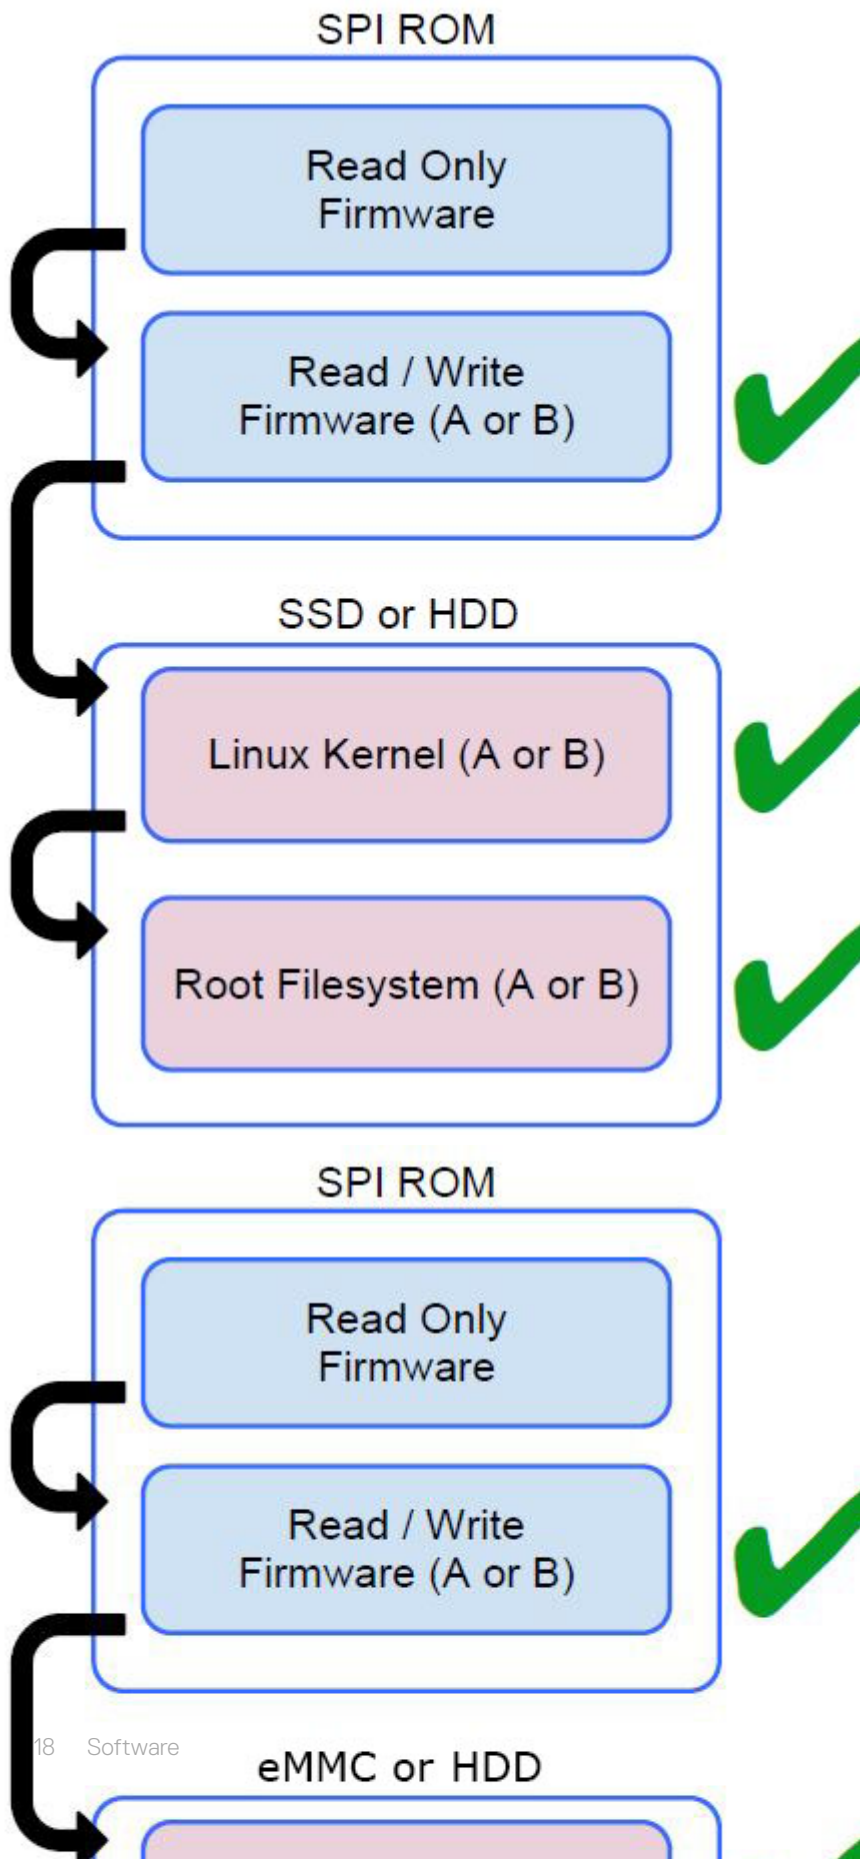


Read Only firmware verifies the integrity of Read/Write (R/W) firmware. R/W firmware verifies the active Linux kernel. During run time, the kernel verifies each block read from disk.

If a verification step fails and there is no backup option, the machine enters recovery mode.

The Developer Mode switch turns off verified boot (at the Kernel stage) to enable users to run Chromium OS (or other OS). The BIOS is always verified.

## Disk Partition Map

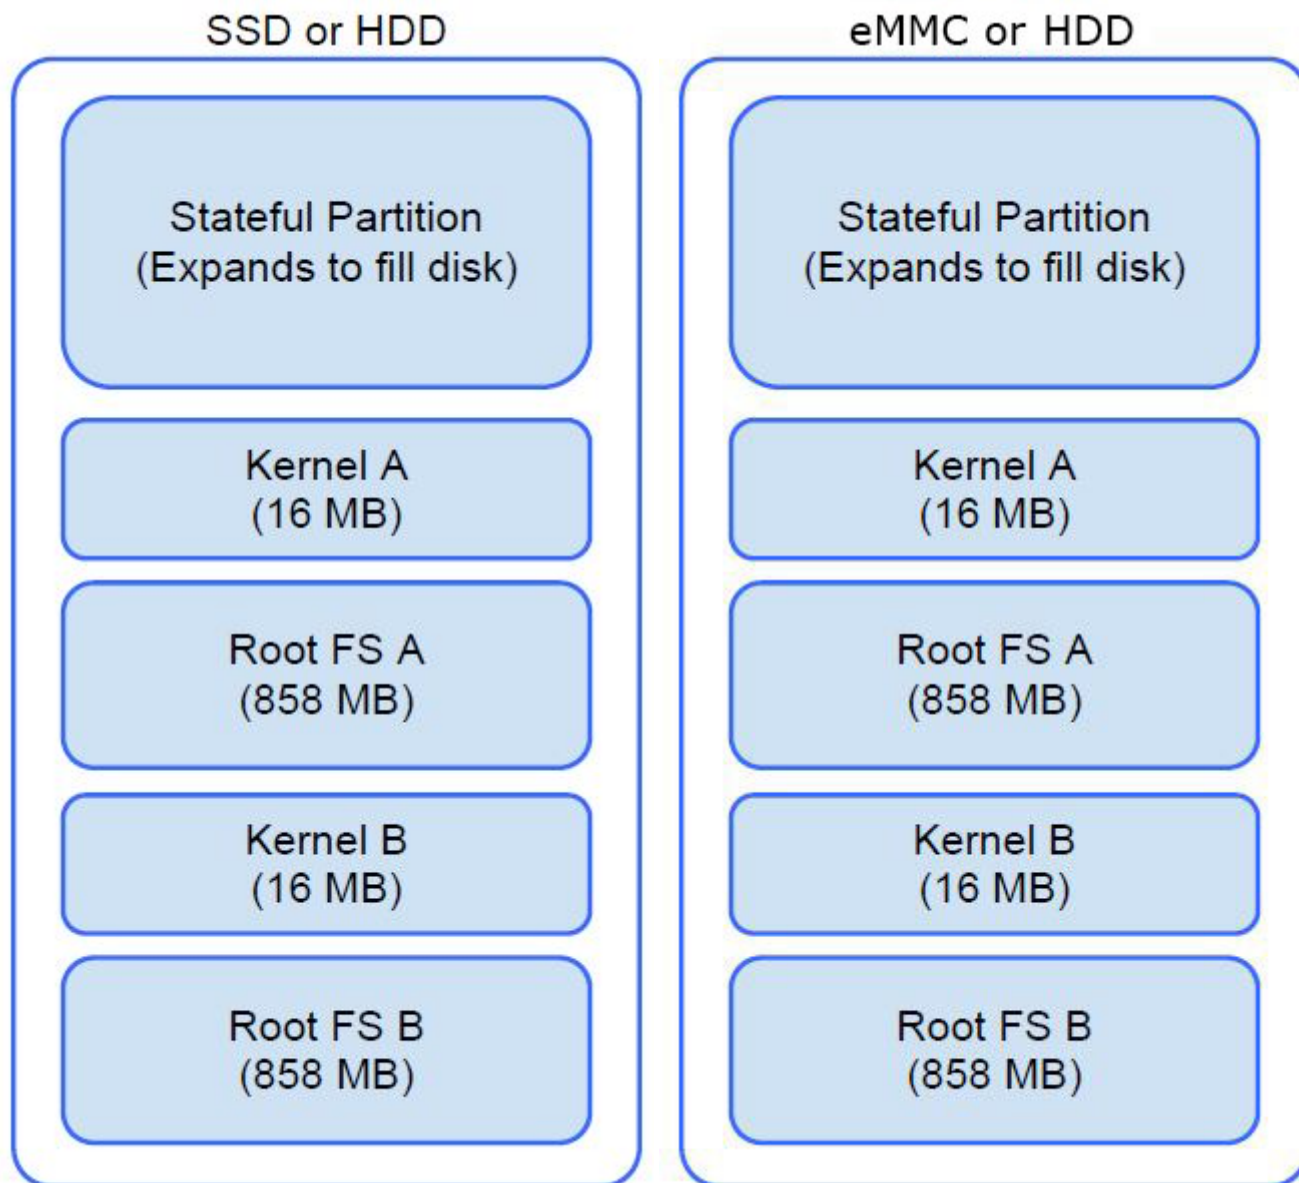



There are two copies of Chrome OS on disk: an active copy and a backup copy. Each copy consists of a kernel partition and a root file system. The backup copy is updated automatically in the background. Users only need to reboot. The partition contains encrypted user data and is also used in the factory for storing test software.

# Developer and Recovery mode

Table 22. Developer and Recovery mode

## Developer Mode

## Recovery Mode

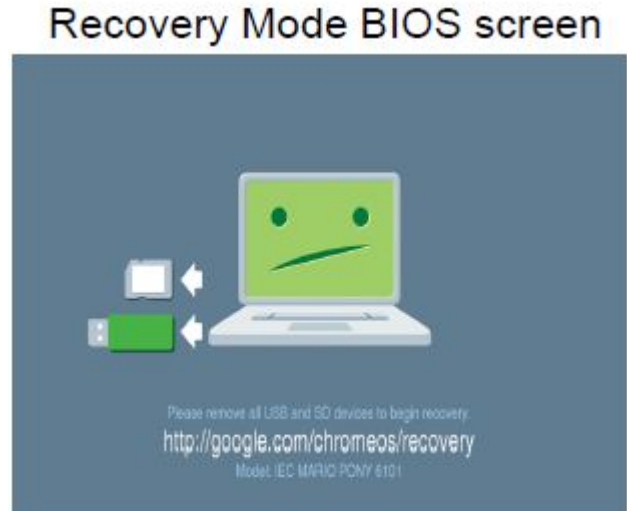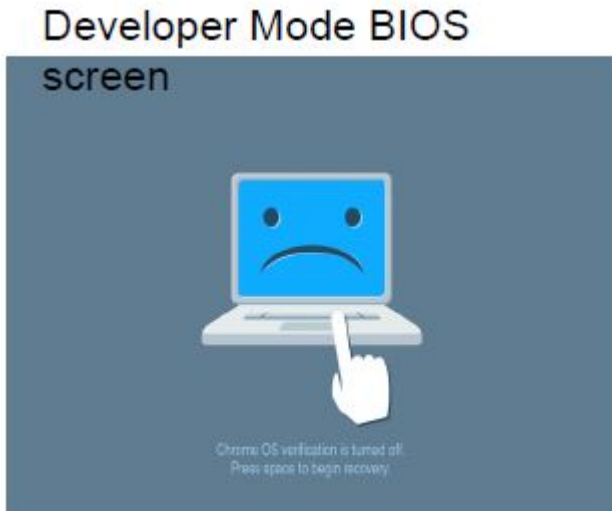

- Used to boot without verification.
- Can be turned on via key combination during boot.
- Stateful partition is wiped during transitions.
- Used in the factory to boot test image.

- Allows a user to reinstall the Chrome OS from a USB key or SD card.
- Recovery mode is entered if verified boot fails.
- A user can force recovery mode via a key combination during boot.

# Coreboot and U-boot Custom Firmware

## Coreboot (x86 only)

- Memory and chipset initialization
- Open-source, except for MRC binary from Intel.

## U-Boot

- Performs verified boot
- Handles recovery and Developer Mode
- Open source code

Normal boot is very fast, as it takes less than 1 second to start loading kernel. Chromebook does not boot other operating systems such as Windows or OS X.

# Chrome vs Chromium OS

**Table 23. Difference between Chromium and Chrome OS**

Difference between Chromium and Chrome OS	
Chromium OS	Chrome OS
<ul style="list-style-type: none"><li>• Is an open source project: <a href="http://www.chromium.org/chromium-os">http://www.chromium.org/chromium-os</a></li><li>• Runs on regular PCs and Chrome devices</li></ul>	<ul style="list-style-type: none"><li>• Is based on Chromium OS</li><li>• Only runs on the Chrome devices with required hardware features (TPM, RO firmware, recovery button, developer switch).</li><li>• Includes additional licensed features such as the Netflix plugin, video codecs, and fonts</li></ul>

## View system information


This page contains all the information about viewing system information for the Dell Chromebook.

Dell Chromebook 11 (3189) 11 (3180) 5190 5190 2-in-1 does not support Dell BIOS. Hence, there are several ways to check system specifications depending on the information you are searching for. The table below lists some of the most commonly used methods to view system information and specifications.


Table 24. View system information

Commands	Action and Purpose
Chrome:help	View basic OS information.

Screenshot

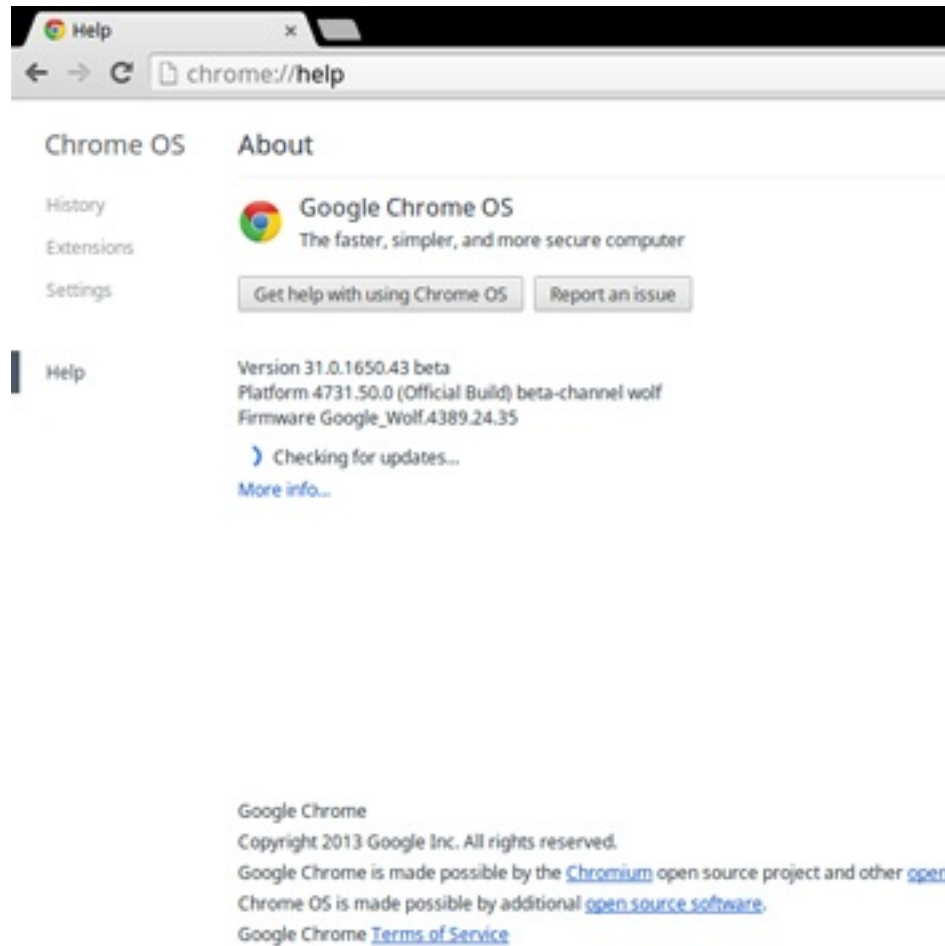


Chrome:settings	View information such as screen resolution options (Device>Display settings), touchpad, and other basic hardware information.
-----------------	---

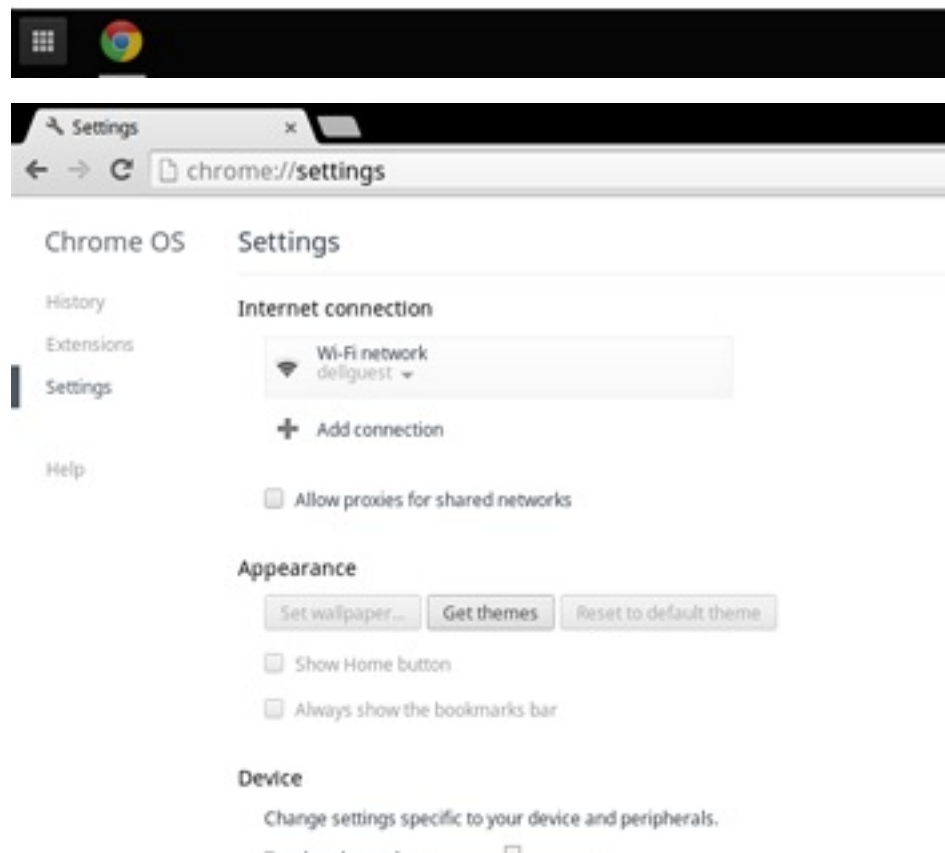

**Commands****Action and Purpose****Screenshot**

Chrome:system

View advanced system information such as the Google Chrome version, BIOS information, CPU information, memory information, network status, power supply information, etc.

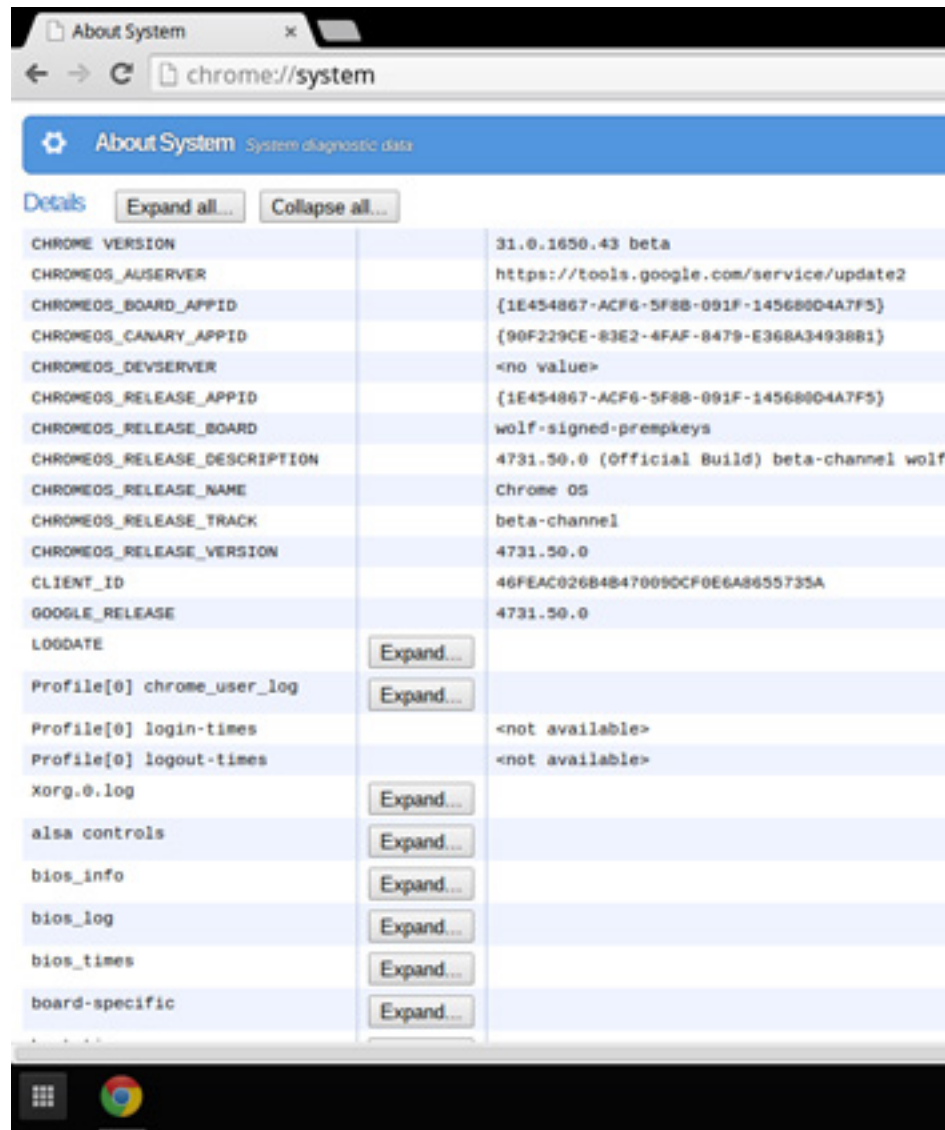


**Commands**

**Action and Purpose**

**Screenshot**

Chrome:net-internals

View advanced networking information.

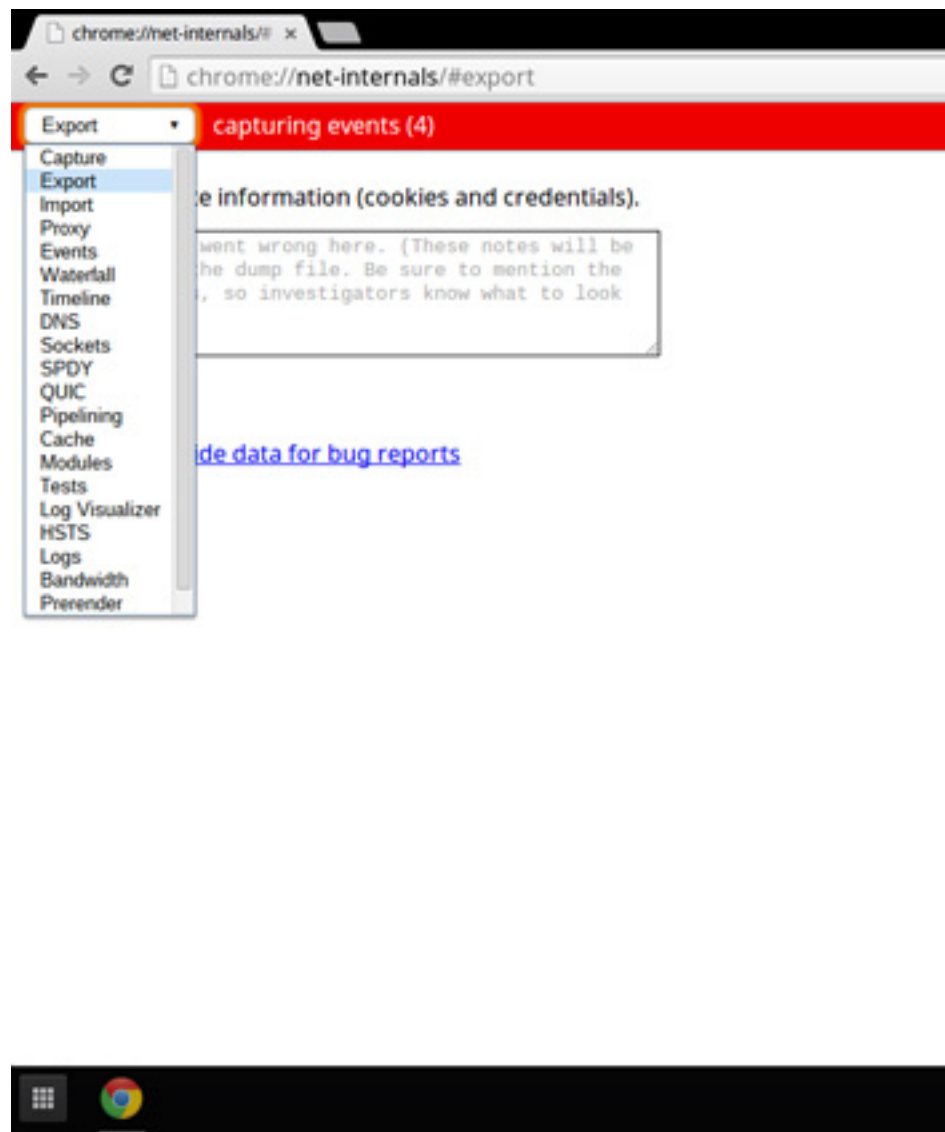



# Getting help

## Contacting Dell

① **NOTE:** If you do not have an active Internet connection, you can find contact information on your purchase invoice, packing slip, bill, or Dell product catalog.

Dell provides several online and telephone-based support and service options. Availability varies by country and product, and some services may not be available in your area. To contact Dell for sales, technical support, or customer service issues:

- 1 Go to **Dell.com/support**.
- 2 Select your support category.
- 3 Verify your country or region in the **Choose a Country/Region** drop-down list at the bottom of the page.
- 4 Select the appropriate service or support link based on your need.