


7 Slot Unmanaged Media Converter Chassis, AC Power Input


Product ID

MCM7-MEDIA-CHASSIS

Front View

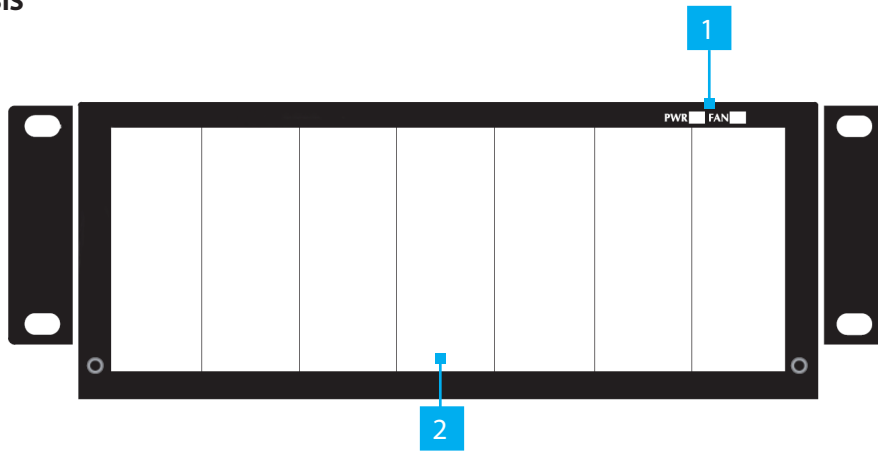

Rear View

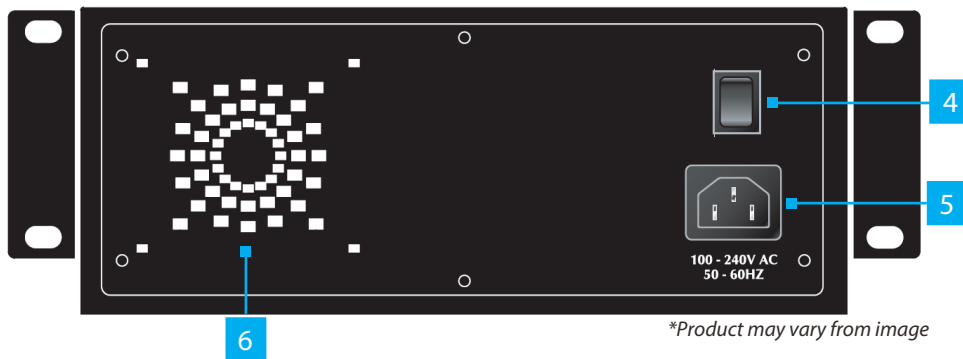

	Feature	Function
1	LEDs	<ul style="list-style-type: none"> Power <ul style="list-style-type: none"> Solid Green: To indicate that the chassis is powered Off: The chassis is off or has failed Fan <ul style="list-style-type: none"> Solid Green: The fan is functional Off: The fan has failed
2	Media Converter Slot (x7)	<ul style="list-style-type: none"> Insert an MCM Series Media Converter
3	Lock Gate Thumb Screws	<ul style="list-style-type: none"> Two Thumb Screws secure the Lock Gate to prevent accidental removal of the Media Converters
4	On/Off Switch	<ul style="list-style-type: none"> Turn the On/Off Switch to the On position to power on the Media Chassis
5	Power Input	<ul style="list-style-type: none"> Connect to an AC Electrical Outlet
6	Cooling Fan	<ul style="list-style-type: none"> Vents air away from the Media Converter Chassis

Package Contents

- Media Converter Chassis x 1
- Rack Mounting Kit x 1
- NA Power Cord x 1
- EU Power Cord x 1
- UK Power Cord x 1
- Port Covers x 5
- Quick-Start Guide x 1

Requirements

For the latest manuals, product information, technical specifications, and declarations of conformance, please visit:

www.StarTech.com/MCM7-MEDIA-CHASSIS

Warning! Caution and shock hazard! Connect only to a properly grounded outlet.

Note: The Media Chassis is designed to work with specific StarTech.com MCM Series Media Converters. For a full list of compatible Media Converters, please visit: www.StarTech.com/MCM7-MEDIA-CHASSIS

Installation

(Optional) Rack Mount the Media Chassis

1. Place the **Mounting Brackets** on each side of the **Media Chassis**. Align the **Holes** in the **Mounting Brackets** with the **Holes** on the sides of the **Media Chassis**.
2. Insert four **Screws** through each **Mounting Bracket** and into the **Media Chassis**.
3. Tighten each **Screw** using a **Phillips Head Screwdriver**.
4. Identify an appropriate position within the **10-inch Mini Rack** to mount the **Media Chassis**

Note: The Media Chassis requires 2U of rack space.

5. If the **10-inch Mini Rack** uses square mounting holes, install **Cage Nuts** (not included) into the square mounting holes on the **2U** of rack space.
6. Place the **Media Chassis** into the rack-space and align the mounting holes on the **Mounting Brackets** with the mounting points on the rack space (e.g. the cage nuts, if used).
7. Use **Cabinet Screws** (not included) to secure the **Media Chassis** to the rack. If not using cage nuts or M5/M6 threaded rack posts, the appropriate mounting hardware for the rack should be used.

Note: Ensure the Screws are properly tightened and the Media Chassis has no movement.

8. The **Media Chassis** is now installed into the **10-inch Mini Rack**.

Installing the Media Converters

1. Ensure the **On/Off Switch** on the **Media Chassis** is in the **Off** position.
2. Loosen the **Lock Gate Thumb Screws** and lower the **Lock Gate**.
3. Select the desired **Media Converter** and insert it into an available **Media Converter Slot**.
4. Slide the **Media Converter** fully into the slot until it is flush with the **Slot Divider**. Ensure the **Barrel Power Connector** on the **Media Converter** is facing downward during insertion. See **Figure 1** for the correct orientation.
5. Repeat the process for any additional **Media Converters**.
6. Raise the **Lock Gate** into position, and tighten the **Thumb Screws** to secure the **Media Converters** in place.
7. Plug in the included **Power Cable** into the **Media Chassis**.
8. Turn the **On/Off Switch** to the **On** position to power on the **Media Chassis**.

Note: Media Converters are hot-swappable after initial installation.

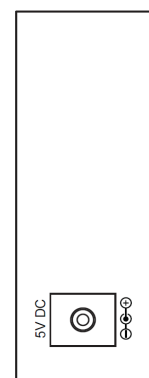


Figure 1



HQ Contact:

StarTech.com Ltd.
45 Artisans Crescent,
London, ON N5V 5E9,
Canada

US Contact:

StarTech.com USA LLP
4490 South Hamilton Rd,
Groveport, OH 43125,
United States

UK Contact:

StarTech.com Ltd.
15 Gowerton Rd,
Northampton, NN4 7BW,
United Kingdom

EU Contact:

StarTech.com Ltd.
Siriusdreef 17-27
2132 WT Hoofddorp
The Netherlands

JP Contact:

StarTech.com K.K.
Atelier Yours Ogawamachi 7F
1-10-2 Kanda Ogawamachi
Chiyoda-ku, Tokyo 101-0052
Japan

FR: startech.com/fr
DE: startech.com/de
ES: startech.com/es
NL: startech.com/nl
IT: startech.com/it
JP: startech.com/jp