




Recessed Pro-Power Kit with Locking Inlet 45-0022

Use DataComm Electronics' Recessed Pro-Power Cable Kit with Locking Inlet to install power and low voltage cables from behind your flat panel TV, your amplifier or other audio and video devices to your equipment room. The 45-0022 Recessed Pro-Power Cable Kit can be installed upright or upside down.

Using the local electrical code approved installation, pull an approved 14/2 with ground or 12/2 with ground building wire cable from the installed Recessed Low Voltage Cable Plate with Power to the selected site in the equipment room. Install a new or old workbox before installing the Recessed Pro-Power Cable Plate with Locking Inlet. This is a non-energized connection. To energize this connection, simply plug the supplied 6 ft. locking extension cord into the recessed locking inlet and plug the straight blade end of the extension cord into your rack mounted surge protector.



45-0021-WH Plate, 45-0022-WH Plate & 6 Ft. Locking Extension Cord

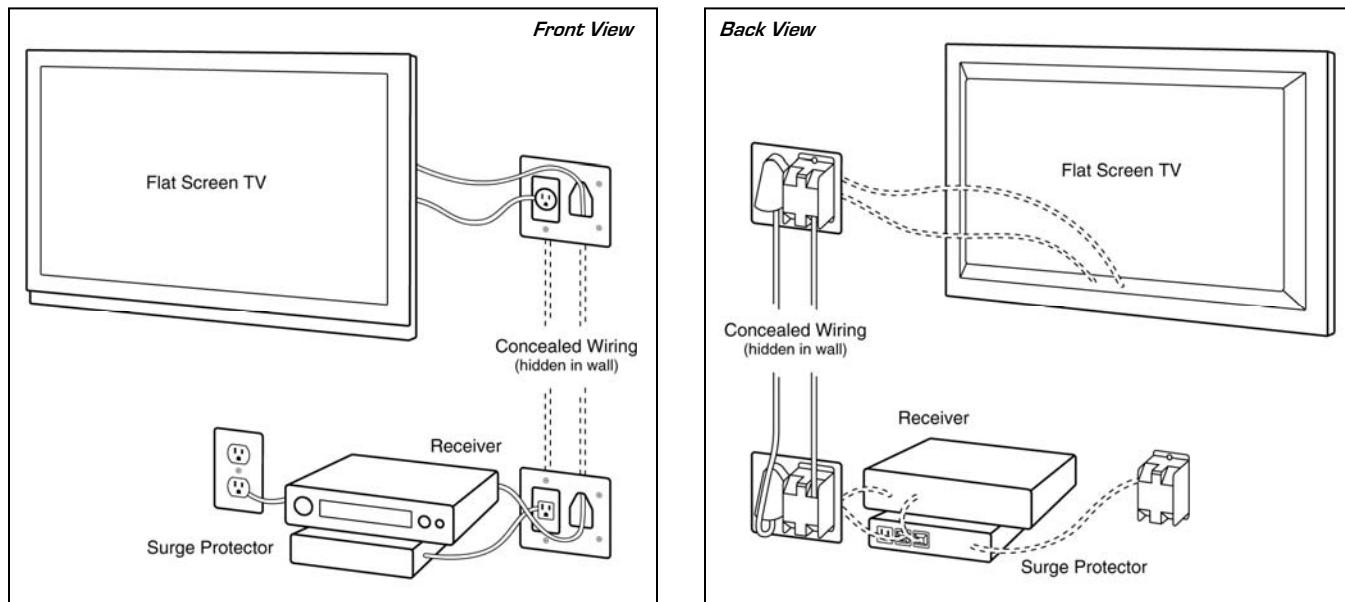

U.S. Patent Numbers D553475, D554475 and 7390964

RoHS Compliant

The Receptacle is an UR, UL Recognized Component



ETL LISTED
CONFORMS TO
UL STD 514C
CERTIFIED TO
CAN/CSA STD C22.2 NO. 42.1

DataComm Electronics
6349 Peachtree St.
Norcross, GA 30071
888.223.7977
770.662.8205
www.datacomelectronics.com