

# ZBOX


→ SKU: ZBOX-BI325-BE/U/J/AUS

**BI325**

**B**  
SERIES

Enjoy a rich multimedia experience with energy efficient ZOTAC ZBOX BI325 mini-PC. Powered by the new Intel Braswell processor that trumps its predecessor with performance and power consumption, this Mini PC is the perfect desktop replacement.

The ZBOX BI325 stands no taller than a coffee maker and no wider than a toaster. It is perfect for daily activities such as web browsing, e-mails, productivity, and smooth HD entertainment.

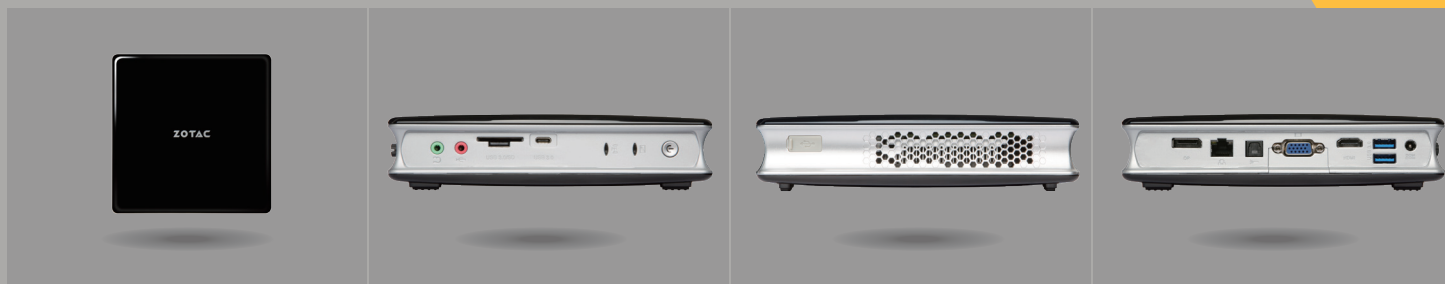

## technical specifications

### FEATURES

- Intel Virtualization technology (VT-x)
- Intel Quick Sync Video technology
- Intel Clear Video HD technology
- Microsoft DirectX 11.2 compatible
- 802.11ac WiFi & Bluetooth 4.0 technology

### SPECIFICATIONS

- Intel HD Graphics
- Intel N3160 (quad-core, 1.6 GHz up to 2.24 GHz)

### HARD DRIVE & MEMORY

- 1 x 2.5-inch SATA 6.0 Gbps HDD/SSD slot
- 2 x DDR3L-1600 SO-DIMM slot (up to 8GB)

### DISPLAY OUTPUTS

- HDMI 1.4b (3840x2160 @ 30 Hz)
- DisplayPort 1.1a (2560x1200 @ 60 Hz)
- VGA (2560x1200 @ 60 Hz)
- HDCP compliant

### AUDIO OUTPUTS

- Loss-less Bitstream (LPCM / bitstream via HDMI)
- Combo mini-optical S/PDIF / analog stereo

### FRONT PORTS

- Microphone input
- Headphone / mini-SPDIF output
- 3-in-1 card reader (SD/SDHC/SDXC)
- USB 3.0 port
- USB 3.0 type-C port
- WiFi LED
- Hard drive LED
- Power button

### TOP PORTS

- 1 x USB 2.0 port

### REAR PORTS

- 2 x USB 3.0 port
- 1 x 10/100/1000 Ethernet (RJ45)
- Power connector
- Wi-Fi Antenna connector

### SOFTWARE COMPATIBILITY

- Microsoft Windows 10 (32/64-bit)
- Microsoft Windows 8.1 / 7\* (64-bit)

### MINI-PC DIMENSIONS

- Length: 188mm (7.4in)
- Width: 188mm (7.4in)
- Height: 44mm (1.73in)

### BOX DIMENSIONS

- Length: 260mm (10.24in)
- Width: 210mm (8.27in)
- Height: 100mm (3.94in)

### INSIDE THE BOX

- ZOTAC ZBOX BI325
- Power brick & cable
- Stand
- Mini Optical S/PDIF adapter
- 1 x Wi-Fi Antenna
- Driver disc

\*Please refer to "installing Windows 7" in the User manual for Windows 7 installation instructions

