

Products Description



PoE30G-AT PoE Adapter is fully compliant with IEEE802.3af and IEEE802.3at standard. It delivers up to 30W output power per port. By using this device, both data and electrical power can be simultaneously delivered through a single CAT5 (or better) Ethernet cable to a non-PoE Ethernet-enabled device, eliminating the trouble to connect it to an outlet nearby with an external power cord. Above all, It could automatic detect whether the PD within the PoE receiving function, If not, it won't deliver power for safety. You can connect it to a wireless AP, Web cam (IP Camera), IP telephone, or other IEEE802.3af/at compliant devices for the purpose of reducing installation cost and improving



Features

- >> Complies with IEEE802.3, IEEE802.3u IEEE802.3ab and IEEE802.3at standards
- >> 2 RJ-45 ports provide 10/100/1000Mbps link rate;
- >> Plug and Play Installation
- >> Delivers both data and electrical power using a single Ethernet cable

Specification

Model No.	PoE30G-AT
Description	PoE Injector
Standard and protocol supported	Compatible with IEEE802.3, IEEE802.3u, IEEE802.3ab, IEEE802.3af , IEEE802.3atStandard
Features	<p>Support the powered devices compatible with IEEE802.3af, IEEE802.3at Standard</p> <p>Transmission range up to 100M</p> <p>Power output can be matched automatically</p> <p>Plug and play</p>
Port	<p>1 GE port</p> <p>1 data&power output port supporting PoE</p>
Indicators	PWR, PoE
Dimension(W*D*H)	131mm*60mm*33mm
Power output	30W
Operating temperature	0°C~40°C
Storage temperature	-40°C~70°C
Relative humidity(Operational)	10%~90% (noncondensing)
Relative humidity(Storage)	5%~90% (noncondensing)
certification	CE\FCC\ROHS




Gigabit
Delivery



Applications


1 - Power PD

Switch (connect PCs)---PoE30G-AT---IP telephone

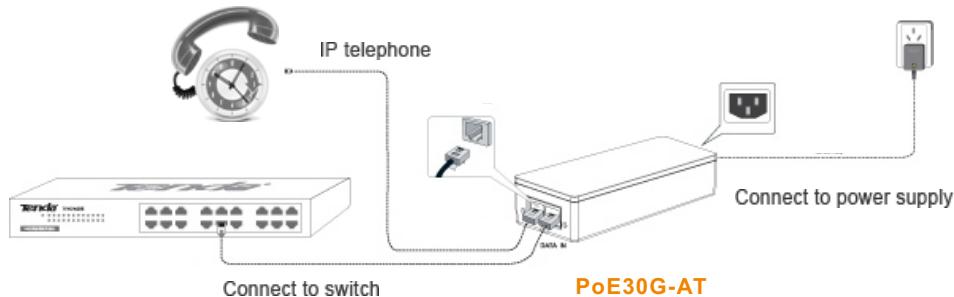


2 - Power wireless AP

Switch (connect PCs)---PoE30G-AT---Wireless AP(W330A)

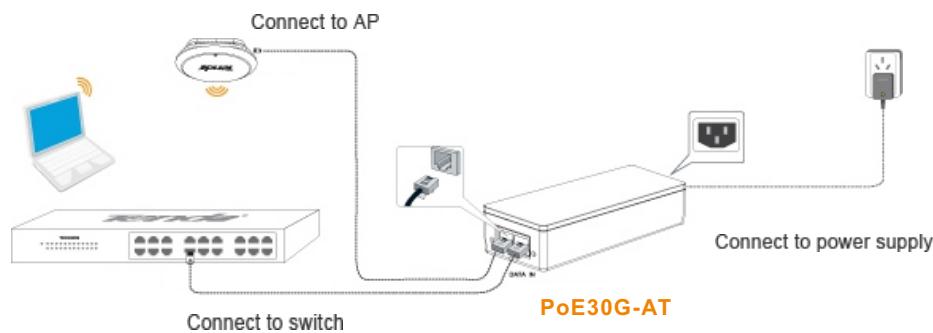

3 - Power IP telephone or IP camera

Switch (connect PCs)---PoE30G-AT---IP camera

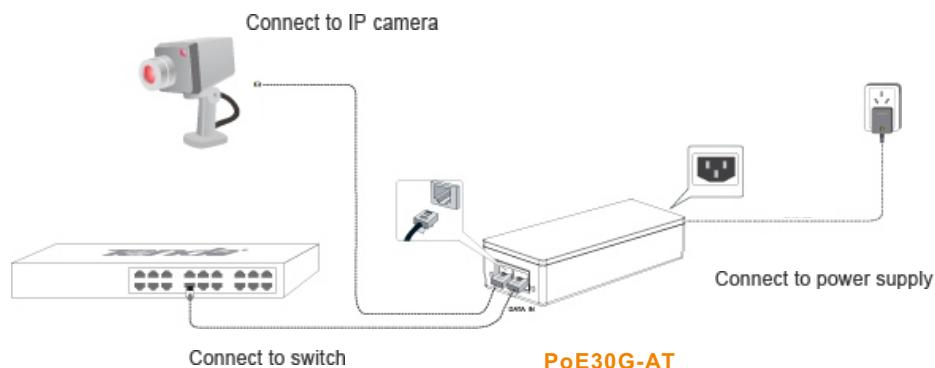

SHENZHEN TENDA TECHNOLOGY CO.,LTD.

100 Shilong Road Shiyan Town, Baoan District Shenzhen 518108, China

Phone: (86 755) 2765 7180 Fax: (86 755) 2765 7178

Email: sales@tenda.com.cn support@tenda.com.cn

<http://www.tendacn.com>



Ralink brand and product names are trademarks or registered trademarks of their respective holders. Information is subject to change without notice. ALL rights reserved.
©2013 SHENZHEN TENDA TECHNOLOGY CO.,Ltd, the Tenda logo is registered trademark of Shenzhen Tenda Technology Co.,Ltd in China and/or other countries.