

COMPACT 4G LTE M2M ROUTER



DIGI TRANSPORT® WR11 XT

Secure 3G/4G/LTE cellular router for retail, kiosk and industrial control applications

Digi TransPort WR11 XT delivers a cost-optimized 4G LTE connection to mission critical M2M applications around the world. These cellular routers are ideal for connecting:

- Building and process automation controllers
- Smart grid assets (meters, switches and controllers)
- IP cameras and access controllers
- Remote data loggers, flow meters and sensing equipment
- Telco infrastructure controllers
- ATMs, kiosks and service terminals

The Digi TransPort WR11 XT provides a secure, reliable connection to industrial controllers, retail terminals and process automation equipment on third party sites or remote locations. This drop-in connectivity gives operators a way to reduce the cost of downtime and service calls and also increase revenue by bringing distributed sites online faster.

Digi management solutions provide easy setup, configuration and maintenance of large installations of remote Digi TransPort devices. Digi Remote Manager® offers webbased device management for remote Digi cellular routers, gateways and third-party devices.

BENEFITS:

- Global HSPA+ and 4G LTE support and certification
- Extremely resilient cellular connection through patented
 Digi SureLink™, VRRP+ protocol and dual SIM slots
- Enterprise routing features for security, logging and redundancy (e.g., stateful firewall, VPN, SNMP); no annual enterprise software license required
- Digi Remote Manager provides mass configuration, device management and troubleshooting tools
- Rugged aluminum enclosure, flanges and optional DIN rail clip for flexible mounting
- 5-year warranty standard—no additional cost

RELATED PRODUCTS












Digi Remote Manager°



LTE - EMEA (M3)	
LTE - EMEA (M3)	
LTE - UNITED STATES (M4) Transfer rate (max): 10 Mbps down, 5 Mbps up Approvals: Sprint (pending) LTE CAT 1: 700(B12,B13)/850(B5)/AWS(B4)/1900(B2) H5PA+: 850/1900 MHz Transfer rate (max): 10 Mbps down, 5 Mbps up Approvals: PTCRB, AT&T, Verizon, Telus (pending) LTE CAT 1: 700(B28)/850(B5)/900(B8)/1800(B3)/2100(B1) 3G H5PA+: 850/900/2100 MHz Transfer rate (max): 10 Mbps down, 5 Mbps up Approvals: PTCRB, Voldafone CONNECTORS (2) 50 \(\Omegas \text{ MA} \text{ (can wait)} (c	
HSPA+: 850/1900 MHz Transfer rate (max): 10 Mbps down, 5 Mbps up Approvals: PTCRB, AT&T, Verizon, Telus (pending) LTE - ANZ/LATAM (M9) LTE CAT 1: 700(β28)/850(β5)/900(β8)/1800(β3)/2100(β1) 3G HSPA+: 850/900/2100 MHz Transfer rate (max): 10 Mbps down, 5 Mbps up GLOBAL HSPA+ - (U9) GLOBAL HSPA+ - (U	
LTE - ANZ/LATAM (M9) 3G HSPA+: 850/900/2100 MHz Transfer rate (max): 10 Mbps down, 5 Mbps up 3G HSPA+: 850/900/1700AWS/1900/2100 MHz 2G EDGE/GPRS: 850/900/1800/1900 MHz Transfer rate (max): 21 Mbps down, 5.76 Mbps up Approvals: PTCRB, Vodafone CONNECTORS (2) 50 \(\Omega \text{ SMA} \text{ (center pin: female); (1) connector for non-LTE models} SIM SLOTS (2) Mini-SIM (2FF) SIM SECURITY Screw-down SIM cover SOFTWARE & MANAGEMENT REMOTE MANAGEMENT Digi Remote Manager® (cloud based); SNMP v1/v2c/v3 (user installed/managed) LOCAL MANAGEMENT MANAGEMENT/ TROUBLESHOOTING TOOLS MEMORY 20 MB RAM, 10 MB file space ETHERNET PORTS (1) RJ-45; 10/100 Mbps (auto-sensing) PHYSICAL	
GLOBAL HSPA+ - (U9) 2G EDGE/GPRS: 850/900/1800/1900 MHz Transfer rate (max): 21 Mbps down, 5.76 Mbps up Approvals: PTCRB, Vodafone CONNECTORS (2) 50 Ω SMA (center pin: female); (1) connector for non-LTE models SIM SLOTS (2) Mini-SIM (2FF) SIM SECURITY Screw-down SIM cover SOFTWARE & MANAGEMENT REMOTE MANAGEMENT Digi Remote Manager® (cloud based); SNMP v1/v2c/v3 (user installed/managed) LOCAL MANAGEMENT WebUI (HTTP/HTTPS); CLI (Telnet, SSH, SMS) MANAGEMENT/ TROUBLESHOOTING TOOLS MEMORY 20 MB RAM, 10 MB file space ETHERNET PORTS (1) RJ-45; 10/100 Mbps (auto-sensing) PHYSICAL	
SIM SLOTS (2) Mini-SIM (2FF) SIM SECURITY Screw-down SIM cover SOFTWARE & MANAGEMENT REMOTE MANAGEMENT Digi Remote Manager® (cloud based); SNMP v1/v2c/v3 (user installed/managed) LOCAL MANAGEMENT WebUI (HTTP/HTTPS); CLI (Telnet, SSH, SMS) MANAGEMENT/ TROUBLESHOOTING TOOLS MEMORY TROUBLESHOOTING TOOLS MEMORY 20 MB RAM, 10 MB file space ETHERNET PORTS (1) RJ-45; 10/100 Mbps (auto-sensing) PHYSICAL	
SIM SECURITY SOFTWARE & MANAGEMENT REMOTE MANAGEMENT Digi Remote Manager® (cloud based); SNMP v1/v2c/v3 (user installed/managed) LOCAL MANAGEMENT MANAGEMENT MANAGEMENT/ TROUBLESHOOTING TOOLS MEMORY 20 MB RAM, 10 MB file space ETHERNET PORTS (1) RJ-45; 10/100 Mbps (auto-sensing) PHYSICAL	
SOFTWARE & MANAGEMENT REMOTE MANAGEMENT Digi Remote Manager® (cloud based); SNMP v1/v2c/v3 (user installed/managed) LOCAL MANAGEMENT WebUI (HTTP/HTTPS); CLI (Telnet, SSH, SMS) MANAGEMENT/ TROUBLESHOOTING TOOLS FTP, SFTP, SCP; Protocol analyzer with PCAP for Wireshark; Event logging with Syslog and SMTP; NTP/SNTP MEMORY 20 MB RAM, 10 MB file space ETHERNET PORTS (1) RJ-45; 10/100 Mbps (auto-sensing) PHYSICAL	
REMOTE MANAGEMENT Digi Remote Manager® (cloud based); SNMP v1/v2c/v3 (user installed/managed) LOCAL MANAGEMENT WebUI (HTTP/HTTPS); CLI (Telnet, SSH, SMS) MANAGEMENT/ TROUBLESHOOTING TOOLS MEMORY 20 MB RAM, 10 MB file space ETHERNET PORTS (1) RJ-45; 10/100 Mbps (auto-sensing) PHYSICAL	
LOCAL MANAGEMENT MANAGEMENT/ TROUBLESHOOTING TOOLS MEMORY 20 MB RAM, 10 MB file space ETHERNET PORTS (1) RJ-45; 10/100 Mbps (auto-sensing) PHYSICAL	
MANAGEMENT/ TROUBLESHOOTING TOOLS FTP, SFTP, SCP; Protocol analyzer with PCAP for Wireshark; Event logging with Syslog and SMTP; NTP/SNTP MEMORY 20 MB RAM, 10 MB file space ETHERNET PORTS (1) RJ-45; 10/100 Mbps (auto-sensing) PHYSICAL	
TROUBLESHOOTING TOOLS MEMORY 20 MB RAM, 10 MB file space ETHERNET PORTS (1) RJ-45; 10/100 Mbps (auto-sensing) PHYSICAL	
PORTS (1) RJ-45; 10/100 Mbps (auto-sensing) PHYSICAL	
PORTS (1) RJ-45; 10/100 Mbps (auto-sensing) PHYSICAL	
PHYSICAL	
DIMENSIONS (L X W X H) 3 in x 4 in x 1 in (7.62 cm x 10.16 cm x 2.54 cm)	
WEIGHT 0.5 lb (.22 kg)	
STATUS LEDS Power on, WWAN signal strength, WWAN service	
ENCLOSURE Industrial (Metal) / IP30	
POWER REQUIREMENTS	
POWER INPUT 5 VDC, 15W minimum power source required	
POWER SUPPLY Must be used with a Digi approved power supply	
POWER CONSUMPTION 3.5W typical (Idle); 10W typical (Peak Tx/Rx)	
ENVIRONMENTAL	
OPERATING TEMPERATURE -30° C to +70° C (-22° F to +158° F) reduced cellular performance may occur above +60° C	
RELATIVE HUMIDITY 5% to 95% (non-condensing)	
APPROVALS	
CELLULAR PTCRB	
SAFETY UL 60950, CSA 22.2 No. 60950, EN60950	
EMISSIONS/IMMUNITY CE, FCC Part 15 Class B, AS/NZS CISPR 22, EN55024, EN55022 Class B	
WARRANTY	
PRODUCT WARRANTY 5 years	

DIGI TRANSPORT® WR11 XT - TOP

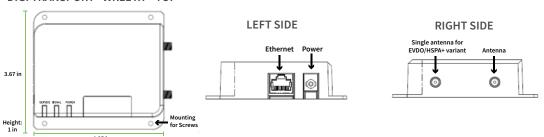



ENTERPRISE SOFTWARE	DESCRIPTION
PROTOCOL SUPPORT	HTTP, HTTPS, FTP, SSL, SMTP, SNMP (v1/v2c/v3), SSH, Telnet and CLI for web management; Remote management via Digi Remote Manager; SMS management, protocol analyzer, ability to capture PCAP for use with Wireshark; DynDNS; Dynamic DNS client compatible with BIND9/No-IP/DynDNS
SECURITY/VPN	IP filtering, stateful inspection firewall with scripting, address and port translation; VPN: IPSec with IKEv1, IKEv2, NAT Traversal; SSL, SSLv2, SSLv3, FIPS 197, open VPN client and server; PPTP, L2TP; (5) VPN tunnels (upgradable to a maximum of 50); Cryptology: SHA-1, MD5, RSA; Encryption: DES, 3DES and AES up to 256-bit (CBC mode for IPsec); Authentication: RADIUS, TACACS+, SCEP for X.509; certificates; Content filtering (via 3rd party); MAC address filtering; VLAN support
ROUTING/FAILOVER	IP pass-through; NAT, NAPT with IP port forwarding; Ethernet bridging; GRE; Multicast routing; Routing protocols: PPP, PPPoE, RIP (v1, v2) OSPF, SRI, BGP, iGMP routing (multicast); RSTP (Rapid Spanning Tree Protocol); IP failover: VRRP, VRRP+TM; Automatic failover/ failback to second GSM network/standby APN
OTHER PROTOCOLS	DHCP; Dynamic DNS client compatible with BIND9/No-IP/DynDNS; QoS via TOS/DSCP/WRED

DIGI REMOTE MANAGER®



INFRASTRUCTURE

- Hosted in a commercial-grade SAS 70-certified environment
- Superior availability, operating to 99.9% or greater
- Open APIs available to support application development

CAPABILITIES

- Centralized management of remote devices over 3G/4G/LTE
- Define standard configurations and automatically monitor individual devices for PCI security compliance
- Report and alert on performance statistics, including connection history, signal quality, latency, data usage and packet loss
- No servers or applications to operate and maintain
- Complete tasks for your entire device network in minutes
- Edit configurations and update firmware for your individual devices or groups
- Monitor the status and location of your remote device via a web browser
- Active or deactivate cellular lines and monitor data to ensure you never incur overage charges

SECURITY

- Certified SSAE-16 facilities
- Over 175 Security Controls in place to protect your data
- Enables compliance with security frameworks like PCI, HIPAA, NIST and more
- Earned SkyHigh's Cloud Trust Program highest ranking of Enterprise-Ready

PART NUMBERS	DIGI TRANSPORT WR11 XT
WR11-M300-DE1-XB	4G LTE EMEA/APAC
WR11-M400-DE1-XB	4G LTE Sprint
WR11-M600-DE1-XB	4G LTE North America
WR11-M900-DE1-XB	4G LTE LATAM/ANZ
WR11-U900-DE1-XW	HSPA+ Global

PART NUMBERS	ACCESSORIES*
76002065	Accessory Kit DC - Includes DC/DC power supply (9-30 VDC / 5 VDC), ethernet cable and antennas (2)
76002062	Accessory Kit AC - Includes AC/DC power supply (US), ethernet cable and antennas (2)
76002063	Accessory Kit AC Intl - Includes AC/DC power supply (Intl plugs), ethernet cable and antennas (2)
76002064	Accessory Kit Ext Temp AC - Includes AC/DC power supply (-30° C to +70° C), ethernet cable and antennas (2)

^{*}Sold separately, unless otherwise noted.

DIGI SERVICE AND SUPPORT / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit www.digi.com/support.

© 1996-2018 Digi International Inc. All rights reserved. All trademarks are the property of their respective owners. DIGI INTERNATIONAL WORLDWIDE HQ 877-912-3444 / 952-912-3444 / www.digi.com

DIGI INTERNATIONAL GERMANY +49-89-540-428-0

DIGI INTERNATIONAL JAPAN +81-3-5428-0261 / www.digi-intl.co.jp DIGI INTERNATIONAL SINGAPORE +65-6213-5380

DIGI INTERNATIONAL CHINA +86-21-50492199 / www.digi.com.cn

