


T32p-30 Simplified service manual for dismantling

Model Name: ThinkVision T32p-30

Exploded Diagram

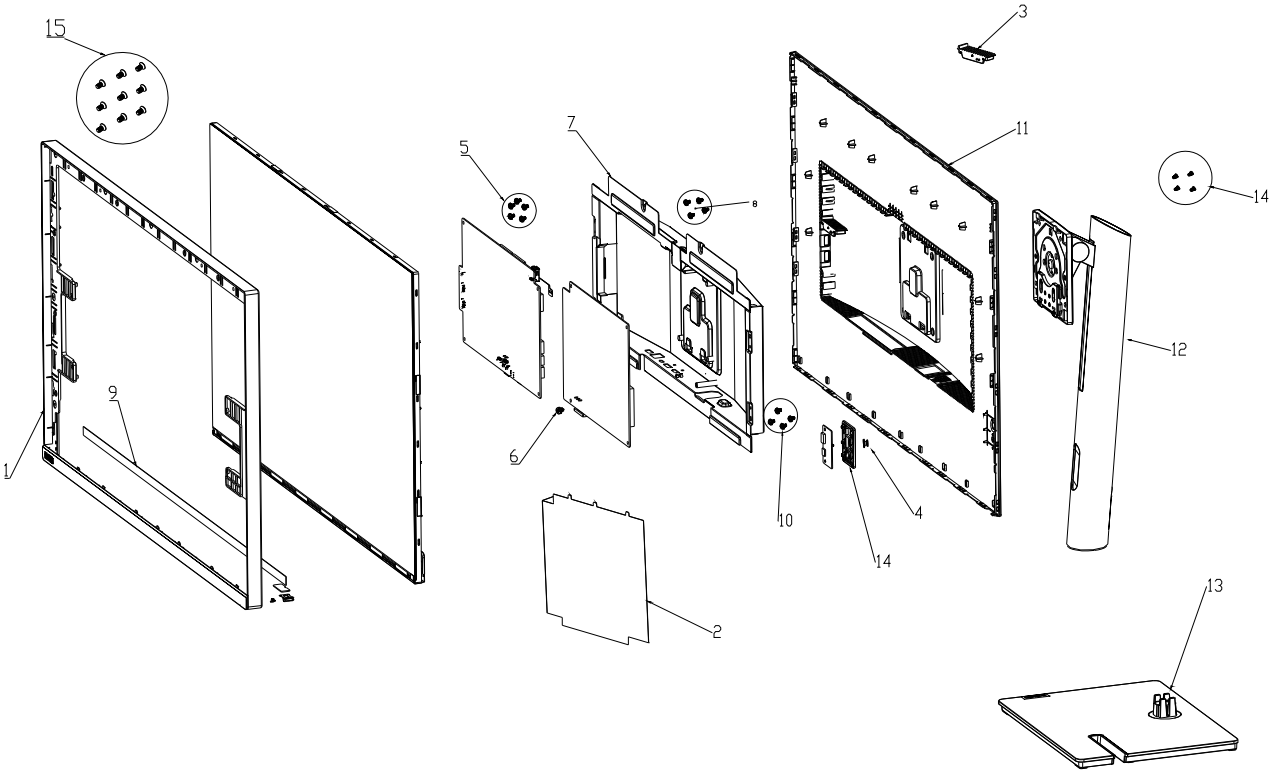

1. Precaution

Please read the precaution as follows to prevent any damages to the LCD Monitor.
Make sure all power connector is removed. Be sure that the LCD Monitor is in power off status.



<p>Prepare soft cloth and sponge as working platform to place LCD monitor horizontally.</p>	
<p>Hold LCD by the side carefully and DON'T touch or press panel directly.</p>	

2. Appropriate tools


Select the Appropriate tools for disassembly and re-assembly.

Phillips screwdriver (#2)	
spacer screwdriver	
C/D disassembly tool	
Gloves or soft cloth	


3. Disassembly SOP
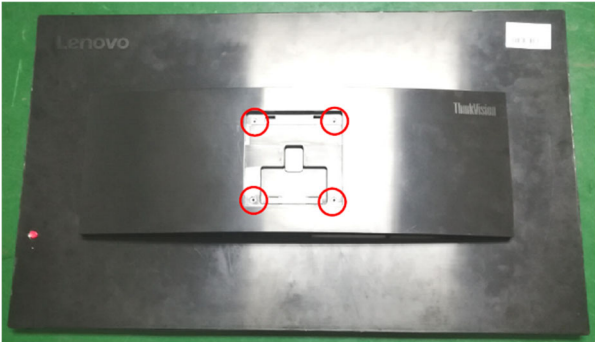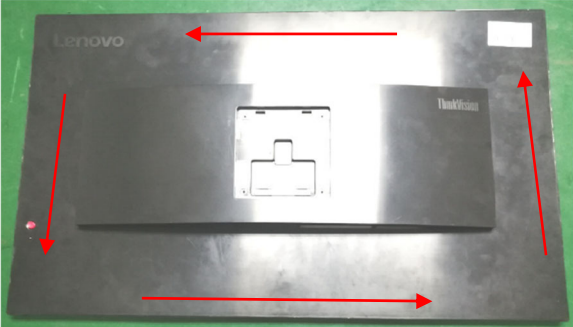
<p>Put the monitor on a flat surface</p>	
<p>Push the button to remove the stand-base assy.</p>	
<p>Remove the screw * 4pcs Tool : Screwdriver #2</p>	
<p>Use the C/D disassembly tool to release Rear cover hook.</p>	


Remove LED board and disconnect the pins.

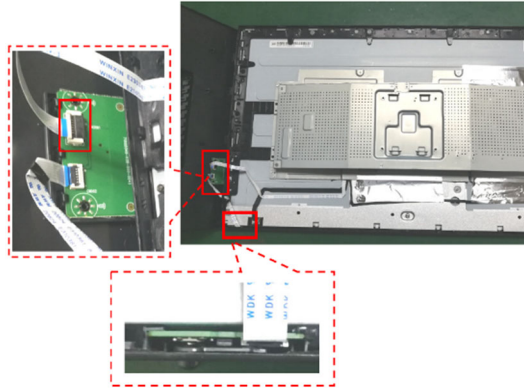


Tear off tapes




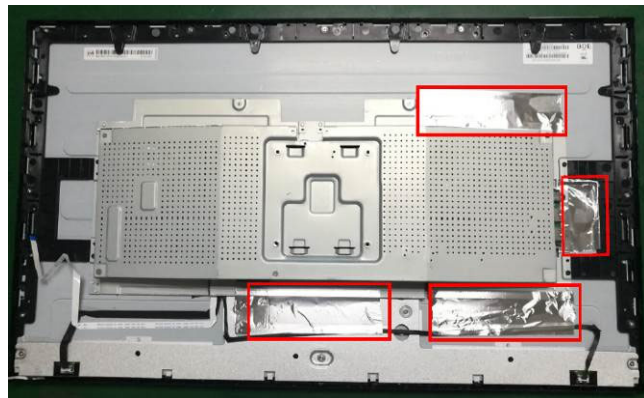


Disconnect pins and remove the cable.


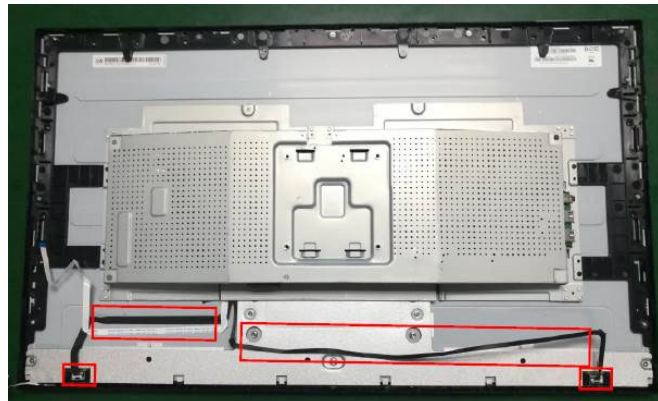


Remove the screw*8 pcs
Tool: Screwdriver #2

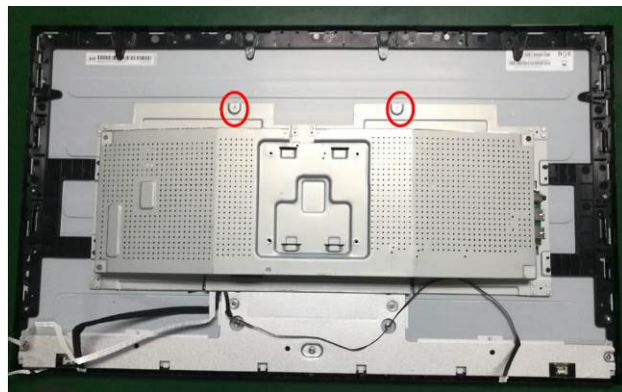


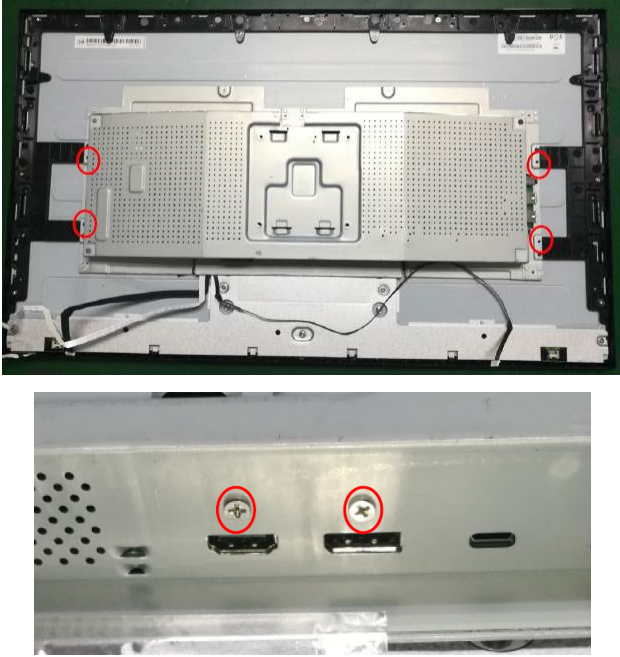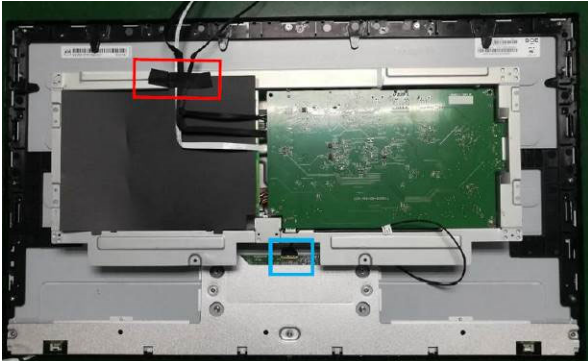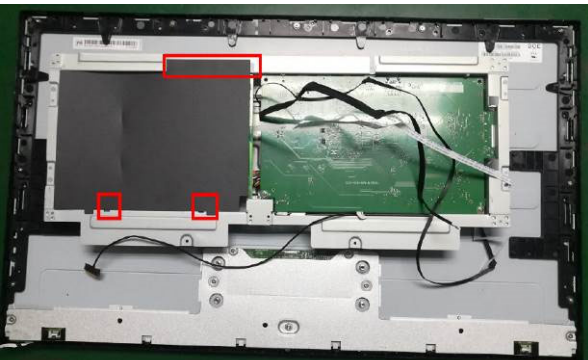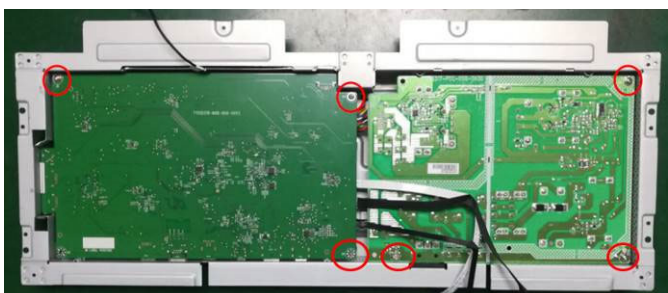	
<p>Remove the tape and disconnect the pin</p>	
<p>Take out the mylar sheet from Main chassis</p>	
<p>Remove All screws. Tool : Screwdriver #2</p>	

Disconnect all the pins

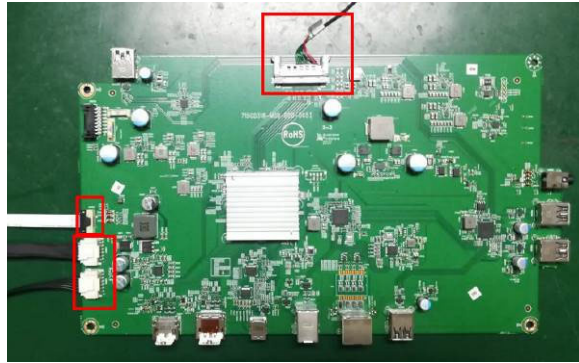
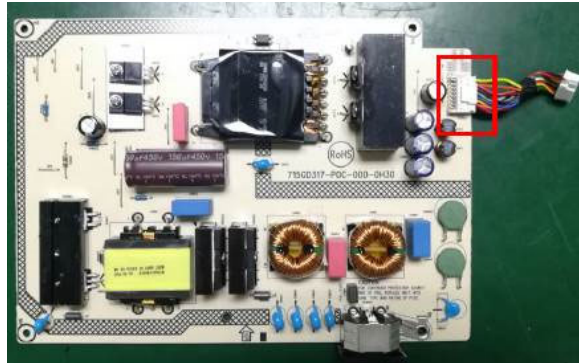


The main frame

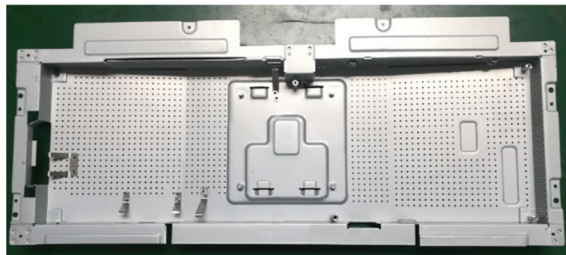

Remove the screw*9pcs
Tool: Screwdriver #2

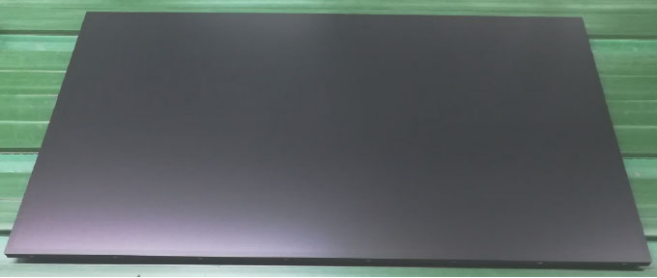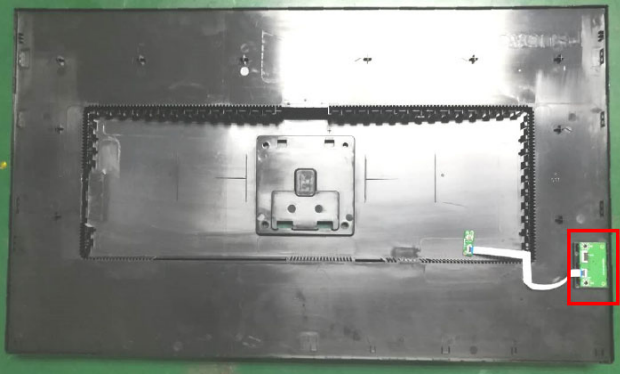

<p>The bezel</p>	
<p>The panel</p>	
<p>Take out key board</p>	
<p>Disconnect the pins and disassemble the key</p>	