


Y25g-30 Simplified service manual for dismantling

Model Name: Lenovo Y25g-30

Exploded Diagram

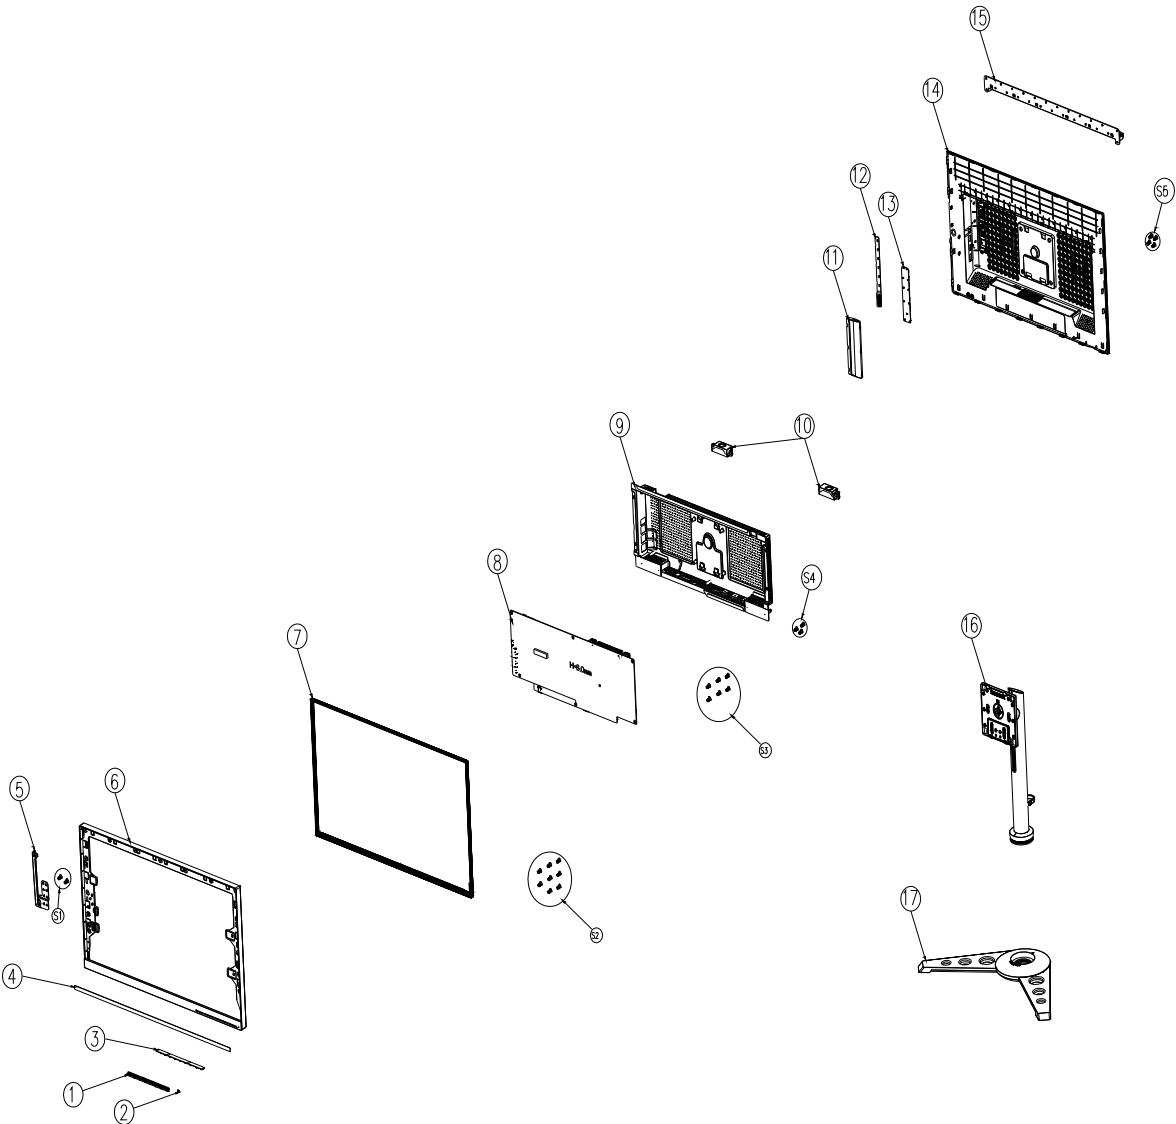

1. Precaution

Please read the precaution as follows to prevent any damages to the LCD Monitor.

Make sure all power connector is removed. Be sure that the LCD Monitor is in power off status.

Prepare soft cloth and sponge as working platform to place LCD monitor horizontally.	
Hold LCD by the side carefully and DON'T touch or press panel directly.	

2. Appropriate tools

Select the Appropriate tools for disassembly and re-assembly.

Phillips screwdriver (#2)	
spacer screwdriver	
C/D disassembly tool	
Gloves or soft cloth	

3. Disassembly SOP

Starting from the back of the monitor, remove the stand assy

Push the button to remove the stand-base assy




Remove the screw*4pcs

Tool : Screwdriver #2




Disconnect the pin and take off the tapes. Then remove the screw*2pcs.


Tool : Screwdriver #2

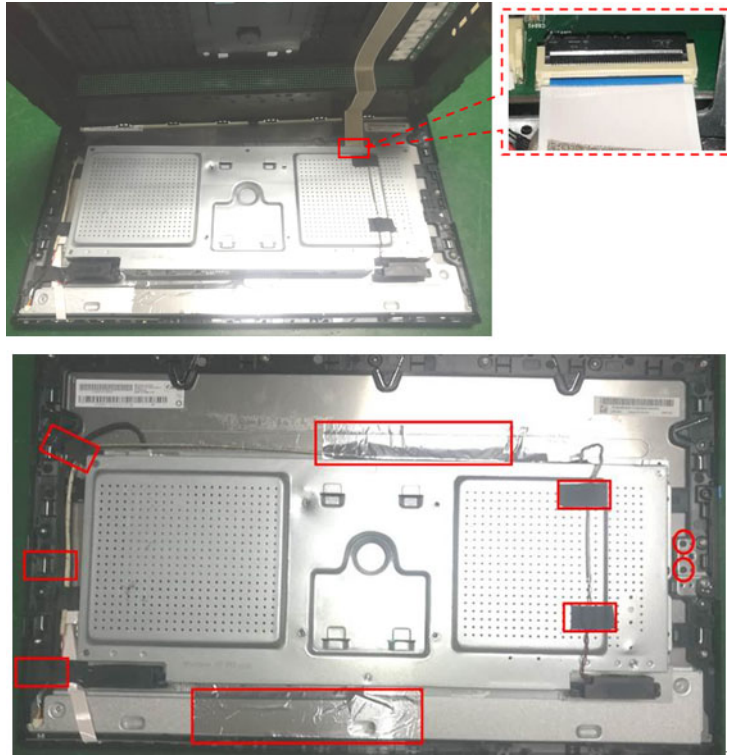


Disconnect the pins and remove the speakers

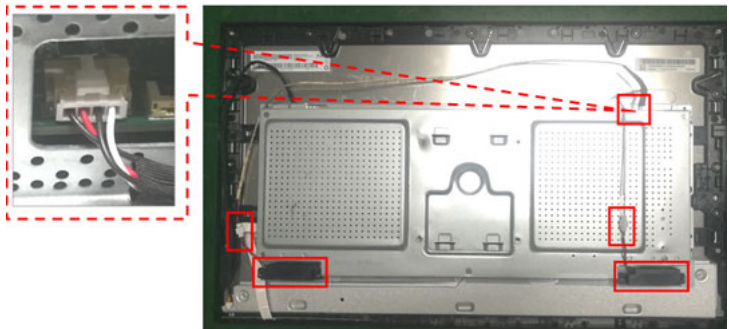


Disconnect the pins to remove the key board and the B/L Cable

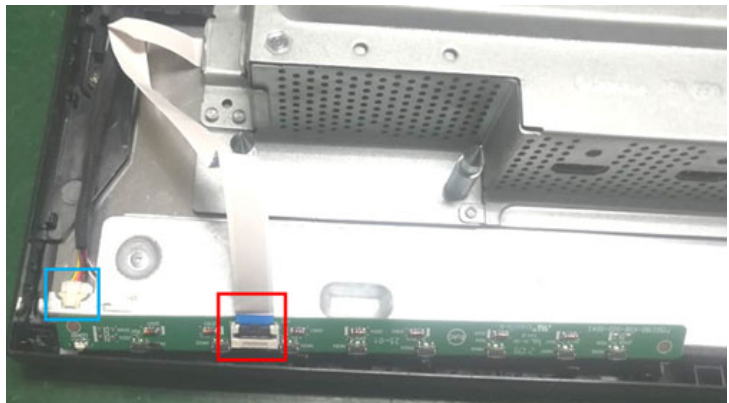

Disconnect the pins to remove the mainframe.

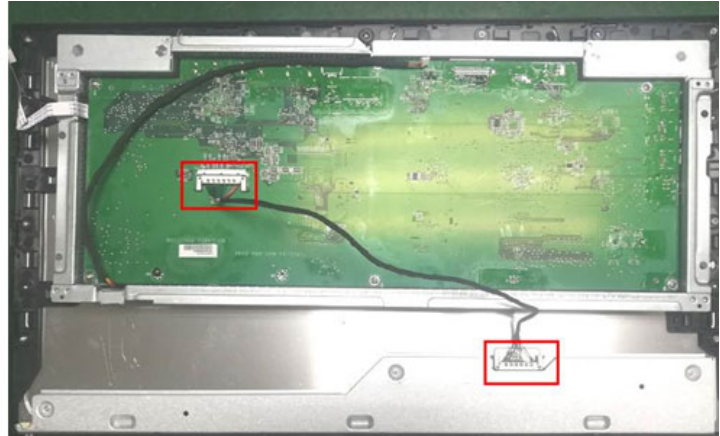

Remove the screw*8pcs
Tool : Screwdriver #2

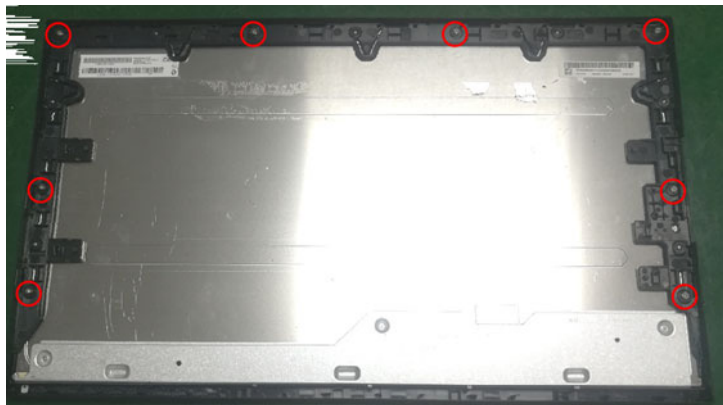

Separated the panel and the middle frame.




The panel




The middle frame




Remove the screw*9pcs
Tool: Screwdriver #2

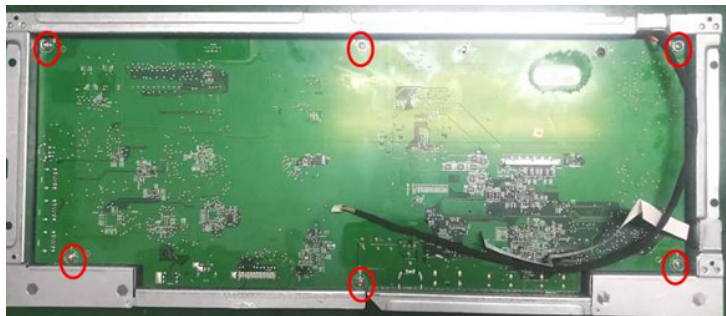

Remove the pins and boards

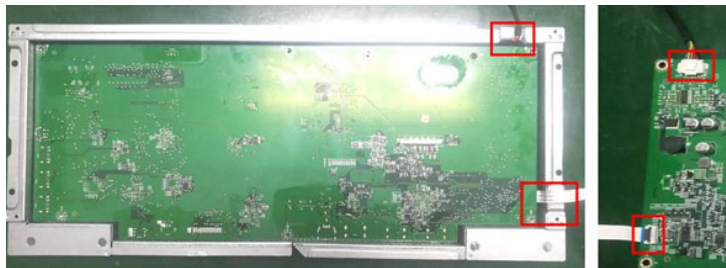

The mainframe

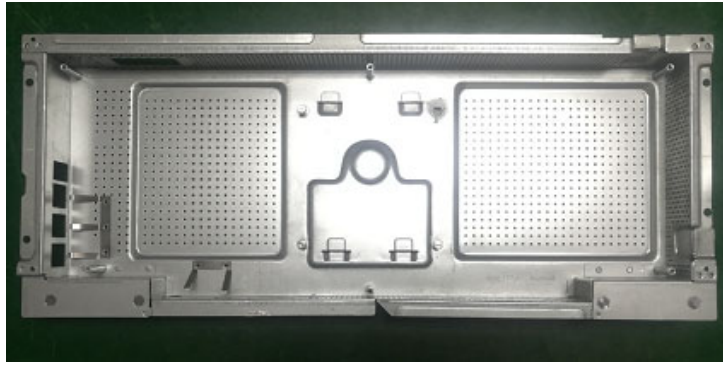

The Rear Cover and the LED board

