


P27q-30 Simplified service manual for dismantling

Model Name: Lenovo P27q-30

Exploded Diagram

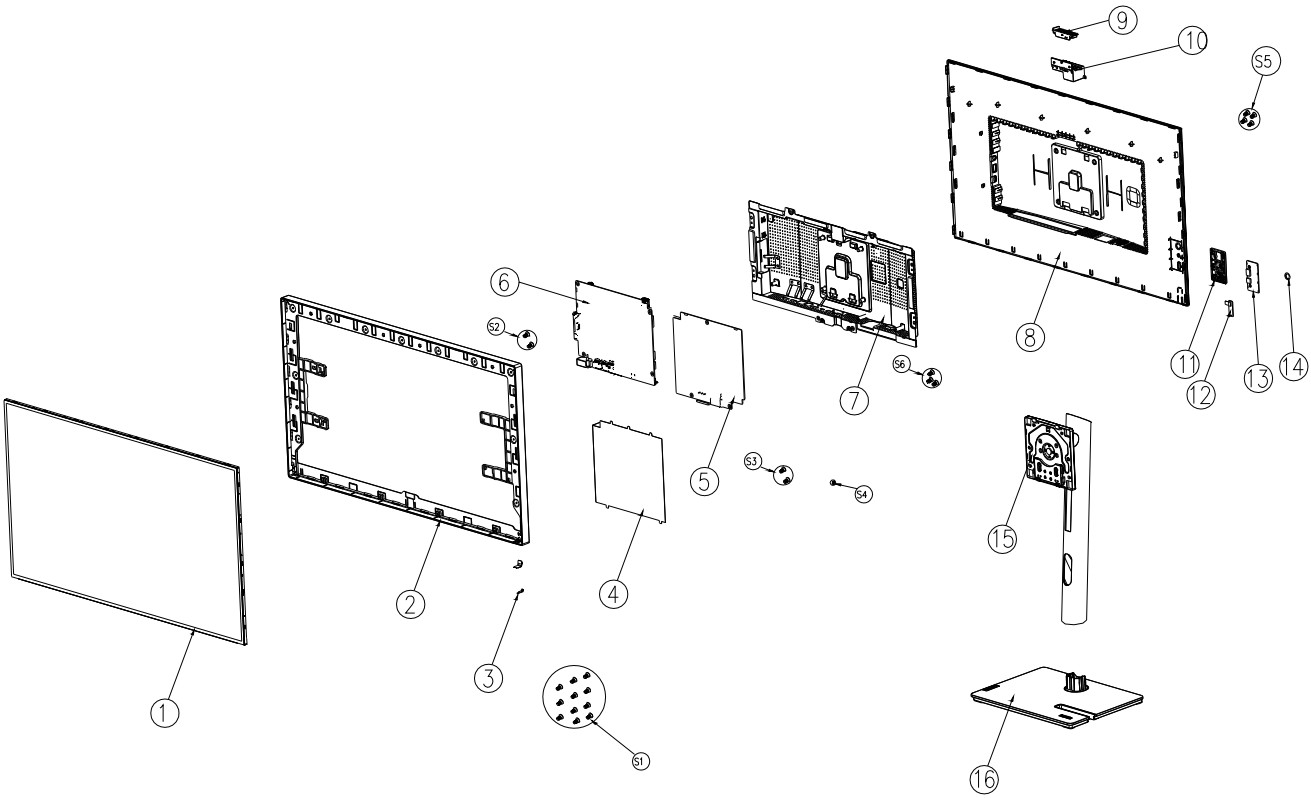

1. Precaution

Please read the precaution as follows to prevent any damages to the LCD Monitor.

Make sure all power connector is removed. Be sure that the LCD Monitor is in power off status.

Prepare soft cloth and sponge as working platform to place LCD monitor horizontally.	
Hold LCD by the side carefully and DON'T touch or press panel directly.	


2. Appropriate tools

Select the Appropriate tools for disassembly and re-assembly.

Phillips screwdriver (#2)	
spacer screwdriver	
C/D disassembly tool	
Gloves or soft cloth	


3. Disassembly SOP

Starting from the back of the monitor, remove the stand assy



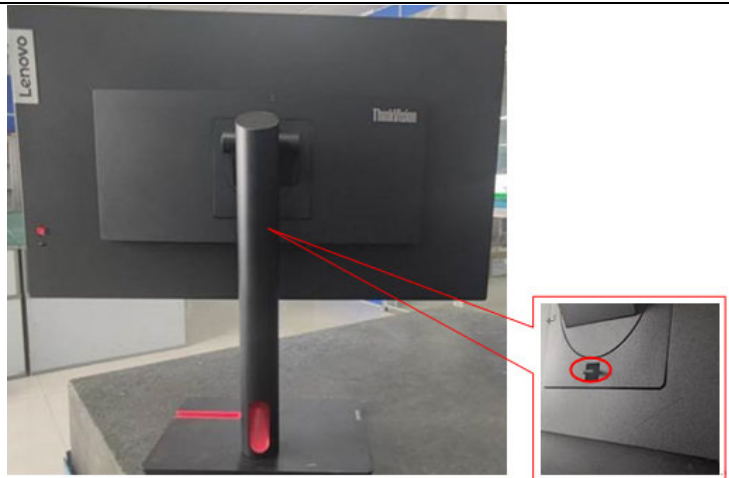


Remove the screw*4pcs


Tool : Screwdriver #2

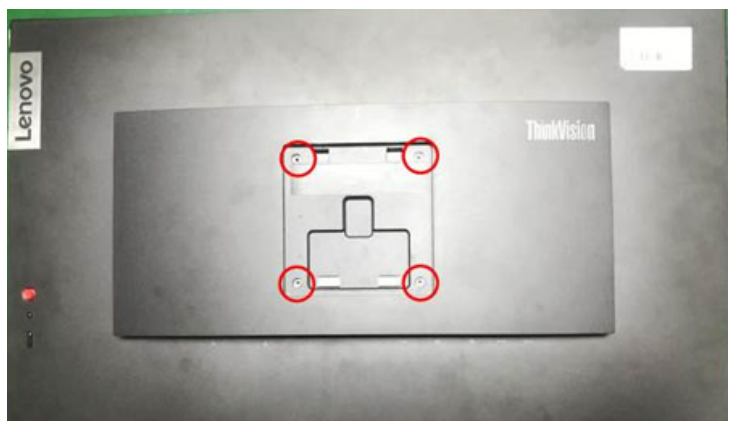

Take off the tape and disconnect the connector.

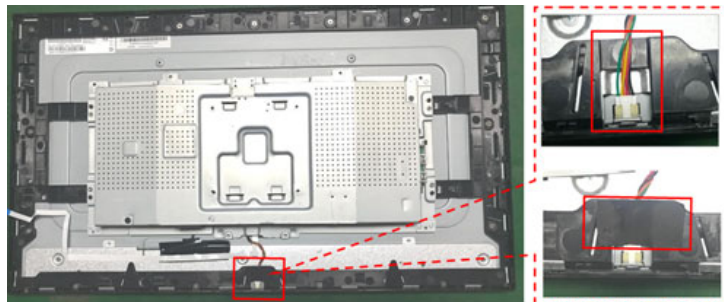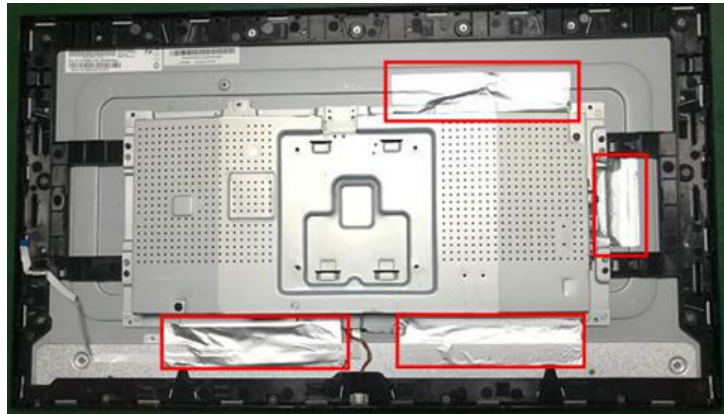
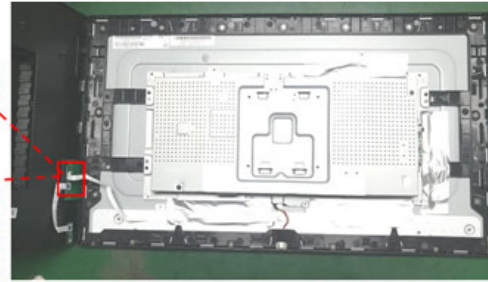


Take off the tape and the mylar.

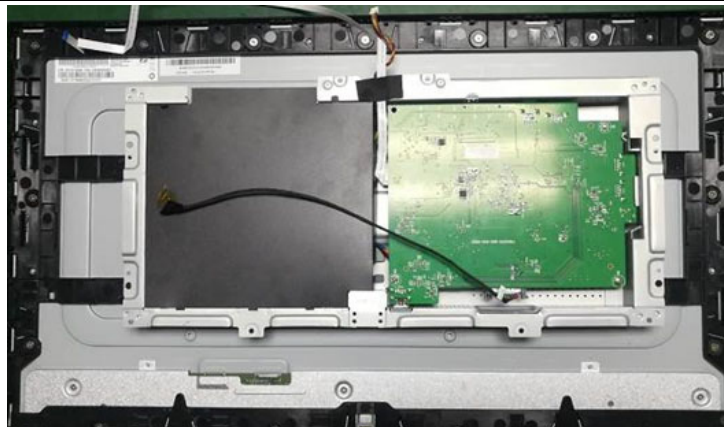

Remove the screw*4pcs to remove the Main board and the power board.

Tool: Screwdriver #2

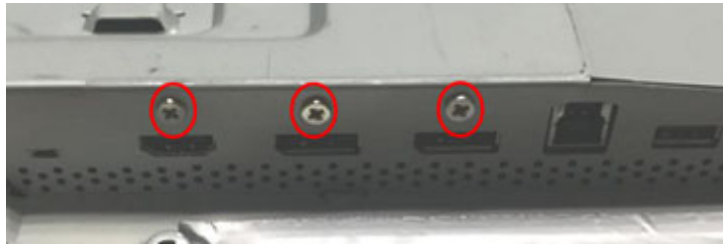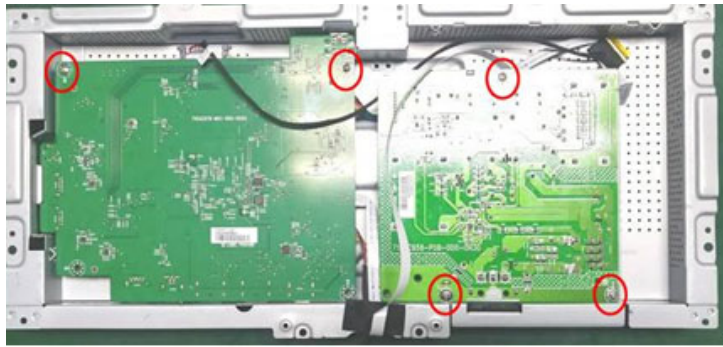


Remove the pins and boards



Remove the screw*16pcs and disconnect the pins.

Tool : Screwdriver #2

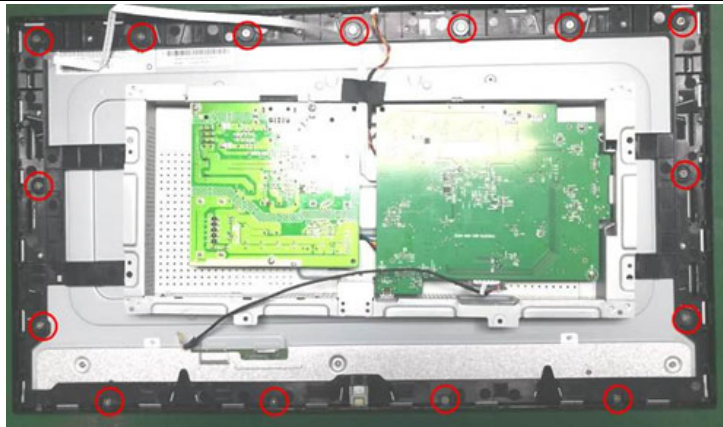

Separated the panel and the middle frame.



The panel



The middle frame



Disconnect the pins to remove the key board and the LED board

