

907


Stereo Audio Power Amplifier (40 Watts per Channel)







The 907 is a high-performance power amplifier for line-level stereo audio signals. It accepts a balanced stereo audio signal on a terminal block connector and delivers 40 watts per channel into an 8Ω load.

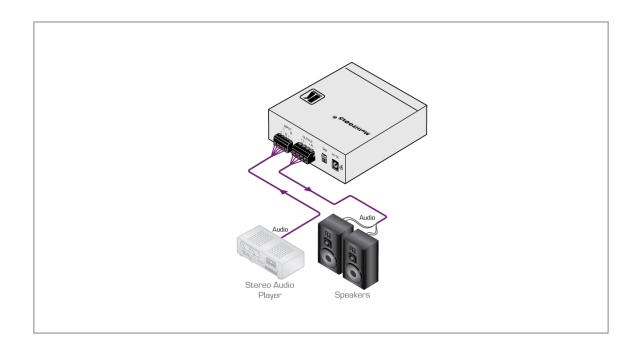



907

FEATURES

- High Efficiency Class D operation.
- Inputs 1 balanced stereo (terminal block).
- Output Terminal block for speakers.
- Controls Volume control knob & mute button.
- Gain Control DIP-Switch.
- Mute and On Indicator LEDs.
- Compact MultiTOOLS® Up to 4 units can be rack mounted side-by-side in a 1U rack space with the optional RK-1 universal rack adapter.

TECHNICAL SPECIFICATIONS

INPUT: 1 balanced stereo audio on a

terminal block connector.

OUTPUT: 1 balanced stereo audio

(speakers) on a terminal block

connector.

OUTPUT POWER: 40 watts per channel into $8\Omega.\,$

OUTPUT MUSIC 150W per channel into 8Ω .

POWER:

INPUT 1.2Vrms.

SENSITIVITY:

AMPLIFIER TYPE: Class D. VOLTAGE GAIN: 20dB (x10).

BANDWIDTH (-

20kHz.

3dB):

S/N RATIO: 60.2dB.
COUPLING: DC.
AUDIO THD + 1.9%.

NOISE:

AUDIO 2nd 0.3%.

HARMONIC:

POWER SOURCE: 24V DC, 5A.

DIMENSIONS: 10.7cm x 10.4cm x 4.0cm (4.2"

x 4.1" x 1.6") W, D, H.

ACCESSORIES: Power supply.

OPTIONS: RK-1 19" rack adapter.