



PDU 6P 12A 100-120V

Cloud Managed 1U 12A Smart PDU with 6 Metered Outlets

Overview

The EnGenius Cloud Managed 1U 12A Smart PDU with 6 Metered Outlets, PDU 6P 12A 100-120V (ECP106) serves as a cloud-based power management solution for diverse applications. It facilitates remote and local control, efficient energy management, and advanced surge protection. Additionally, it offers unified management for all EnGenius devices, simplifying maintenance and troubleshooting by enabling power cycling of multiple devices.



Features & Benefits

Function

- Real-time power consumption monitoring and alarming per outlet
- Remote switching per outlet
- 1.3 inches display for visualizing power information
- Attempt to automatically reconnect from internet outages
- Local and cloud management with analytic reports

Safety

- 15A circuit breaker from overloading protection
- Fire proof MOV and grounded protection
- FCC, IC, UL1449 certification

Integration

- RESTFUL API supported
- SNMP v1 2c 3 supported

Technical Specifications

Input

Nominal Voltage	100-120V
Frequency	50/60Hz
Derated Input Current	12A
Plug Type	SJT 14AWG
Power Cord Type	NEMA-5-15P
Power Cord Length	1830mm
LED indicators	1 x Outlet Power Switch 2 x LAN 1 x Outlet Power Indicator 1 x Grounded Indicator 1 x SPD Indicator

Output

Nominal Voltage	100-120V
Frequency	50/60Hz
Derated Input Current	12A
Outlet Type	NEMA-5-15R
Outlet Number	6
Overload Protection	15A
Maximum Power Consumption	1440W for 120V

Environmental & Physical

Physical Interfaces	2 x 10/100/1000 BASE-T IEC-C13 Inlet Reset Button 15A Circuit Breaker
Operating Temperature	Operating: 0°C ~ +50°C
Storage Temperature	Storage: -30°C ~ +70°C
Storage Humidity	Humidity 5% ~ 95% RH Non-condensing
Surge Protection	Yes
ESD Protection	Yes


Dimensions & Weight

Weight	1035 g
Dimensions	440 x 44 x 70 mm
Enclosure material	AL6063
Package Contents	1 – ECP106 PDU 1 – Power Cord 1 – Rack Ear 1 – Rack Screw Kit 1 – Quick Installation Guide

Compliance & Warranty

Safety Compliance	UL1449 type5, UL62368-1, CSA22.2
WEEE	Yes
RoHS	Yes
Regulatory Compliance	FCC IC

Hardware Overviews

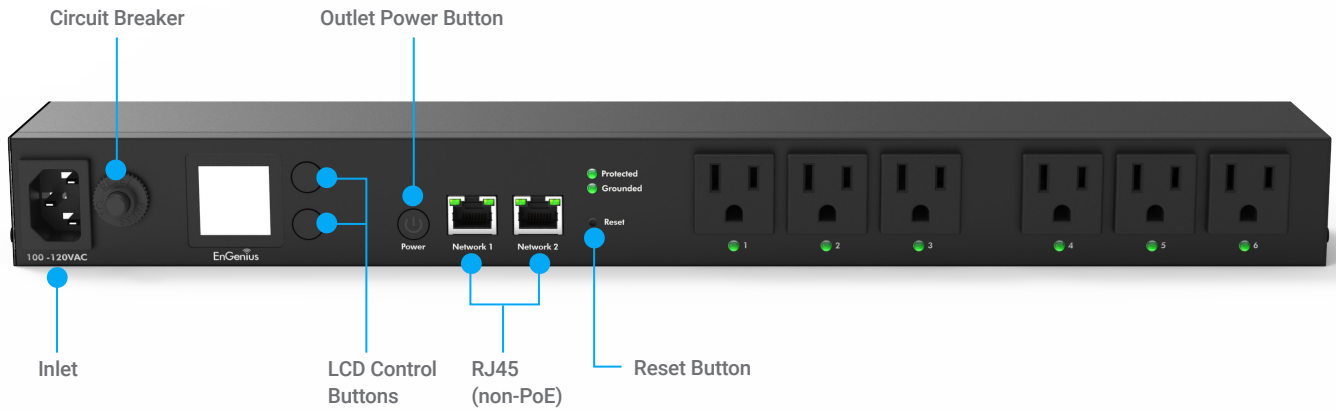

EnGenius Technologies | Costa Mesa, California, USA

Email: support@engeniustech.com
Website: www.engeniustech.com
Local contact: (+1) 714 432 8668

EnGenius Networks Singapore Pte Ltd. | Singapore

Email: techsupport@engeniustech.com.sg
Website: www.engeniustech.com.sg
Local contact: (+65) 6227 1088

EnGenius Technologies Canada | Ontario, Canada

Email: support@engeniustech.com
Website: www.engeniustech.com
Local contact: (+1) 905 940 8181

EnGenius Networks Dubai | Dubai, UAE

Email: support@engeniustech.com
Website: www.engeniustech.com
Local contact: (+971) 4 339 1227

EnGenius Networks Europe B.V. | Eindhoven, Netherlands

Email: support@engeniustech.com
Website: www.engeniustech.com
Local contact: (+31) 40 8200 887

恩碩科技股份有限公司 | Taiwan, R.O.C.

Email: sales@engeniustech.com.tw
Website: www.engeniustech.com.tw
Local contact: (+886) 933 250 628

Features and specifications subject to change without notice. Trademarks and registered trademarks are the property of their respective owners. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his/her own expense. Prior to installing any surveillance equipment, it is your responsibility to ensure the installation is in compliance with local, state and federal video and audio surveillance and privacy laws.

Version 1.2 23/ 11/ 2023

