





Wall Plate Alignment Spacer Kit

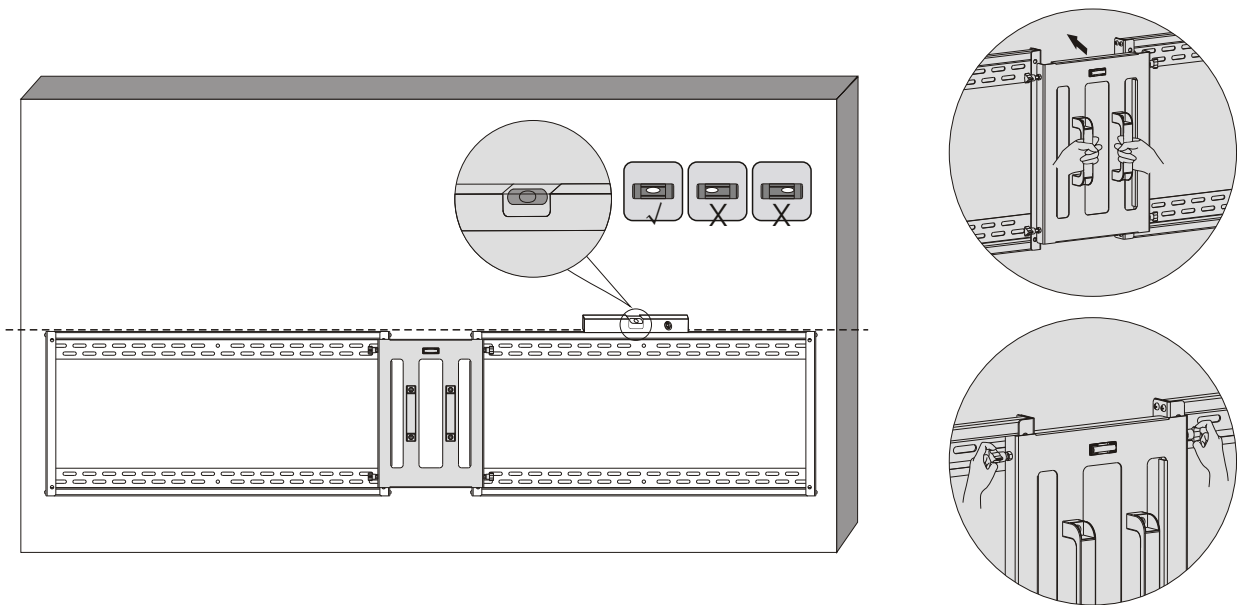

3. With the Small Spacers, Place the Third Mount as Shown in the Next Row

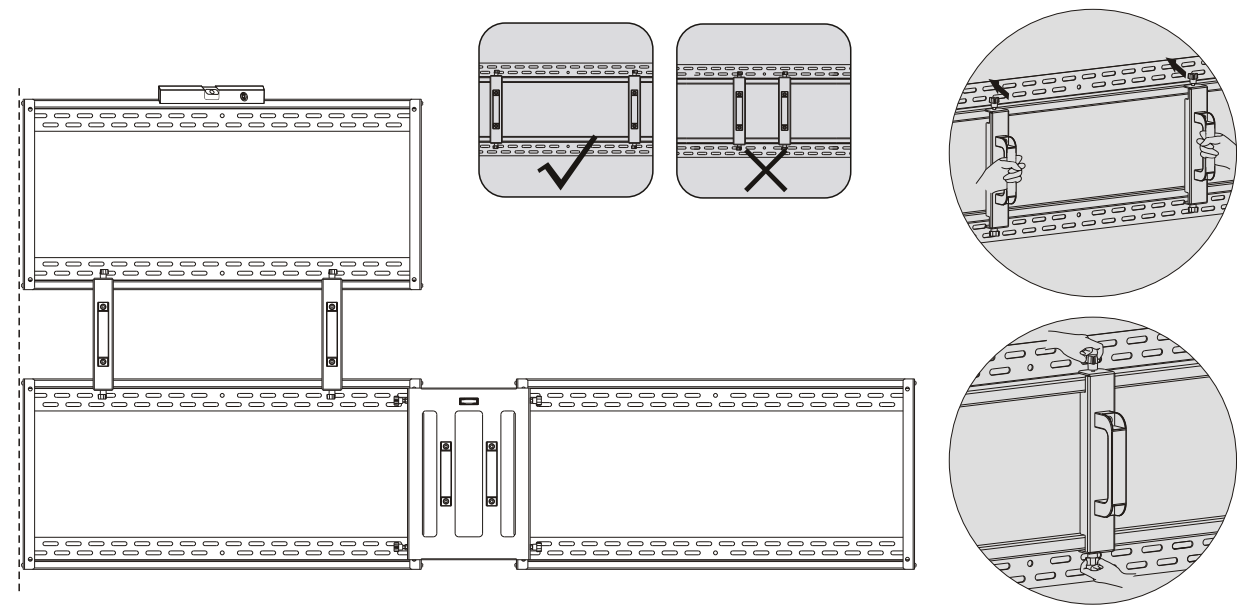

4. Repeat the Third Step to Install the Fourth Mount.

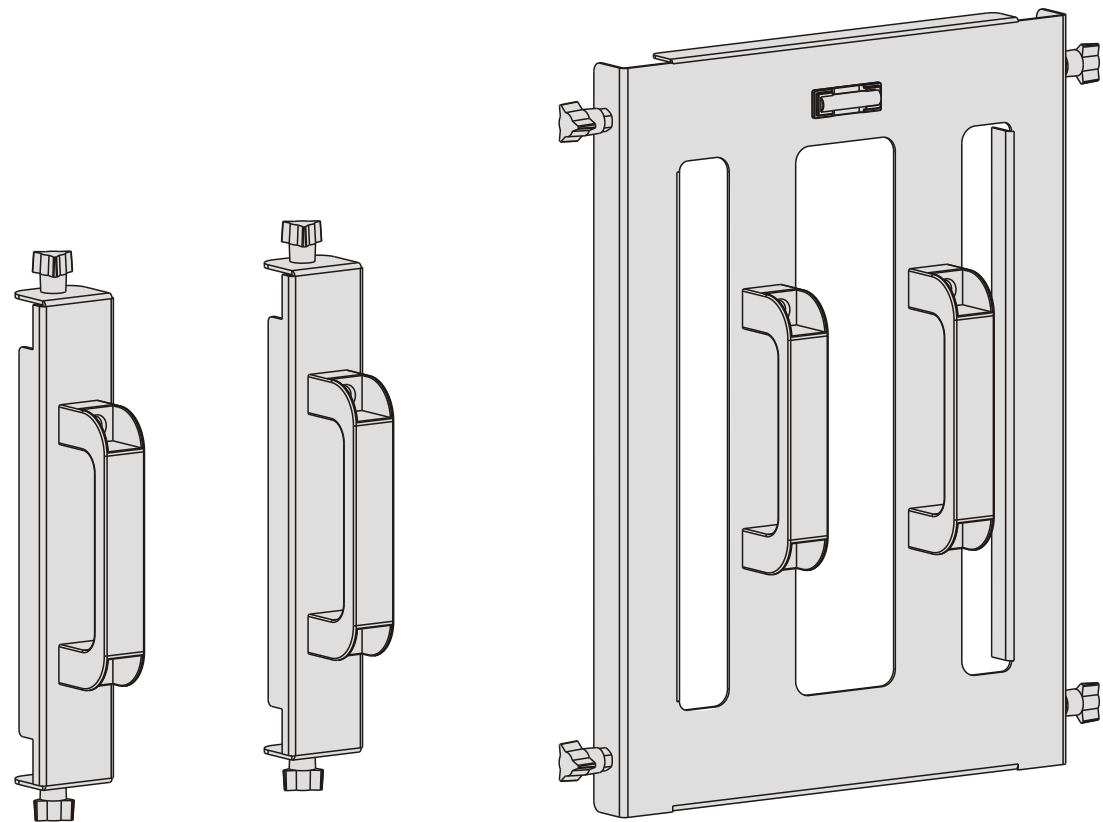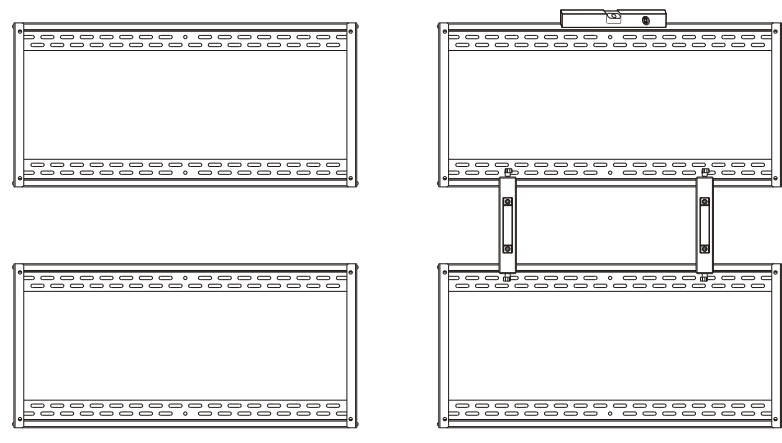

INSTALLATION MANUAL

VZ-XMS-SP49


VZ-XMS-SP55

NOTE: Read the entire instruction manual before you start installation and assembly.


WARNING

- Do not begin the installation until you have read and understood all the instructions and warnings contained in this installation sheet. If you have any questions regarding any of the instructions or warnings, please contact your local distributor.
- This product was designed to be installed and utilised **ONLY** as specified in this manual. Improper installation of this product may cause damage or serious injury.
- This product should only be installed by someone with good mechanical ability who has basic building experience and fully understands this manual.
- Make sure that the supporting surface will safely support the combined weight of the equipment and all attached hardware and components.
- Always use an assistant or mechanical lifting equipment to safely lift and position the equipment.
- Tighten screws firmly, but do not over tighten. Over tightening can cause damage to the items, This greatly reduces their holding power.
- This product is intended for indoor use only. Using this product outdoors could lead to product failure and personal injury.


Required for Installation



Component Checklist (Model VZ-XMS-SP49)



Small Spacer
x2



Large Spacer
x1




Knobs
x4




Knobs
x4

Component Checklist (Model VZ-XMS-SP55)



Small Spacer
x2



Large Spacer
x1





Knobs
x4






Knobs
x4



1. Install the First Mount from the Bottom Left

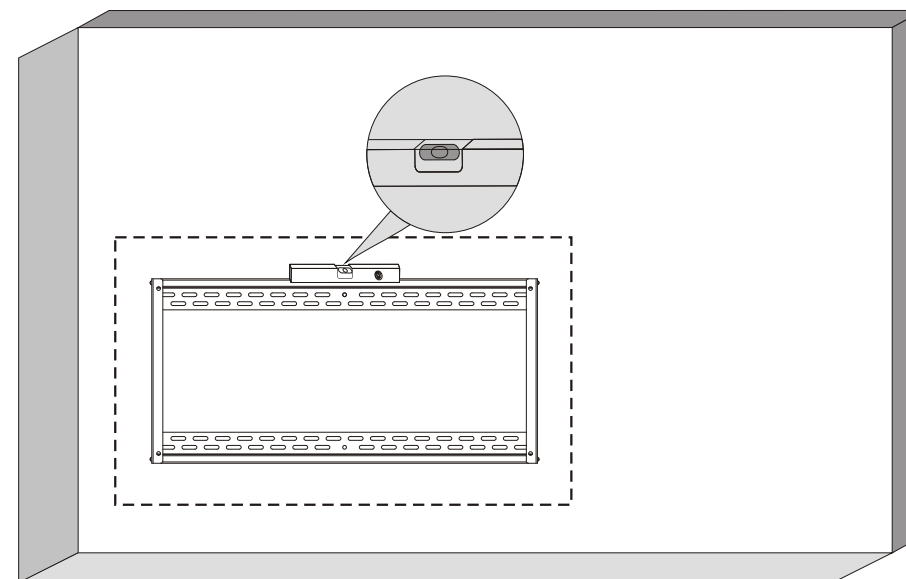

2. With the Large Spacer, Place the Second Mount as Shown.

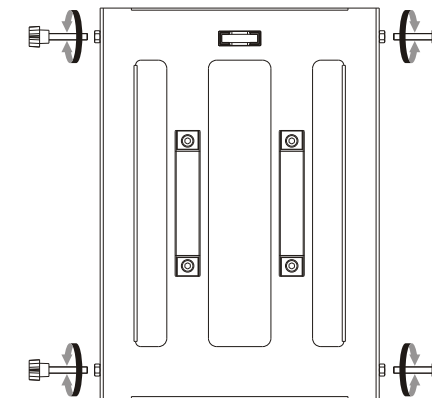

9. Lock the Pop-out Module with the Plastic Locking Pieces

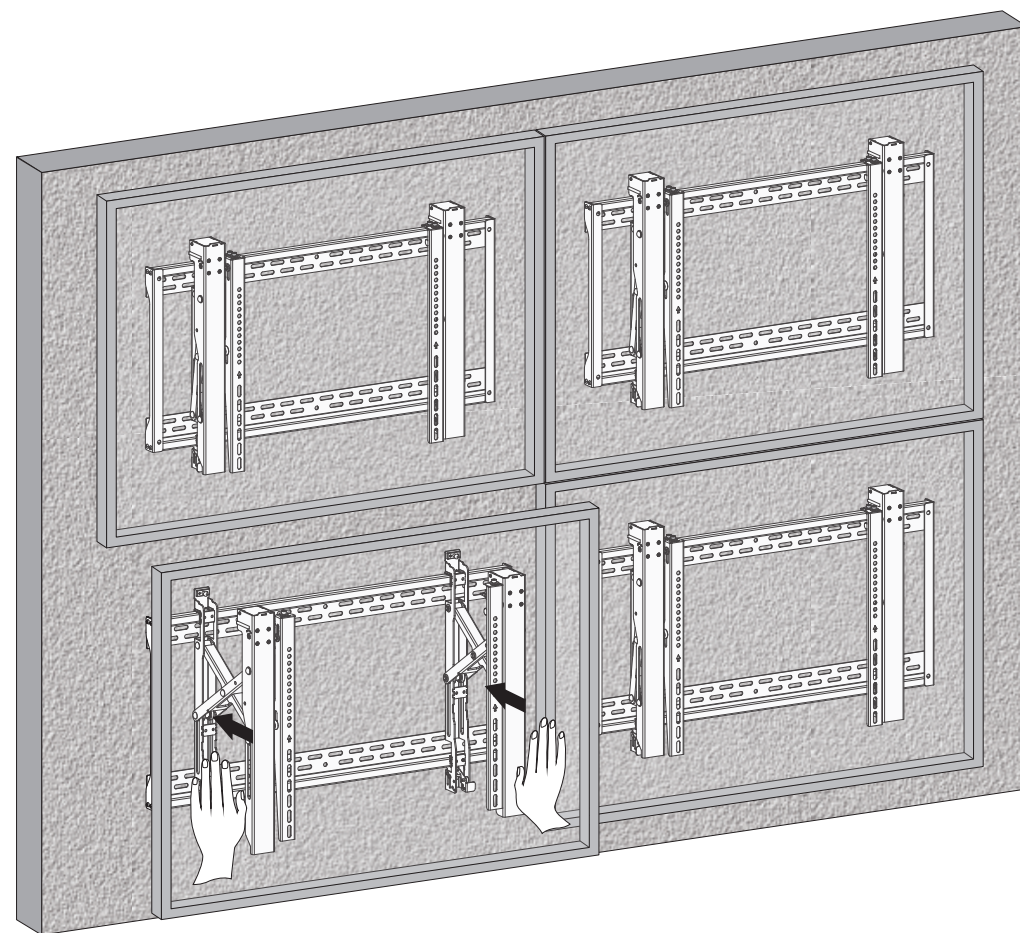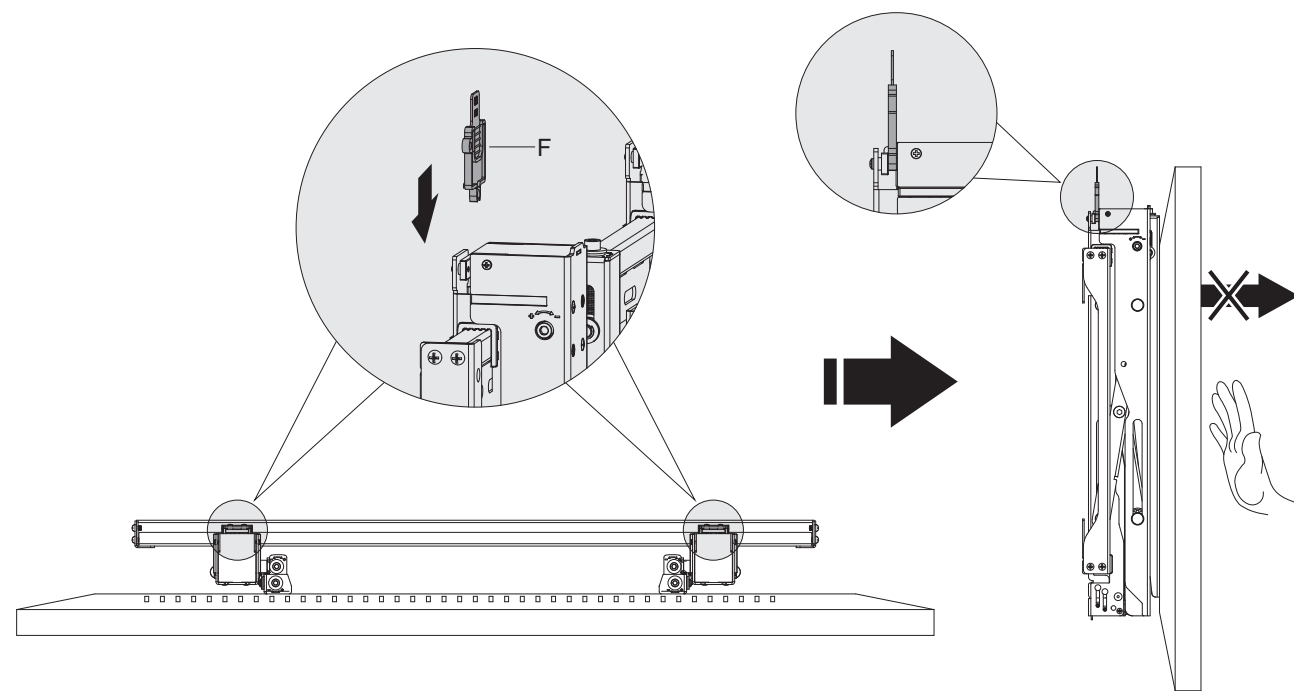


Maintenance

- Check that the bracket is secure and safe to use at regular intervals(at least every three months).
- Please contact your distributor if you have any questions.

Video Wall Mount



CAUTION: DO NOT EXCEED RATED LISTED WEIGHT. SERIOUS INJURY OR PROPERTY DAMAGE MAY OCCUR!

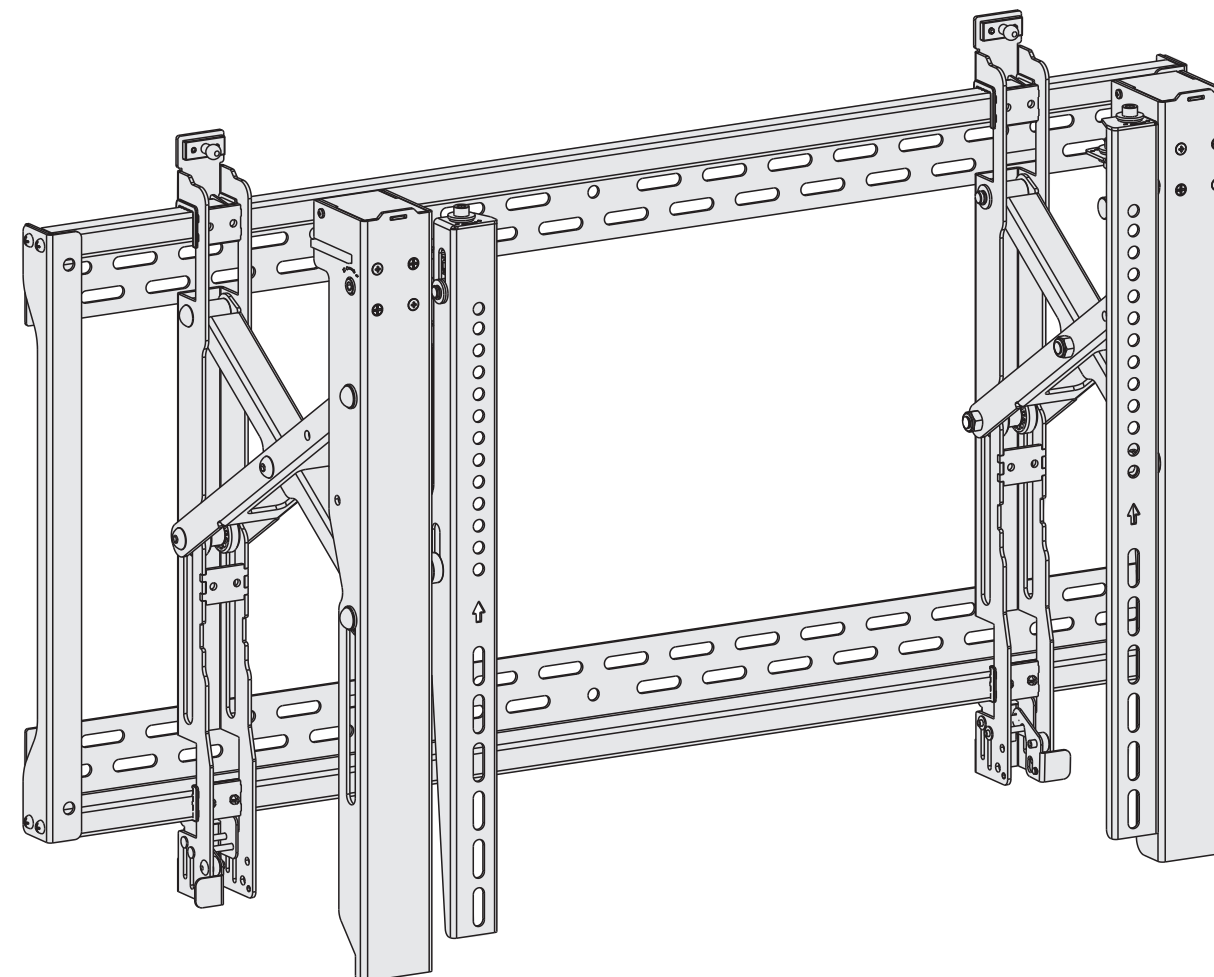

INSTALLATION MANUAL

VZ-XMS

VESA

200x200/300x200
300x300/400x200
400x300/400x400
600x400/800x400



70kg/154lbs

NOTE: Read the entire instruction manual before you start installation and assembly.

WARNING


- Do not begin the installation until you have read and understood all the instructions and warnings contained in this installation sheet. If you have any questions regarding any of the instructions or warnings, please contact your local distributor.
- This mounting bracket was designed to be installed and utilised **ONLY** as specified in this manual. Improper installation of this product may cause damage or serious injury.
- This product should only be installed by someone with good mechanical ability who has basic building experience and fully understands this manual.
- Make sure that the supporting surface will safely support the combined weight of the equipment and all attached hardware and components.
- Always use an assistant or mechanical lifting equipment to safely lift and position the equipment.
- Tighten screws firmly, but do not over tighten. Over tightening can cause damage to the items, This greatly reduces their holding power.
- This product is intended for indoor use only. Using this product outdoors could lead to product failure and personal injury.

Required for Installation



Component Checklist


IMPORTANT: Ensure that you have received all parts according to the component checklist prior to installation. If any parts are missing or faulty, telephone your local distributor for a replacement.

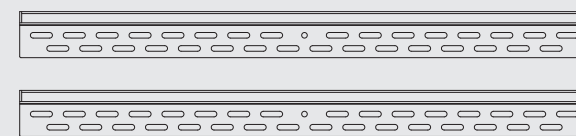


wall plate
A




connecting plate
B




M5x8
E

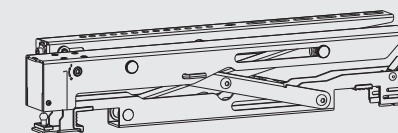

left pop-out adapter bracket
C

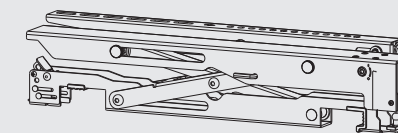


right pop-out adapter bracket
D




plastic locking piece
F


Package M




M5x14
M-A




M6x14
M-B




M8x20
M-C




M6x30
M-D




M8x30
M-E



washer
M-F




small spacer
M-G




big spacer
M-H


Package W

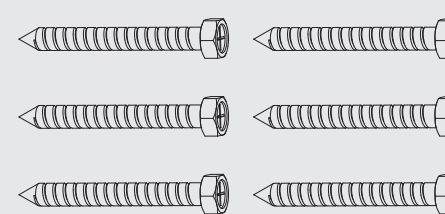

ST6.3x55
W-A


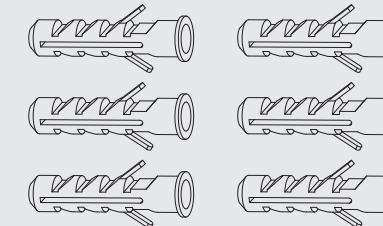


concrete anchor
W-B





D6 washer
W-C


1. Product Dimensions

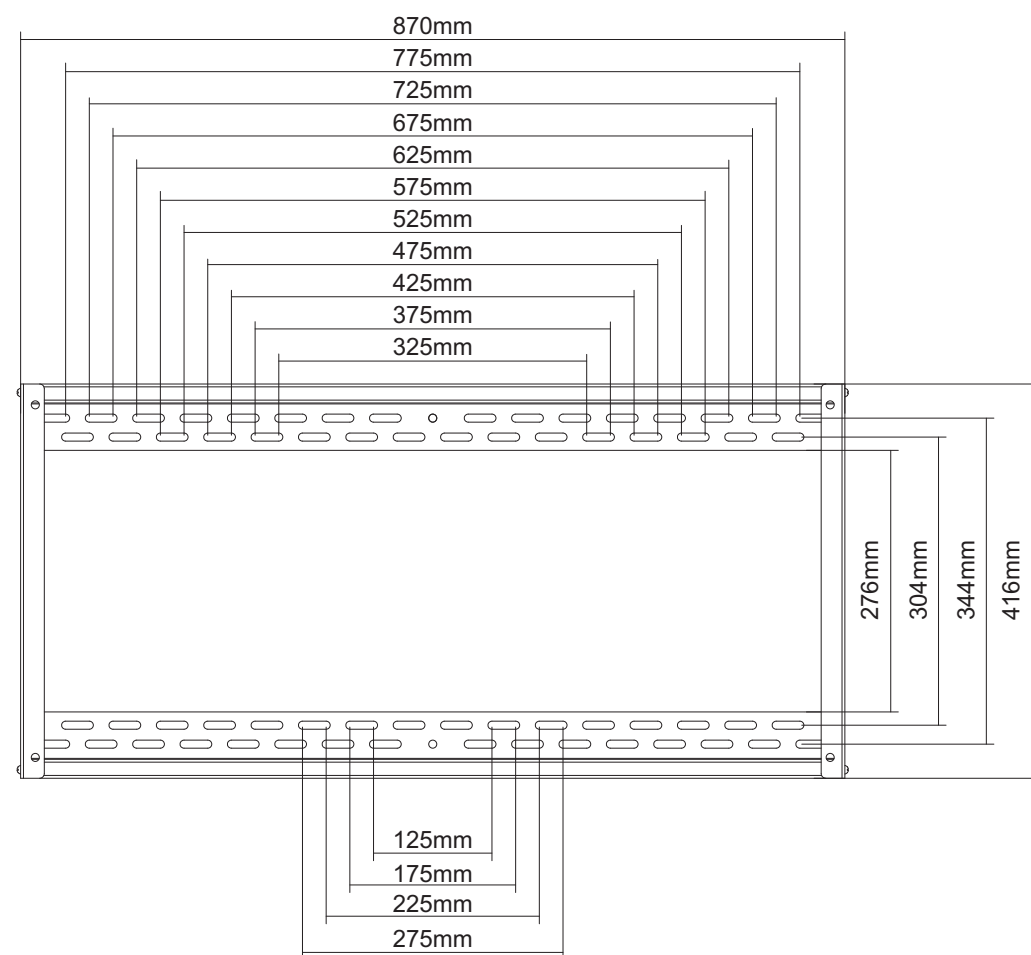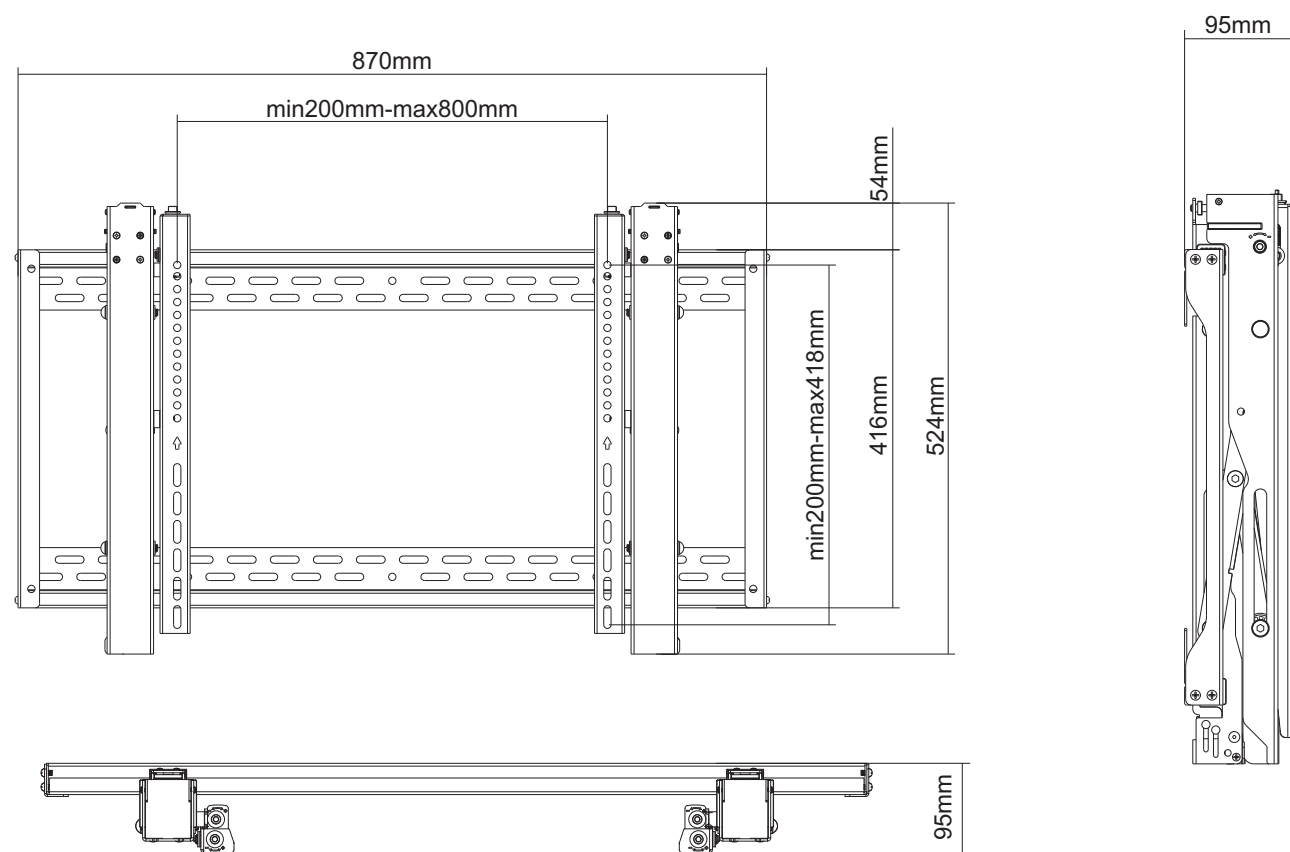


2. Video Wall Installation

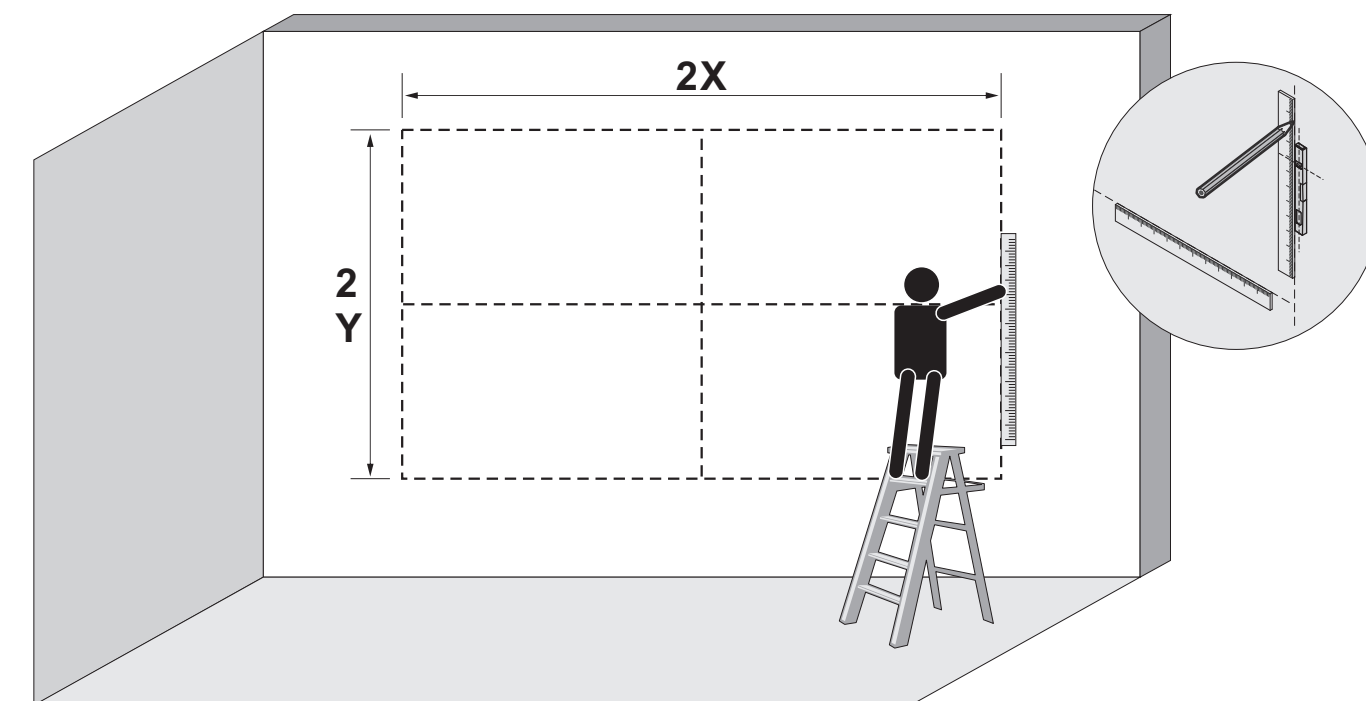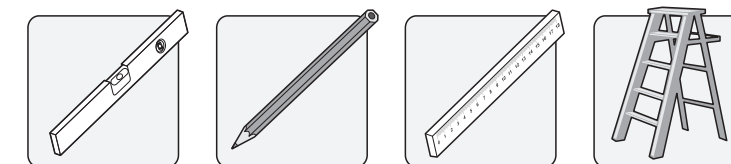

X=Length of display Y=Height of display

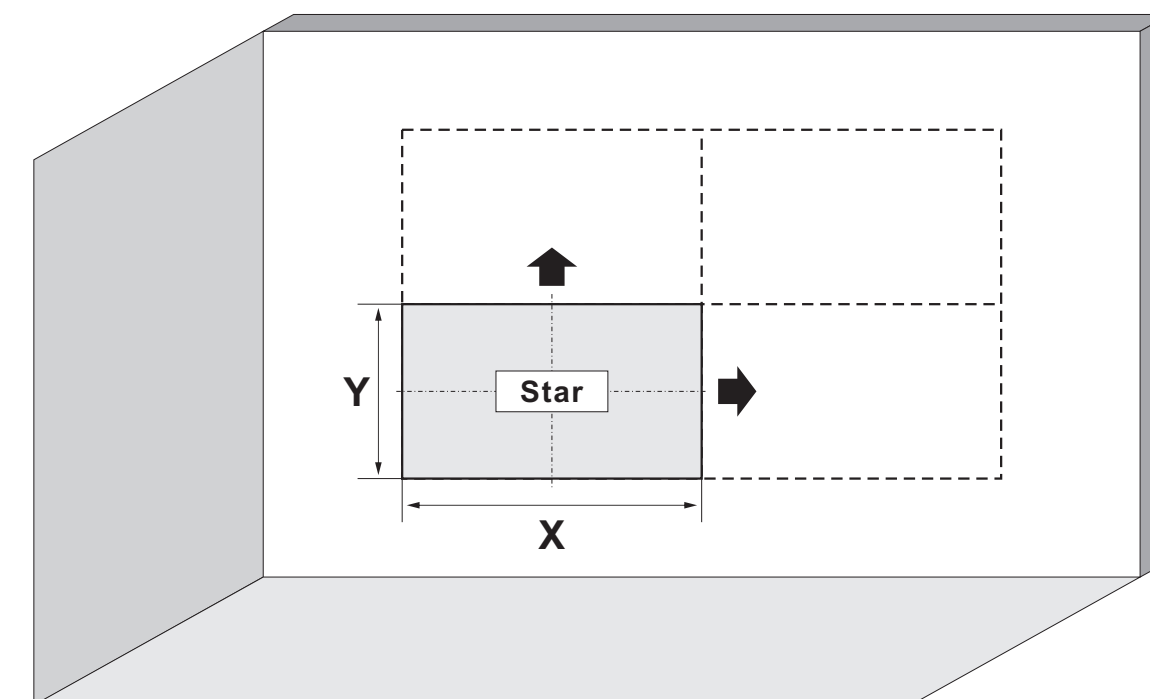


3. Assembling the Wall Plate

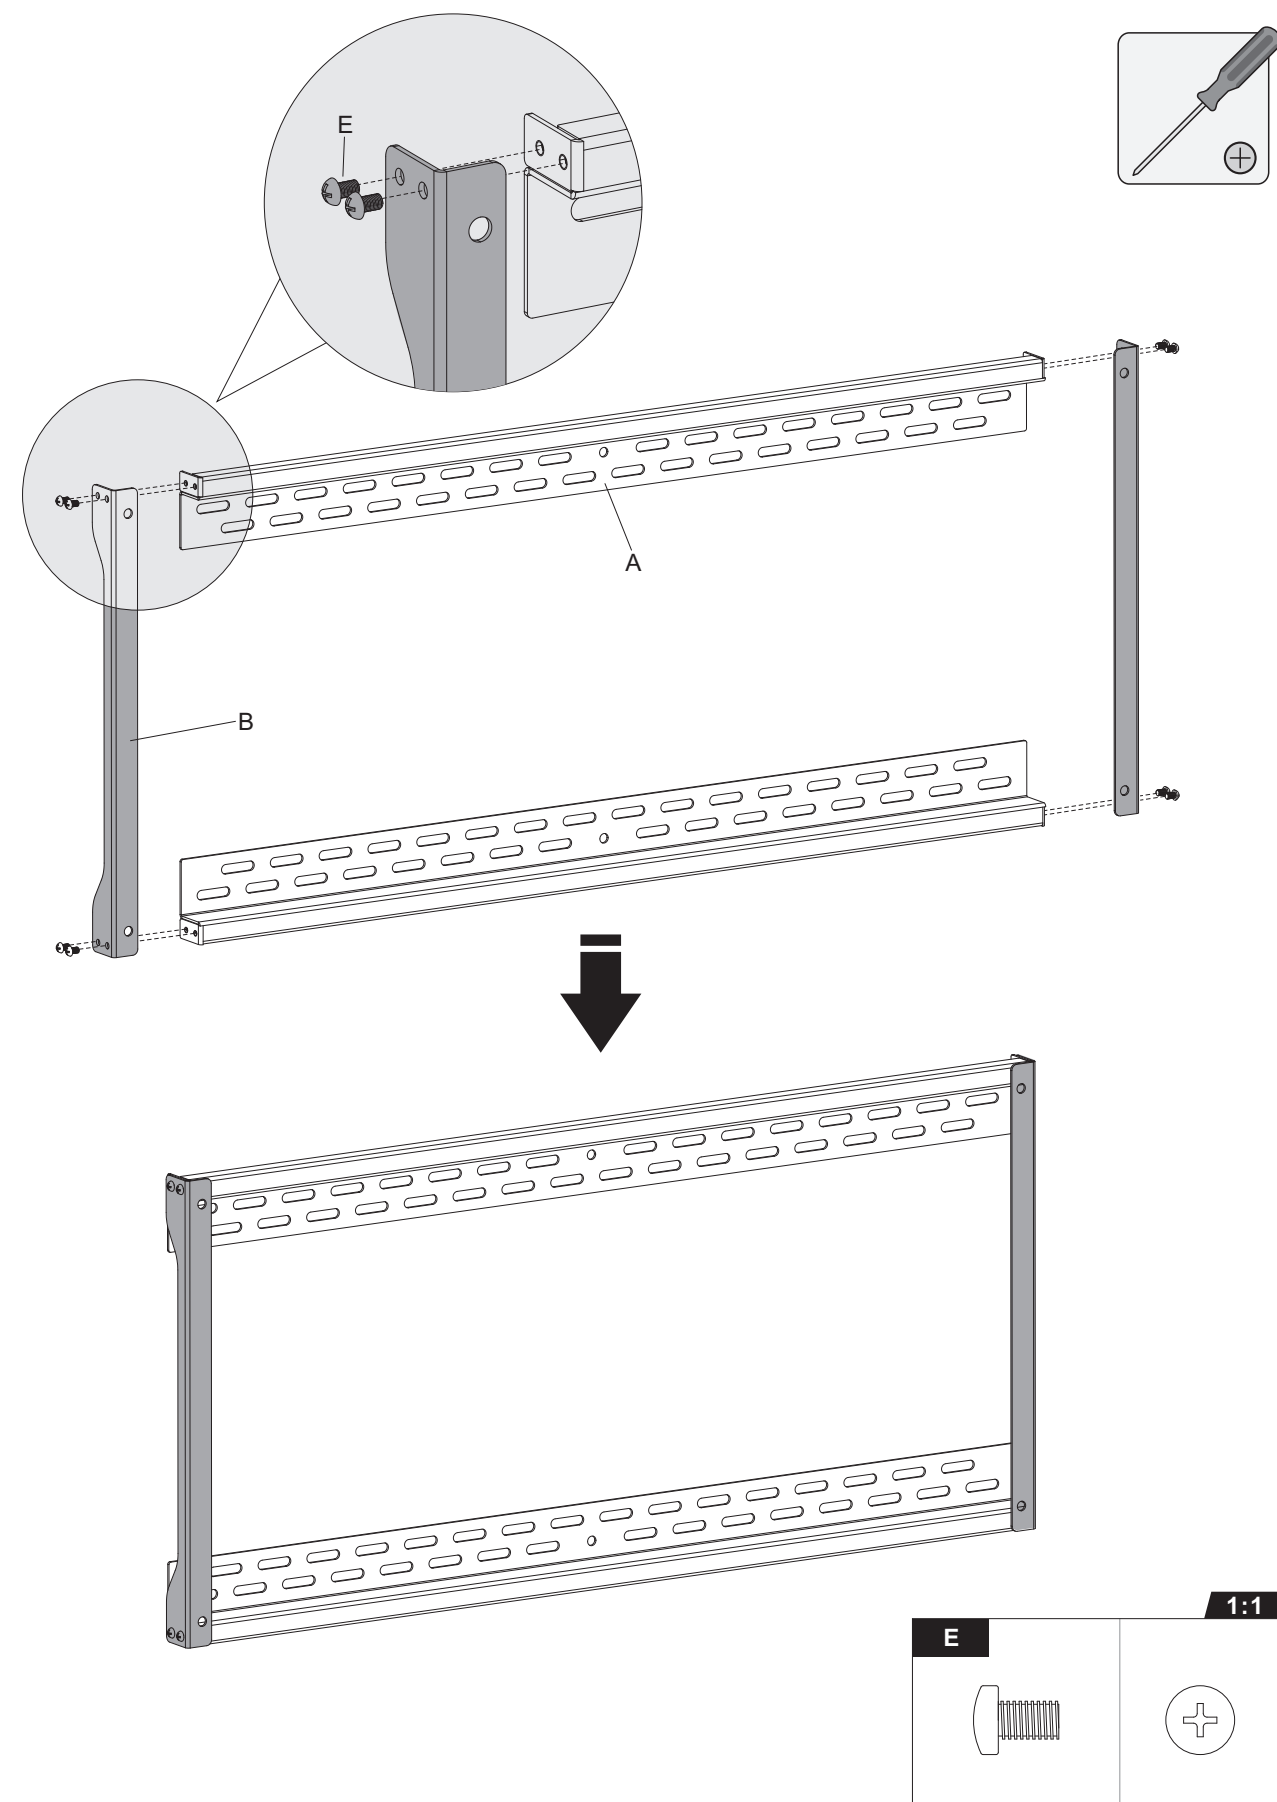

Attach the connecting plates to the wall plates using the appropriate screws.

4. For Solid Brick and Concrete Wall Mounting

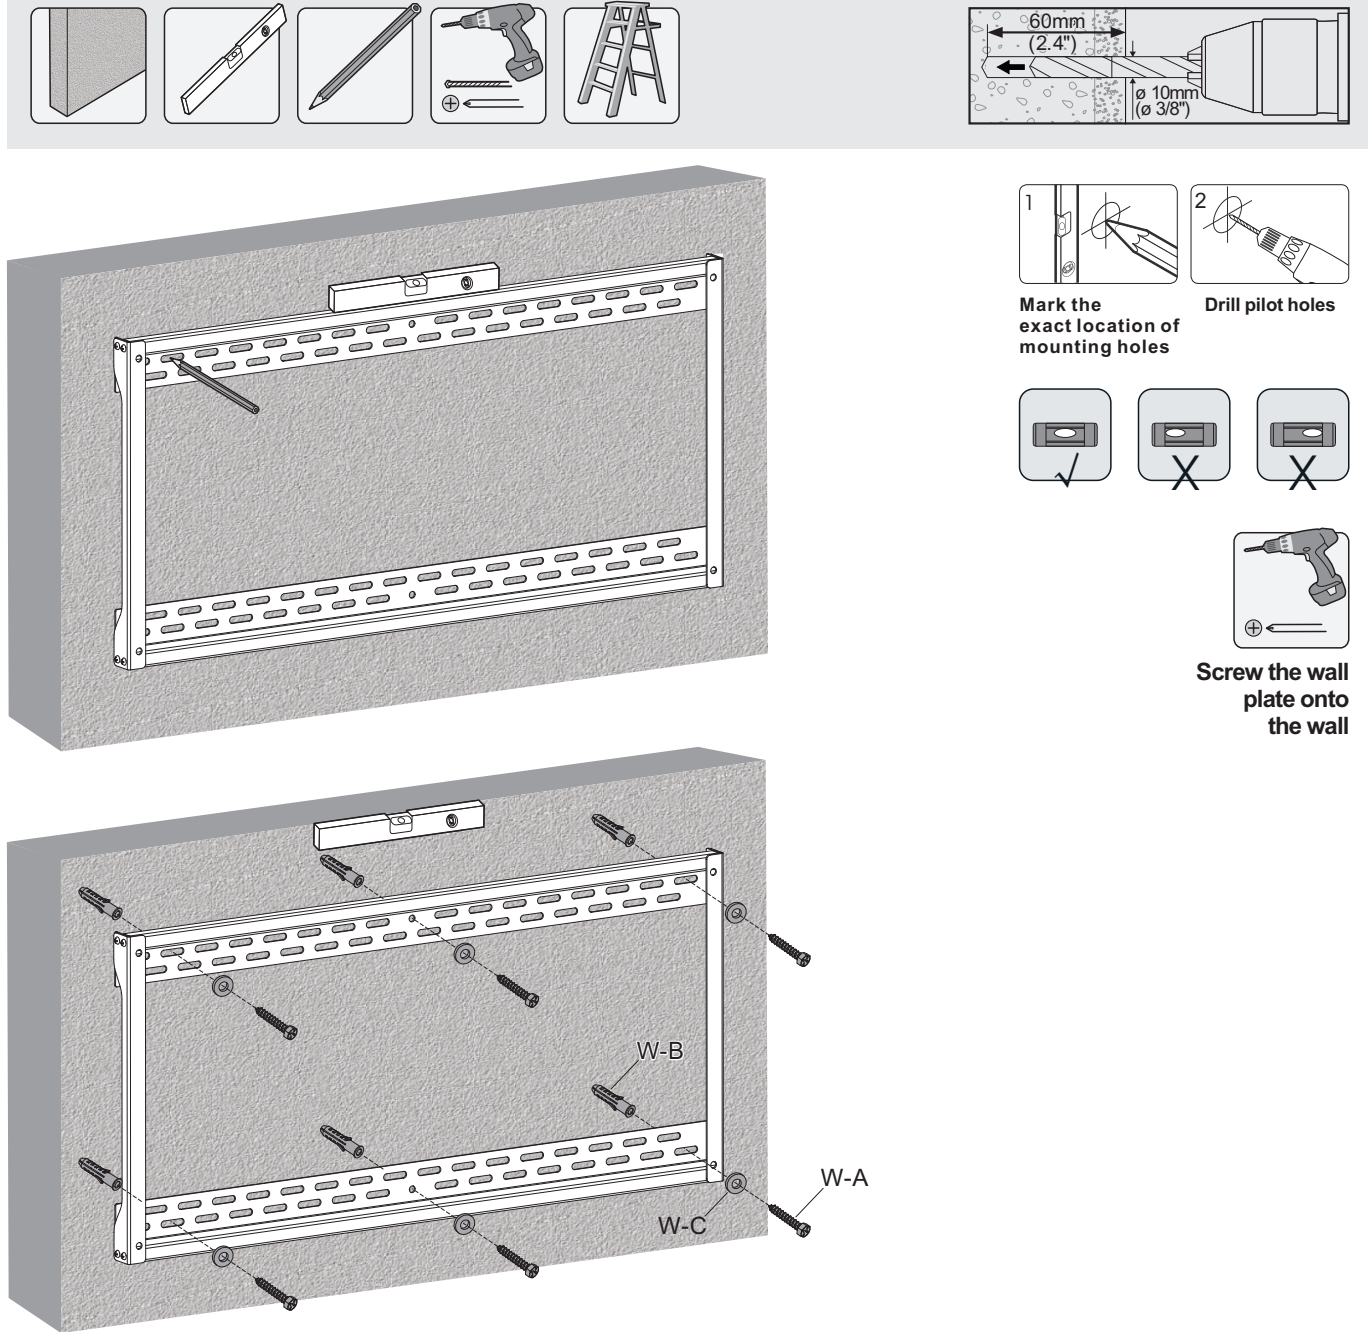


W-A		W-B	
W-C			


WARNING

Installers must verify that the supporting surface will safely support the combined weight of the equipment and all attached hardware and components.


X=Length of display
Y=Height of display

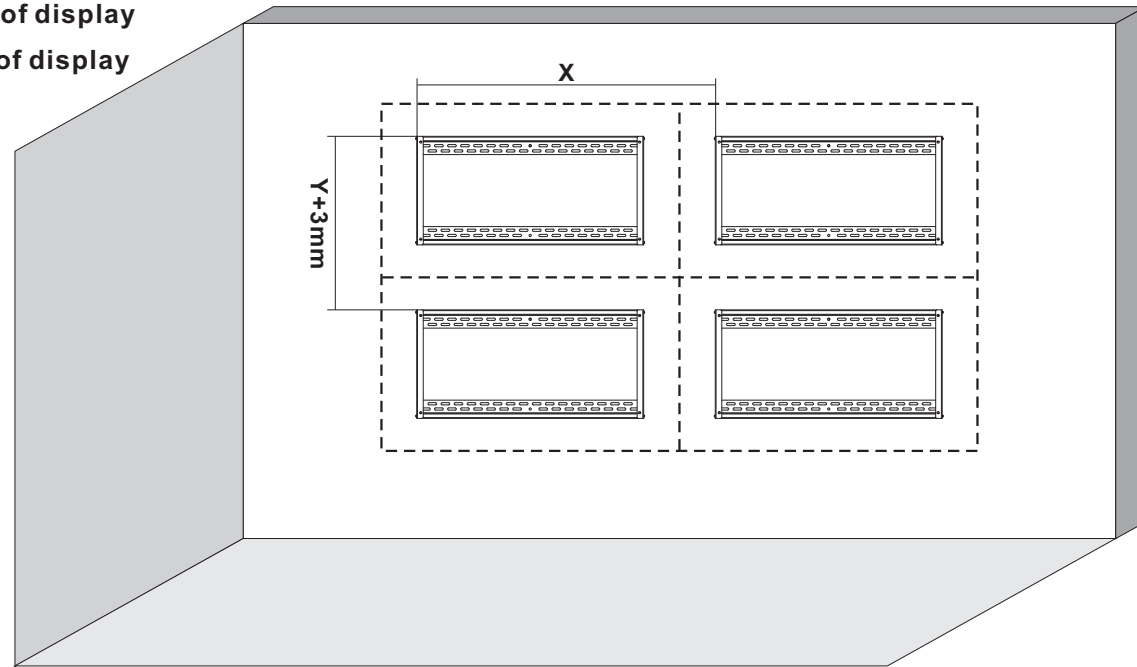

5. Installing the Pop-out Adapter Brackets

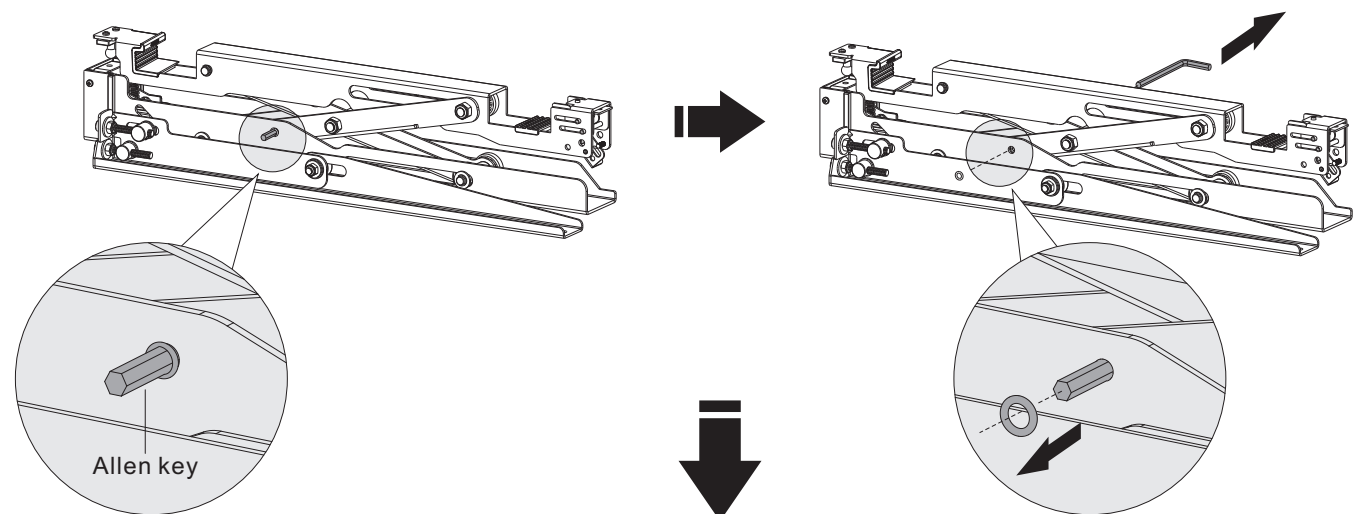


Remove the Allen key from the pop-out adapter brackets.

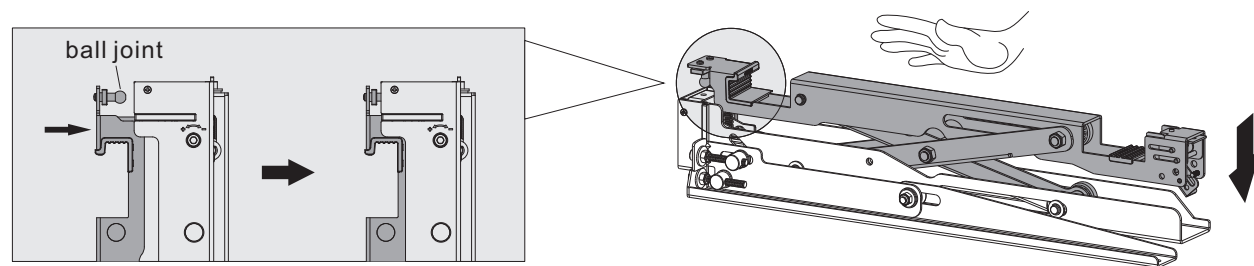





Push the pop-out arm until the ball joint snaps into place.

Note: With the arrow pointing up.

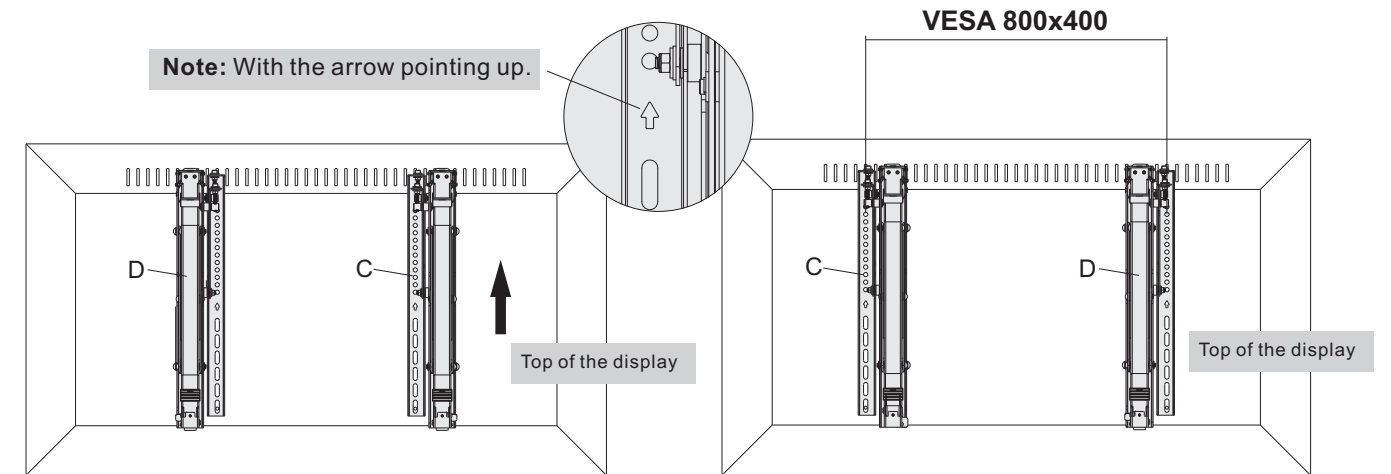




For VESA 800x400, the positions of "D" and "C" are exchanged.

5-1 For Flat Back Screens

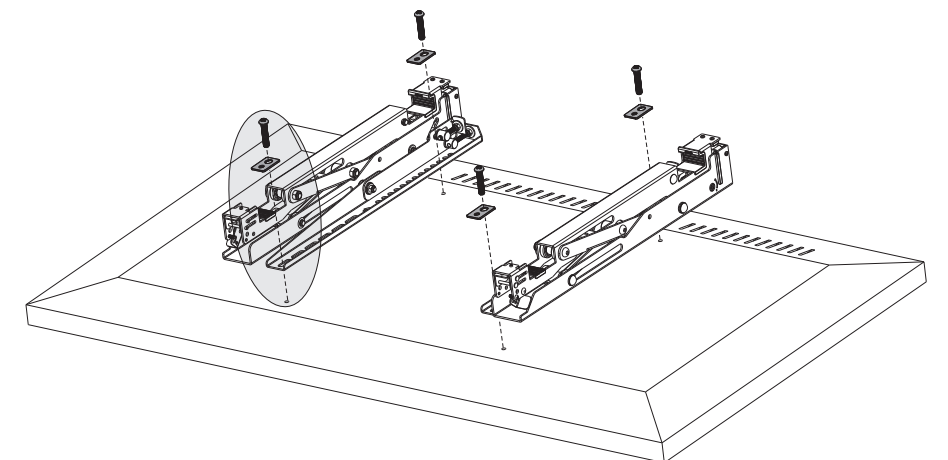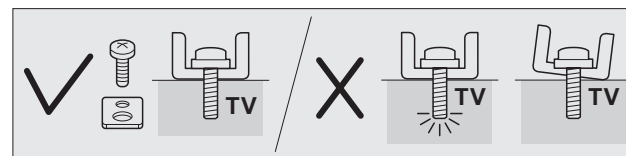

1:1			
M-A		M-B	
M-C		M-F	

5-2. For Bump-out or Recessed Back Screens

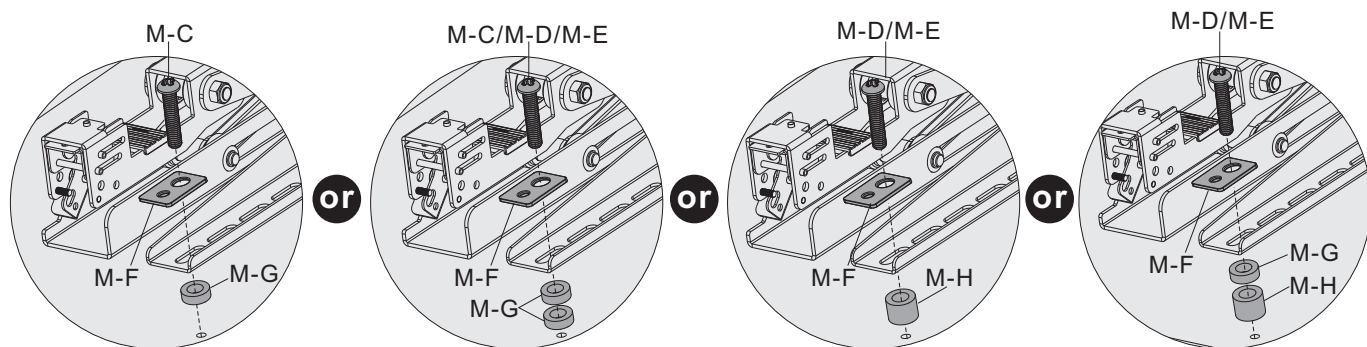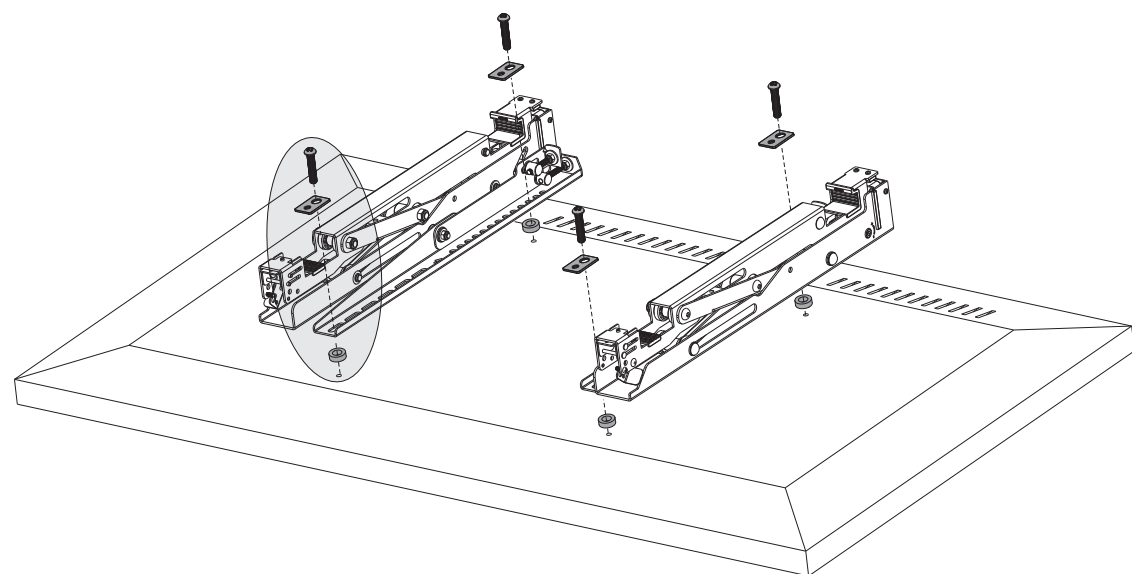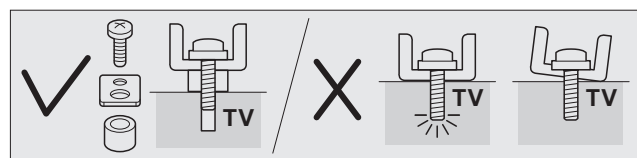

M-C 		M-D 	
M-E 		M-F 	
M-G 		M-H 	


1:1

Note: Choose the appropriate screws, washers and spacers (if necessary) according to the type of screen.


- Position the adapter brackets as close as possible to the center of the display.
- Screw the adapter brackets onto the display.

⚠ Tighten all screws but do not over tighten.


6. Hooking the Display onto the Wall Plate

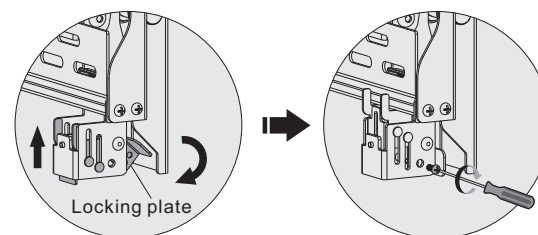


Turn the locking plates downward to fasten the wall plate and tighten the screws to secure.



Use a padlock to prevent the display from being stolen (The padlock is not included).

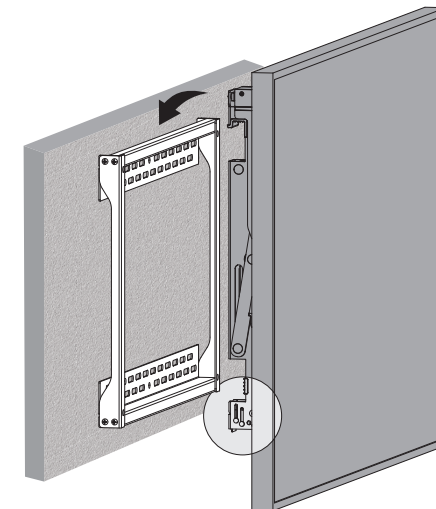


7. Adjustment


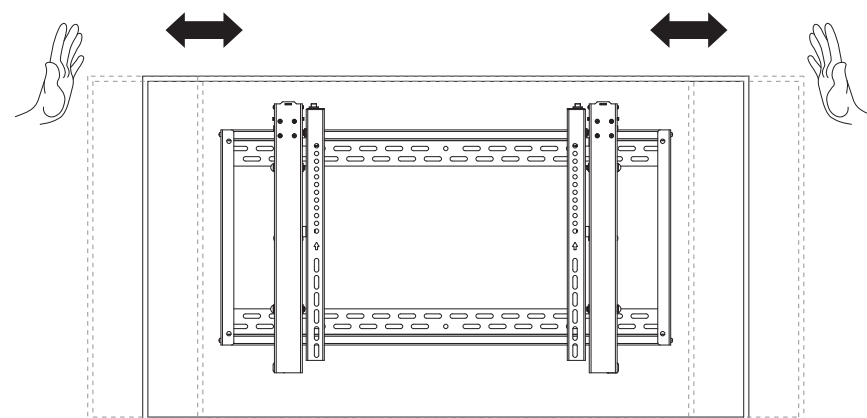


Push the display to left or right to enable fast alignment.





Micro Adjustment

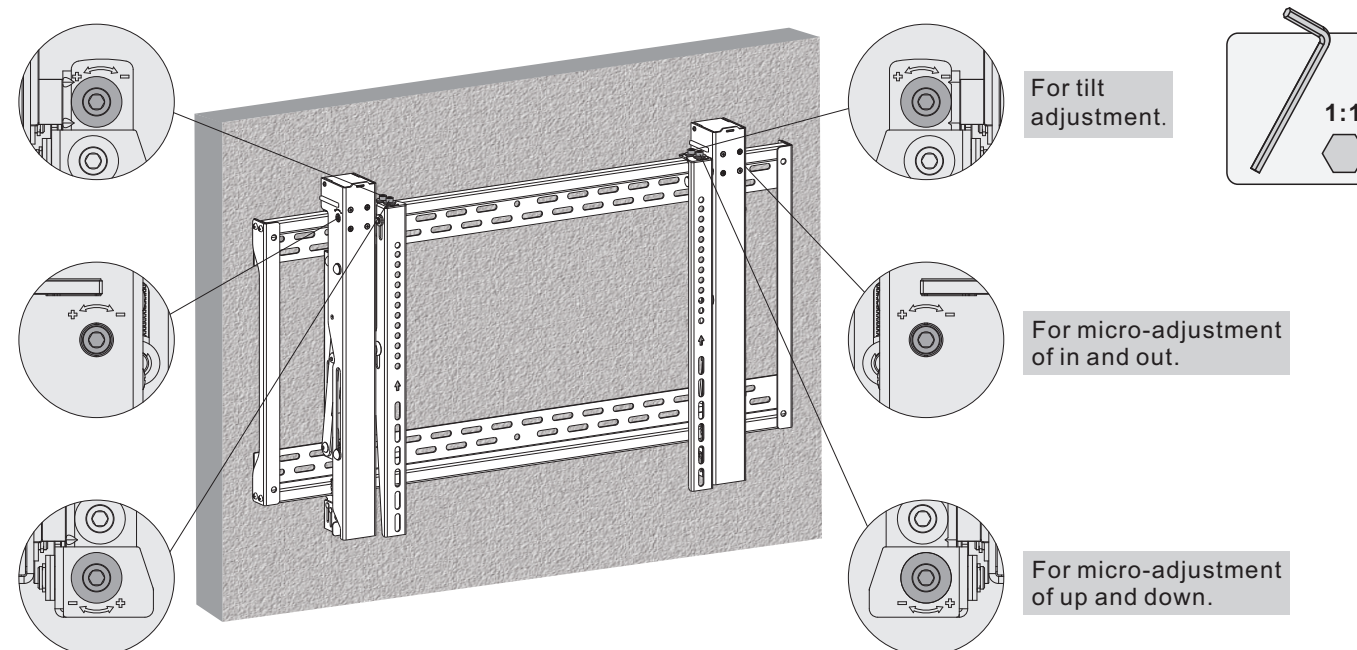


Tilt adjustment

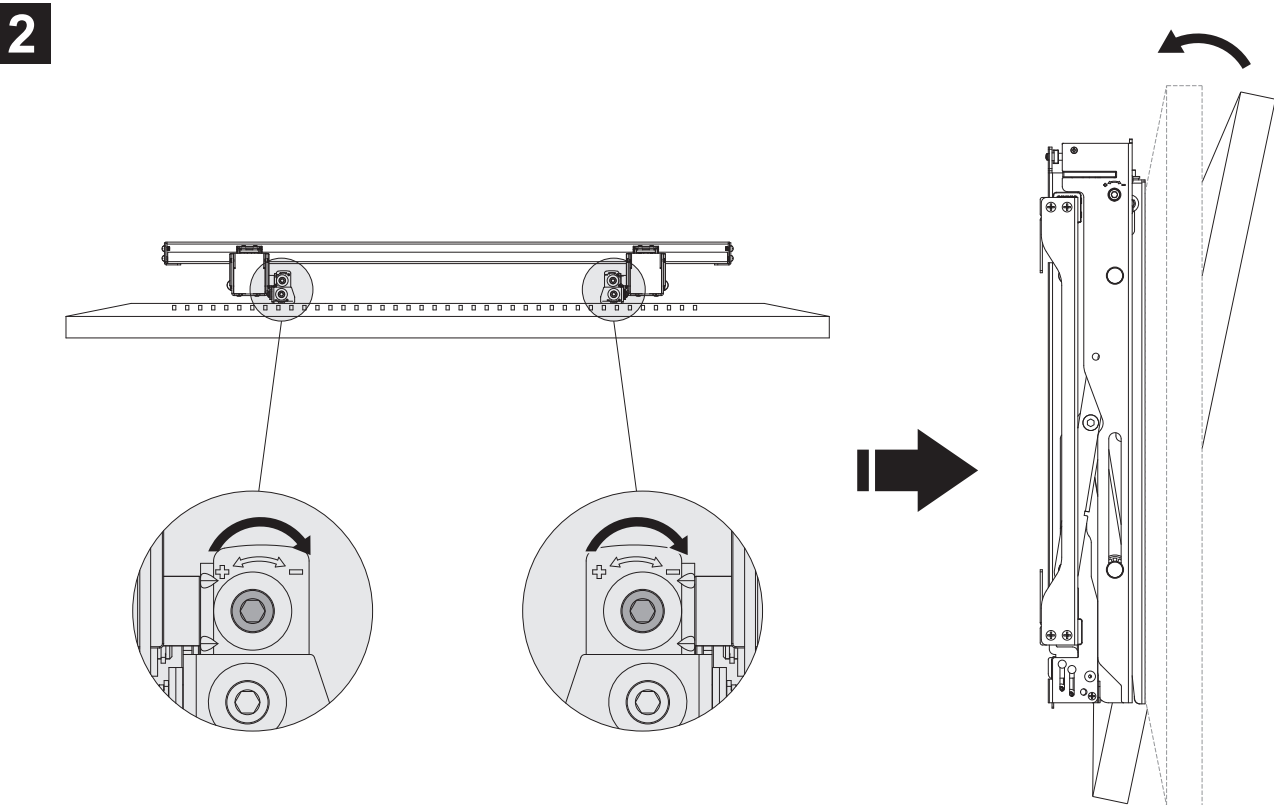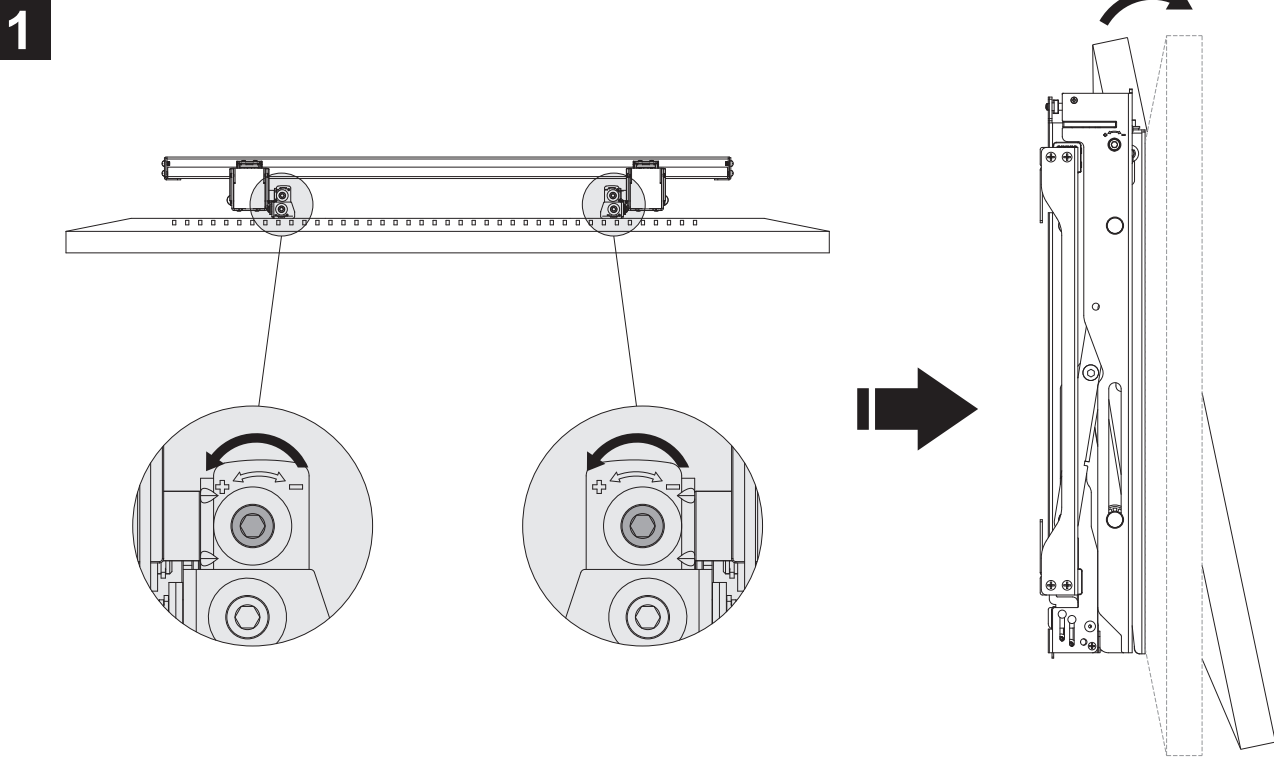

Height adjustment

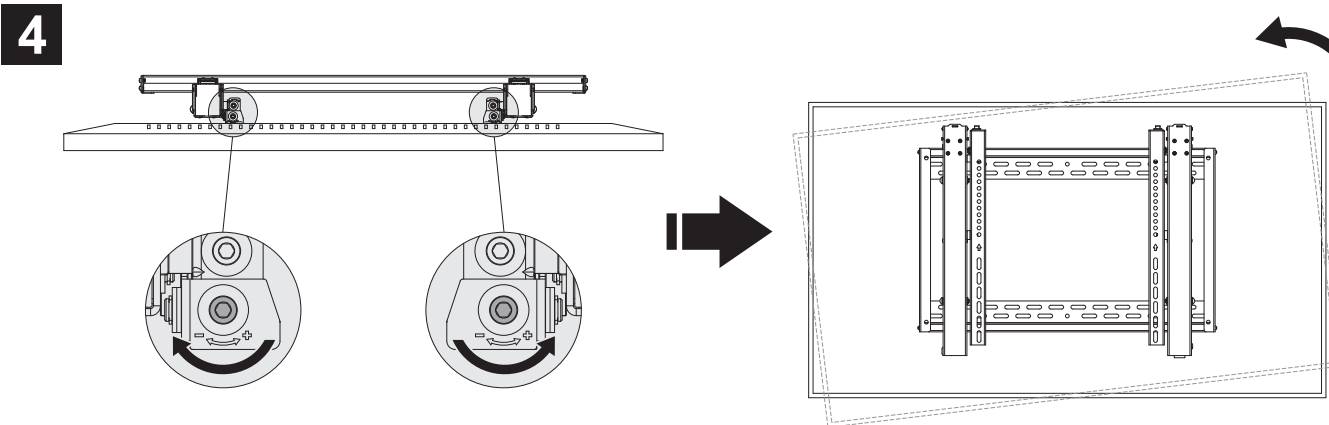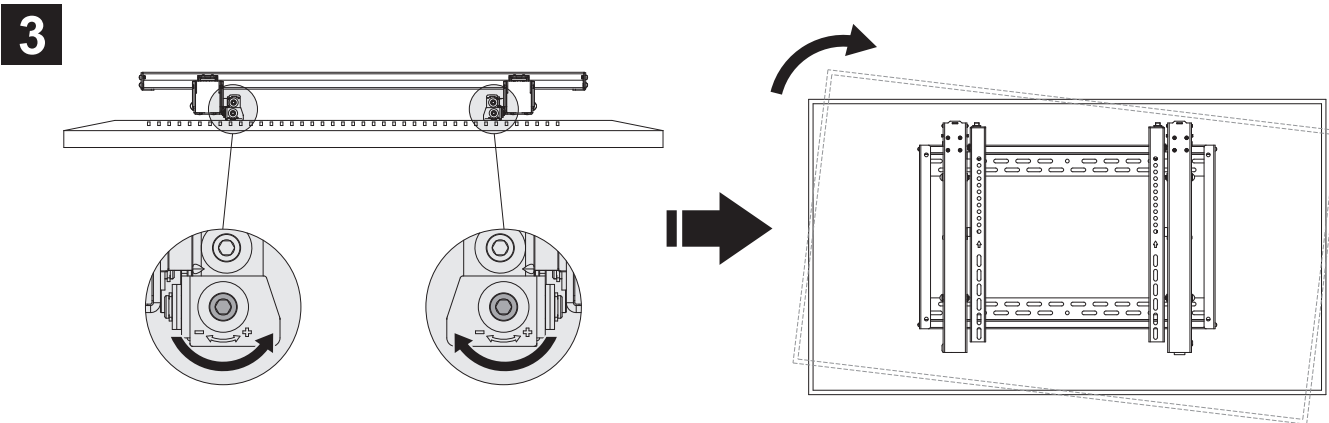
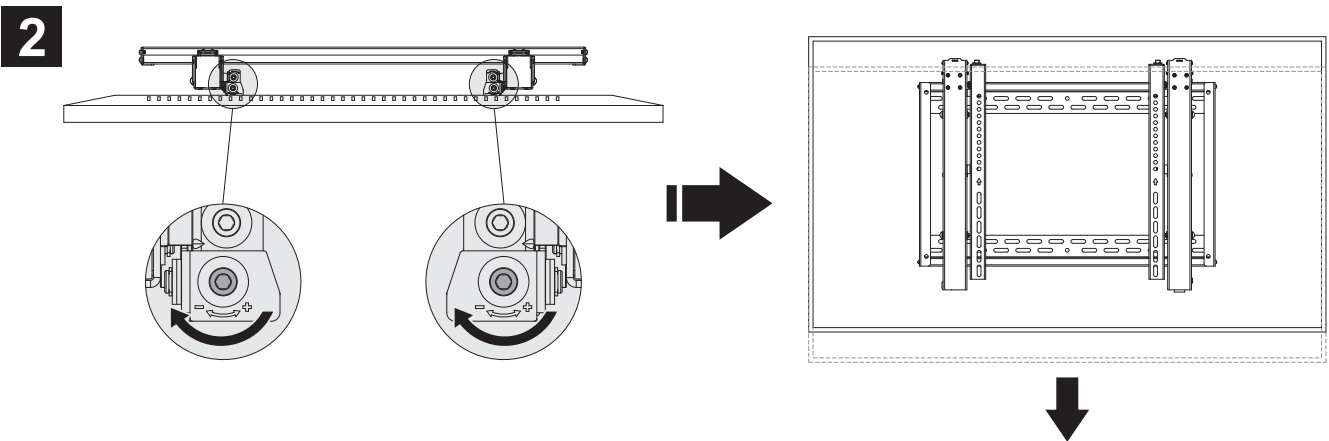
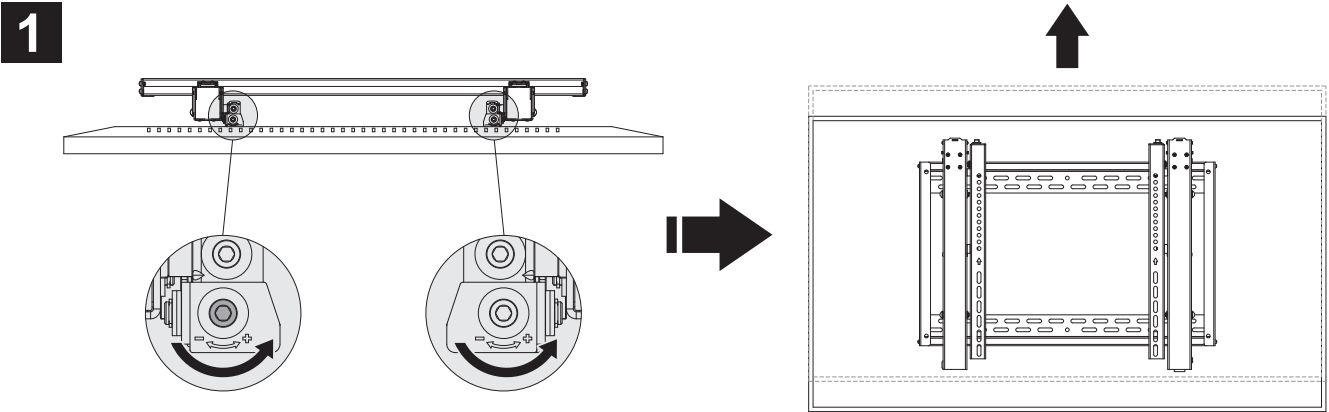


Depth adjustment

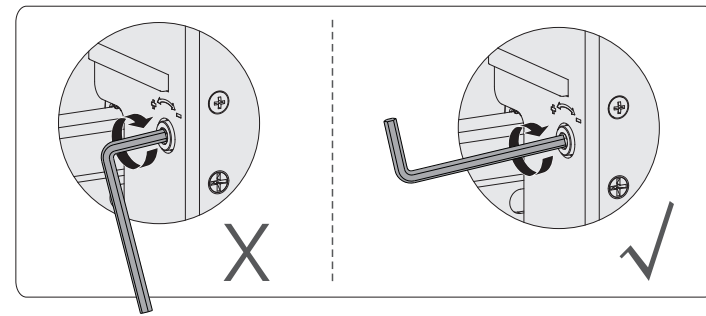

Note:

- Don't use the short end of Allen key to tighten the adjustment screw.
- Use the long end of Allen key to tighten the adjustment screw.

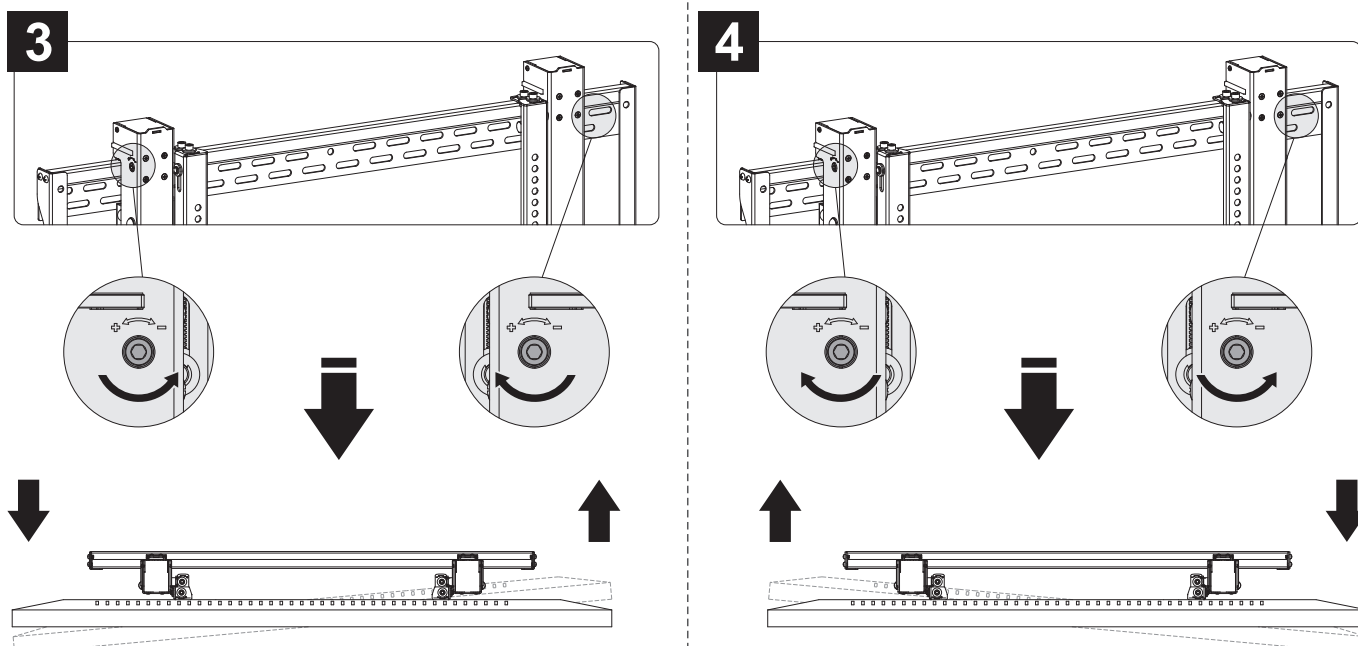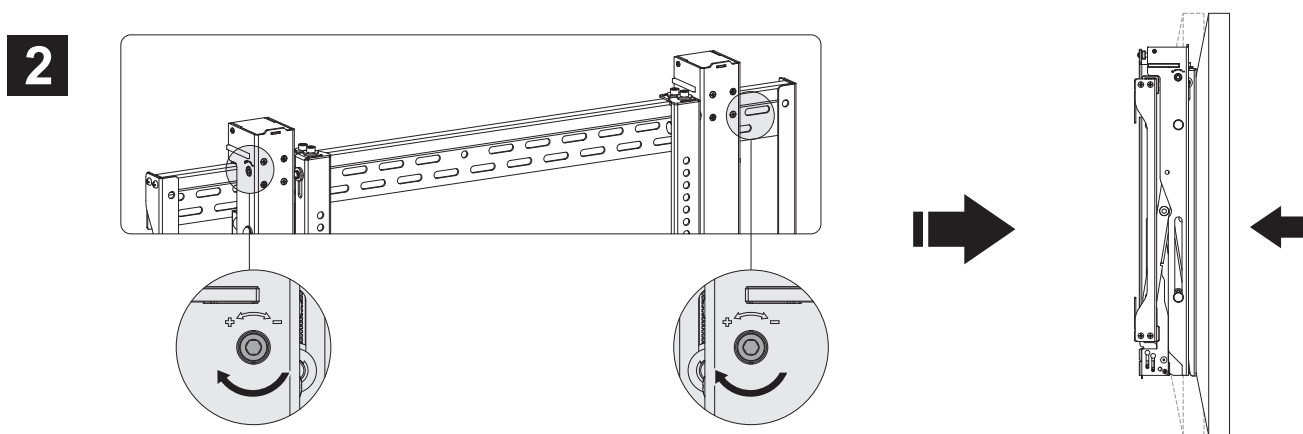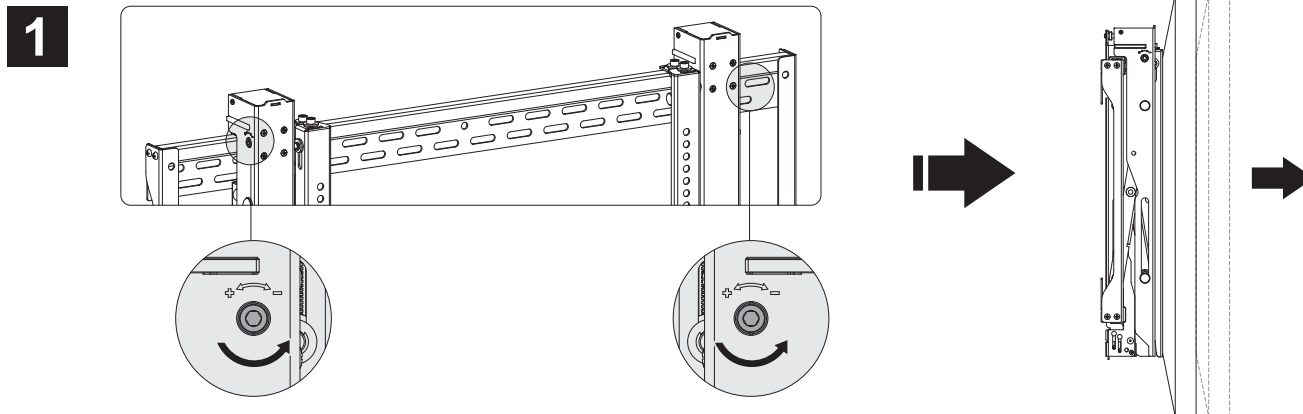

8. Level the Displays

