



# CUBE Transport® Cart Pro


## Pre-Wired User Guide



# About Your Product

## Product Overview - Front View

**CUBE Transport Cart Pro Pre-Wired** provides charging & mobility for up to 30 devices.

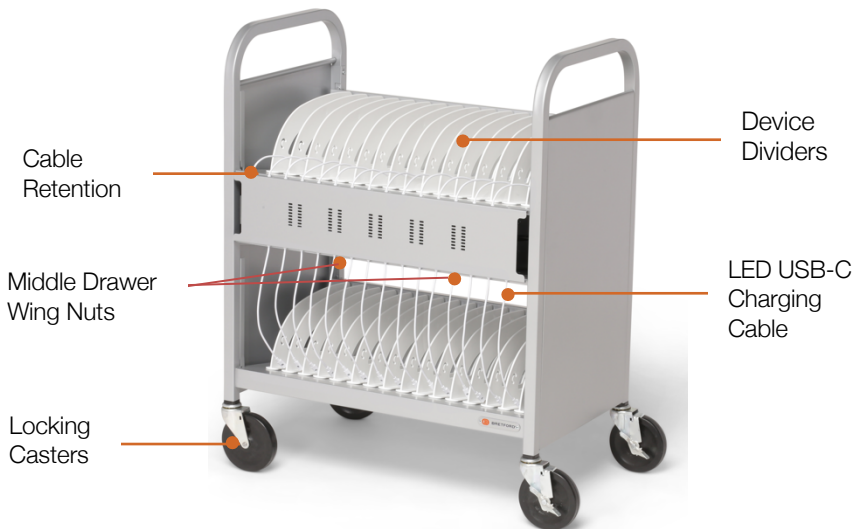



# About Your Product

## Product Overview - Rear View



Power  
Switch

Power Cord  
and Cord  
Winder



# About Your Product

## Technical Specifications

### CUBE Transport Cart Pro Pre-Wired 30

Model	TVCTPD30C
Outer Dimensions (W x D x H)	28.75" x 18.0" x 37" / 73.0cm x 45.7cm x 94.0cm
Slot Dimensions (W x D x H)	1.4" x 14" x 9.9" / 3.2cm x 35.6cm x 25.1cm
Capacity	30 devices
Weight (empty)	80 lb / 36.3 kg
Rating	120V, 12A max. 50-60Hz AC
Charging	Supports device power adapters up to 48W each, or 1,440W total
Warranty	For the latest information, please visit <a href="https://bretford.com/warranty">bretford.com/warranty</a> .
Certifications	



# Using Your Product

## Getting Started

To turn on your CUBE Transport Cart Pro unit, plug the power cord located in the back of the cart into a wall outlet. Check the power switch that it is toggled in the “RESET” position. The power switch will glow red when there is power to the cart.

## USB-C Cables

The CUBE Transport Cart Pro is pre-wired with 30 USB-C to USB-C cables with a LED charging indicator light. When a cable is plugged into a device, the LED will show an amber color when charging and turn green color when the charging status is >90%.






# Using Your Product

## Cable Access

1. If needed to replace a cable, access the cart from the front.
2. Loosen (2) wing nuts, located under the middle shelf, half-way and slide out the module.
3. Unplug the cable from the USB-C hub and remove the cable retention feature from the front panel.
4. Take the new cable and insert the USB-C end, without the LED indicator, into the USB-C hub and then insert the cable retention into the front panel.
5. Slide the module back into the cart, making sure the front panel is flush to the cart with the extra slack of the cables hidden underneath and USB-C end for the devices are accessible. Tighten (2) wing nuts.

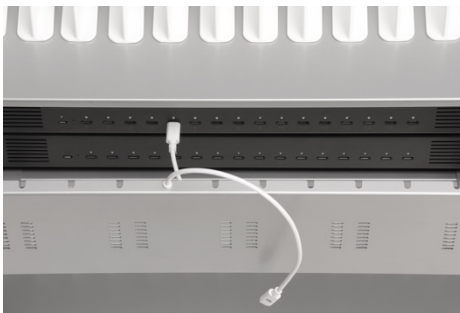



# Using Your Product

## Troubleshooting

### Not Getting Power to Devices

The CUBE Transport Cart Pro provides simultaneous power to all slots. If you notice that is not the case, try these steps below:

1. Ensure the unit is properly plugged into the wall outlet and the red light on the power switch is illuminated.
2. Access the module, using the steps above, to confirm all USB-C cables are plugged into the USB-C hub.
3. Ensure the (2) USB-C hubs are plugged into the e-unit located behind the USB-C hubs on the middle shelf. This can be accessed the back of the cart.



# Important Information

## Safety Notice

- Product for indoor use only
- Do not plug the unit in if the switch or power cord has been damaged.
- Unplug unit from the wall before moving to a different location.
- The socket-outlet shall be installed near the equipment and shall be easily accessible.
- For safety purposes, make sure all electrical components do not exceed the maximum load rating of 12 amps.



# Additional Resources

## Contact Support

Technical support is available by contacting Bretford Customer Care via phone, email or the web:

Hours of Operation: M-F, 7:30am - 4:30pm CST

Telephone: +1-800-521-9614

Email: [customerservice@bretford.com](mailto:customerservice@bretford.com)

Website: [www.bretford.com/contact](http://www.bretford.com/contact)

Bretford, CUBE, CUBE Transport and the B design are trademarks or registered marks of Bretford Manufacturing, Inc. Patents pending. © 2025 Bretford Manufacturing, Inc. All rights reserved.