


Laptop Riser with Extendable Arm and 360° Rotating Base

Product ID

ATER-LAPTOP-RISER

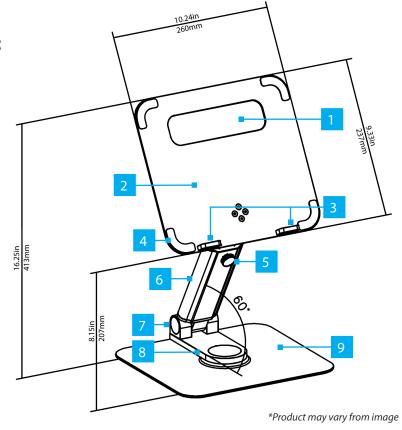

	Feature	Function
1	Airflow Cutout	Improves Laptop/Device cooling
2	Laptop Plate/Tray	Support for Laptops/Devices
3	Slide Stops	Prevents the Laptop/Device from sliding off the Laptop Plate/Tray by providing a secure barrier at the bottom
4	4x Anti-Slip Pads	 Helps keep Laptop/Device from sliding around One on each Corner of the Laptop Plate/Tray
5	Adjustment Knob	Locks/Unlocks the Arm Extension feature
6	Extension Arm	Adjusts the height of the Laptop Plate/Tray
7	Joint Covers (1x Shown, 1x Hidden)	 Decorative cover on each side of the Arm Swivel Plate (1x Left Cover Shown) which also hides the Tension Adjustment Nut (available on the right side only)
8	Arm Swivel Plate	Provides 360 degree rotating/swivel capabilities for the Arm Swivel Plate assembly
9	Base	 Supports the Extension Arm and Laptop Plate/Tray Supports Laptops/Devices up to 11lbs (5kg)

Package Contents

- Laptop Riser x 1
- Wrench x 1
- Joint Covers x 2
- Quick-Start Guide x 1

Requirements

For the latest manuals, product information, technical specifications, and declarations of conformance, please visit: www.StarTech.com/ATER-LAPTOP-RISER

Installation

Warning! Do not exceed the weight capacity of this product. Overloading this product might result in personal injury or property damage. Weight capacity of the Laptop Riser is 11lbs (5kg).

Warning! This product is freestanding and therefore prone to tipping in certain configurations. The stability of the product and mounted equipment must be properly assessed for its intended use before using it or whenever any adjustments are made. Failure to do so may result in equipment and/or personal injury.

(Optional) Adjust the Extension Arm Tension

Warning! Do not do adjustments when equipment is on the Laptop Riser. If adjustments are necessary with equipment in place, ensure two people are involved to prevent accidental drops and/or potential damage to the laptop.

- 1. Remove the Cover: Peel off the Joint Cover on the right side of the Lower Arm Joint.
- 2. **Adjust the Tension:** Using the included **Wrench** or a **13mm Socket Wrench** (not included), rotate the **Tension Adjustment Nut** clockwise to increase tension or counterclockwise to decrease tension.

Note: Do not over-tighten the Tension Adjustment Nut. The Tension Adjustment Nut should only be slightly tightened if a small tension increase is required.

3. **Reapply the Cover:** If the original **Joint Cover** is still usable, reapply it. If not, use one of the included **Joint Covers** by removing its liner and applying it over the **Joint**.

Laptop Arm Extension/Retraction

Warning! Before using the new configuration, ensure that the stability of the mounted laptop will be adequate for the intended use.

- 1. If required, remove the Laptop from the Laptop Plate.
- 2. Loosen the Adjustment Knob.
- 3. Extend or retract the **Extension Arm** to the desired position.
- 4. Tighten the Adjustment Knob.

