


DD Phone (T54W+DD10K) Quick Start

DECT USB dongle DD10K allows you to turn the SIP-T54W IP phone to the DECT desk phone (hereinafter referred to as DD phone).


After that, you can use the IP phone as a handset with a base station.

Package Contents

DD10K

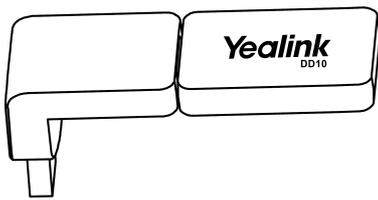


DD10K



Quick Start Guide


T54W

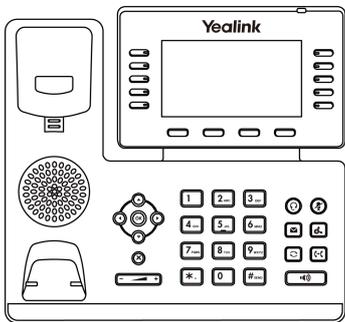

IP Phone



Handset




Handset Cord




Quick Start Guide




Ethernet Cable
(2m CAT5E FTP Cable)



Power Adapter
(Optional)



Stand



Wall Mount Bracket
(Optional)

Firmware Requirements

The firmware of T54W should be later than 85.

To download the latest firmware, go to [Yealink support](#).


To upgrade the firmware of T54W, see [Update DD Phone](#).

Insert DD10K into T54W

Insert the DD10K into the USB port on the back of the phone.

TIP

If the firmware versions of the DD10K and IP phone do not match, the IP phone will upgrade/downgrade the DD10K.

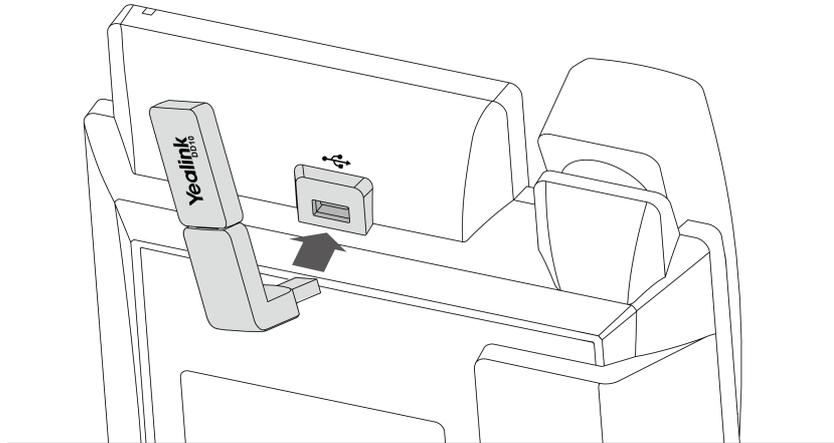**Enable DD Phone Mode**

You should enable the DD phone mode first before using T54W as a DECT desk phone.

To enable the DD phone mode when T54W is powered on (only for firmware version 84 or later):

1. Insert the DD10K.

The phone screen prompts you whether to switch to the DD phone mode.

2. Press the OK soft key to continue, and T54W switches to the DD phone mode after rebooting.

To enable the DD phone mode when T54W is powered off:

1. Insert the DD10K.
2. Power T54W.

T54W switches to the DD phone mode automatically after startup.

Register DD Phone to Base/DM

You can register the DD phones to W70B, W75 Multi-Cell System, W80 Multi-Cell System, and W90 Multi-Cell System. Each DD phone can be registered to only one base station.

See [Register Devices to W70B](#) or [Register Devices to W75DM/W80DM/W90DM](#) for detailed information.

Register an Account

See [Account Registration](#).

How to Update DD Phone?

See [Update DD Phone](#).

How to Place, Answer Calls

See [Place Calls](#) for detailed information.

See [Answer Calls](#) for detailed information.

How to Update Firmware

See [Update Handset](#) for detailed information.