SM39

Headworn | Condenser type | TA4F
Live | Vocal | Speech

Show with sound and motion

Ultimate performance

SM39 brings a performance experience like never before for artists who seek on-stage mobility, stability, and high-quality sound. Its unobtrusive design and ergonomically based frame design provide a stress-free wearing experience. The SM39 pursues both dynamic movement and clear, powerful vocals, delivering uncompromising sound that captivates audiences and creates memorable performances.



■Cardioid pattern separates voice, eliminating unnecessary background noise for clear, powerful sound.
■Flexible boom arm adjusts to hold the mic in precise position during vigorous movement. Ergonomic, natural fit with lightweight design for long-stage performances.

More details here

■Highly hydrophobic sweat-resistant coating and sturdy construction protect against sweat and humidity.

Manufacturer model / JAN Code	SM39-TQG 0042406798761
Directionality	Cardioid
Frequency response	70Hz–20kHz
Connector	TA4F
Weight	55.4g
Cable Length	1.5m
Accessories	Indoor windscreen (RK381), Outdoor windscreen Clean (RK382), clip (RK380)



WH20

Headworn | Dynamic | TA4F
Live | Vocal | Speech

Ideal for active users
headworn microphone

Delivers high-quality sound pickup for active users. Suitable for diverse scenes such as aerobics instructors and musicians.



■ Lightweight wire frame and flexible headband provide comfortable and stable fit.

More details here
Wired model details → P. 45

Model number / JAN code	WH20TQG/0042406066037
Directivity	Cardioid
Frequency response	50Hz–15kHz
Connector	TA4F
Weight	63g
Cable length	1.2m
Accessories	Wind screen × 2, cable clip



TYPICAL POLAR PATTERNS
FIGURE 7



TYPICAL FREQUENCY RESPONSE
FIGURE 6

SM35

Headworn | Condenser type | TA4F
Live | Vocal | Speech

Comfortable fit and
Dual high-fidelity acoustics

With high fit performance, it supports vigorous performances. Tight cardioid characteristics suppress other sounds, prevent feedback and audio bleed, enabling outstanding on-stage performance.



■With a wire-frame headset, it safely and comfortably fits active vocalists and multi-layer performers playing many instruments.
■Cardioid characteristics reduce overlap and feedback, suitable for loud stages or behind floor monitor.
■Seamless compatibility with all Shure wireless bodypack transmitters, suitable for stages from live houses to arenas.

More details here
Wired model → P. 45

Model number / JAN code	SM35-TQG/0042406325820
Polar pattern	Cardioid
Frequency response	40Hz–20kHz
Connector	TA4F
Weight	72g
Cable Length	1.1m
Accessories	Cable clip, windscreen ×2

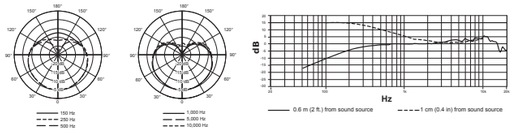

SM31FH Hz

Headworn | Condenser | TA4F
Fitness

Gained excellent sweat resistance,
fitness model with enhanced durability

Designed to resist humidity and handle intense movement with high fit performance, making it ideal for fitness use.



■ Uses hydrophobic material that resists humidity. Reduces microphone element damage from sweat.

■ Wire-frame headset delivers stable and comfortable wear. Ideal for fitness/aerobics instructors.

More details here

Model number / JAN code	SM31FH-TQG/0042406325745
Directivity	Cardioid
Frequency response	45Hz–20kHz
Connector	TA4F
Weight	60g
Cable length	1.1m
Accessories	Cable clip, wind screen × 2

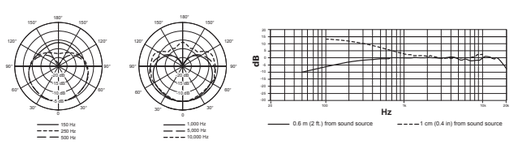

PGA31

Headworn | Condenser type | TA4F
Live | Speech

High-quality headworn with excellent cost performance

PGA31 for speech and performance offers multi-functionality at a reasonable price, delivering reliable performance in any situation.



■Broad frequency response from 60 Hz to 20 kHz and high input level capture a wide range of signal levels clearly.
■Easy-to-wear wire-frame headset ensures a secure fit for active performers and multiplayer setups with many instruments.

More details here

Model number / JAN code	PGA31-TQG/0042406370028
Polar pattern	Cardioid
Frequency response	60Hz–20kHz
Connector	TA4F
Weight	45g
Cable Length	1.3m
Accessories	Cable clip, windscreen ×2

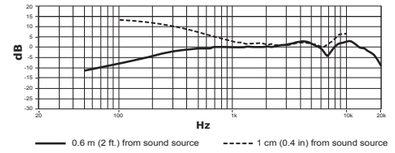

MX153

Ear set | Condenser | TA4F
Speech | Presentation

ultra-small ear-set microphone

Professional-grade ultra-small ear-set microphone, requiring a wider feedback margin than lavalier microphones, ideal for applications where you want discreet wear for speeches, etc. It conveys speech very clearly, making it ideal for presentations, meetings, and live sound SR.



■ Ultra-small omnidirectional cartridge, providing very clear speech without proximity effect.
■ Ultra-lightweight, comfortable, flexible design allows easy, stable wear.
■ Commshield® technology protects against interference from mobile phones and digital bodypack transmitters.

More details here

Model number / JAN code	MX153B/O-TQG 0042406236133	MX153C/O-TQG 0042406236157	MX153T/O-TQG 0042406236140
Polar pattern	Omnidirectional		
Frequency response	20Hz–20kHz		
Power	+5 V DC (130µA minimum)		
Connector	TQG/TA4F connector		
	Black	Cocoa	Beige
Mass	19.8 g		
Accessories	Mic pouch, wind screen × 3, color clip		

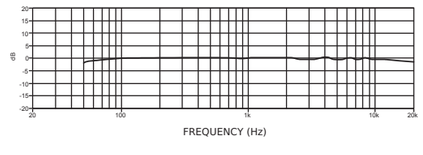

FREQUENCY (Hz)

WBH54

Ear set | Condenser type | TA4F
Live | Vocal | Speech

Capture targeted sound reliably with super-cardioid

A super-compact condenser microphone, born for scenes where discreet appearance and excellent sound quality are required, such as TV broadcasting, theaters, and tours. Despite its small size, the super-cardioid pattern reproduces rich, clear, and natural speech and vocals.



■Gives wide feedback margin and uses super-cardioid pickup to suppress ambient noise.
■Ergonomic shape with about 38 g lightweight design for comfortable wear. The microphone boom can be mounted on either side.

More details here

Model number / JAN code	WBH54B 0042406113441	WBH54T 0042406113434
Polar pattern	Super-cardioid	
Frequency response	50Hz-20kHz	
Connector	TA4F	
Color	Black	Beige
Weight	38g	
Cable Length	1.5m	
Accessories	Windscreen ×2, hi-boost EQ cap, Swivel clip, spare boom holder, carrying case	

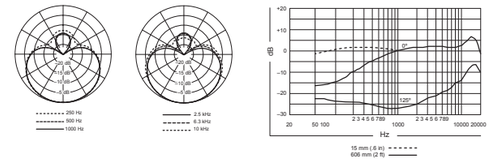

CVL

Lavalier | Condenser | TA4F
Speech | Presentation

achieving high durability and uncompromising sound quality

A convenient and high-performance clip-on cardioid condenser microphone. Simple and easy to use, discreet wearing in a compact size. Ideal for presentations and speeches.



■ Wide frequency response from 50 Hz to 20 kHz and up to 139 dB input level, capturing a broad dynamic range clearly.
■ Refined durability for harsh outdoor recording.

More details here

Model number / JAN code	CVL-B/C-TQG/ 0042406325813
Directivity	Cardioid
Frequency response	50Hz–20kHz
Connector	TA4F
Weight	25g
Cable length	1.3 m
Accessories	Cable clip, wind screen × 2

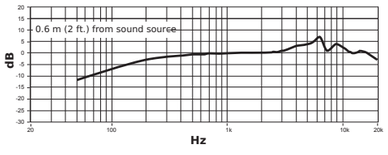

WL183m/WL184m/WL185m

Lavalier | Condenser Type | TA4F

Speech | Presentation



Captures refined personal voice

For presentations and speeches. WL183m is omnidirectional, WL184m is super-cardioid, WL185m is cardioid.



■ Wide dynamic range and frequency response for accurate sound reproduction.
■ It is unobtrusive when worn on clothing and ideal for pickup in presentations and speeches.

More details here
WL183m WL184m WL185m

Manufacturer Part Number	WL183MB/ O-TQG	WL183MW/ O-TQG	WL184MB/ S-TQG	WL184MW/ S-TQG	WL185MB/ C-TQG	WL185MW/ C-TQG
JAN Code	0042406 806015	0042406 806275	0042406 806534	0042406 806794	0042406 792141	0042406 792400
Polar Pattern	Omnidirectional		Supercardioid		Cardioid	
Frequency Response	70Hz–20kHz					
Connector	TA4F					
Dimensions (Ø×L)	12.74×13.55mm (mic portion only)					
Cable length	1.2m					
Color	Black	White	Black	White	Black	White
Accessories	Foam Windscreen, Tie Clip, Microphone Pouch					

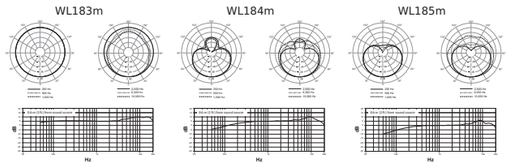

WL93

Lavalier | Condenser Type | TA4F

Speech | Presentation | Theatre | Broadcast

Born for speech use, ultra-small lavalier microphone

In a small, unobtrusive size, it delivers accurate and clear sound comparable to standard microphones.

■ Optimized for wearing on the chest, with a smooth, expansive presence-boosting frequency response.
■ With adjusted bass roll-off, reduces clothing rustle and ambient noise.



Details here

Manufacturer Part Number	WL93-6	WL93T-X	WL93-X
JAN Code	0042406053136	0042406321990	0042406222228
Polar Pattern	Omnidirectional		
Frequency Response	50Hz–20kHz		
Connector	TA4F		
Dimensions (W×H×D)	6×4×9mm (mic portion only)		
Weight	16g		
Cable length	1.9m	1.2m	1.2m
Color	Black	Beige	Black
Accessories	Windscreen, Tie Clip, Stitch-on Bracket, Microphone Pouch		

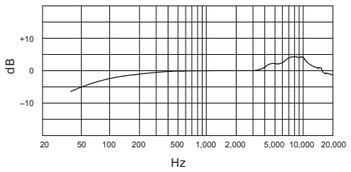

WB98H/C

Condenser type | TA4F

Live | Musical instrument only | Woodwind instrument | Percussion instrument

Wireless model of BETA 98H/C. For woodwind and percussion instruments.

WB98H/C, the wireless version of BETA 98H/C, is a cardioid condenser premium microphone for wind and percussion, easily attachable to bells and rims.



■ High maximum SPL to handle extremely high sound pressure levels for wind instruments and percussion.
■ Refined frequency response reproduces an open, natural sound.
■ Equipped with a highly flexible cable (1.6m) with a 4-pin mini connector, usable with all Shure wireless bodypack transmitters.

For details see: Wired models → P. 35

Manufacturer Part Number / JAN Code	WB98H/C-X /0042406222204
Polar pattern	Cardioid
Frequency response	20Hz–20kHz
Connector	TA4F
Dimensions	Microphone head φ10mm
Mass	65g (microphone part)
Cable length	1.6m
Included items	Wind screen ×2, cable holder, Angle brace, microphone pouch

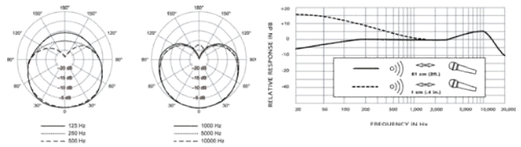

PGA98H

Condenser type | TA4F

Live | Music instrument | Woodwind instrument

Easy to install.

Microphone for wind instruments

Professional-quality cardioid condenser microphone ideal for woodwind and brass instruments. Flexible, unobtrusive gooseneck design with a durable construction.



■ Unique microphone cartridge design recreates wind instrument sound clearly.
■ Integrated horn clamp for quick and easy mounting on wind instruments. Flexible gooseneck allows precise positioning.

For details see: Wired models → P. 36

Manufacturer part number / JAN code	PGA98H-TQG/0042406396738
Polar pattern	Cardioid
Frequency response	60Hz–20kHz
Connector	TA4F
Dimensions (Microphone head × gooseneck length)	φ18×146mm
Mass	210g
Cable length	1.5m
Included items	Wind screen, pouch
Option	Wind screen (AP98WS)

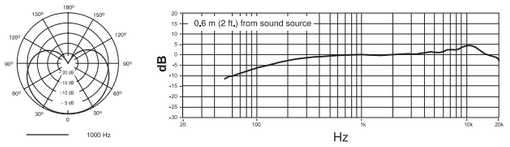

The microphones on this page can connect to all Shure wireless system body-pack transmitters.

Accessories

Manufacturer Model	JAN Code	Name	Description	Compatible
31A1856	-	3/8 inch to 5/8 inch Conversion Thread	Color: Brass, convert 3/8 inch (stand side, European thread) to 5/8 inch (holder side, Shure) to be converted	
95A2050	-	3/8 inch to 5/8 inch conversion thread	Color: Silver, convert 3/8 inch (stand side, European thread) to Convert to 5/8 inch (holder side, Shure)	
A100WS	0042406113113	Wind Screen		KSM141, KSM137
A12	0042406056533	Mount Flange	Gooseneck fixed, diameter 45mm, 5/8 inch thread	
A12B	0042406053730	Mount Flange	Gooseneck fixed, diameter 45mm, 5/8 inch thread, color: Black	
A13HD	0042406053723	Mount Flange	Gooseneck fixed, diameter: 76mm, 5/8 inch thread	
A13HDB	0042406053716	Mount Flange	Gooseneck fixed, diameter 76mm, 5/8 inch thread, color: Black	
A15AS	0042406054010	Microphone Attenuator	Attenuation: 15/20/25dB switchable	
A15BT	0042406054003	Impedance - Matching Transformer	Primary: 33kΩ (XLR pin, female) Secondary: 600Ω or 7,500Ω (XLR pin, male) Balanced type, used to connect equipment with different impedances and levels	
A15HP	0042406053990	High-pass Filter	Eliminates noise from wind, air conditioning, and vibration, 100 Hz (12 dB/oct, load 800Ω or more) Connector: Input side (XLR pin, female) to output side (XLR pin, male)	
A15LA	0042406053983	Line Input Adapter	Connect line-level signal to mic input	
A15PRS	0042406053976	Phase Inverter Adapter	Switchable phase of balanced line	
A15TG	0042406053969	Tone Generator	Used for equipment setup and troubleshooting Oscillation frequency: 700Hz Output level: -41.5±4.5dBV Power: 1.5V alkaline battery or 1.5V mercury battery, ON/OFF switch	
A181WS	0042406199865	Wind Screen		BETA 181
A1WS	0042406060622	Wind Screen	Color: Gray	BETA 56A, BETA 57A
A25D	0042406072304	Microphone Holder	5/8 inch thread included, Holder for microphones with handles of 3/4 inch or larger	BETA 58A, BETA 57A, BETA 87, SM58, SM57, SM86, SM48, SM137, PGA58, PGA57, PGA48, PGA81, 545SD, 565SD
A25E	0042406140614	Microphone Holder		KSM8, KSM9, KSM9HS
A26M	0042406053006	Dual Microphone Mount	5/8 inch thread	BETA 57A, SM57
A26X	0042406056601	Extension Bar	5/8 inch thread Length: 7.6 cm	BETA 52A, BETA 56A, SUPER 55, 55SH SERIES II
A27M	0042406056618	Stereo Adapter	Allows stereo recording using two microphones	KSM141, KSM137, SM81
A27SM	0042406107716	Suspension / Shock Mount	Color: Black	BETA 27, SM27, PGA27
A2WS-BLK	0042406112420	Windscreen	Color: Black	SM57, 545SD
A2WS-GRA	0042406112413	Windscreen	Color: Gray	SM57, 545SD
A32M	0042406065955	Swivel Stand Adapter		KSM32, BETA 27, SM27
A32SM	0042406065962	Elastic Suspension Shock Mount		KSM32
A32WS	0042406067096	Windscreen	Color: Black	KSM44A, KSM32, BETA 27, SM27, PGA27
A3WS	0042406053945	Windscreen	Color: Black	PGA81, KSM137
A42OR	0042406186711	For Shock Mount Elastic Band		KSM32
A44ASM	0042406191241	Elastic Suspension Shock Mount		KSM44A
A4CC	0042406861748	Soft-Shell Carrying Case		SM4
A4EB	0042406861885	Rubber Band for Shock Mount		SM4
A4M	0042406862028	Swivel Mount Microphone Clamp	Microphone Clamp included with SM4 standalone (SM4-K). The SM4 KIT is not included.	SM4
A4PF-J	0042406867818	Pop filter		SM4
A4SM-J	0042406867849	Shock mount		SM4
A50D	0042406099950	Drum mount	Attach microphone holder directly to drum	
A53M	0042406053914	Isolation mount	5/8 inch thread Cuts mechanical vibration noise by more than 20 dB	SM81, SM63, KSM141, KSM137
A55M	0042406053891	Isolation mount	5/8 inch thread Cuts mechanical vibration noise by more than 20 dB	BETA 58A, BETA 57A, BETA 87, SM58, SM57, SM86, SM48, SM137, PGA58, PGA57, PGA48, 545SD, 565SD
A56D	0042406071376	Drum mount	Mount and use microphone holder	BETA 57, BETA 56, SM57, PGA57
A57AWS	0042406060653	Wind screen	Color: Black	BETA 57A
A57F	0042406073462	Microphone holder	5/8 inch thread	SM81, KSM141, KSM137, SM63, BETA 181
A58WS-BLK	0042406112444	Wind screen	Color: Black	BETA 58A, SM58, SM48, PGA58, PGA48, 565SD
A58WS-BLU	0042406112451	Wind screen	Color: Blue	BETA 58A, SM58, SM48, PGA58, PGA48, 565SD
A58WS-GRA	0042406112437	Wind screen	Color: Gray	BETA 58A, SM58, SM48, PGA58, PGA48, 565SD
A58WS-GRN	0042406112468	Wind screen	Color: Green	BETA 58A, SM58, SM48, PGA58, PGA48, 565SD
A58WS-RED	0042406112475	Wind screen	Color: Red	BETA 58A, SM58, SM48, PGA58, PGA48, 565SD
A58WS-YEL	0042406112482	Wind Screen	Color: Yellow	BETA 58A, SM58, SM48, PGA58, PGA48, 565SD
A75M	0042406187183	Universal Microphone Mount	2-way structure combining rim mount and pole mount adapter into one	BETA 98, BETA 181
A7WS	0042406076166	Wind Screen	Close-up Wind Screen	SM7B
A81WS	0042406056649	Wind Screen	Color: Black	SM81, SM57
A83-FUR	0042406323147	Windjammer		VP83, VP83F
A83W	0042406325585	Wind Screen	Foam Wind Screen	VP83, VP83F
A85WS	0042406053853	Wind Screen	Color: Black	BETA 87A, BETA 87C, SM87A, SM86, KSM9, KSM8, NXN8/C, NXN8/S
A98D	0042406065979	Drum Mount		BETA 98
A98KCS	0042406052979	Microphone Mount		BETA 98/S
A6D	0042406844796	Drum Mount		NXN6
AK32C	0042406494618	Carrying Case		KSM32/SL
AK44C	0042406494601	Carrying Case		KSM44A
AK8C	0042406464574	Carrying Case		KSM8
AK9C	0042406494595	Carrying Case		KSM9, KSM9HS
AMV-CHARGE-J	0042406810654	Charging Case	MoveMic Charging Case	MoveMic One/Two
AMV-LAV-FUR	0042406809764	Wind Jammer	Wind Jammer for MoveMic clip-on wireless microphone	MoveMic One/Two
AMV-LAV-MM	0042406809900	Magnetic mount	Magnetic mount for MoveMic clip-on wireless microphone	MoveMic One/Two
AMV-LAV-WS/B	0042406810043	Wind screen	MoveMic replacement wind screen, color: Black	MoveMic One/Two
AMV-LAV-WS/W-KIT	0042406810180	Wind screen & Clip cover kit	Wind screens ×2 for MoveMic clip-on wireless microphones, c Lip cover ×2, color: White	MoveMic One/Two
AMV-LAV-Z6	0042406810302	MoveMic for replacement and add-on Microphone	MoveMic clip-on wireless microphone for replacement and add-on. Charging case is not included.	MoveMic One/Two
AMV-LTG	0042406397445	Micro-B - Lightning cable	Cable length: 1m	MV7, MV88+ VIDEO KIT, MV5, MV51
AMV-LTG15	0042406563192	Micro-B - Lightning cable	Cable length: 38cm	MV88+ VIDEO KIT, MV88+ stereo USB, MV5, MV51
AMV-PC	0042406563208	Clamp & microphone clip		MV88+VIDEO KIT
AMV-USB	0042406397452	Micro-B - USB cable	Cable length: 1m	MV88+ VIDEO KIT, MV5, MV51
AMV-USBC15	0042406563215	Micro-B - USB cable	Cable length: 38cm	MV88+ VIDEO KIT, MV5, MV51
AMV-USBC-LTG15	0042406810487	USB-C-Lightning cable	Cable length: 38cm Use MoveMic products with iOS devices, & Data transfer cable for updates	MoveMic
AMV-USBC-USBC15	0042406810623	USB-C-USB-C cable	Cable length: 38cm	MoveMic
AMV-3.5-3.5	0042406809627	3.5mm-3.5mm stereo Cable	Cable length: 61cm coiled cord	MoveMic
AMV5-DS	0042406397384	Desktop stand		MV5, MV5C
AMV6WS	0042406872669	Wind screen	Black	MV6

Maker part number	JAN code	Name	Description	Supported
AMV7+WS	0042406860895	Wind Screen	Black	MV7+
AMV7-K-WS	0042406660747	Wind Screen	Color: Black	MV7, MV7X
AMV7-S-WS	0042406660877	Wind Screen	Color: Silver	MV7
AMV88-FUR	0042406397223	Wind Jammer	Rycote Wind Jammer	MV88+ VIDEO KIT, MV88+ stereo USB
AMV88-WS	0042406397360	Wind Screen	Foam Wind Screen	MV88+ VIDEO KIT, MV88+ stereo USB
AMVL-BAG	0042406471428	Carrying Pouch		MVL
AMVL-CLIP	0042406471398	Tie Clip	Metal Tie Clip	MVL
AMVL-FUR	0042406471404	Wind Jammer		MVL
AMVL-WS	0042406471411	Form Wind Screen		MVL
ANXNC	0042406794763	Microphone Case	Nexadyne 8/C, 8/S Wired Microphone Case	NXN8/C, NXN8/S
AP56DM	0042406397155	Drum Mount		PGA56, PGA52
AP98DM	0042406397162	Drum Mount Clip		PGA98D
AP98WS	0042406455589	Wind Screen		PGA98H, PGA98D
C100J	0042406052542	Microphone Cable	Cable length: 30m Material: Hi-Flex	
C15AHZ	0042406060806	Microphone Cable	Cable length: 4.6m, 6.3mm phone plug	
C20AHZ	0042406060820	Microphone Cable	Cable length: 6.1m, material: Hi-Flex, Connector: XLR pin, female (chrome) → 1/4 inch phone plug	
C25B	0042406052474	Microphone Cable	Cable length: 7.5m, low impedance dynamic balanced cable	
C25E	0042406052450	Microphone Cable	Cable length: 7.5m, material: Triple-Flex, Connector: XLR pin, female (black) → XLR pin, male (chrome)	
C25J	0042406060837	Microphone Cable	Cable length: 7.6m, material: Hi-Flex, Connector: XLR pin, female (chrome) → XLR pin, male (chrome)	
C50J	0042406060844	Microphone Cable	Cable length: 15m Material: Hi-Flex	
C98D	0042406072748	Replacement Cable		BETA 98AD/C
G-12	0042406055673	Flexible Goose Neck	Cable length: 300mm, both ends 5/8 inch threads, color: silver	
G-18	0042406055680	Flexible Goose Neck	Cable length: 450mm, both ends 5/8 inch threads, color: silver	
G12-CN	0042406056243	Flexible Goose Neck	Length: 300mm, 5/8 inch thread → XLR pin, female (mic side), color: silver	
G12B	0042406055697	Flexible Goose Neck	Length: 300mm, both ends 5/8 inch threads, color: black	
G18-CN	0042406056250	Flexible Goose Neck	Length: 450mm, 5/8 inch thread → XLR pin, female (mic side) Side bend (horizontal hole) included, color: silver	
G18A	0042406056267	Flexible Goose Neck	Length: 450mm, both ends 5/8 inch threads, side bend (horizontal hole) included, color: silver	
G6A	0042406056274	Flexible Goose Neck	Length: 150mm, both ends 5/8 inch threads, side bend (horizontal hole) included, color: silver	
MS-10C	612079115709	Microphone Stand	Floor stand, color: chrome	
PS-6	0042406098786	Pop Screen	Screen diameter: 150mm, gooseneck length: 350mm	
RK143G	0042406053808	Replacement Grill		SM58
RK183T1	0042406054263	Single-mount Tie Clip	2 pieces included	WL183, WL184, WL185
RK183T2	0042406054256	Dual-mount tie clip	1 piece	WL183, WL184, WL185
RK183WS	0042406054249	Windscreen	4 pieces, color: black	BETA 98, WL183, WL184, WL185, SM35, WB98H/C
RK184WS	0042406054232	Wind screen	Color: black	SM1, SM2, SM10A, SM12A, SM14
RK187T1-B	0042406809092	Single tie clip	Color: black	WL183M, WL184M, WL185M
RK187T1-W	0042406809221	Single tie clip	Color: white	WL183M, WL184M, WL185M
RK187T2-B	0042406809351	Dual tie clip	Color: black	WL183M, WL184M, WL185M
RK187T2-W	0042406809481	Dual tie clip	Color: white	WL183M, WL184M, WL185M
RK187WS-B	0042406872799	Snap-fit windscreen, 4 pieces, color: black		WL183M, WL184M, WL185M
RK187WS-W	0042406872928	Snap-fit windscreen, 4 pieces, color: white		WL183M, WL184M, WL185M
RK200BC	0042406054225	Belt clip	Belt clip for XLR connector	SM11
RK203TC	0042406053792	Tie clip	Tie clip	SM11
RK214G	0042406053631	Replacement grille		SM87, SM86
RK229WS	0042406056342	Windscreen	Foam windscreen Color: Brown	SM63, SM63L
RK244G	0042406056366	Replacement grille		SM57
RK248G	0042406056373	Replacement grille		SM48
RK261BWS	0042406054195	Windscreen	Pack of 4, Color: Black	WL183, WL184, WL185
RK265G	0042406053785	Replacement grille		BETA 58A
RK279	0042406055925	Instrument mounting kit	Kit contents: Tie clips, Cable clips, Shock mounts, Extension mounts, Rubber bushings, Hook-and-loop tape, Mount adapter	SM11
RK282	0042406054188	Swivel microphone mount		BETA 98
RK304T	0042406056410	Windscreen	Foam windscreen & tie clips Color: Beige	SM93, WL93T
RK307DB	0042406056427	Dual mount tie clips	Color: Black	SM93, WL93
RK311	0042406053624	Windscreen	Color: Black	SM81
RK312	0042406053617	Replacement grille		BETA 87A, BETA 87C
RK318WS	0042406055987	replacement kit	Black windscreen ×2, clips	WH20
RK319	0042406055994	headset band		WH20, WH30
RK320	0042406053778	replacement grille		BETA 57A, BETA 56A
RK321	0042406053594	replacement grille		BETA 52
RK323G	0042406053761	replacement grille	Color: Black	BETA 58A
RK324G	0042406053587	replacement grille		BETA 87
RK332G	0042406054171	replacement grille		588SDX
RK345	0042406053563	windscreen	Color: Charcoal gray	SM7B
RK345B	0042406816717	windscreen	Color: Black	SM7dB
RK354SB	0042406056113	single mount tie clip	Set of 2, color: Black	WL93, SM93
RK355WS	0042406056106	windscreen	Set of 4, color: Black	WL93, SM93
RK366G	0042406057615	Replacement grille	Color: White	SM63
RK367G	0042406057622	Replacement grille	Color: White	SM63L
RK368G	0042406057639	Replacement grille	Color: Black	SM63LB
RK371	0042406067164	Replacement grille	Color: Champagne Gold	KSM32/SL
RK372	0042406067171	Replacement grille	Color: Charcoal Gray	KSM32/CG
RK373	0042406067188	Shock mount strap	A32SM Elastic suspension shock mount strap (2 pieces)	KSM32
RK376	0042406325752	Replacement kit	Clips x2, foam windscreen	CVL
RK377	0042406325769	Replacement kit	Wind screen x2, cable clip	PGA31
RK378	0042406325776	Replacement kit	Wind screens x2, cable clips	SM35
RK379	0042406325783	Replacement kit	Clip + foam windscreen x2	SM31FH
RK380	0042406927215	Clip		SM39
RK381	0042406927345	Indoor windscreen		SM39
RK382	0042406927475	Outdoor windscreen		SM39
RK383	0042406194358	Shock mount band		KSM32
RK384	0042406927604	SM39 Headset frame		SM39
RPM181/BI	0042406187909	Cartridge	Bidirectional	BETA181
RPM181/C	0042406187886	Cartridge	Cardioid	BETA181
RPM181/O	0042406187893	Cartridge	Omnidirectional	BETA181
RPM181/PRE	0042406187923	XLR Preamplifier		BETA 181
RPM181/S	0042406187916	Cartridge	Supercardioid	BETA181
RPM262	0042406139069	Replacement grille		KSM9CG
RPM264	0042406139045	Replacement grille		KSM9HS
RPM266	0042406452137	Replacement grille	Color: Black	KSM8/B

Maker part number	JAN code	Name	Description	Supported
RPM268	0042406452144	Replacement Grill	Color: Brushed Nickel	KSM8/N
RPM280	0042406795364	Replacement Grill	Nexadyne 8/C Replacement Grill, Cardioid, Color: Black	NXN8/C
RPM281	0042406795500	Replacement Grill	Nexadyne 8/S Replacement Grill, Supercardioid, Color: Black	NXN8/S
RPM284	0042406845533	Replacement Grill	Nexadyne 2 Replacement Grill, Color: Black	NXN2
RPM285	0042406845670	Replacement Grill	Nexadyne 5 Replacement Grill, Color: Black	NXN5
RPM286	0042406845816	Replacement Grill	Nexadyne 6 Replacement Grill, Color: Black	NXN6
RPM316	0042406166102	Wind Screen	Snap-fit Wind Screen (4 pcs), Color: Black	BETA 54, WBH54B
RPM318	0042406166119	Wind Screen	Snap-fit Wind Screen (4 pcs), Color: Beige	WBH54T
RPM400TQG	0042406481878	XLR Preamplifier	TQG/TA4F compatible, belt clip included	SM35, CVL
RPMP48G	0042406397179	replaceable grill		PGA48
RPMP52G	0042406397193	replaceable grill		PGA52
RPMP56G	0042406397209	replaceable grill		PGA56
RPMP57G	0042406397216	Replaceable Grill		PGA57
RPMP58G	0042406397186	Replaceable Grill		PGA58
RS65	0042406053747	Replaceable Grill		565SD
S15A	0042406052115	Microphone Stand		
S37A	0042406052108	Desk Stand	W116×H73×D165mm, 691g, 5/8 inch screw, Mounting microphone holder for use	
S41E	0042406072281	Desk Stand		
VIP55SM	0042406403894	Dual Mount Kit		SM57

Wireless system accessories

Manufacturer part number	JAN code	Name	Description	Supported systems
PA805DB-RSMA	0042406694933	Passive directional antenna	GLX-D4R+ receiver and Frequen Ci Manager reception up to 8dB Improves; minimizes interference from 2.4GHz signal RSMA cable (3m) included	GLX-D+
PS24J	0042406473729	AC Adapter	Power adapter for SVX, BLX, GLX-D6+ wireless receivers	SVX, BLX, GLX-D+
PS43J	0042406473767	AC Adapter	Power adapter for GLX-D4+, GLX-D4R+ wireless receivers	GLX-D+
SB903	0042406563031	Lithium-ion rechargeable battery	Rechargeable batteries for SLXD1, SLXD2 wireless transmitters	SLX-D
SB904	0042406695060	Lithium-ion rechargeable battery	Rechargeable batteries for GLX-D+ digital wireless system transmitter for up to 17 hours operation. Note: with older GLX-D and GLX-D Advanced are not compatible	GLX-D+
SBC10-903-J	0042406562966	Single charger for SB903 battery	Charge one SB903 lithium-ion battery via an AC power source or a USB port to charge	SLX-D
SBC10-904-J	0042406727983	Single battery charger for SB904	Charge the SB904 lithium-ion battery via an AC power source or a USB-C port to charge	GLX-D+
SBC10-USBC-J	0042406728409	USB-C battery charger	Use the GLX-D+ handheld transmitter and bodypack transmitter to connect Charge using the cent	GLX-D+
SBC203-J	0042406562850	Dual docking charging station	Directly charge 2 SB903 units or SLXD1, SLXD2	SLX-D
SBC80-903-J	0042406758529	8-bay charger for SB903 battery	Charge up to 8 SB903 lithium-ion batteries	SLX-D
SBC-DC-903	0042406789066	SLXD5-DC Battery Eliminator Kit	DC from a DC power source to continuously supply power to the SLXD5 receiver Battery eliminator kit.	SLX-D5
UA221DB-RSMA	0042406695244	Reverse SMA passive antenna splitter	One pair of antennas shared by two GLX-D4R+ receivers. UA8-2.4-5.8 1/2 wavelength antenna or PA805DB-RSMA passive directional antenna For use with Contents: Splitters x2, Coaxial cables x2	GLX-D+
UA505-RSMA	0042406504171	Paintable wall mount	Paintable for mounting PA805DB-RSMA or UA8-2.4-5.8 wall mount and BNC connector	GLX-D+
UA8-2.4-5.8	0042406695367	1/2 wavelength antenna	45-degree omni-directional antenna (for 2.4GHz) For use with GLX-D4R+ receivers and the GLX-D+ Frequency Manager	GLX-D+
UA802-RSMA	0042406504126	Reverse SMA cable	Cable length: 0.6m Coaxial cable	
UA806-RSMA	0042406504133	Reverse SMA cable	Cable length: 1.8m Coaxial cable	
UA8100-RSMA	0042406504164	Reverse SMA cable	Cable length:30.4m Coaxial cable	
UA825-RSMA	0042406504140	Reverse SMA cable	Cable length: 7.6m coaxial cable	
UA850-RSMA	0042406504157	Reverse SMA cable	Cable length: 15.2m coaxial cable	
URT2	0042406151177	Universal rack tray	Rack mount for BLX4, BLX88, and GLX-D4+ receivers in a 1U space attachment that enables	BLX, GLX-D+
WA301	0042406769532	Water-resistant silicone protective sleeve for SLXD5	A flexible silicone sleeve that is easy to attach, to protect the SLXD5 receiver from out Protects against impacts and water splashes, etc.	SLXD5
WA302	0042406053174	Guitar cable	Cable length: 0.76m Connector: TA4F (transmitter side) → 6.35mm plug	
WA304	0042406066051	Instrument cable	Cable length: 0.65m Connector: TA4F (transmitter side) → L-shaped 6.35mm plug	
WA305	0042406325943	Premium guitar cable	Cable length: 0.9m Connector: lock ring TA4F (transmitter side) → 6.35mm plug (gold Chrome)	
WA306	0042406326780	Instrument cable	Cable length: 0.9m Connector: TA4F (transmitter side) → Neutrik straight 6.35mm plug gr	
WA307	0042406535892	Instrument cable	Cable length: 0.9m Connector: TA4F with locking mechanism (transmitter side) → Neutrik straight 6.35mm plug L-shaped standard plug	
WA310	0042406055635	Connection cable	Cable length: 1.2m Connector: TA4F (transmitter side) → XLR pin, female	
WA311	0042406790253	Cold shoe mount for SLXD5	Stable mounting of SLXD5 receiver on camera accessory shoe Possible.	SLXD5
WA371	0042406072342	Microphone holder		
WA580B	0042406128094	Fabric pouch for bodypack transmitter	Color: Black	
WA580W	0042406128100	Fabric pouch for bodypack transmitter	Color: White	
WA615M	0042406117890	Color ID Ring	ID identification rings for handheld transmitters 5-color set Color: Yellow, Blue, Red, Orange, White	BLX, GLX-D+
WA621	0042406228626	Color ID Cap	BLX2 Handheld Transmitter 5-color Identification Caps Color: Yellow, Blue, Red, Green, White	BLX
WACR	0042406189910	Color ID Cap	SVX2 Handheld Transmitter 6-color Identification Caps Color: Red, Green, Blue, Brown, Yellow, Purple	SVX
WADRM	0042406189903	Dual rack mount kit		SVX
WASRM	0042406189897	Single rack mount kit		SVX



For information about Shure products, please visit the Shure website.

www.shure.com/ja-JP

Shure Japan Limited

For product inquiries, please contact an authorized Shure dealer or the Shure website.

Support page: www.shure.com/ja-JP

●The information shown is current as of May 2025. • The color of products may appear different from the actual color due to photography and printing. • The listed products are subject to change in specifications, design, price, and included accessories without notice. • Listed products are shown at open price. • The Shure product names and technologies listed are trademarks or registered trademarks of Shure Incorporated in the United States and other countries. Other company product names and company names mentioned are trademarks or registered trademarks of their respective owners.

Content current as of May 2025
V.2025.05

© 2025 Shure Japan Limited