

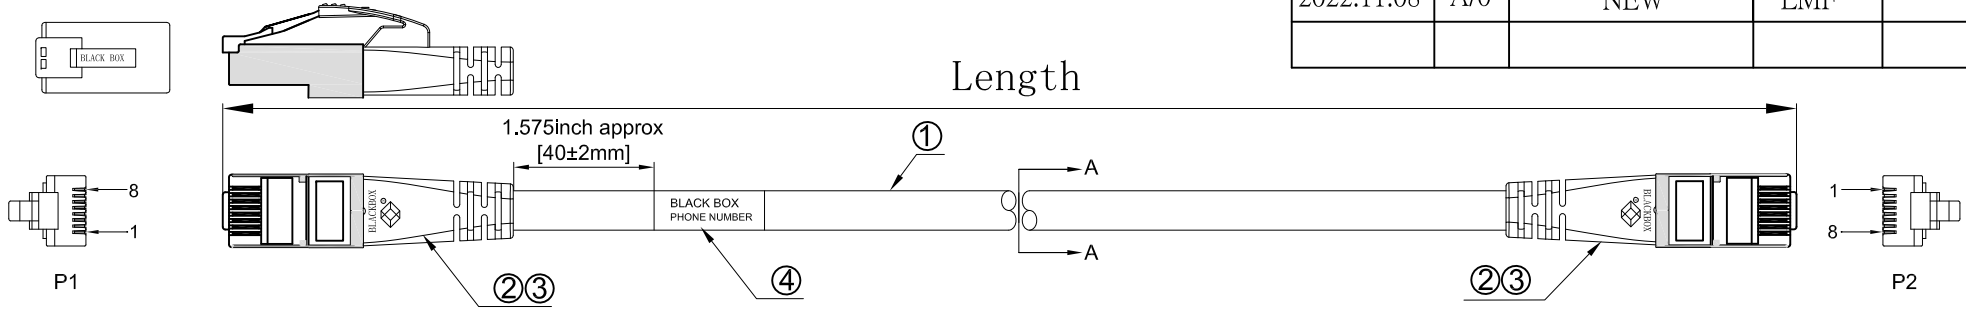


DATE	REV	DESCRIPTION	BY	CHKD
2022.11.08	A/0	NEW	LMF	

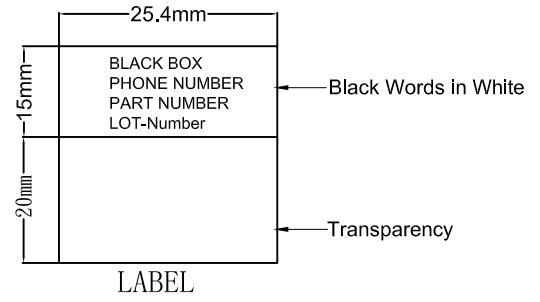

Marking: BLACK BOX CORPORATION --- GIGATRUE CATEGORY 6 SHIELDED --- TESTED TO 250MHZ -- ▲ E196163-Y CM (UL) c(UL) S/FTP 60°C 4PR
26AWG STR ▲ 3P VERIFIED TO ANSI/TIA-568.2-D & ISO/IEC 11801-1 & EN 50288-5-2 & IEC60332-1-2 MM-YY

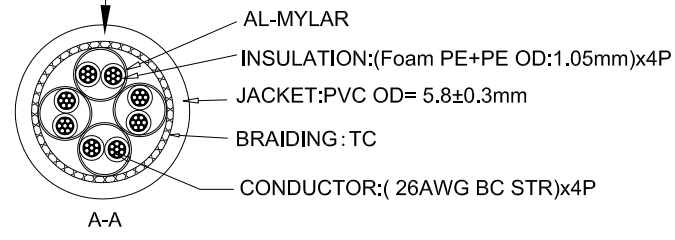

Conductor		Bare Copper 26AWG 7/0.0060inch approx
Insulation		Thickness:MIN at any point:0.0079inch MAX AVG:0.0138inch Diameter:0.0421inch approx
Jacketing	PVC	Thickness:MIN at any point:0.0197inch MAX AVG:0.0217inch Diameter:0.2284inch approx
WIRE	CAT.6 S/FTP Stranded 26AWGX4P	
PLUG	Assembly+BOOT 8P8C 50u" (1.27 μm) Gold 3 piece plug (film+stand+plug)	
COLOR	BLUE	
RJ45 Plugs Standard -IEC 60603-7		

Note:
1.Channel Test
2.100% Test(Open,short,miswire)
3.Contact Resistance:2Ω Max.
4.Insulation Resistance:DC/250V,10 MΩ Min. For 0.01s
5.Hi-pot Test:AC/250V 5mA Max. For 0.01s
6.All Material meet the RoHS2.0, Reach

Attenuation (Maxinmum):35.9dB @250MHZ
Cable Type:4-pair S/FTP
Conductor Gauge:26AWG, stranded
Frequency:Up to 250MHZ
Impedance:100±15 ohms
NEXT (Minimum):33.1dB @250MHZ
PS-NEXT (Minimum):30.2dB @250MHZ
Return Loss (Minimum):8dB @250MHZ
Standards:ANSI/TIA-568.2-D CAT.6 Channel

PINOUT			
P1(T568B)		P2(T568B)	WIRE
1		1	WHITE/ORANGE
2		2	ORANGE
3		3	WHITE/GREEN
6		6	GREEN
4		4	BLUE
5		5	WHITE/BLUE
7		7	WHITE/BROWN
8		8	BROWN
Shield		Shield	BRAID

④	Label	Cable Label 35x25.4mm	1PC
③	Boot	Transparent Boot Marking "BLACK BOX"	2PCS
②	Plug	RJ45 8P8C 50u" Shielded Marking "BLACK BOX"	2PCS
①	Cable	LAN CABLE Cat.6 S/FTP 26AWGX4P STR PVC CM	A/R
No.	TITLE	DESCRIPTION	Q'TY

Tolerance:
X. ±
.X ±
.XX ±
.XXX ±
Angle:
X° ±
.X° ±

Approved by: P/N:C6PC70S-BL-XX
Drawn by: LMF Description: Cat.6 S/FTP #26 +Locking Snagless Boots
Date: 2022. 11. 08 DWG. NO:
Scale: Unut:mm AHEET: 1 OF 1 REV:03