



RUCKUS Unleashed 200.17 User Guide
Published from
CommScope Technical Content Portal by
6 January 2025

CommScope Legal Statements

© 2025 CommScope, Inc. All rights reserved

No part of this content may be reproduced in any form or by any means or used to make any derivative work (such as translation, transformation, or adaptation) without written permission from CommScope, Inc. and/or its affiliates ("CommScope"). CommScope reserves the right to revise or change this content from time to time without obligation on the part of CommScope to provide notification of such revision or change.

Export Restrictions

These products and associated technical data (in print or electronic form) may be subject to export control laws of the United States of America. It is your responsibility to determine the applicable regulations and to comply with them. The following notice is applicable for all products or technology subject to export control:

These items are controlled by the U.S. government and authorized for export only to the country of ultimate destination for use by the ultimate consignee or end-user(s) herein identified. They may not be resold, transferred, or otherwise disposed of, to any other country or to any person other than the authorized ultimate consignee or end-user(s), either in their original form or after being incorporated into other items, without first obtaining approval from the U.S. government or as otherwise authorized by U.S. law and regulations.

Disclaimer

THIS CONTENT AND ASSOCIATED PRODUCTS OR SERVICES ("MATERIALS"), ARE PROVIDED "AS IS" AND WITHOUT WARRANTIES OF ANY KIND, WHETHER EXPRESS OR IMPLIED. TO THE FULLEST EXTENT PERMISSIBLE PURSUANT TO APPLICABLE LAW, CommScope DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, TITLE, NON-INFRINGEMENT, FREEDOM FROM COMPUTER VIRUS, AND WARRANTIES ARISING FROM COURSE OF DEALING OR COURSE OF PERFORMANCE. CommScope does not represent or warrant that the functions described or contained in the Materials will be uninterrupted or error-free, that defects will be corrected, or are free of viruses or other harmful components. CommScope does not make any warranties or representations regarding the use of the Materials in terms of their completeness, correctness, accuracy, adequacy, usefulness, timeliness, reliability, or otherwise. As a condition of your use of the Materials, you warrant to CommScope that you will not make use thereof for any purpose that is unlawful or prohibited by their associated terms of use.

Limitation of Liability

IN NO EVENT SHALL CommScope, CommScope AFFILIATES, OR THEIR OFFICERS, DIRECTORS, EMPLOYEES, AGENTS, SUPPLIES, LICENSORS, AND THIRD-PARTY PARTNERS, BE LIABLE FOR ANY DIRECT, INDIRECT, SPECIAL, PUNITIVE, INCIDENTAL, EXEMPLARY OR CONSEQUENTIAL DAMAGES, OR ANY DAMAGES WHATSOEVER, EVEN IF CommScope HAS BEEN PREVIOUSLY ADVISED OF THE POSSIBILITY OF SUCH DAMAGES, WHETHER IN AN ACTION UNDER CONTRACT, TORT, OR ANY OTHER THEORY ARISING FROM YOUR ACCESS TO, OR USE OF, THE MATERIALS. Because some jurisdictions do not allow limitations on how long an implied warranty lasts, or the exclusion or limitation of liability for consequential or incidental damages, some of the above limitations may not apply to you.

Trademarks

All trademarks identified by ™ or ® are trademarks or registered trademarks in the US and may be registered in other countries. All product names, trademarks, and registered trademarks are property of their respective owners.

Patent marking notice

For applicable patents, see www.cs-pat.com. That website is intended to give notice under 35 U.S.C. § 287(a) of articles that are patented or for use under the identified patents. That website identifies the patents associated with each of the patented articles.

Table of Contents

Contact Information, Resources, and Conventions

Introducing RUCKUS Unleashed

Overview.	18
Network Overview.	19
Feature Parity with ZoneDirector.	20
Limitations and Deviations from ZoneDirector.	23
RUCKUS Unleashed-Only Features.	23
Supported Access Points.	24
H350.	24
H550.	27
R350.	28
R350e.	30
R550.	32
R650.	34
R750.	36
R670.	38
R770.	40
R850.	42
T350 Family.	44
T350SE.	46

T750.....	49
T750SE.....	51

Setting Up an Unleashed Wi-Fi Network

Overview of the Setup Process.....	55
Step 1: Unpack and Install the Unleashed Master AP.....	56
Step 2: Configure Your Unleashed Network.....	56
Step 2a: Setup Using the Mobile App.....	56
Step 2b: Setup Using a Web Browser.....	59
Step 2c: Setup Using the Command Line Interface.....	70
Step 3: Customize Your Wireless LANs.....	74
Step 4: Deploy Additional Unleashed Member Access Points.....	76

Using the Admin Interface

Unleashed Administration Interface Overview.....	78
Navigating the Dashboard.....	78
Using the Dashboard Components.....	80

Dedicated Master Configuration

Dedicated Master Overview.....	85
Converting an Unleashed Master AP to Dedicated Master.....	85
Joining a Member AP to the Dedicated Master Network.....	87
Joining a Member AP to Dedicated Master Using Option 43 (Recommended).....	88

Placing a Member AP in the Same Network as Dedicated Master.	89
Setting the Dedicated Master IP Address in the Member AP CLI.	89
Dedicated Master AP or Member AP Behind NAT.	90
Checking Dedicated Master Status in the Unleashed Web Interface.	91
Smart Redundancy Configuration.	92
Smart Redundancy Setup Overview.	93
Configuring Dedicated Master for Smart Redundancy.	93
Checking the Standby Dedicated Master.	101
Disabling Smart Redundancy.	102

WLAN Configuration

WLAN Configuration Overview.	105
WLAN Usage Types.	107
Creating a New WLAN.	108
802.1X EAP WLANs.	111
802.1X WLAN Survivability.	112
Guest WLANs.	114
Deploying a Guest WLAN.	115
Configuring Email Server Settings.	122
Configuring SMS Server Settings.	123
Creating a Guest Pass Operator.	125
Configuring Guest Subnet Restrictions.	128

Using the BYOD Onboarding Portal.	129
Working with Guest Passes.	133
Social Media WLANs.	158
Guest Access Walled Garden.	184
Hotspot WLANs.	185
Configuring Global WLAN Settings.	185
Editing an Existing WLAN.	187
Using a QR Code to Join a Wi-Fi Network.	188
Deleting a WLAN.	190
Disabling a WLAN Temporarily.	190

Advanced WLAN Configuration

Advanced WLAN Configuration Overview.	192
Configuring Advanced WLAN Options.	192
Zero-IT and DPSK Settings.	194
Enabling Zero-IT for a WLAN.	196
Enabling DPSK for a WLAN.	196
WLAN Priority Settings.	205
BSS Priority.	206
Access Control Settings.	208
QoS Mirroring.	210
Application Policies.	212

Creating an Application Control Policy.	213
Radio Control Settings.	214
Creating Separate WLANs for 2.4, 5, and 6 GHz Radios.	217
Other Advanced WLAN Settings.	218
Configuring Client Isolation Allowlists.	220
Bypass Apple CNA.	222

Access Point Configuration

Access Points Configuration Overview.	224
Show Mesh Topology.	227
Show Client Info.	228
Show Events and Alarms.	229
Configuring Global AP Settings.	229
Radio (2.4G).	230
Radio (5G).	231
Radio (6G).	232
Other.	237
Monitoring an Individual AP.	240
Show Client Info.	241
Show WLANs Info.	242
Show AP Info.	242
Show Events and Alarms.	245

Client Status and Traffic Graphs.	246
Configuring an Individual AP.	246
Renaming an AP.	250
Working with AP Groups.	251
Viewing AP Group Members.	252
Modifying the System Default AP Group.	253
Creating a New AP Group.	256
Modifying Model-Specific Controls.	259
Configuring AP Ethernet Ports.	261
Restarting an AP.	266
Removing an AP.	267

ICX Switch Management

ICX Switch Management Overview.	268
RUCKUS ICX Release Compatibility Matrix.	269
Preparing an ICX Switch for Unleashed Management.	271
Approving a New Switch to Join Unleashed.	273
Monitoring Connected ICX Switches.	276
Accessing the RUCKUS Switch Home Page.	278
Managing Switch Ports.	279
Audio-Visual Profile Support for an ICX Switch.	281
AV Profile Overview.	284

Creating an AV Profile on an ICX Switch.	288
Fanless Mode Support for an ICX Switch.	290
Enabling Fanless Mode on an ICX Switch.	291
Backing up and Restoring a Switch Configuration.	293
Backing up and Restoring a Switch List.	296
Upgrading ICX Switch Firmware.	299

Working with Clients

Client Management Overview.	302
Viewing the Clients List.	302
Renaming a Client.	306
Deleting a Client.	308
Permanently Blocking a Client Device.	309
Marking a Client as a Favorite.	309
Running a Speed Performance Test on a Wireless Client.	310
iPerf3 Integration in Unleashed.	313
Client Connection Troubleshooting.	314
Marking a Client as a Legacy Device.	316
Adding User Accounts to the Internal User Database.	316
Authenticating Clients Using an External Database.	317

Configuring Admin & Services Settings

Admin & Services Overview.	318
System Settings.	318
System Info Settings.	319
IP Settings.	328
Configuring the System Time.	339
Setting the Country Code.	341
Configuring User Roles.	343
Adding New Users to the Local Database.	345
Changing an Existing User Account.	347
Importing Users into the Local Database using CSV File.	347
Deleting a User Record.	349
Changing User Password.	349
Mesh Networking.	351
Enabling Log Delivery to Remote Syslog Server.	360
Services.	362
AAA Servers.	363
Access Control.	368
Application Recognition and Control.	374
Bonjour Gateway.	380
Dynamic PSK.	384
Guest Access Services.	390

Hotspot Services.	391
Radio Control.	395
WIPS.	405
URL Filtering.	410
Wi-Fi Calling.	415
Tunnel Configuration.	419
Administration Settings.	420
Preferences.	420
Backup and Restore.	422
Upgrade.	425
Diagnostics.	431
Working with SSL Certificates.	441
Testing Network Connectivity.	447
Network Management.	448
Enabling Remote Management.	454
Technical Support.	455

Remote Portal Support

Remote Portal Overview.	457
Registering on the Remote Portal.	457
Configuring Security Settings.	459
Deleting a Registered Account.	461

Logging in Using Social Media Accounts.	463
Logging In Using Your Apple Account.	463
Logging In Using Your Google Account.	466
Logging In Using Your Facebook Account.	468
Recovering Your Social Media Account.	471
Navigating the Remote Portal Dashboard.	473
Structured Administration Account to Manage Networks.	475
Monitoring Your Network.	476
Administrator Settings.	477
Managing Your Network.	478
Viewing the Logs.	481
 Unleashed Access Point Power Supply Considerations	
AP Power Warnings.	483
Power Limitations by PoE Mode and AP Model.	484

Contact Information, Resources, and Conventions

Contacting RUCKUS Customer Services and Support

The Customer Services and Support (CSS) organization is available to provide assistance to customers with active warranties on their RUCKUS products, and to customers and partners with active support contracts.

For product support information and details on contacting the Support Team, go directly to the RUCKUS Support Portal using <https://support.ruckuswireless.com>, or go to <https://www.ruckusnetworks.com> and select **Support**.

What Support Do I Need?

Technical issues are usually described in terms of priority (or severity). To determine if you need to call and open a case or access the self-service resources, use the following criteria:

- Priority 1 (P1)—Critical. Network or service is down and business is impacted. No known workaround. Go to the **Submit a Case** section.
- Priority 2 (P2)—High. Network or service is impacted, but not down. Business impact may be high. Workaround may be available. Go to the **Submit a Case** section.
- Priority 3 (P3)—Medium. Network or service is moderately impacted, but most business remains functional. Click the **CONTACT** tab at the top of the page and explore the **Self-Service Online Help** options.
- Priority 4 (P4)—Low. Requests for information, product documentation, or product enhancements. Click the **CONTACT** tab at the top of the page and explore the **Self-Service Online Help** options.

Open a Case

When your entire network is down (P1), or severely impacted (P2), call the appropriate telephone number listed below to get help:

- Continental United States: 1-855-782-5871
- Canada: 1-855-782-5871
- Europe, Middle East, Africa, Central and South America, and Asia Pacific, toll-free numbers are available at <https://support.ruckuswireless.com/contact-us> and Live Chat is also available.
- Worldwide toll number for our support organization. Phone charges will apply: +1-650-265-0903

We suggest that you keep a physical note of the appropriate support number in case you have an entire network outage.

Self-Service Resources

The RUCKUS Support Portal at <https://support.ruckuswireless.com> offers a number of tools to help you to research and resolve problems with your RUCKUS products, including:

- Technical Documentation—<https://support.ruckuswireless.com/documents>
- Community Forums—<https://community.ruckuswireless.com>
- Knowledge Base Articles—<https://support.ruckuswireless.com/answers>
- Software Downloads and Release Notes—https://support.ruckuswireless.com/#products_grid
- Security Bulletins—<https://support.ruckuswireless.com/security>

Using these resources will help you to resolve some issues, and will provide the Technical Assistance Center (TAC) with additional data from your troubleshooting analysis if you still require assistance through a support case or Return Merchandise Authorization (RMA). If you still require help, open and manage your case at https://support.ruckuswireless.com/case_management.

Document Feedback

RUCKUS is interested in improving its documentation and welcomes your comments and suggestions.

You can email your comments to RUCKUS at #Ruckus-Docs@commscope.com.

When contacting us, include the following information:

- Document title and release number
- Document part number (on the cover page)
- Page number (if appropriate)

For example:

- RUCKUS SmartZone Upgrade Guide, Release 5.0
- Part number: 800-71850-001 Rev A
- Page 7

RUCKUS Product Documentation Resources

Visit the RUCKUS website to locate related documentation for your product and additional RUCKUS resources.

Release Notes and other user documentation are available at <https://support.ruckuswireless.com/documents>. You can locate the documentation by product or perform a text search. Access to Release Notes requires an active support contract and a RUCKUS Support Portal user account. Other technical documentation content is available without logging in to the RUCKUS Support Portal.

White papers, data sheets, and other product documentation are available at <https://www.ruckusnetworks.com>.

Online Training Resources

To access a variety of online RUCKUS training modules, including free introductory courses to wireless networking essentials, site surveys, and products, visit the RUCKUS Training Portal at <https://commscopeuniversity.myabsorb.com/>. The registration is a two-step process described in this [video](#). Create a CommScope account and then register for, and request access for, CommScope University.

Document Conventions

The following table lists the text conventions that are used throughout this guide.

Table 1. Text Conventions

Convention	Description	Example
monospace	Identifies command syntax examples	device(config)# interface ethernet 1/1/6
bold	User interface (UI) components such as screen or page names, keyboard keys, software buttons, and field names	On the Start menu, click All Programs .
<i>italics</i>	Publication titles	Refer to the <i>RUCKUS Small Cell Release Notes</i> for more information.

Notes, Cautions, and Safety Warnings

Notes, cautions, and warning statements may be used in this document. They are listed in the order of increasing severity of potential hazards.

 **Note:** A NOTE provides a tip, guidance, or advice, emphasizes important information, or provides a reference to related information.

 **Attention:** An ATTENTION statement indicates some information that you must read before continuing with the current action or task.

 **CAUTION:** A CAUTION statement alerts you to situations that can be potentially hazardous to you or cause damage to hardware, firmware, software, or data.

 **DANGER:** A DANGER statement indicates conditions or situations that can be potentially lethal or extremely hazardous to you. Safety labels are also attached directly to products to warn of these conditions or situations.

Command Syntax Conventions

Bold and italic text identify command syntax components. Delimiters and operators define groupings of parameters and their logical relationships.

Convention	Description
bold text	Identifies command names, keywords, and command options.
<i>italic text</i>	Identifies a variable.
[]	Syntax components displayed within square brackets are optional. Default responses to system prompts are enclosed in square brackets.
{x y z}	A choice of required parameters is enclosed in curly brackets separated by vertical bars. You must select one of the options.
x y	A vertical bar separates mutually exclusive elements.
< >	Nonprinting characters, for example, passwords, are enclosed in angle brackets.
...	Repeat the previous element, for example, member[member...].

Convention	Description
\	Indicates a “soft” line break in command examples. If a backslash separates two lines of a command input, enter the entire command at the prompt without the backslash.

Introducing RUCKUS Unleashed

Overview

Network Overview

Feature Parity with ZoneDirector

Limitations and Deviations from ZoneDirector

RUCKUS Unleashed-Only Features

Supported Access Points

Overview

RUCKUS Unleashed is custom designed to help small business owners grow their businesses, deliver an excellent customer experience and manage costs while supporting enterprise-class Wi-Fi and highly customizable control of mobile devices with minimal IT staff.

RUCKUS Unleashed provides a controllerless option for small to medium-sized Wi-Fi deployments where up to 128 access points can be deployed in a self-healing, redundant wireless network with no controller required, while still providing many of the enterprise-class features that traditionally required a RUCKUS WLAN controller (for example, ZoneDirector or SmartZone controller). Beginning with Unleashed 200.13, Dedicated Master is introduced as a replacement for ZoneDirector 1200, which provides controller functionalities such as Smart Redundancy, tunnel WLAN, cross-network segment networking, and so on.

RUCKUS Unleashed access points (APs) have built-in controller capabilities including user access controls, guest networking features, advanced Wi-Fi security and traffic management. As businesses grow to multiple sites or larger scale deployments, RUCKUS offers an easy migration path to cloud-based or controller-based Wi-Fi, using the same RUCKUS access points.

RUCKUS Unleashed provides small to medium-sized business environments with superior performance, lower costs, and simplified management. Separate controller support contracts and access point licenses are not needed, significantly reducing upfront and recurring costs, and the simplified web interface also makes deploying RUCKUS Unleashed easy.

The RUCKUS Unleashed platform offers many of the features that previously required a controller, and without having to sacrifice many features that previously required a controller, such as Zero-IT, Dynamic PSK (DPSK), Smart Mesh, ChannelFly, Application Recognition and Control (ARC), Bonjour Gateway, Bonjour Fencing, and one-step firmware upgrades of the entire network from a single interface.

Parent topic: [Introducing RUCKUS Unleashed](#)

Network Overview

A RUCKUS Unleashed network consists of a RUCKUS Unleashed "Master AP" and a number of RUCKUS Unleashed member APs (up to 128 total).


- Note:** Beginning with release 200.8, the maximum capacity limit has been increased from 50 APs and 1,024 clients to 128 APs and 2,048 clients per RUCKUS Unleashed network in bridge mode (gateway mode supports up to 25 APs and 512 clients).

In addition to serving Wi-Fi clients like a standard AP, the Master AP also performs the same functions as a controller; all control functions are performed through the Master AP and pushed to the other APs on the network.

A RUCKUS Unleashed member AP joins a Master AP in the same subnet automatically. RUCKUS Unleashed member APs do not attempt to join a ZoneDirector or SmartZone controller on the network. If the Master AP is offline, one of the member APs assumes the role of RUCKUS Unleashed Master and takes over control of the RUCKUS Unleashed network.

The following figure illustrates the basic components of a RUCKUS Unleashed network.

Figure 1. Basic Unleashed Network Topology

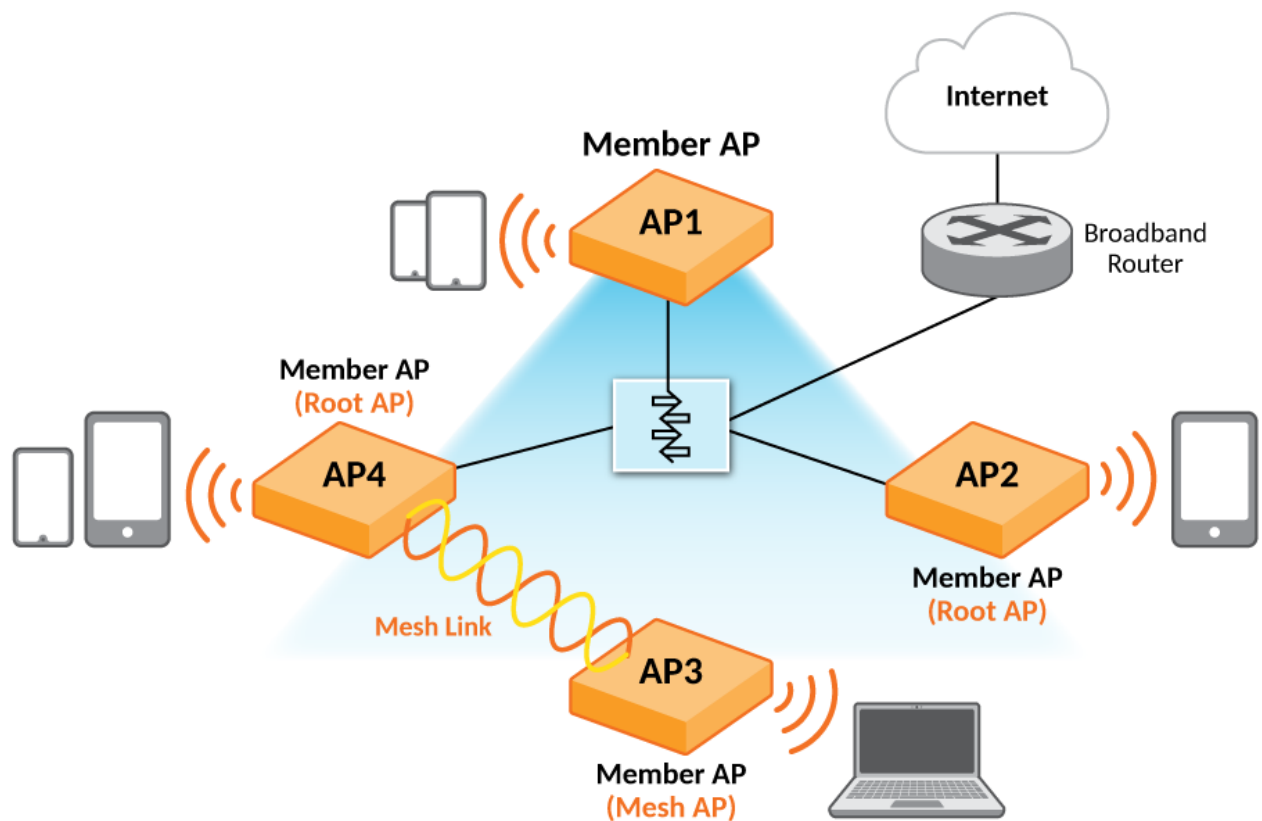


Unleashed Dedicated Master Network Overview

A RUCKUS Unleashed Dedicated Master network consists of two Dedicated Master APs (R750, R770, or R850) and a number of Unleashed member APs (up to 150 total).

When Unleashed is switched to Dedicated Master mode, a maximum capacity limit of 4,000 clients is supported. The maximum DPSK number and Guest key is increased from 2,048 through 4,000. The maximum station cache number that is used for recording a client's fingerprinting data is enhanced from 4,096 through 8,000.

The following figure illustrates the basic components of an Unleashed Dedicated Master network.

Figure 2. Basic Unleashed Dedicated Master Network Topology

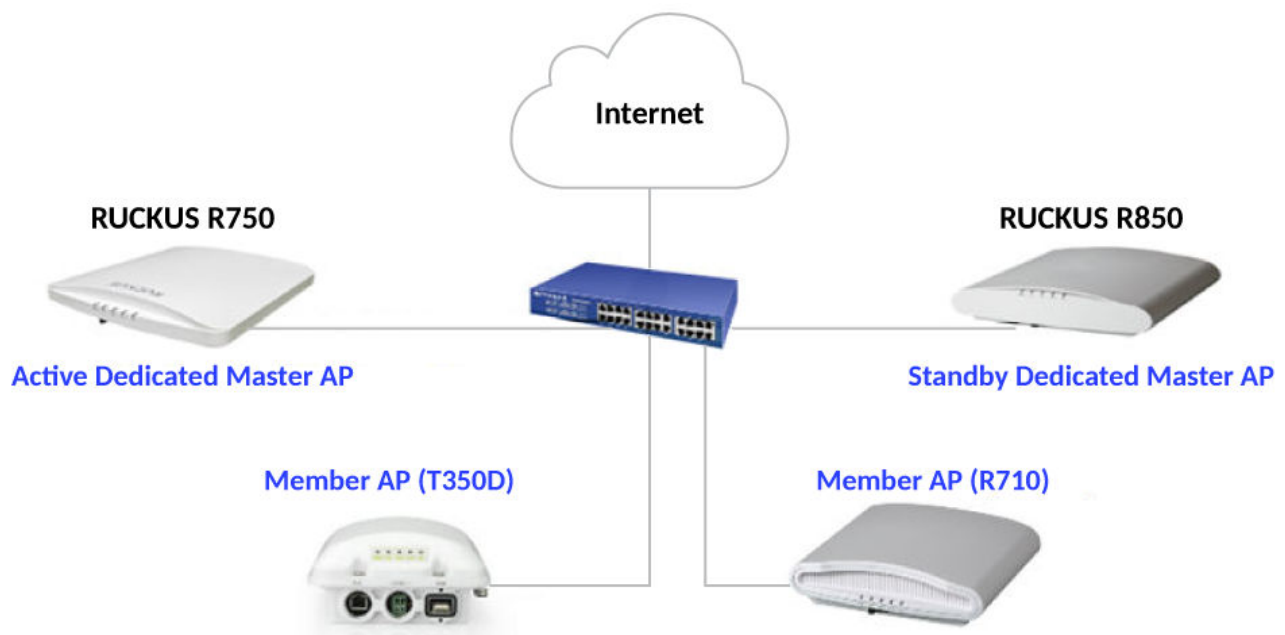

To configure a Dedicated Master AP, refer to [Dedicated Master Configuration](#).

Parent topic: [Introducing RUCKUS Unleashed](#)

Feature Parity with ZoneDirector

The RUCKUS Unleashed platform provides many of the same features that are currently available using a ZoneDirector wireless LAN controller:

- Smart Mesh
- One-step firmware upgrades of the entire network from a single interface
- Layer 2 roaming
- Layer 3 discovery support

- Zero-IT support for automatic client Wi-Fi configuration
- Dynamic Pre-Shared Keys (DPSK)
- Guest WLANs
- WLAN types:
 - Captive Portal (Web Auth)
 - Hotspot (WISPr)
 - Guest Access (Guest Pass)
 - Social Media (Facebook, LinkedIn, Microsoft, Google)
- 802.1X EAP authentication using an external AAA server (RADIUS)
- Bonjour Gateway
- WLAN encryption and authentication options:
 - Open + None
 - Open + None + MAC Auth
 - Open + None + Web Auth
 - Open + WPA2 + AES + PSK
 - Open + WPA2 + AES + DPSK
 - 802.1X + WPA2 + AES + AAA
 - 802.1X + WPA3 + SAE + AAA
 - Open + WPA3 + SAE
 - Open + WPA2/WPA3-Mixed + SAE + AES
 - Open + OWE
- Radio Frequency (RF) management features:
 - BeamFlex

- ChannelFly
- Background Scanning
- Automatic Channel Selection based on ChannelFly or Background Scanning
- SpeedFlex
- Rogue AP detection
- Client management features:
 - Access Control Lists
 - Application Recognition and Control (ARC)
 - HTTP/HTTPs Redirect
 - Up to 1,024 local users supported (on the internal database)
 - Up to 1,024 client devices supported (depending on encryption and authentication method)
 - Self-Service Guest Pass
 - Client Load Balancing
 - Band Steering
 - Client Isolation
 - Client Fingerprinting
 - Device Access Policies
- DHCP server (configured manually from Network Master AP)
- SNMP Management
- Syslog Delivery to External Syslog Server
- Management IP Interface
- Multi-Language support
- WLAN Prioritization

- Dynamic VLANs
- Enable or Disable WLANs on a per-radio basis
- AP Groups
- Tunnel configuration support for Dedicated Master
- Smart Redundancy ability
- AP VLAN support

Parent topic: [Introducing RUCKUS Unleashed](#)

Limitations and Deviations from ZoneDirector

While many ZoneDirector features are included, RUCKUS Unleashed does not provide the entire ZoneDirector feature set.

The following features are either not supported, supported but with limitations, or are currently unsupported but planned for a future release:

- IPv6 is not supported.
- No interface to communicate with SmartCell Insight analytics engine or SPoT location services.
- No Northbound Interface to pass client authentication responsibility to an external entity.
- No WLAN groups.

Parent topic: [Introducing RUCKUS Unleashed](#)

RUCKUS Unleashed-Only Features

The following features are unique to the RUCKUS Unleashed platform and do not correspond to any existing ZoneDirector or other RUCKUS controller features:

- The RUCKUS Unleashed platform does not require an external controller - all controller functions are performed through a single "Master AP" web interface. The Master AP serves the same functions as a ZoneDirector controller would perform on the network; that is, all control functions are performed through the controller and pushed to the other APs on the network.
- A Member AP automatically takes over all AP control functions if the Master AP is offline.

- **Preferred Master:** Administrators can configure an AP to serve as the "preferred" Master AP. If the preferred Master is offline, another member AP will become the Master. When the preferred Master comes back online, it will resume the RUCKUS Unleashed Master role.
 - **Dedicated Master:** You can enable Dedicated Master mode only when the Master AP is an R750 AP, R770 AP, or R850 AP. Specify one Dedicated Master AP as the primary and the other Dedicated Master AP as the secondary to act as the active and standby Dedicated Masters.
 - The user interface provides simplified and more intuitive controls for some controller functions, and hides or removes some of the less-used options for easier navigation and configuration.
 - **Gateway Mode:** The Master AP can be configured as a gateway router, performing all NAT and DHCP functions as well as serving as the RUCKUS Unleashed network controller and serving wireless clients.
- 🔗 **Note:** When gateway mode is enabled, RUCKUS Unleashed supports a maximum 25 APs and 512 concurrent clients due to the additional resource demands placed on the Master AP when in gateway mode.
- **ICX Switch Management:** RUCKUS Unleashed provides a user interface for monitoring and managing RUCKUS ICX switches and ICX switch stacks.

Parent topic: [Introducing RUCKUS Unleashed](#)

Supported Access Points

The following RUCKUS access points are supported by RUCKUS Unleashed:


Parent topic: [Introducing RUCKUS Unleashed](#)

H350

The H350 is a Wi-Fi 6 (802.11ax) Wi-Fi access point with integrated switch in a wall-plate form factor.

This section describes the physical features of the RUCKUS Unleashed H350 802.11ax Access Point.

Figure 1. H350 Access Point

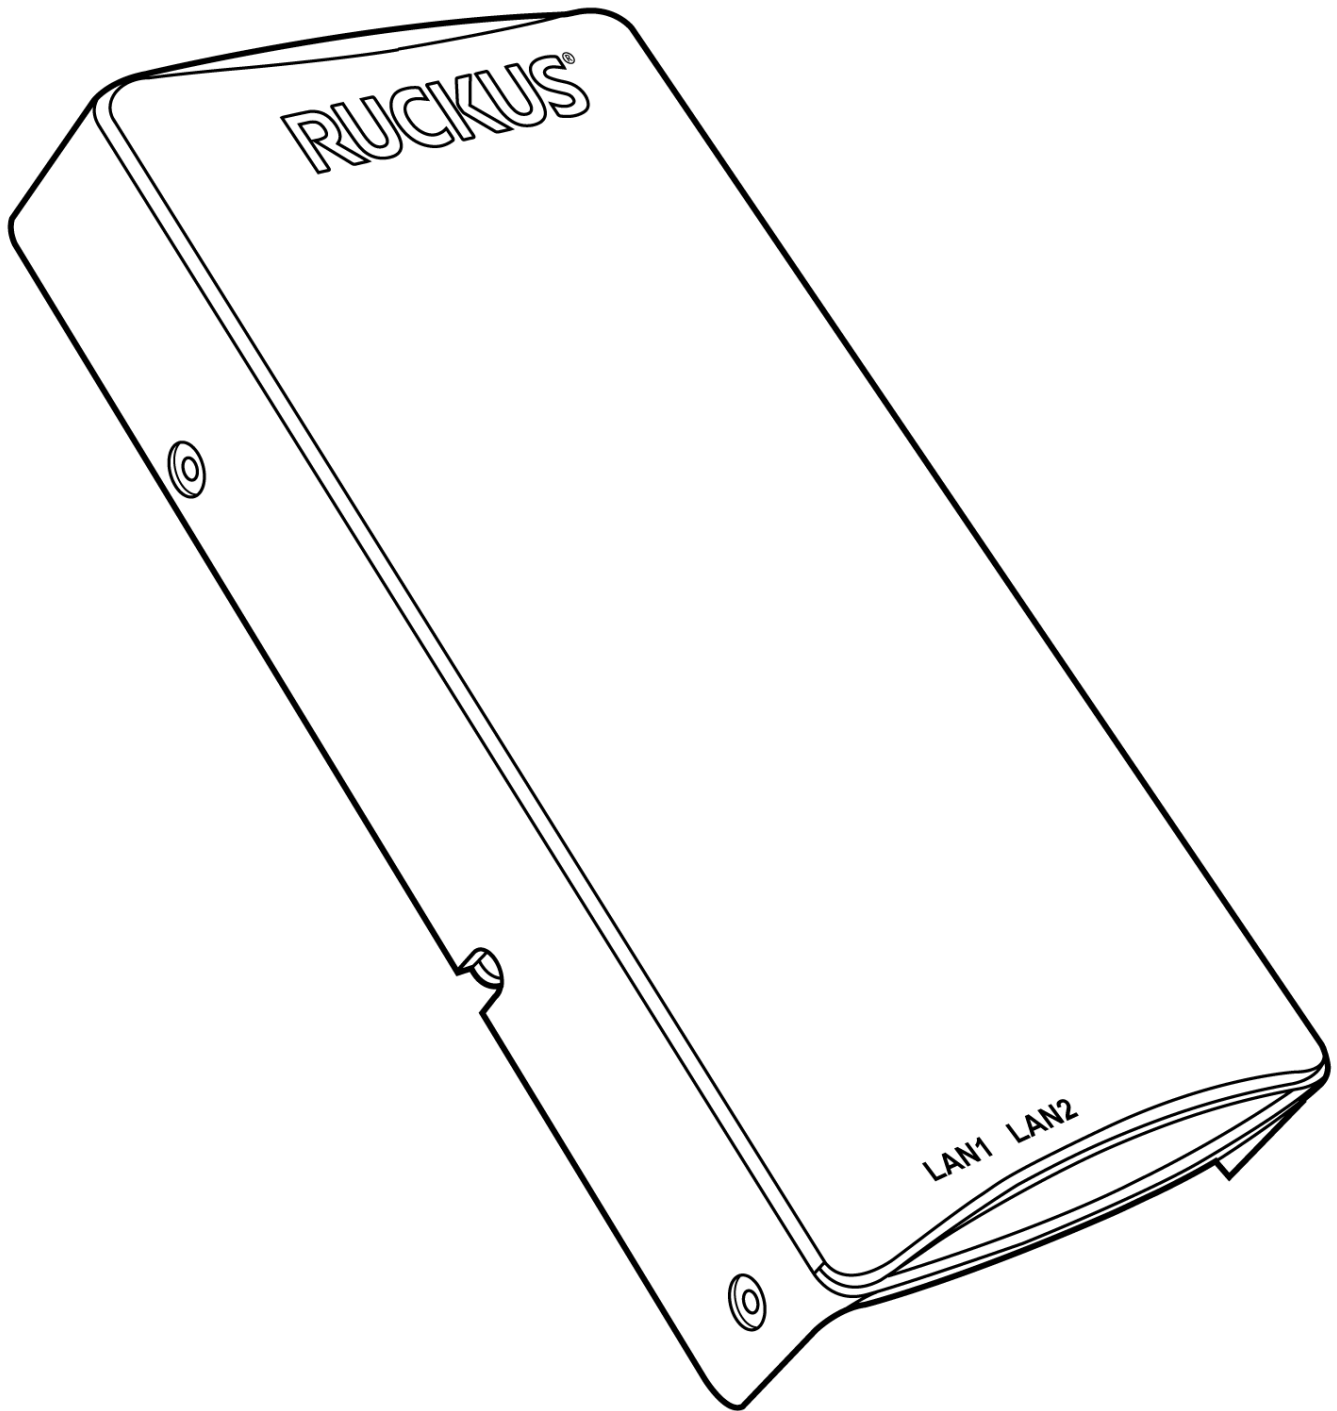

Rear Panel

The H350 AP features five LEDs on its rear panel. (LEDs are concealed when mounted.)

Table 1. Front Panel LEDs

LED	Status	Description
PWR	Off	No power connected.
	Solid Red	Boot up in process.
	Flashing Green	System started, no routable IP address detected.
	Solid Green	Routable IP address received.
CTL	Off	Unleashed Member AP.
	Flashing Green (slow, every 2 seconds)	Network problem. Cannot contact Unleashed Master.
	Flashing Green (fast, 2x per second)	Receiving configuration or image upgrade.
	Solid Green	Unleashed Master AP.
AIR	Off	No upstream mesh connection (Root AP).
	Solid Green	Upstream mesh connection established (Mesh AP).
	Solid Red	Upstream mesh connection issue.
2.4G	Off	Radio is down.
	Solid Amber	Radio is up, no clients are connected to the 2.4 GHz radio.
	Solid Green	Radio is up, at least one client is connected to the 2.4 GHz radio.
5G	Off	Radio is down.
	Solid Amber	Radio is up, no clients are connected to the 5 GHz radio.
	Solid Green	Radio is up, at least one client is connected to the 5 GHz radio.
	Flashing Green	Radio is up, at least one downstream Mesh AP is connected to the 5G radio.


Parent topic: [Supported Access Points](#)

H550

The H550 is an 802.11ax Wave 2 dual-band concurrent Wi-Fi Wall Switch with integrated 5-port gigabit Ethernet, in a form factor designed for mounting to electrical outlet boxes.

This section describes the physical features of the RUCKUS Unleashed H550 802.11ax Access Point.

Figure 1. H550 Access Point

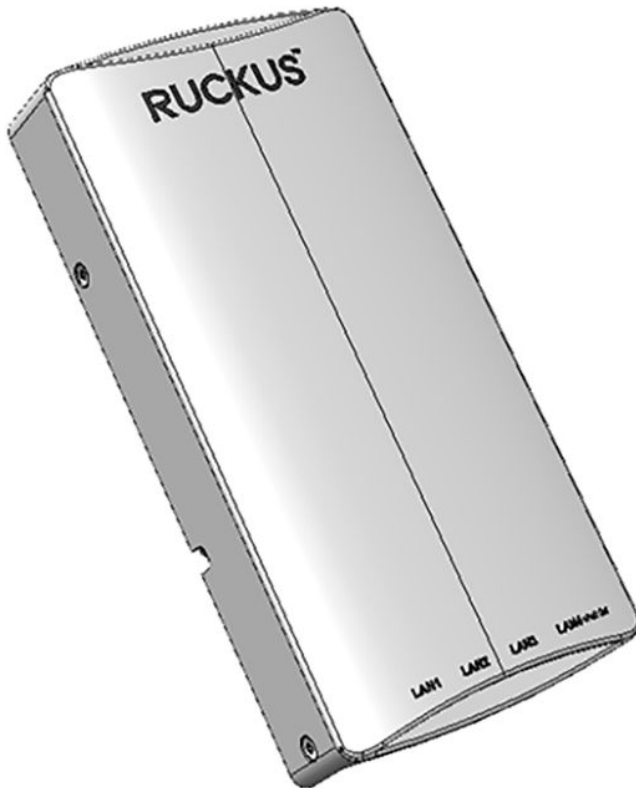

Rear Panel

The H550 AP features five LEDs on its rear panel. (LEDs are concealed when mounted.)

Table 1. Front Panel LEDs

LED	Status	Description
PWR	Off	No power connected.
	Solid Red	Boot up in process.
	Flashing Green	System started, no routable IP address detected.
	Solid Green	Routable IP address received.

LED	Status	Description
CTL	Off	Unleashed Member AP.
	Flashing Green (slow, every 2 seconds)	Network problem. Cannot contact Unleashed Master.
	Flashing Green (fast, 2x per second)	Receiving configuration or image upgrade.
	Solid Green	Unleashed Master AP.
AIR	Off	No upstream mesh connection (Root AP).
	Solid Green	Upstream mesh connection established (Mesh AP).
	Solid Red	Upstream mesh connection issue.
2.4G	Off	Radio is down.
	Solid Amber	Radio is up, no clients are connected to the 2.4 GHz radio.
	Solid Green	Radio is up, at least one client is connected to the 2.4 GHz radio.
5G	Off	Radio is down.
	Solid Amber	Radio is up, no clients are connected to the 5 GHz radio.
	Solid Green	Radio is up, at least one client is connected to the 5 GHz radio.
	Flashing Green	Radio is up, at least one downstream Mesh AP is connected to the 5G radio.


Parent topic: [Supported Access Points](#)

R350

The Unleashed R350 is a dual-band concurrent 2x2:2 802.11ax Wave 2 Access Point that delivers high-performance wireless networking at a competitive price point in a compact form factor.

This section describes the physical features of the RUCKUS Unleashed R350 802.11ax Access Point.

Figure 1. R350 Access Point

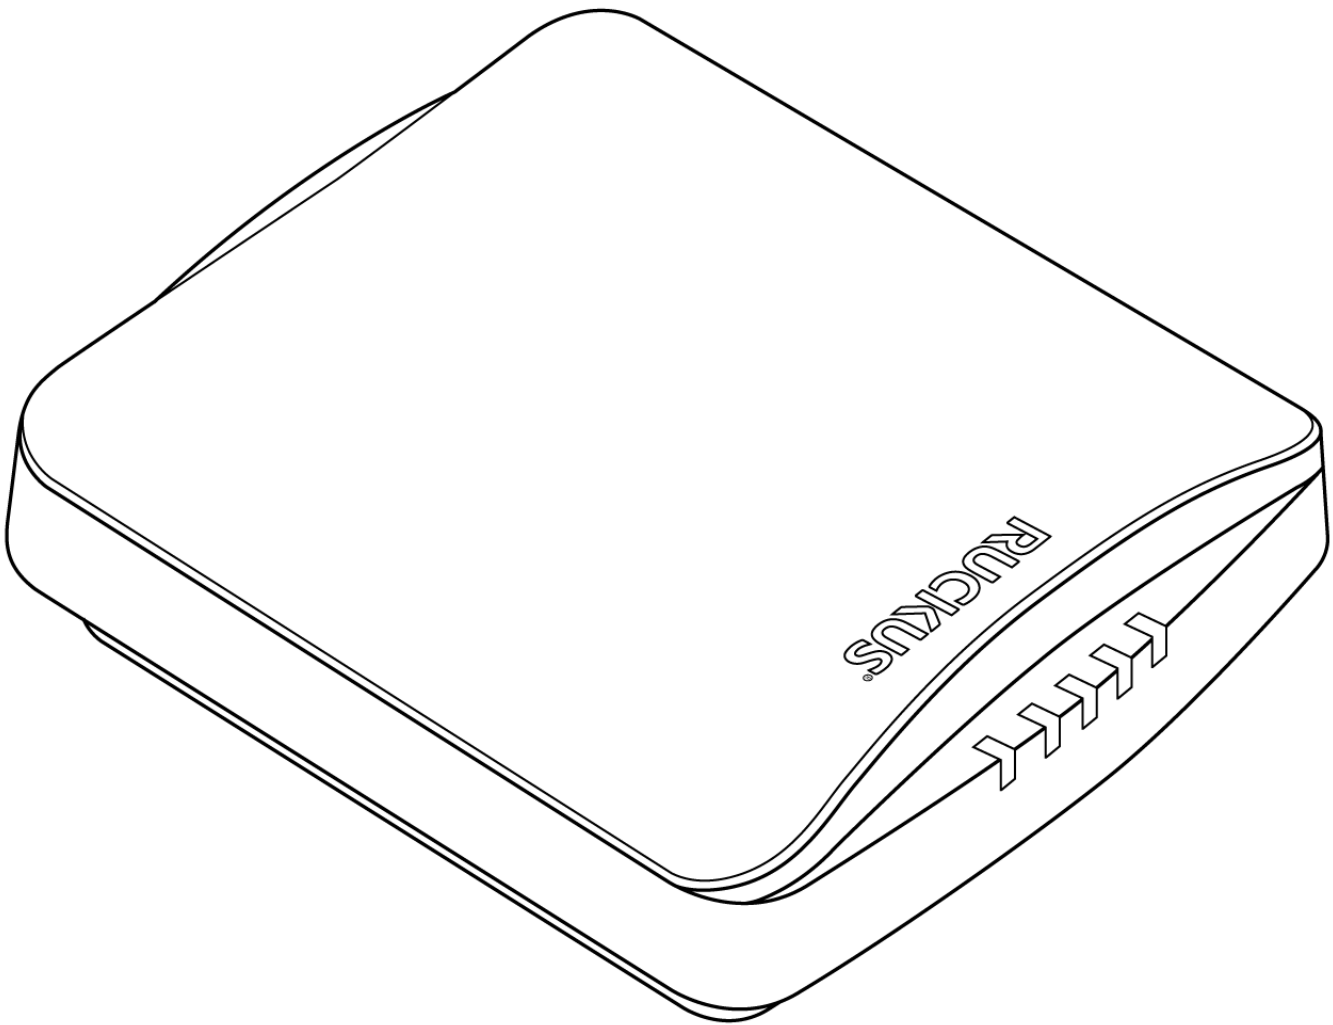

Front Panel

The R350 AP features five LEDs on its front panel.

Table 1. Front Panel LEDs

LED	Status	Description
PWR	Off	No power connected.
	Solid Red	Boot up in process.
	Flashing Green	System started, no routable IP address detected.
	Solid Green	Routable IP address received.
CTL	Off	Unleashed Member AP.

LED	Status	Description
	Flashing Green (slow, every 2 seconds)	Network problem. Cannot contact Unleashed Master.
	Flashing Green (fast, 2x per second)	Receiving configuration or image upgrade.
	Solid Green	Unleashed Master AP.
AIR	Off	No upstream mesh connection (Root AP).
	Solid Green	Upstream mesh connection established (Mesh AP).
	Solid Red	Upstream mesh connection issue.
2.4G	Off	Radio is down.
	Solid Amber	Radio is up, no clients are connected to the 2.4 GHz radio.
	Solid Green	Radio is up, at least one client is connected to the 2.4 GHz radio.
5G	Off	Radio is down.
	Solid Amber	Radio is up, no clients are connected to the 5 GHz radio.
	Solid Green	Radio is up, at least one client is connected to the 5 GHz radio.
	Flashing Green	Radio is up, at least one downstream Mesh AP is connected to the 5G radio.


Parent topic: [Supported Access Points](#)

R350e

The Unleashed R350e is a dual-band concurrent 2x2:2 802.11ax Wave 2 Access Point that delivers high-performance wireless networking at a competitive price point in a compact form factor.

This section describes the physical features of the RUCKUS Unleashed R350e 802.11ax Access Point.

Figure 1. R350e Access Point

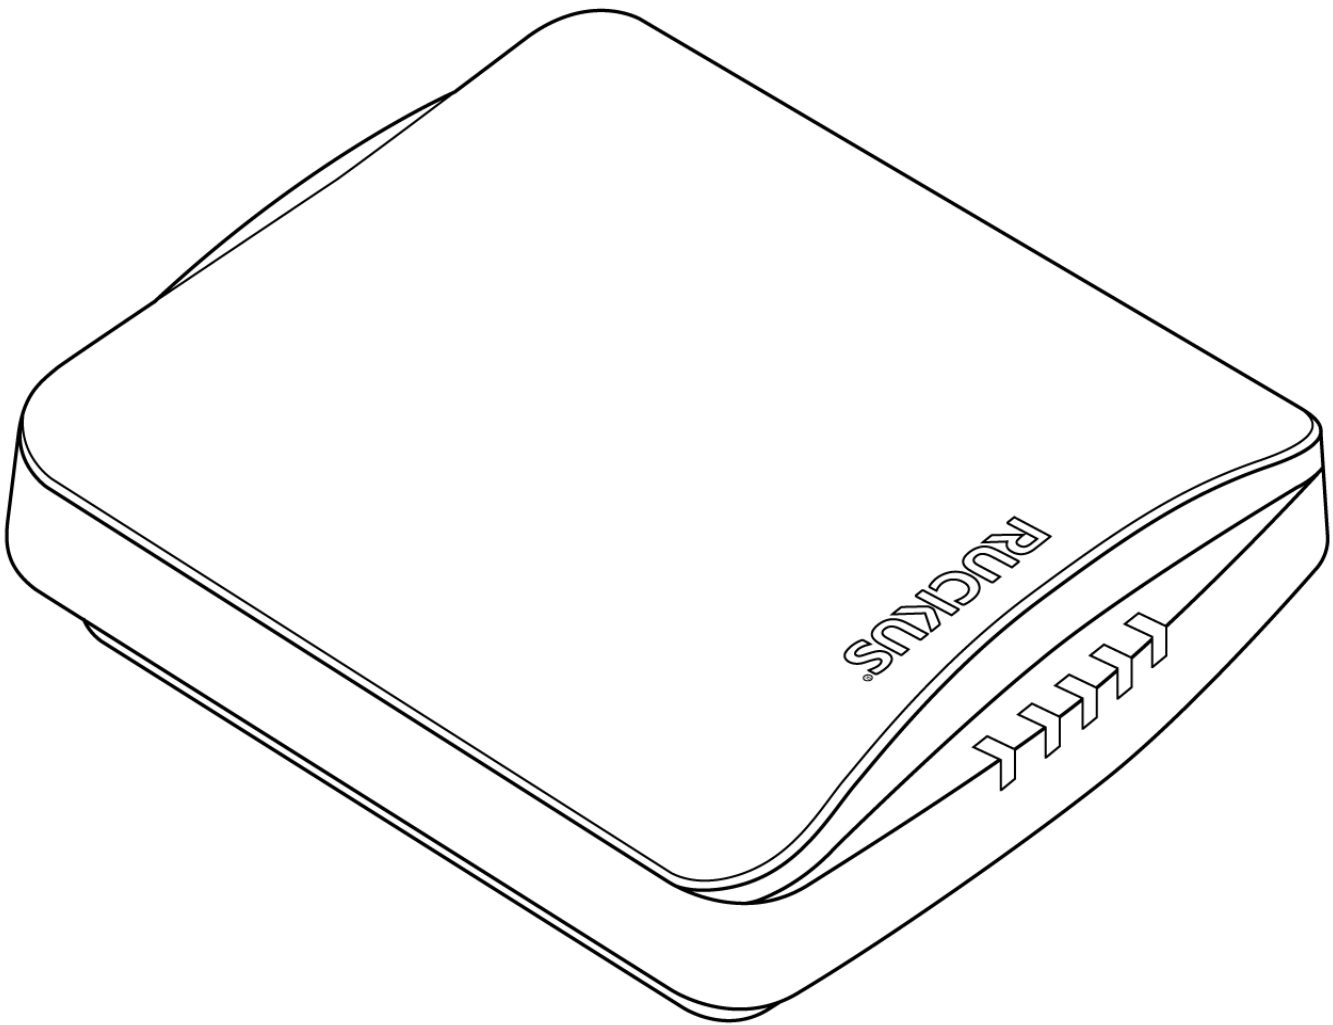

Front Panel

The R350e AP features five LEDs on its front panel.

Table 1. Front Panel LEDs

LED	Status	Description
PWR	Off	No power connected.
	Solid Red	Boot up in process.
	Flashing Green	System started, no routable IP address detected.
	Solid Green	Routable IP address received.
CTL	Off	Unleashed Member AP.

LED	Status	Description
	Flashing Green (slow, every 2 seconds)	Network problem. Cannot contact Unleashed Master.
	Flashing Green (fast, 2x per second)	Receiving configuration or image upgrade.
	Solid Green	Unleashed Master AP.
AIR	Off	No upstream mesh connection (Root AP).
	Solid Green	Upstream mesh connection established (Mesh AP).
	Solid Red	Upstream mesh connection issue.
2.4G	Off	Radio is down.
	Solid Amber	Radio is up, no clients are connected to the 2.4 GHz radio.
	Solid Green	Radio is up, at least one client is connected to the 2.4 GHz radio.
5G	Off	Radio is down.
	Solid Amber	Radio is up, no clients are connected to the 5 GHz radio.
	Solid Green	Radio is up, at least one client is connected to the 5 GHz radio.
	Flashing Green	Radio is up, at least one downstream Mesh AP is connected to the 5G radio.


Parent topic: [Supported Access Points](#)

R550

The RUCKUS R550 is a mid-range indoor 2x2:2 Wi-Fi 6 (802.11ax) dual-band access point with integrated 2-port Ethernet interface. The R550 is targeted for medium-density, small to mid-size indoor enterprise WLAN applications in the enterprise, education, hospitality, carrier, healthcare and retail industries.

This section describes the physical features of the RUCKUS Unleashed R550 AP.

Figure 1. Unleashed R550 Access Point

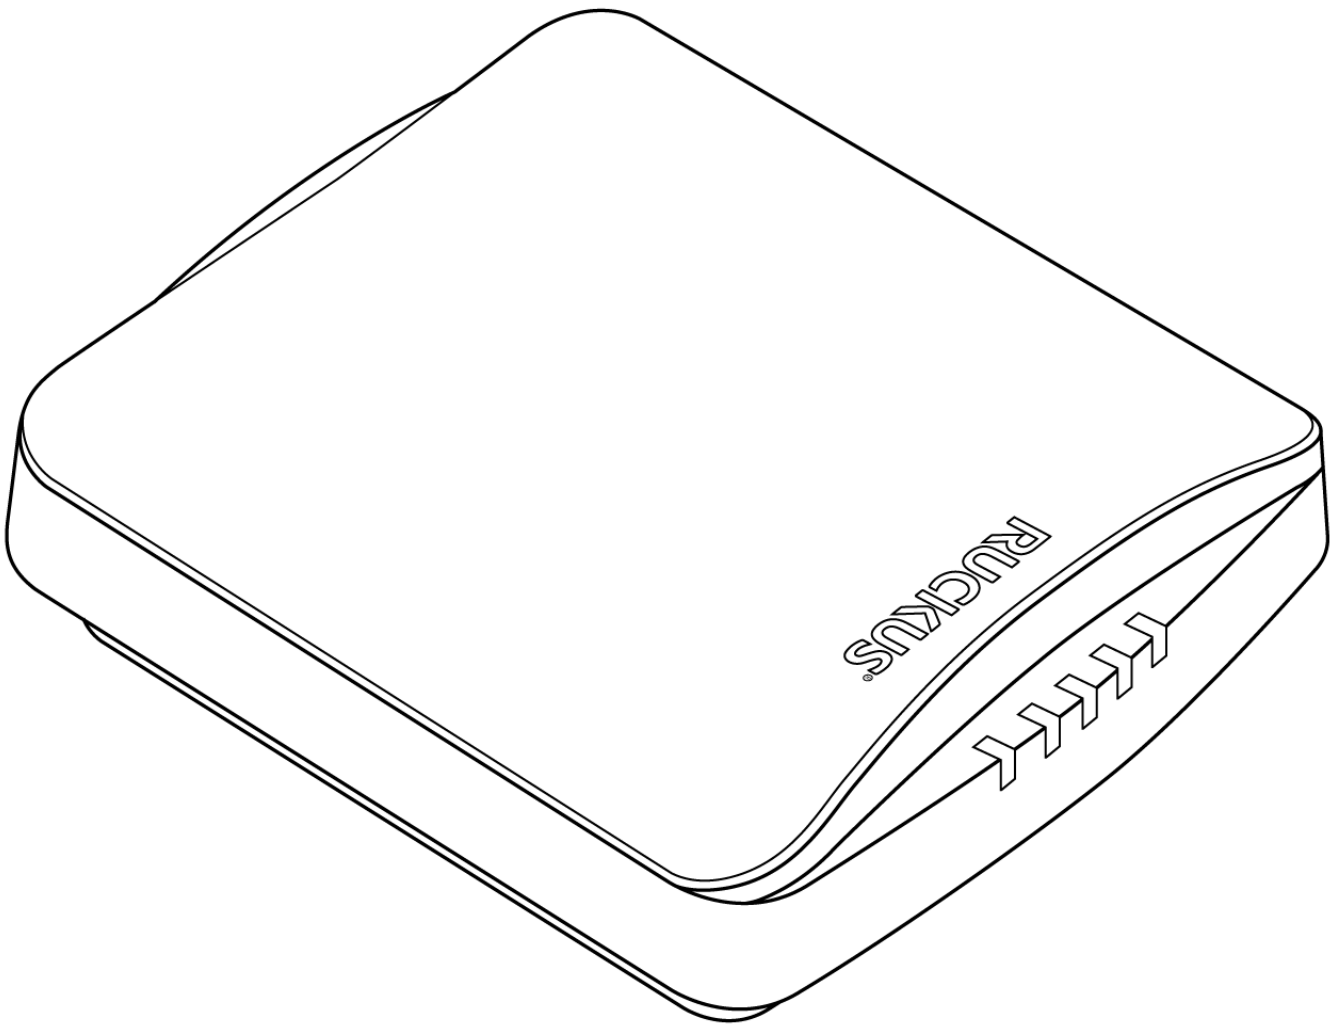

Front Panel

The R550 AP features five LEDs on its front panel.

Table 1. Front Panel LEDs

LED	Status	Description
PWR	Off	No power connected.
	Solid Red	Boot up in process.
	Flashing Green	System started, no routable IP address detected.
	Solid Green	Routable IP address received.
CTL	Off	Unleashed Member AP.

LED	Status	Description
	Flashing Green (slow, every 2 seconds)	Network problem. Cannot contact Unleashed Master.
	Flashing Green (fast, 2x per second)	Receiving configuration or image upgrade.
	Solid Green	Unleashed Master AP.
AIR	Off	No upstream mesh connection (Root AP).
	Solid Green	Upstream mesh connection established (Mesh AP).
	Solid Red	Upstream mesh connection issue.
2.4G	Off	Radio is down.
	Solid Amber	Radio is up, no clients are connected to the 2.4 GHz radio.
	Solid Green	Radio is up, at least one client is connected to the 2.4 GHz radio.
5G	Off	Radio is down.
	Solid Amber	Radio is up, no clients are connected to the 5 GHz radio.
	Solid Green	Radio is up, at least one client is connected to the 5 GHz radio.
	Flashing Green	Radio is up, at least one downstream Mesh AP is connected to the 5G radio.

Parent topic: [Supported Access Points](#)

R650

The RUCKUS R650 is a mid-range "Wi-Fi 6" (802.11ax) dual-band indoor 4x4: 4 AP with BeamFlex+, one 2.5 Gbps PoE+ port, and one 1 Gbps Ethernet port.

This section describes the physical features of the RUCKUS Unleashed R650 AP.

Figure 1. Unleashed R650 Access Point



Front Panel

The R650 AP features five LEDs on its front panel.

Table 1. Front Panel LEDs

LED	Status	Description
PWR	Off	No power connected.
	Solid Red	Boot up in process.
	Flashing Green	System started, no routable IP address detected.
	Solid Green	Routable IP address received.
CTL	Off	Unleashed Member AP.
	Flashing Green (slow, every 2 seconds)	Network problem. Cannot contact Unleashed Master.
	Flashing Green (fast, 2x per second)	Receiving configuration or image upgrade.
	Solid Green	Unleashed Master AP.
AIR	Off	No upstream mesh connection (Root AP).
	Solid Green	Upstream mesh connection established (Mesh AP).

LED	Status	Description
2.4G	Solid Red	Upstream mesh connection issue.
	Off	Radio is down.
	Solid Amber	Radio is up, no clients are connected to the 2.4 GHz radio.
	Solid Green	Radio is up, at least one client is connected to the 2.4 GHz radio.
5G	Off	Radio is down.
	Solid Amber	Radio is up, no clients are connected to the 5 GHz radio.
	Solid Green	Radio is up, at least one client is connected to the 5 GHz radio.
	Flashing Green	Radio is up, at least one downstream Mesh AP is connected to the 5G radio.

Parent topic: [Supported Access Points](#)

R750


The Unleashed R750 is a dual-band concurrent "Wi-Fi 6" (802.11ax) AP that supports 8 spatial streams (4x4:4 in 5GHz, 4x4:4 in 2.4GHz).

The Unleashed R750 provides advanced 11ax features such as OFDMA, MU-MIMO, 11ax power save, and WPA3. It includes a USB port and a 2.5 GbE port that supports 802.3af, 802.3at and 802.3bt (40W) PoE, and one 1 GbE port (non-PoE).

 **Note:** Dedicated Master mode is supported if an R750 AP is the Master AP in the Unleashed network.

This section describes the physical features of the RUCKUS Unleashed R750 AP.

Figure 1. Unleashed R750 Access Point

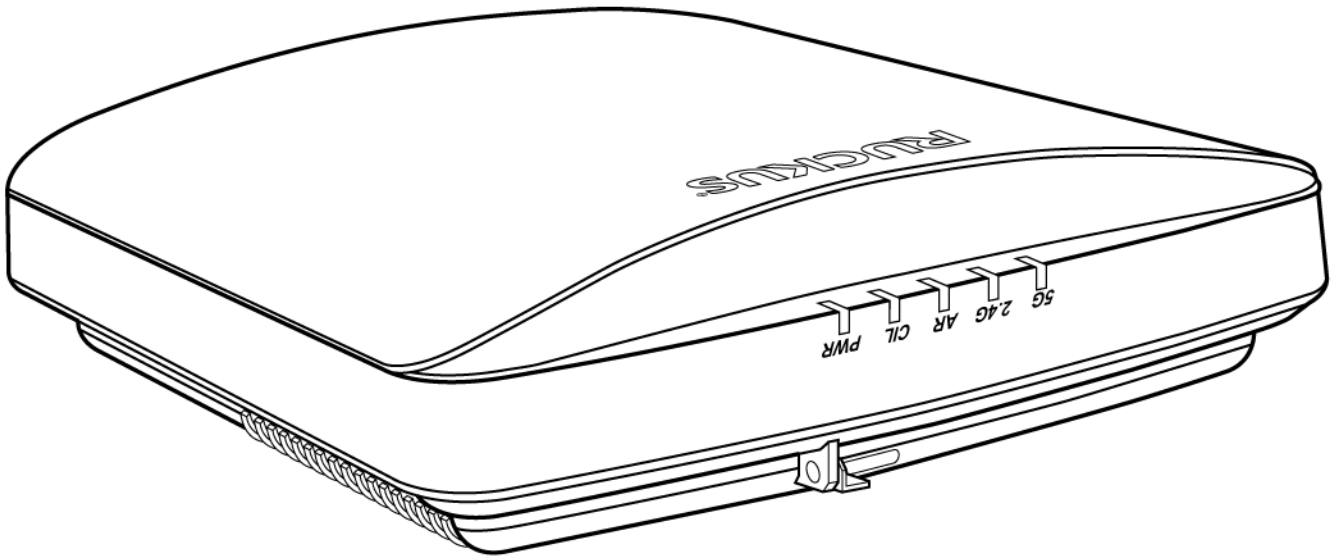

Front Panel

The R750 AP features five LEDs on its front panel.

Table 1. Front Panel LEDs

LED	Status	Description
PWR	Off	No power connected.
	Solid Red	Boot up in process.
	Flashing Green	System started, no routable IP address detected.
	Solid Green	Routable IP address received.
CTL	Off	Unleashed Member AP.
	Flashing Green (slow, every 2 seconds)	Network problem. Cannot contact Unleashed Master.
	Flashing Green (fast, 2x per second)	Receiving configuration or image upgrade.
	Solid Green	Unleashed Master AP.
AIR	Off	No upstream mesh connection (Root AP).
	Solid Green	Upstream mesh connection established (Mesh AP).
	Solid Red	Upstream mesh connection issue.

LED	Status	Description
2.4G	Off	Radio is down.
	Solid Amber	Radio is up, no clients are connected to the 2.4 GHz radio.
	Solid Green	Radio is up, at least one client is connected to the 2.4 GHz radio.
5G	Off	Radio is down.
	Solid Amber	Radio is up, no clients are connected to the 5 GHz radio.
	Solid Green	Radio is up, at least one client is connected to the 5 GHz radio.
	Flashing Green	Radio is up, at least one downstream Mesh AP is connected to the 5G radio.

Parent topic: [Supported Access Points](#)

R670

The RUCKUS Unleashed R670 is a tri-band concurrent Wi-Fi 7 (IEEE 802.11be) indoor AP that supports six spatial data streams (2x2:2 in 2.4GHz, 5GHz, and 6GHz [tri-band mode] or 2x2:2 in 2.4GHz and 4x4:4 in 5GHz [dual-band mode]).

This AP provides Wi-Fi 7 features such as Multi-Link Operation (MLO), Preamble Puncturing, 4K Quadrature Amplitude Modulation (QAM), and 320 MHz Channels. The RUCKUS Unleashed AP includes a USB port, a 5 Gbps Ethernet port (which supports IEEE Standards 802.3af, 802.3at, and 802.3bt PoE), and a 1 GbE port (non-PoE).

This section describes the physical features of the RUCKUS Unleashed R670 AP.

Figure 1. Unleashed R670 Access Point



R670 AP Front Panel

The R670 AP features a single system LED on its front panel that can display three colors (Red, Amber, and Green).

Table 1. R670 AP Front Panel LED

State Base Light	Status	Description
Power Negotiation Mode (Red)	Off	No power connected.
	Slow Blinking Red (The light is on for 0.5 seconds and off for 1.5 seconds)	AP is on and in IEEE 802.3af low-power mode.
	Solid Red	AP is on and in full-power mode and boot-up is in process.
Operation Preparation State (Amber)	Blinking Amber (The light is on for 1 second and off for 1 second)	One of the following: System is in Configure.Me or Zero Touch Mesh (ZTM) state. Management Gateway is lost.

State Base Light	Status	Description
	Solid Amber	AP has successfully obtained an IP address, either through DHCP or a static IP assignment.
	Fast Blinking Amber (The light is on for 0.25 seconds and off for 0.75 seconds.)	AP is being loaded with a configuration or firmware update.
	Slow Blinking Amber (The light is on for 0.5 seconds and off for 1.5 seconds)	Connection to the system controller is lost.
Service State (Green)	Solid Green	AP WLAN services and Controller management are operational.
		AP WLAN has at least one client connected.
		AP WLAN has at least one client connected and Mesh networking is established.
Exception State	Blinking between Red and Green	AP is Factory Reset.
	Blinking between Red and Amber	AP is Factory Reset to Recovery Mode.
	Blinking Red/Off/Green/Off/Amber/Off	Controller is not reachable.

Parent topic: [Supported Access Points](#)

R770

The RUCKUS Unleashed R770 is a tri-band concurrent Wi-Fi 7 (IEEE 802.11be) indoor AP that supports eight spatial data streams (2x2:2 in 2.4Ghz and 6GHz and 4x4:4 in 5Ghz).

The RUCKUS Unleashed R770 AP provides Wi-Fi 7 features such as Multi-Link Operation (MLO), Preamble Puncturing, 4K Quadrature Amplitude Modulation (QAM), and 320 MHz Channels. The RUCKUS Unleashed AP includes a USB port, a 10 Gbps Ethernet port (which supports IEEE Standards 802.3af, 802.3at, and 802.3bt PoE), and a 1 GbE port (non-PoE).

 **Note:** Dedicated Master mode is supported if a R770 AP is the Master AP in the RUCKUS Unleashed network.

This section describes the physical features of the RUCKUS Unleashed R770 AP.

Figure 1. Unleashed R770 Access Point

R770 AP Front Panel

The R770 AP features a single system LED on its front panel that can display three colors (Red, Amber, and Green).

Table 1. R770 AP Front Panel LEDs

State Base Light	Status	Description
Power Negotiation Mode (Red)	Off	No power connected.
	Slow Blinking Red (The light is on for 0.5 seconds and off for 1.5 seconds)	AP is on and in IEEE 802.3af low-power mode.
	Solid Red	AP is on and in full-power mode and boot-up is in process.
Operation Preparation State (Amber)	Blinking Amber (The light is on for 1 second and off for 1 second)	One of the following: System is in Configure.Me or Zero Touch Mesh (ZTM) state.

State Base Light	Status	Description
		Management Gateway is lost.
	Solid Amber	AP has successfully obtained an IP address, either through DHCP or a static IP assignment.
	Fast Blinking Amber (The light is on for 0.25 seconds and off for 0.75 seconds.)	AP is being loaded with a configuration or firmware update.
	Slow Blinking Amber (The light is on for 0.5 seconds and off for 1.5 seconds)	System controller is lost.
Service State (Green)	Solid Green	AP WLANs services and Controller management are operational.
		AP WLAN has at least one client connected.
		AP WLAN has at least one client connected and Mesh networking is established.
Exception State	Blinking between Red and Green	AP is Factory Reset.
	Blinking between Red and Amber	AP is Factory Reset to Recovery Mode.
	Blinking Red/Off/Green/Off/Amber/Off	Controller is not reachable.

Parent topic: [Supported Access Points](#)

R850


The Unleashed R850 is a dual-band Wi-Fi 6 Indoor access point with 12 radio chains, operating in 8x8:8 mode on the 5GHz band and in 4x4:4 mode on the 2.4GHz band, supporting peak PHY rates of 4.8Gbps (5GHz) and 1.148Gbps (2.4GHz).

The R850 has one 5 Gbps PoE Ethernet port and one 1 Gbps port and a USB port for additional connectivity. The R850 will operate with PoH, uPOE and 802.3at power.

 **Note:** Dedicated Master mode is supported if an R850 AP is the Master AP in the Unleashed network.

This section describes the physical features of the RUCKUS Unleashed R850 AP.

Figure 1. Unleashed R850 Access Point

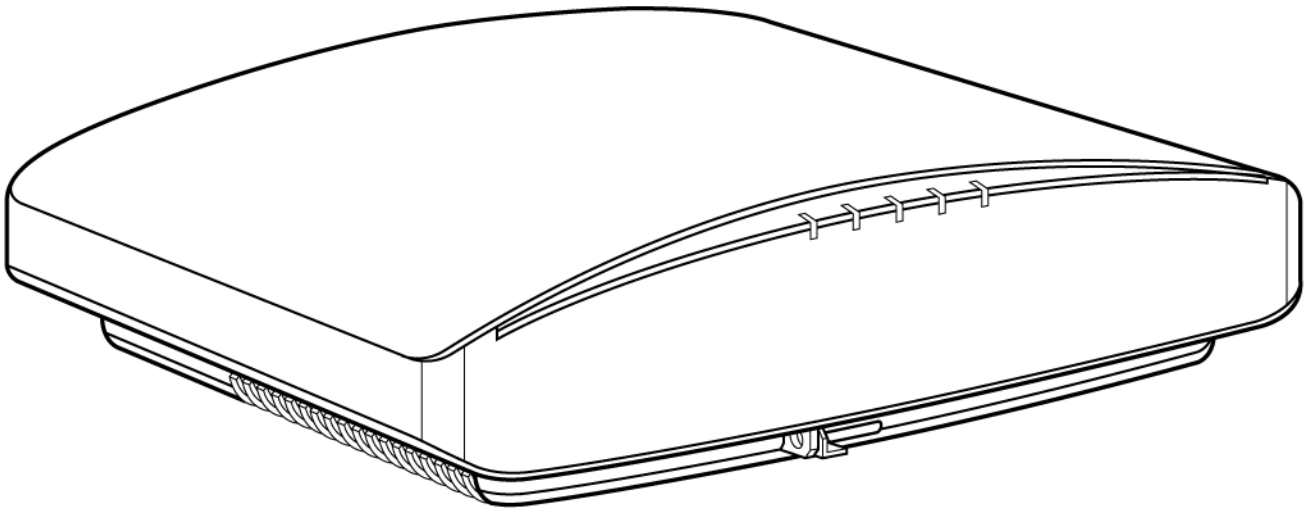

Front Panel

The R850 AP features five LEDs on its front panel.

Table 1. Front Panel LEDs

LED	Status	Description
PWR	Off	No power connected.
	Solid Red	Boot up in process.
	Flashing Green	System started, no routable IP address detected.
	Solid Green	Routable IP address received.
CTL	Off	Unleashed Member AP.
	Flashing Green (slow, every 2 seconds)	Network problem. Cannot contact Unleashed Master.
	Flashing Green (fast, 2x per second)	Receiving configuration or image upgrade.
	Solid Green	Unleashed Master AP.
AIR	Off	No upstream mesh connection (Root AP).

LED	Status	Description
	Solid Green	Upstream mesh connection established (Mesh AP).
	Solid Red	Upstream mesh connection issue.
2.4G	Off	Radio is down.
	Solid Amber	Radio is up, no clients are connected to the 2.4 GHz radio.
	Solid Green	Radio is up, at least one client is connected to the 2.4 GHz radio.
5G	Off	Radio is down.
	Solid Amber	Radio is up, no clients are connected to the 5 GHz radio.
	Solid Green	Radio is up, at least one client is connected to the 5 GHz radio.
	Flashing Green	Radio is up, at least one downstream Mesh AP is connected to the 5G radio.

Parent topic: [Supported Access Points](#)

T350 Family


The Unleashed T350 family provides 802.11ax "Wave 2" features, including MU-MIMO, in an outdoor access point.

This section describes the physical features of the RUCKUS Unleashed T310 family of dual-band 802.11ax Wave 2 Outdoor Access Points.

The T350 is available in four antenna variants:

- T350c: Standard omni antenna
- T350d: Standard omni antenna, extended temperature range

Figure 1. T350d Outdoor Access Point

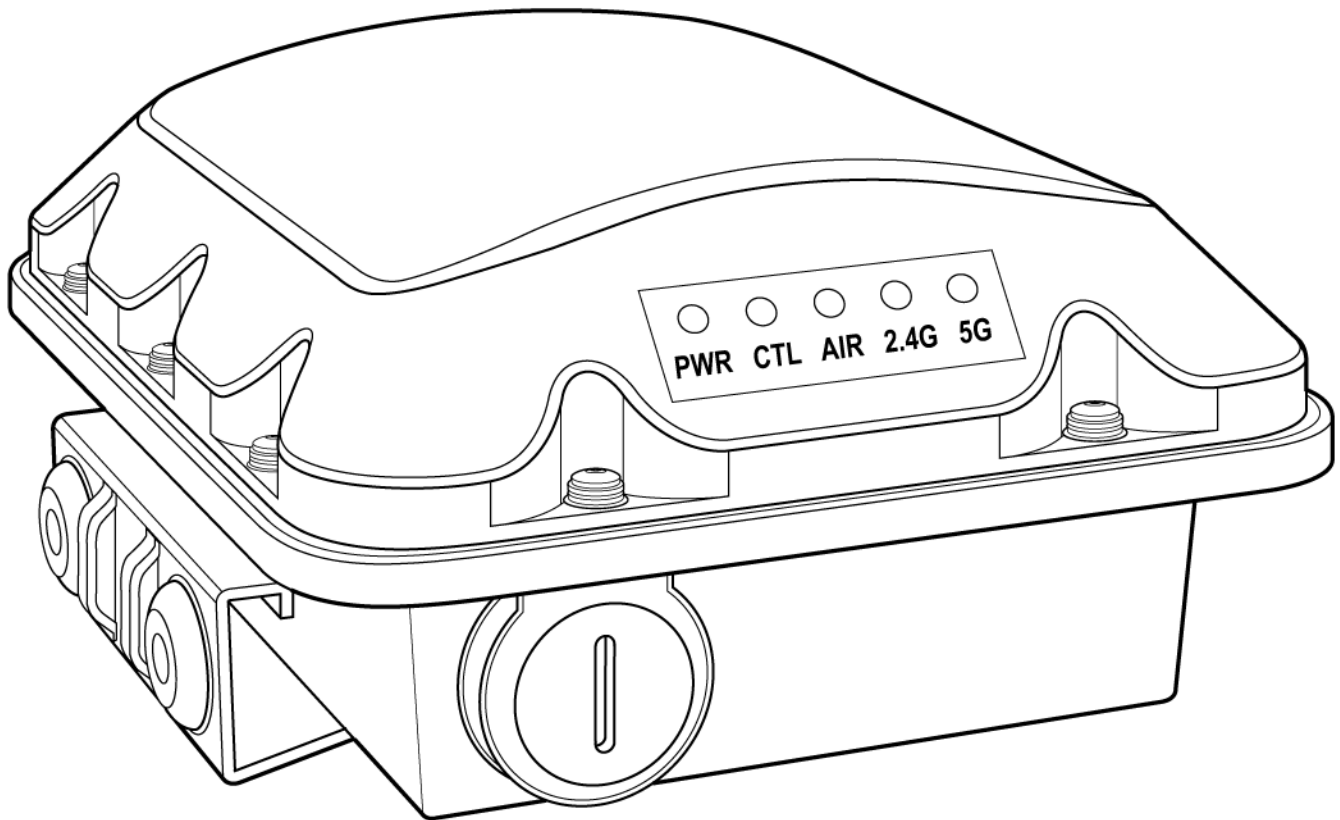

Front Panel

The T350 features five LEDs on its front panel.

Table 1. Front Panel LEDs

LED	Status	Description
PWR	Off	No power connected.
	Solid Red	Boot up in process.
	Flashing Green	System started, no routable IP address detected.
	Solid Green	Routable IP address received.
CTL	Off	Unleashed Member AP.
	Flashing Green (slow, every 2 seconds)	Network problem. Cannot contact Unleashed Master.
	Flashing Green (fast, 2x per second)	Receiving configuration or image upgrade.
	Solid Green	Unleashed Master AP.

LED	Status	Description
AIR	Off	No upstream mesh connection (Root AP).
	Solid Green	Upstream mesh connection established (Mesh AP).
	Solid Red	Upstream mesh connection issue.
2.4G	Off	Radio is down.
	Solid Amber	Radio is up, no clients are connected to the 2.4 GHz radio.
	Solid Green	Radio is up, at least one client is connected to the 2.4 GHz radio.
5G	Off	Radio is down.
	Solid Amber	Radio is up, no clients are connected to the 5 GHz radio.
	Solid Green	Radio is up, at least one client is connected to the 5 GHz radio.
	Flashing Green	Radio is up, at least one downstream Mesh AP is connected to the 5G radio.

Parent topic: [Supported Access Points](#)


T350SE

The RUCKUS T350se is a Wi-Fi 6 (802.11ax) Wi-Fi access point supporting dual-band concurrent 2x2:2 802.11ax (5GHz) and 2x2:2 802.11ax (2.4GHz) for outdoor applications.

The T350se has an internal 120-degree sectorized antenna, an integrated single 1-Gbps Ethernet port, a DC port, an USB port, and 2 N-type ports to connect to an external antenna.

This section describes the physical features of the RUCKUS Unleashed T350SE AP.

Figure 1. Unleashed T350SE Access Point

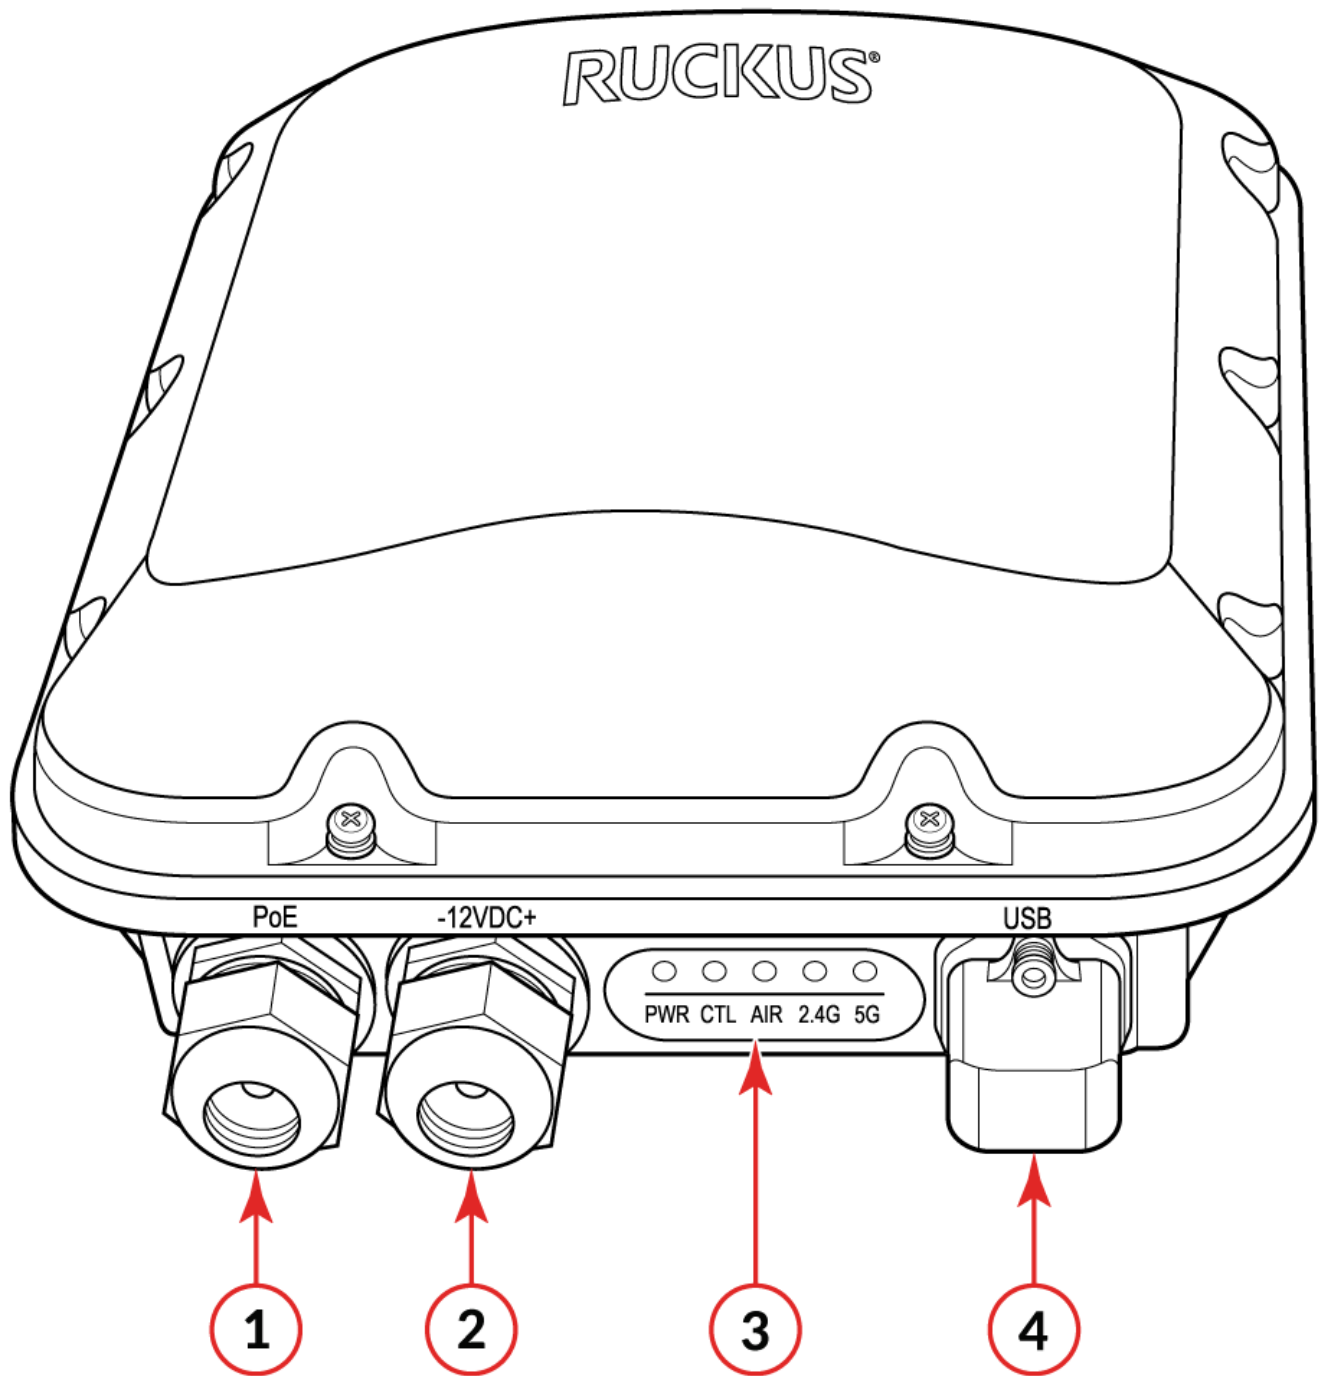

1. PoE
2. 12V DC
3. LED
4. USB

Front Panel

The T350SE AP features five LEDs on its front panel.

Table 1. Front Panel LEDs

LED	Status	Description
PWR	Off	No power connected.
	Solid Red	Boot up in process.
	Flashing Green	System started, no routable IP address detected.
	Solid Green	Routable IP address received.
CTL	Off	Unleashed Member AP.
	Flashing Green (slow, every 2 seconds)	Network problem. Cannot contact Unleashed Master.
	Flashing Green (fast, 2x per second)	Receiving configuration or image upgrade.
	Solid Green	Unleashed Master AP.
AIR	Off	No upstream mesh connection (Root AP).
	Solid Green	Upstream mesh connection established (Mesh AP).
	Solid Red	Upstream mesh connection issue.
2.4G	Off	Radio is down.
	Solid Amber	Radio is up, no clients are connected to the 2.4 GHz radio.
	Solid Green	Radio is up, at least one client is connected to the 2.4 GHz radio.
5G	Off	Radio is down.
	Solid Amber	Radio is up, no clients are connected to the 5 GHz radio.
	Solid Green	Radio is up, at least one client is connected to the 5 GHz radio.

LED	Status	Description
	Flashing Green	Radio is up, at least one downstream Mesh AP is connected to the 5G radio.

Parent topic: [Supported Access Points](#)

T750


The RUCKUS T750 is a high-end dual-band outdoor Wi-Fi 6 AP that supports 8 spatial streams (4x4:4 in 5GHz, 4x4:4 in 2.4GHz).

The T750 provides advanced 802.11ax features including OFDMA and MU-MIMO, and supports up to 1,024 client connections with increased capacity, improved coverage and performance in ultra-high density environments.

The T750 includes a 2.5 GbE Ethernet PoE+ port for high speed Ethernet backhaul, along with an SFP fiber port for fiber backhaul. Additionally, it includes built-in GPS, USB port, gigabit PoE out port, and IP-67 rated weather proofing.

This section describes the physical features of the RUCKUS Unleashed T750 AP.

Figure 1. Unleashed T750 Access Point

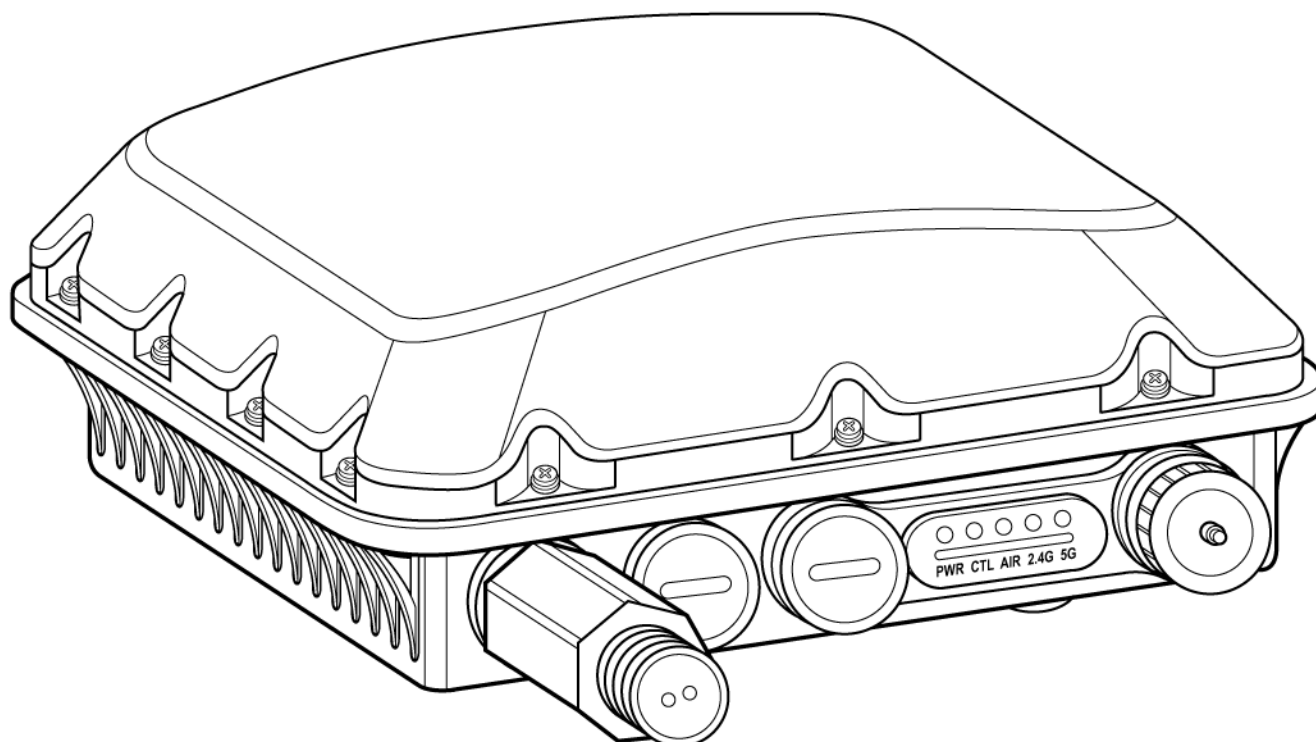

Front Panel

The T750 AP features five LEDs on its front panel.

Table 1. Front Panel LEDs

LED	Status	Description
PWR	Off	No power connected.
	Solid Red	Boot up in process.
	Flashing Green	System started, no routable IP address detected.
	Solid Green	Routable IP address received.
CTL	Off	Unleashed Member AP.
	Flashing Green (slow, every 2 seconds)	Network problem. Cannot contact Unleashed Master.
	Flashing Green (fast, 2x per second)	Receiving configuration or image upgrade.
	Solid Green	Unleashed Master AP.
AIR	Off	No upstream mesh connection (Root AP).
	Solid Green	Upstream mesh connection established (Mesh AP).
	Solid Red	Upstream mesh connection issue.
2.4G	Off	Radio is down.
	Solid Amber	Radio is up, no clients are connected to the 2.4 GHz radio.
	Solid Green	Radio is up, at least one client is connected to the 2.4 GHz radio.
5G	Off	Radio is down.
	Solid Amber	Radio is up, no clients are connected to the 5 GHz radio.
	Solid Green	Radio is up, at least one client is connected to the 5 GHz radio.

LED	Status	Description
	Flashing Green	Radio is up, at least one downstream Mesh AP is connected to the 5G radio.

Parent topic: [Supported Access Points](#)

T750SE


The RUCKUS T750SE is a high-end dual-band outdoor Wi-Fi 6 AP with external antenna connectors that supports 8 spatial streams (4x4:4 in 5GHz, 4x4:4 in 2.4GHz).

The T750SE provides advanced 802.11ax features including OFDMA and MU-MIMO, and supports up to 1,024 client connections with increased capacity, improved coverage and performance in ultra-high density environments.

The T750SE includes a 2.5 GbE Ethernet PoE+ port for high speed Ethernet backhaul, along with an SFP fiber port for fiber backhaul. Additionally, it includes built-in GPS, USB port, gigabit PoE out port, and IP-67 rated weather proofing.

This section describes the physical features of the RUCKUS Unleashed T750SE AP.

Figure 1. Unleashed T750SE Access Point

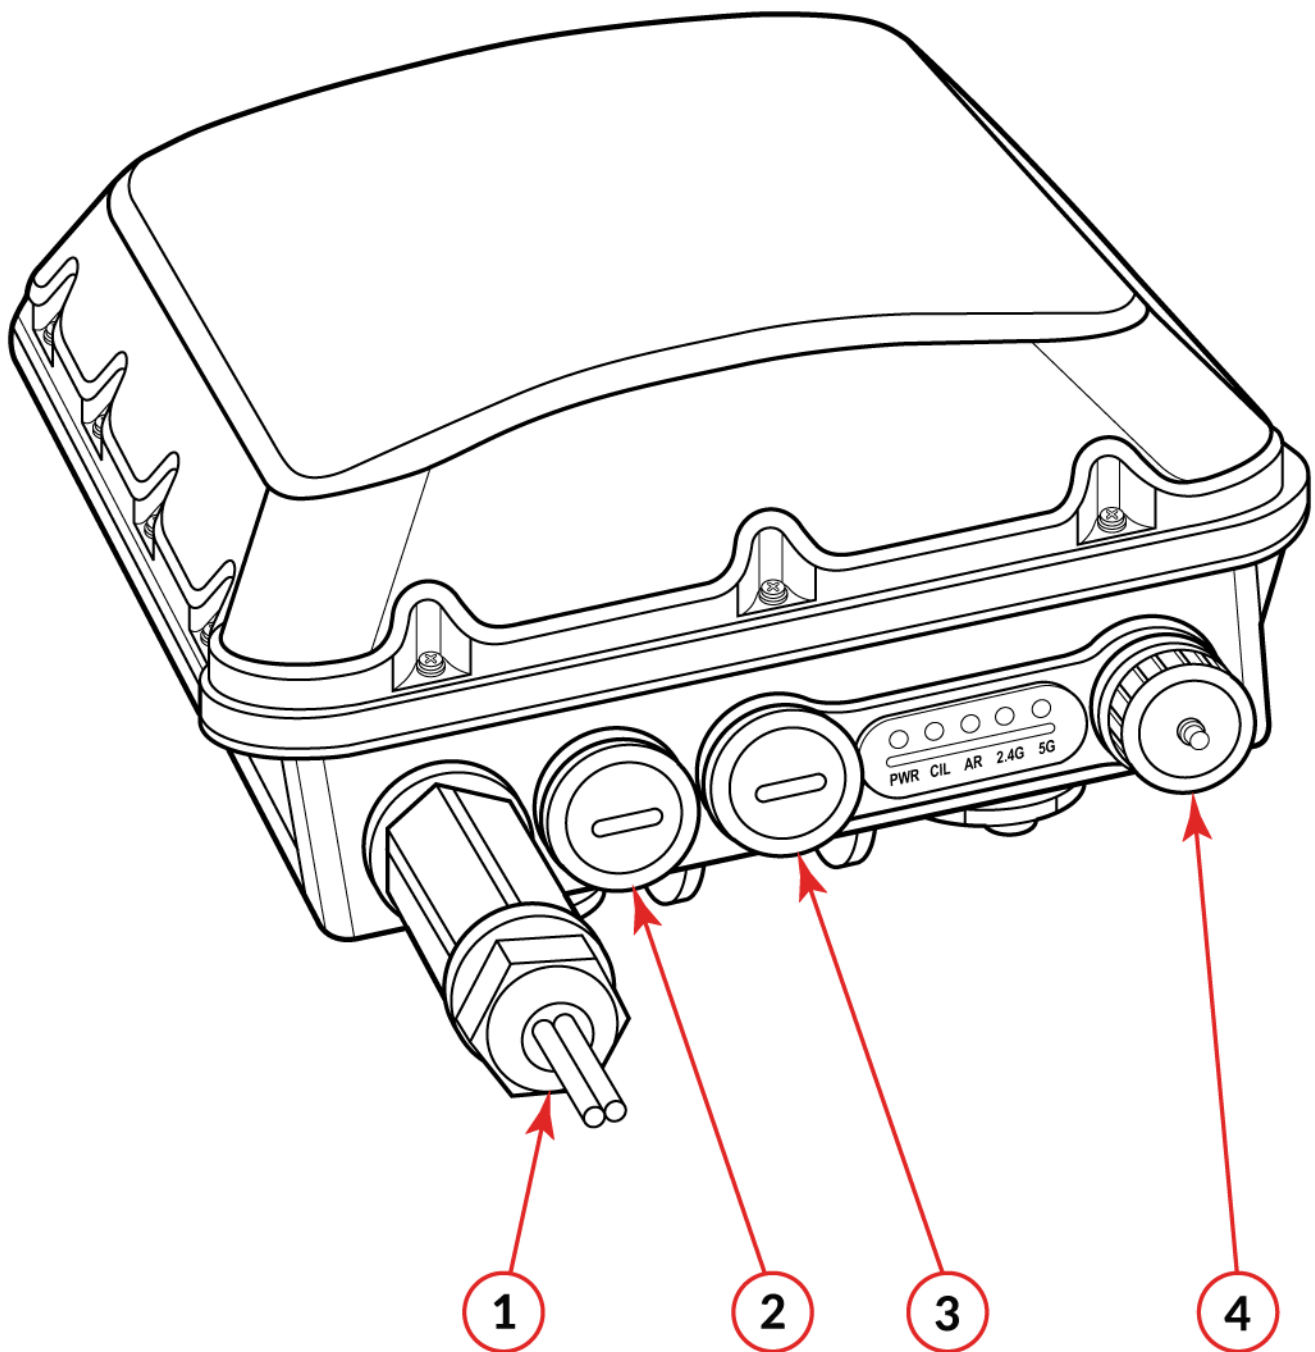

1. SFP port
2. PoE IN
3. PoE OUT
4. AC port

Front Panel

The T750SE AP features five LEDs on its front panel.

Table 1. Front Panel LEDs

LED	Status	Description
PWR	Off	No power connected.
	Solid Red	Boot up in process.
	Flashing Green	System started, no routable IP address detected.
	Solid Green	Routable IP address received.
CTL	Off	Unleashed Member AP.
	Flashing Green (slow, every 2 seconds)	Network problem. Cannot contact Unleashed Master.
	Flashing Green (fast, 2x per second)	Receiving configuration or image upgrade.
	Solid Green	Unleashed Master AP.
AIR	Off	No upstream mesh connection (Root AP).
	Solid Green	Upstream mesh connection established (Mesh AP).
	Solid Red	Upstream mesh connection issue.
2.4G	Off	Radio is down.
	Solid Amber	Radio is up, no clients are connected to the 2.4 GHz radio.
	Solid Green	Radio is up, at least one client is connected to the 2.4 GHz radio.
5G	Off	Radio is down.
	Solid Amber	Radio is up, no clients are connected to the 5 GHz radio.
	Solid Green	Radio is up, at least one client is connected to the 5 GHz radio.

LED	Status	Description
	Flashing Green	Radio is up, at least one downstream Mesh AP is connected to the 5G radio.

Parent topic: [Supported Access Points](#)

Setting Up an Unleashed Wi-Fi Network

Overview of the Setup Process

[Step 1: Unpack and Install the Unleashed Master AP](#)

[Step 2: Configure Your Unleashed Network](#)

[Step 3: Customize Your Wireless LANs](#)


[Step 4: Deploy Additional Unleashed Member Access Points](#)

Overview of the Setup Process

The following steps are required for setup and configuration of a RUCKUS Unleashed wireless network.

1. [Step 1: Unpack and Install the Unleashed Master AP](#)
2. [Step 2: Configure Your Unleashed Network](#)
3. [Step 3: Customize Your Wireless LANs](#)
4. [Step 4: Deploy Additional Unleashed Member Access Points](#)
5. Begin Using Your RUCKUS Unleashed Network!

Figure 1. RUCKUS Unleashed Setup Overview

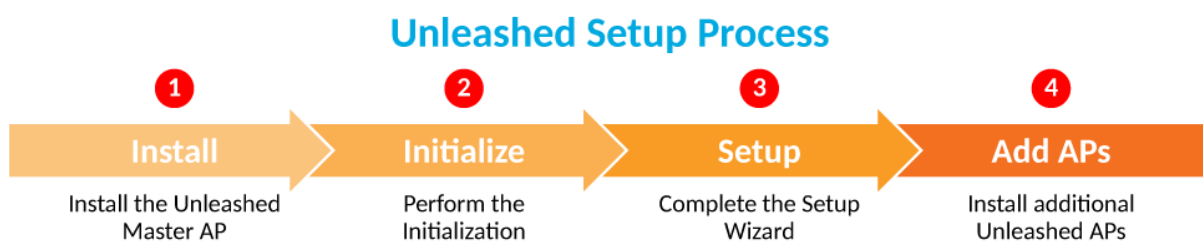

Note: For a video presentation of this setup process, see the RUCKUS Training video [Installing the Unleashed Master AP](#).

Parent topic: [Setting Up an Unleashed Wi-Fi Network](#)

Step 1: Unpack and Install the Unleashed Master AP

1. Choose which Unleashed AP will become the Unleashed Master AP (the AP that performs all of the control functions of your Unleashed network). Any Unleashed AP can be the Master.

 **Note:** Do NOT connect multiple APs to power and the network all at once. In the initial setup stage, you should choose one AP as the Master AP and connect it to the network and power, and then complete the initial setup steps on this Master AP before connecting any other APs. Once setup is complete, you can continue connecting other APs to power and the network.

2. Perform the hardware installation according to the instructions in the Unleashed Access Point Quick Setup Guide that is included in the box with each Unleashed AP.

3. Once powered on and connected to the local network, the Unleashed AP boots up and begins broadcasting a temporary unencrypted WLAN named "ConfigureMe-[xxxxxx]".

 **Note:** DNS-spoof is enabled on the AP to intercept DNS queries and respond with the Master AP's IP address. Clients associated to this temporary WLAN do not have Internet access.

Parent topic: [Setting Up an Unleashed Wi-Fi Network](#)

Step 2: Configure Your Unleashed Network

Unleashed can be deployed using either a Mobile App (available for iOS and Android), or using your PC's web browser.

Beginning with release 200.7, Unleashed initial setup can also be performed using the command line interface (CLI).

Refer to the relevant section depending on which method you prefer to use:

Parent topic: [Setting Up an Unleashed Wi-Fi Network](#)

Related information

[Step 2a: Setup Using the Mobile App](#)

[Step 2b: Setup Using a Web Browser](#)

[Step 2c: Setup Using the Command Line Interface](#)

Step 2a: Setup Using the Mobile App

To perform setup using the Mobile App, download the iOS or Android app from your app store.


As soon as the AP is powered on and connected to the local network, it boots up and begins broadcasting a temporary unencrypted WLAN named "Configure.Me-[xxxxxx]" from both radios.

1. Using your client's Wi-Fi connection settings, select and associate to the "Configure.Me-[xxxxxx]" WLAN.

2. Launch the app, and follow the on-screen instructions to configure your RUCKUS Unleashed networks.

For a quick installation, click **Typical Install** > **Start** > **Quick Install**.

Figure 1. RUCKUS Unleashed Mobile App for iOS and Android

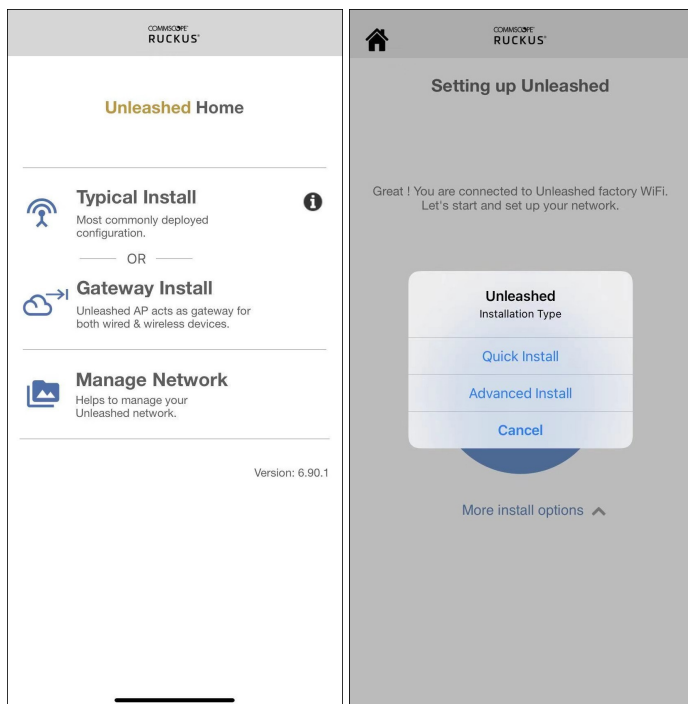


To configure RUCKUS Unleashed, in the **Wireless LAN** page, enter WLAN name, password, and the country where the AP is located, and click **Next**. In the **Administration** page, enter admin username and password, and click **Finish**.

The figure displays four sequential screenshots of the RUCKUS Unleashed mobile app interface:

- Step 1: Configure Unleashed - Wireless LAN**
 - WLAN Name: Ruckus-Wireless 1
 - WLAN Password: (empty field)
 - Country where AP is located: US
 - Buttons: Back, Next
- Step 2: Configure Unleashed - Administration**
 - Admin Username: admin
 - Admin Password: (empty field with toggle icon)
 - Buttons: Back, Finish
- Configuring Unleashed**
 - Status: Customization in progress...
 - Progress indicator: 3m 43s remaining...
- Congratulations!**
 - Message: Your Unleashed network is ready to use !
 - Action: Test your WiFi Speed !
 - Button: Manage Network

Figure 2. Configuring RUCKUS Unleashed from the Mobile App for iOS and Android

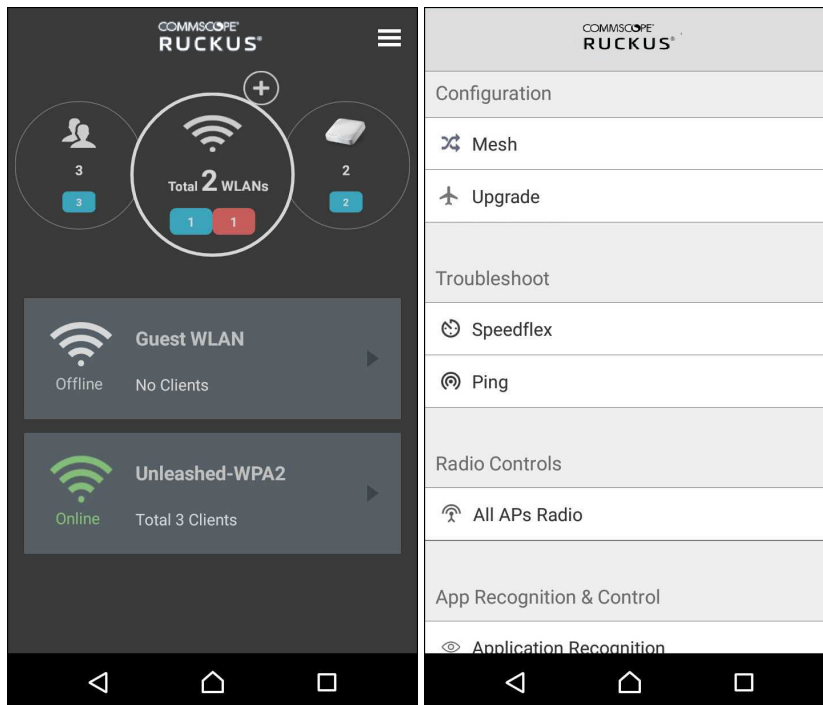

Parent topic: [Step 2: Configure Your Unleashed Network](#)


Step 2b: Setup Using a Web Browser

To perform setup using a web browser, connect to the RUCKUS Unleashed setup network using any Wi-Fi capable client device.

1. Using your the Wi-Fi configuration settings on your client device (such as a laptop or mobile device), select and associate to the **Configure.Me-[xxxxxx]** WLAN, and launch a web browser.

 **Note:** Only R750 AP, R770 AP, or R850 AP support Dedicated Master mode.

2. In your browser's URL bar, enter the following address and press **Enter**: <https://10.154.231.125:9090/>.
Figure 1. Connecting to "Configure.Me-[xxxxxx]" WLAN and Launching a Web Browser

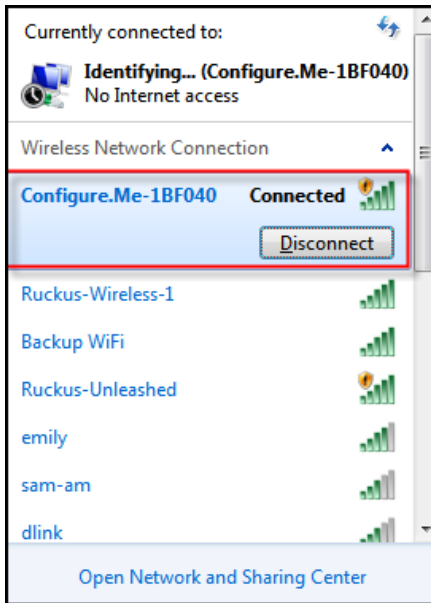


Depending on your browser, you may be presented with one of the following security warnings:

- This connection is not trusted (Firefox)
- Your connection is not private (Chrome)
- There is a problem with this website's security certificate (Internet Explorer)

This is normal, as the RUCKUS Unleashed AP does not have an SSL certificate that is recognized by your browser.

Figure 2. Security Warning (Chrome)

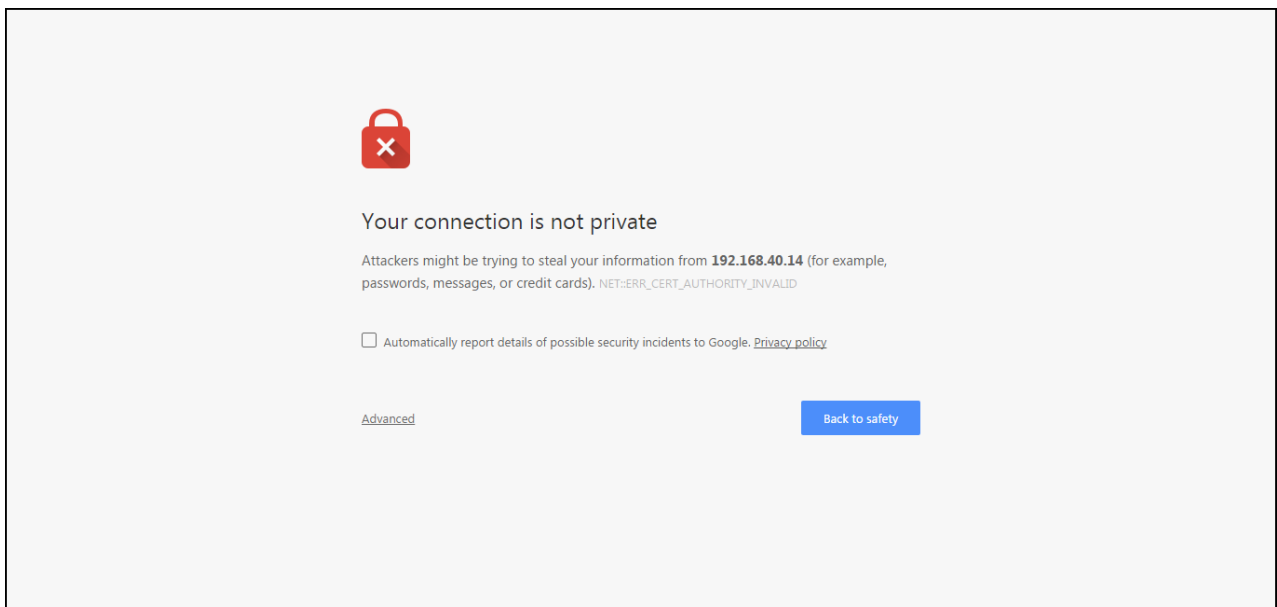

3. In response to the security warning, complete one of the following processes:
 - Click **I Understand the Risks > Add Exception... > Confirm Security Exception** (Firefox)
 - Click **Advanced > Proceed to [IP address] (unsafe)** (Chrome)
 - Click **Continue to this website (not recommended)** (Internet Explorer)

You will be redirected to the Setup Wizard, which guides you through the process of setting up the Master AP.

4. Work through the Setup Wizard and check your configuration choices on the final page, before clicking **Finish** to complete the setup.
 - a. On the first page of the wizard, select your language from the menu.
 - b. Under **Quick Install**, fill in the following options:
 - Under **Wireless LAN**, enter the name (ESSID) and password.
 - Under **Administrator**, enter the admin username and password.
 - Under **Country Code**, select a country.

Figure 3. Installation Page

The screenshot shows the 'Unleashed Installation' page. At the top right, there is a language dropdown menu set to 'English'. The main content area is titled 'Quick Install' and includes the text: 'This is the most simple and quick way to install (Internal Gateway: Disabled, Mesh: Disabled)'. Below this, there are three sections: 'Wireless LAN' with fields for 'Name (ESSID):' (containing 'Ruckus-Wireless 1') and 'Passphrase:'; 'Administrator' with fields for 'Admin Username:' (containing 'admin') and 'Password:'; and 'Country Code:' with a dropdown menu set to 'United States'. At the bottom, there is a 'Custom Install' link and the text 'Provide more advanced options to install'. The footer shows 'Version: 200.10.10.5.88' and a 'Local Upgrade' link.

- 🔗 **Note:** Click **Custom Install** for other installation options. For more information, refer to [Advanced Install](#) and [UMM Install](#). For information on **Local Upgrade** options, refer to [Installation with Local Upgrade](#).

Parent topic: [Step 2: Configure Your Unleashed Network](#)

Advanced Install

Advanced Install is the typical way to install if you do not want to use UMM.

1. On the first page of the **Installation** window, select **Custom Install > Advanced Install**.
2. On the **System** page, complete the following steps:
 - a. Enter a name for the Unleashed system. This system name can be used to identify the Unleashed device on your local area network.
 - b. Select your country code from the menu.

🔗 **Note:** The **Country Code** option is not displayed if the AP is shipped from the factory with a fixed country code.

- c. If you want to enable Mesh networking for your Unleashed network, select the **Mesh** check box. Refer to [Mesh Networking](#) for more information.

🔗 **Note:** If the Unleashed AP does not support Mesh (for example, the R310), it can be configured as the Unleashed Master AP, but it will not be able to participate in the Mesh network.

🔗 **Note:** If the Master AP is in Gateway mode and the WAN port is connected through PPPoE, Mesh can be enabled, but the Master AP must be a Root AP to become a member of a Mesh tree; all of the other connected member APs can be part of a Mesh tree.

- d. Select the **Dedicated Master** check box if you want to enable Dedicated Master for the Unleashed network.

🔗 **Note:** Dedicated Master is supported only for the R750 AP, R770 AP, and R850 AP.

- e. Click **Next** to continue.

Figure 1. Setup Wizard: System Page

3. On the **IP Setting** page, select whether the AP will serve as a gateway using one Ethernet port as a WAN port (connected to a cable or DSL modem, PPPoE connection, and so on), and the other as a LAN port.

Note: If your modem or router already provides gateway functionality, do not enable Gateway mode on the Unleashed Master AP. For more information, refer to [Gateway Mode](#).

- a. Select whether to assign a manual IP address or allow the system to obtain an IP address automatically using DHCP. The default is **DHCP** (Dynamic).

Note:

If you plan to manually assign and maintain IP addresses for your wireless network, select **Manual** (Static) and enter the IP address of your Unleashed Master AP. Ensure that the IP address is outside the range assigned for Wi-Fi clients. Otherwise, leave the default of **DHCP** (Dynamic) and let Unleashed do all the work for you.

- b. If you select **Manual**, enter an IP address, netmask, gateway address, and DNS server addresses in the fields provided.

Note: Optionally, if a manual IP address is configured, you can enable the built-in DHCP Server to provide IP addresses to clients on the Unleashed subnet. For more information, refer to [DHCP Server](#).

Figure 2. Setup Wizard: IP Setting Page

The screenshot displays the configuration interface for RUCKUS Unleashed 200.17. At the top, a progress bar shows five steps: 1. System, 2. IP setting (highlighted in orange), 3. Wireless LAN, 4. Administrator, and 5. Review. Below the progress bar, the 'WAN IP Address' section is visible. It includes a dropdown menu for 'WAN IP Address' and two radio buttons: 'Manual' and 'DHCP'. The 'DHCP' option is selected. Below the radio buttons, there are input fields for 'IP Address' (192.172.10.225), 'Netmask' (255.255.255.0), 'Gateway' (192.172.10.1), 'Primary DNS Server' (137.117.0.1), 'Secondary DNS Server' (8.8.4.4), and 'Access VLAN' (1).

- c. Enter the access VLAN ID for Dedicated Master and click **Next**.

 **Note:** The default value of the access VLAN ID is 1.

- d. If Gateway mode is enabled, select whether to assign a manual IP address or allow the system to obtain an IP address automatically using DHCP or PPPoE for the WAN port, and configure the local subnet settings for the LAN port. Under **Standby WAN Port**, select whether to assign a manual IP address or allow the system to obtain an IP address automatically using DHCP. The default is **DHCP** (Dynamic). For more information on Gateway mode, refer to [Gateway Mode](#).

 **Note:** A standby WAN port is applicable only for the H350 AP and H550 AP.

Figure 3. Enabling Gateway Mode

e. Click **Next** to continue.

4. On the **Wireless LAN** page, complete the following steps:

- In the **Name (ESSID)** field, enter a name for your first wireless LAN.
- For **Password Protect (WPA2/WPA3-Mixed)**, select **Yes** or **No**.

 **Note:** Only the WPA3 encryption is used on 6 GHz radio for the Wi-Fi 7 APs.

- If WPA2 encryption is selected, enter a password. The password must contain from 8 through 63 alphanumeric characters.


d. Click **Next** to continue.

5. On the **Administrator** page, complete the following steps:

- a. Enter your admin username and password.
 - b. Re-enter the password in the **Confirm Password** field.
 - c. (Optional) Click the **Password Recovery** check box to allow you to reset your password in the event that your username or password is forgotten.
 - d. Enter a security email address, security question, and security answer.
 - e. Click **Next** to continue.
6. On the **Review** page, check that all the settings you have made are correct. If any settings must be changed, click **Back** to return to the previous wizard page.
 7. If you are satisfied with your choices, click **Finish** to complete the setup.
After clicking the **Finish** button, the Unleashed Master AP reboots and a **Configuring system settings & rebooting** page is displayed. Wait for the progress screen to complete before proceeding.


 **Note:** Do not disconnect power or network cables during this process, and do not click Back or Refresh in your web browser.

Figure 4. Configuring System Settings & Rebooting Page

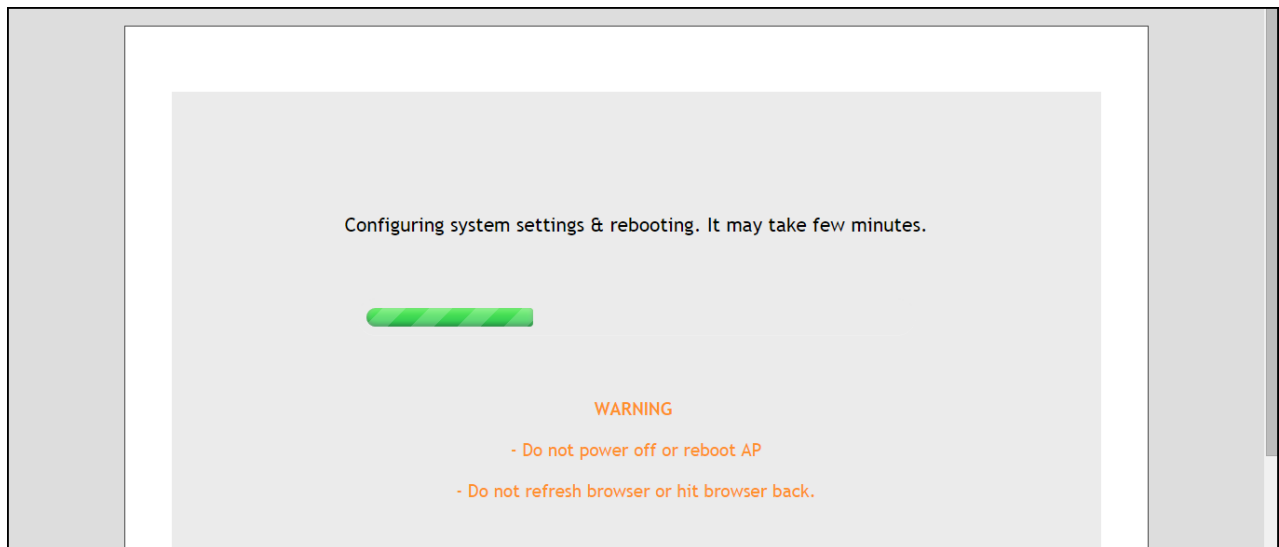

8. After setup is complete, the **Congratulations!** page is displayed. Ensure that you are connected to the WLAN that you configured, and click **Finish**. You will be redirected to the login page.
9. On the login page, enter your username and password, and click **Unleash**.

After a successful login, the **Unleashed Dashboard** displays an overview of your RUCKUS Unleashed network.

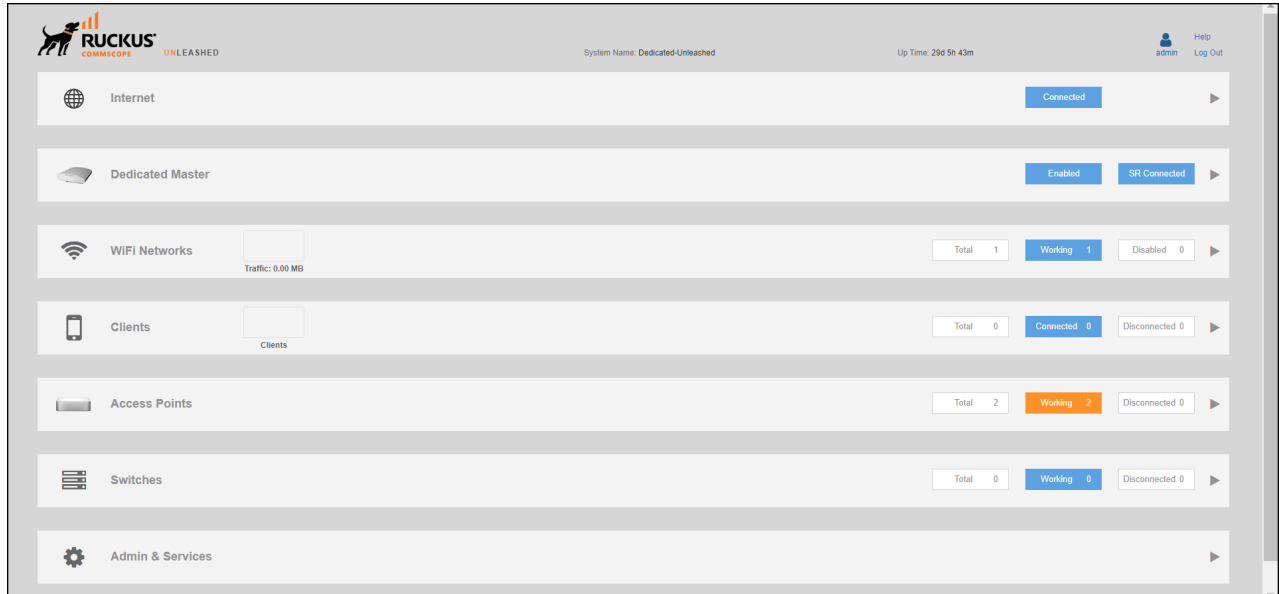Figure 5. Unleashed Dashboard

10. Continue to [Step 3: Customize Your Wireless LANs](#).

Parent topic: [Step 2b: Setup Using a Web Browser](#)

UMM Install

If an Unleashed Multi-Site Manager (UMM) server is available, you can allow automatic Unleashed deployment configuration by running a configuration template from the UMM server to the Unleashed Master AP during setup.

To enable UMM easy deployment:

1. On the second page of the installation wizard, select **UMM Install**.
2. Enter the **UMM Domain/IP** address.
3. Enter the **Config Template Name** of the deployment configuration template configured on UMM for the Unleashed network.
4. Click **Next**. The Unleashed AP attempts to connect to the UMM server to retrieve the configuration template.
5. If successful, the configuration template is pushed to the AP and the Unleashed deployment is configured according to the template.

Figure 1. UMM Install

Unleashed Installation

☐ **Advanced Install**

This is the most typical way to install if one do not want to use UMM

☒ **UMM Install**

Use image from UMM to install an Unleashed network

* UMM Domain/IP:

10.10.13.17

UMM address from where the Unleashed Network can retrieve configuration

* Config Template Name:

UMM Template 1

Configuration template pre-stored in UMM for the Unleashed Network

* System Name:

Ruckus-Unleashed

Name your system 32 characters max using alphanumeric characters excluding space.

Back

Next

Figure 2. Contacting UMM for Easy Deployment

Contacting UMM (10.200.3.4) for easy deployment. It may take a few minutes.

Pulling configuration template from UMM...

WARNING

- Do not power off or reboot the AP.

Cancel

Parent topic: [Step 2b: Setup Using a Web Browser](#)

Installation with Local Upgrade

The Local Upgrade option during the installation settings allows the admin to upgrade the RUCKUS Unleashed firmware to a newer release build prior to deployment.


To perform a local upgrade before completing the RUCKUS Unleashed setup:

1. On the first page of the setup wizard, select **Local Upgrade**. The Local Upgrade page appears.
2. Click **Choose File** and select the locally stored RUCKUS Unleashed image file.
3. Click **Upgrade**.
4. When complete, click **Reboot** to reboot the AP and restart the installation process using the new firmware.

Figure 1. Local Upgrade - Installation Page

The screenshot displays the 'Unleashed Installation' page. At the top right, there is a language dropdown menu set to 'English'. The main content area is divided into two sections: 'Quick Install' and 'Custom Install'. The 'Quick Install' section is highlighted and contains the following fields: 'Wireless LAN' with 'Name (ESSID): Ruckus-Wireless 1' and 'Passphrase: [password field]'; 'Administrator' with 'Admin Username: admin' and 'Password: [password field]'; and 'Country Code: United States'. A note below the administrator fields states: 'If a Ruckus ICX switch is managed by Unleashed then it will use the same login credentials as provided above.' The 'Custom Install' section is currently inactive. At the bottom right, the version '200.10.10.5.68' is displayed, and a red box highlights the 'Local Upgrade' link.

Figure 2. Choose Local Image File to Upgrade

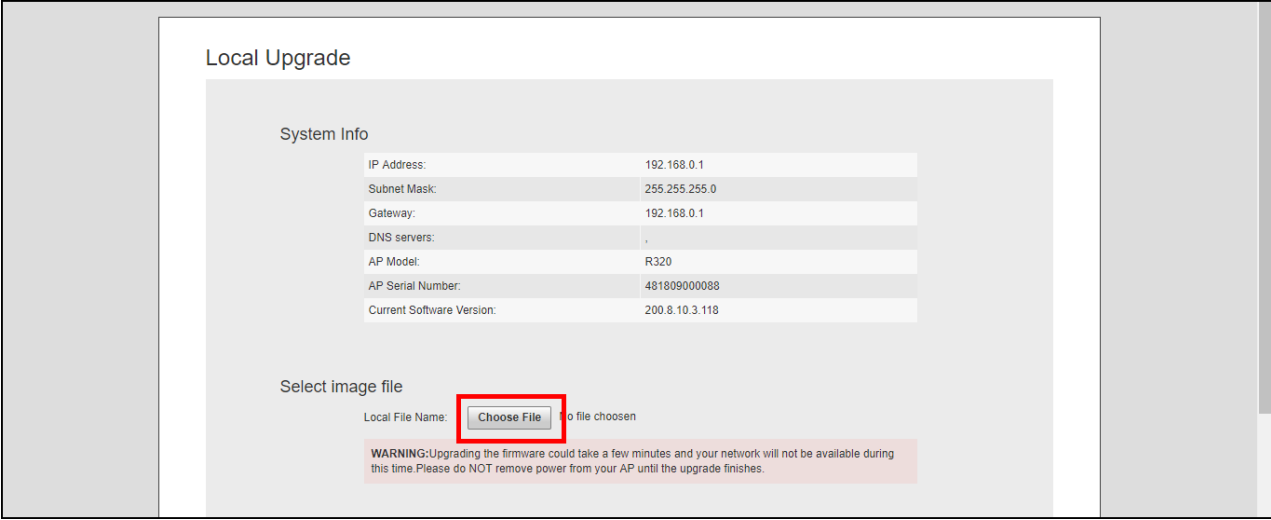

Local Upgrade

System Info

IP Address:	192.168.0.1
Subnet Mask:	255.255.255.0
Gateway:	192.168.0.1
DNS servers:	,
AP Model:	R320
AP Serial Number:	481809000088
Current Software Version:	200.8.10.3.118

Select image file

Local File Name: Choose File No file chosen

WARNING: Upgrading the firmware could take a few minutes and your network will not be available during this time. Please do NOT remove power from your AP until the upgrade finishes.

Parent topic: [Step 2b: Setup Using a Web Browser](#)

Step 2c: Setup Using the Command Line Interface

The CLI setup wizard allows you to quickly configure your Unleashed Master AP with basic settings using a short series of CLI commands.

To perform Unleashed setup using CLI commands, use the following procedure:

1. When the Unleashed AP is in factory default state, associate to the "Configure.Me-xxxxxx" WLAN and connect to the Unleashed CLI using SSH (default IP address: **10.154.231.125**), and log in using the default user name and password:

- Please login: **super**
- Password: **sp-admin**

 **Note:** For information on using the Unleashed CLI, see the Unleashed Command Line Interface Reference Guide, available from support.ruckuswireless.com.

The Unleashed CLI Wizard Configuration Tool starts automatically.

2. Follow the instructions in the setup wizard to configure your Unleashed Master AP. The following are two examples.

Configure Unleashed AP to Bridge Mode

```
Please login: super
Password: *****

Welcome to Ruckus Wireless Unleashed CLI Setup Wizard

Would you like to start the Setup Wizard? [yes/no]: yes
```

```

Enter the way of installation. 1. easy-deployment installation 2. local wizard
[1/2] 2

Enter Administrative User Name (32 characters max) [admin]:
admin
Enter Administrator Password (4-32 characters):
****
Re-enter Administrator Password (4-32 characters):
****

Enter System Name (32 characters max) [Ruckus-Unleashed]:
Unleashed

Enter Country Code (or 'help' to show the list) [US]: US

Enable Mesh [yes/NO]? no

Enable Gateway Mode [yes/NO]? no

Enable Dedicated Master [yes/NO]? no

Enter WAN IP type [1]:
  1: DHCP Mode;
  2: Manual Mode;
1

Enter Access VLAN [1]: 1

Enable WLANs [YES/no]? yes

Enter Wireless LAN (ESSID, 1-32 characters) [Ruckus-Wireless 1]:
Unleashed-SSID
Is it an Open WLAN [yes/NO]? no
Enter the WPA2 Passphrase (8-63 characters): *****
Re-enter the WPA2 Passphrase (8-63 characters):
*****

Please review the following settings:
System Name=           Unleashed
Administrator Name=    admin
Country Code=          US
Mesh Supported=        Disable
Gateway Mode Supported= Disable
Dedicated Master Supported= Disable
IPv4 Mode=             DHCP
Access VLAN=           1
WLAN ESSID=            Unleashed-SSID
Wireless Authentication= WPA2_PSK

Done with the Setup Wizard [yes/no]? yes

Save the configuration ...

It will take a few minutes to complete, do not power off the AP! This AP will
reboot automatically.

Welcome to Ruckus Unleashed Network Command Line Interface
ruckus>

```

Configure Unleashed AP in Dedicated Mode

```

Please login: super
Password: *****

```

Welcome to Ruckus Wireless Unleashed CLI Command Line Interface

Would you like to start the Setup Wizard? [yes/no]: **yes**

Enter the way of installation:

1. easy-deployment installation.(Warning: The configuration costs about 15 seconds to store in system, and in flash empase the device may be damaged if power-off. So please avoid rebooting device after 60 seconds if network is reachable)

2. local wizard

please enter 1 or 2:

2

Enter Administrative User Name (32 characters max) [admin]:

admin

Enter Administrator Password (4-32 characters):

Re-enter Administrator Password (4-32 characters):

Enter System Name (32 characters max) [Ruckus-Unleashed]:

Unleashed

Enter Country Code (or 'help' to show the list) [US]: **US**

Enable Mesh [yes/NO]? **yes**

Enable Gateway Mode [yes/NO]?

Enable Dedicated Master [yes/NO]? **yes**

Enter WAN IP type [1]:

1: DHCP Mode;

2: Manual Mode;

1

Enter Access VLAN [1]: **1**

Enable WLANs [YES/no]?

Enter Wireless LAN (ESSID, 1-32 characters) [Ruckus-Wireless 1]:

Dedicated-SSID

Is it an Open WLAN [yes/NO]?

Enter the WPA2 Passphrase (8-63 characters):

Re-enter the WPA2 Passphrase (8-63 characters):

Please review the following settings:

System Name= Unleashed

Administrator Name= admin

Country Code= US

Mesh Supported= Enable

Gateway Mode Supported= Disable

Dedicated Master Supported= Enable

IPv4 Mode= DHCP

Access VLAN= 1

WLAN ESSID= Dedicated-SSID

Wireless Authentication= WPA2_PSK

Done with the Setup Wizard [yes/no]? **yes**

Save the configuration ...

It will take a few minutes to complete, do not power off the AP! This AP will reboot automatically.

```
Welcome to Ruckus Unleashed Network Command Line Interface
ruckus>
```

Configure Unleashed AP to Gateway Mode

```
Please login: super
Password: *****

Welcome to Ruckus Wireless Unleashed CLI Setup Wizard

Would you like to start the Setup Wizard? [yes/no]: yes

Enter the way of installation. 1. easy-deployment installation 2. local wizard
[1/2] 2

Enter Administrative User Name (32 characters max) [admin]:
admin
Enter Administrator Password (4-32 characters):
*****
Re-enter Administrator Password (4-32 characters):
*****

Enter System Name (32 characters max) [Ruckus-Unleashed]:
Unleashed-Gateway

Enter Country Code (or 'help' to show the list) [US]: US

Enable Mesh [yes/NO]? no

Enable Gateway Mode [yes/NO]? yes

Enter AP R510 WAN Port:
  1: port1, eth0, UP:
  2: port2, eth1, DOWN:
1

Enter WAN IP type [1]:
  1: DHCP Mode;
  2: Manual Mode;
  3: PPPOE Mode;
1

Enter LAN & WLAN IP Address [10.106.0.1]:
192.168.1.1
Enter LAN & WLAN IP Netmask [255.255.0.0]:
255.255.255.0
Enter Client Starting IP Address [10.106.0.2]:
192.168.1.2
Enter Client Ending IP Address [10.106.7.209]:
192.168.1.200

Enter Lease Time [2]:
  1: 6 hours;
  2: 12 hours;
  3: 1 day;
  4: 2 days;
  5: 1 week;
  6: 2 weeks;
1

Enable WLANs [YES/no]? yes

Enter Wireless LAN (ESSID, 1-32 characters) [Ruckus-Wireless 1]:
Unleashed-SSID
Is it an Open WLAN [yes/NO]? no
```

```

Enter the WPA2 Passphrase (8-63 characters):
*****
Re-enter the WPA2 Passphrase (8-63 characters):
*****

Please review the following settings:
System Name=           Unleashed-Gateway
Administrator Name=    admin
Country Code=          US
Mesh Supported=        Disable
Gateway Mode Supported= Enable
WAN Port=              port1 eth0 UP
IPv4 Mode=             DHCP
LAN Port IPv4 Address Info= 192.168.1.1/255.255.255.0
Client Starting IPv4=    192.168.1.2
Client Ending IPv4=     192.168.1.200
Lease Time=            6 hours
WLAN ESSID=            Unleashed-SSID
Wireless Authentication= WPA2_PSK

Done with the Setup Wizard [yes/no]? yes

Save the configuration ...

It will take a few minutes to complete, do not power off the AP! This AP will
reboot automatically.

Welcome to Ruckus Unleashed Network Command Line Interface
ruckus>

```

Parent topic: [Step 2: Configure Your Unleashed Network](#)

Step 3: Customize Your Wireless LANs


Once the Unleashed Master AP has been initialized, you can fine-tune the settings of your first WLAN (that you created during the setup wizard), and create any additional WLANs needed prior to attaching additional Unleashed member APs.

Then, when you deploy additional member APs in whatever order you prefer, they will automatically retrieve all WLAN configuration settings (and any other settings you have configured) from the Unleashed Master AP.

To customize an existing wireless LAN:


1. From the **Dashboard**, click anywhere in the **Wi-Fi Networks** section to expand the display of your deployed WLANs.

Figure 1. Click the Wi-Fi networks section to expand

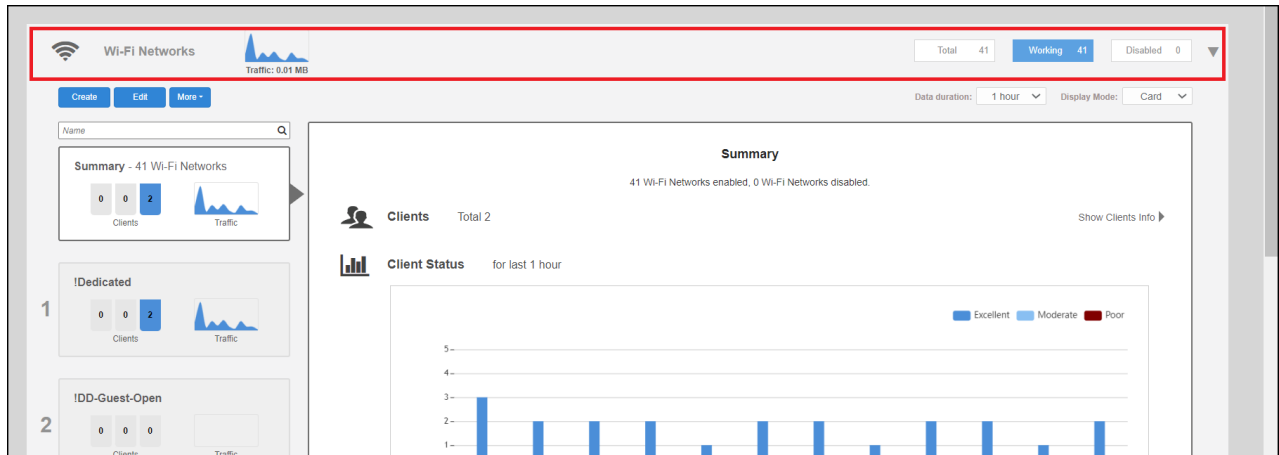

2. Select the WLAN box from the list on the left, and click the **Edit** button to edit the WLAN's settings.

Figure 2. Select WLAN and click Edit to configure the WLAN settings

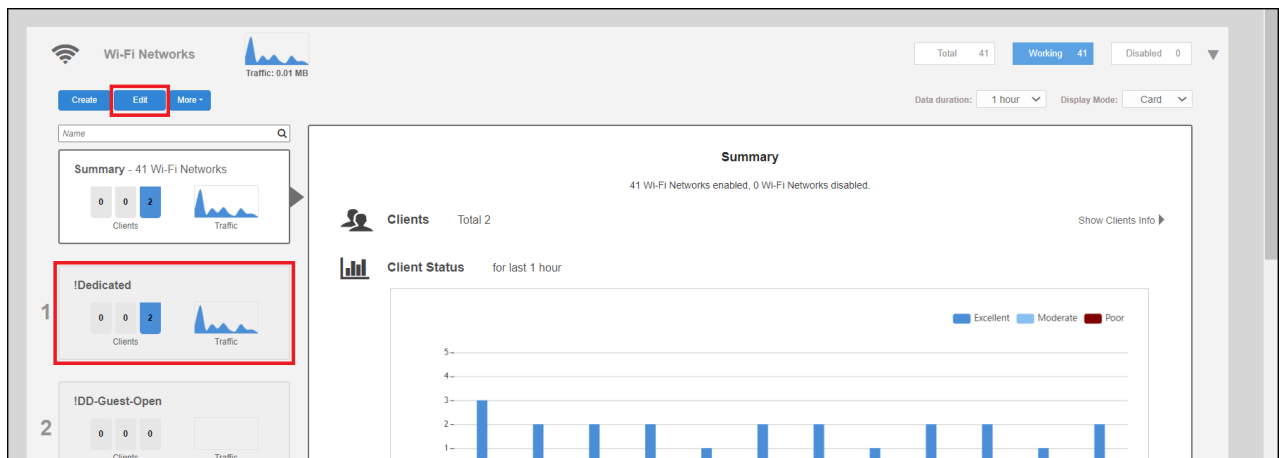


3. Configure the following WLAN settings:

- **Name:** Enter a recognizable name for this WLAN.
- **Usage Type:** Select Standard for most typical wireless network usage scenarios. Select Guest Access to create a Guest WLAN, or select Hotspot to create a Hotspot WLAN.
- **Authentication:** Select Open, for open authentication, or authenticate users against an internal local database or an external authentication server using 802.1X or MAC address.
- **Authentication Server:** Select an AAA server (or Local Database) to authenticate users when 802.1X or MAC authentication method is selected.
- **Encryption Method:** Select WPA2 for standard wireless security. Select None for no encryption.
- **Password:** Enter a WPA2 password for use when connecting to this WLAN if WPA2 is selected.

 **Note:** For information on additional WLAN configuration options, see [WLAN Configuration](#).

4. Click **OK** to save your changes.
5. Repeat for any additional WLANs you would like to create. All WLANs will be deployed to each new member AP as soon as it joins the Unleashed network.

Figure 3. Editing an existing WLAN

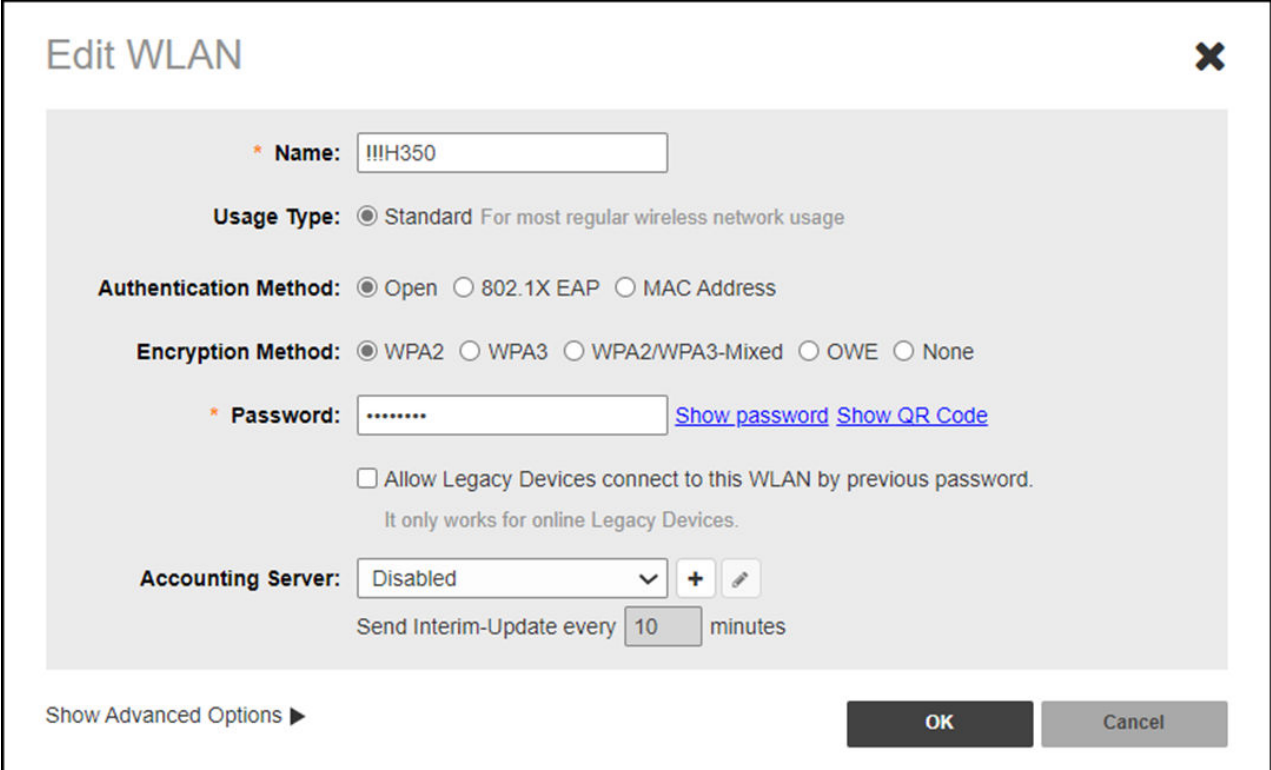

Edit WLAN

* **Name:**

Usage Type: ☒ Standard For most regular wireless network usage

Authentication Method: ☒ Open ☐ 802.1X EAP ☐ MAC Address

Encryption Method: ☒ WPA2 ☐ WPA3 ☐ WPA2/WPA3-Mixed ☐ OWE ☐ None

* **Password:** [Show password](#) [Show QR Code](#)

☐ Allow Legacy Devices connect to this WLAN by previous password.
It only works for online Legacy Devices.

Accounting Server:

Send Interim-Update every minutes

Show Advanced Options ►

Congratulations! Your Unleashed network is now configured and ready for use. You may now proceed to [Step 4: Deploy Additional Unleashed Member Access Points](#).

Parent topic: [Setting Up an Unleashed Wi-Fi Network](#)

Step 4: Deploy Additional Unleashed Member Access Points

Deploying additional Unleashed member APs is simply a matter of connecting them via Ethernet to the same Layer 2 network and providing power. They will discover the Unleashed Master and join automatically. No additional steps are necessary.

The second and any additional APs that join an Unleashed network will automatically assume the role of Unleashed "member AP." Thereafter, if the Master AP goes offline, one of the member APs will become the new Master and assume control of the Unleashed network.

- **Note:** When a member AP joins the Master for the first time, if it is running a different firmware version than the Master, it will automatically download and upgrade (or downgrade) itself to the correct firmware version to match that of the Master, reboot, and then rejoin the Unleashed network once the matching firmware is running.

Parent topic: [Setting Up an Unleashed Wi-Fi Network](#)

Using the Admin Interface

[Unleashed Administration Interface Overview](#)

[Navigating the Dashboard](#)

[Using the Dashboard Components](#)

Unleashed Administration Interface Overview

The Unleashed Admin Interface provides tools for use in managing all aspects of your Unleashed deployment.

It contains configuration pages for managing Internet connection status, Unleashed Access Points, ICX switches, wireless LANs, user accounts, system settings and administrator preferences.

Parent topic: [Using the Admin Interface](#)

Navigating the Dashboard

The RUCKUS Unleashed dashboard is the primary interface used for monitoring and configuring all aspects of your network. The RUCKUS Unleashed dashboard is divided into three main sections as described in the following table.

Figure 1. Unleashed Dashboard

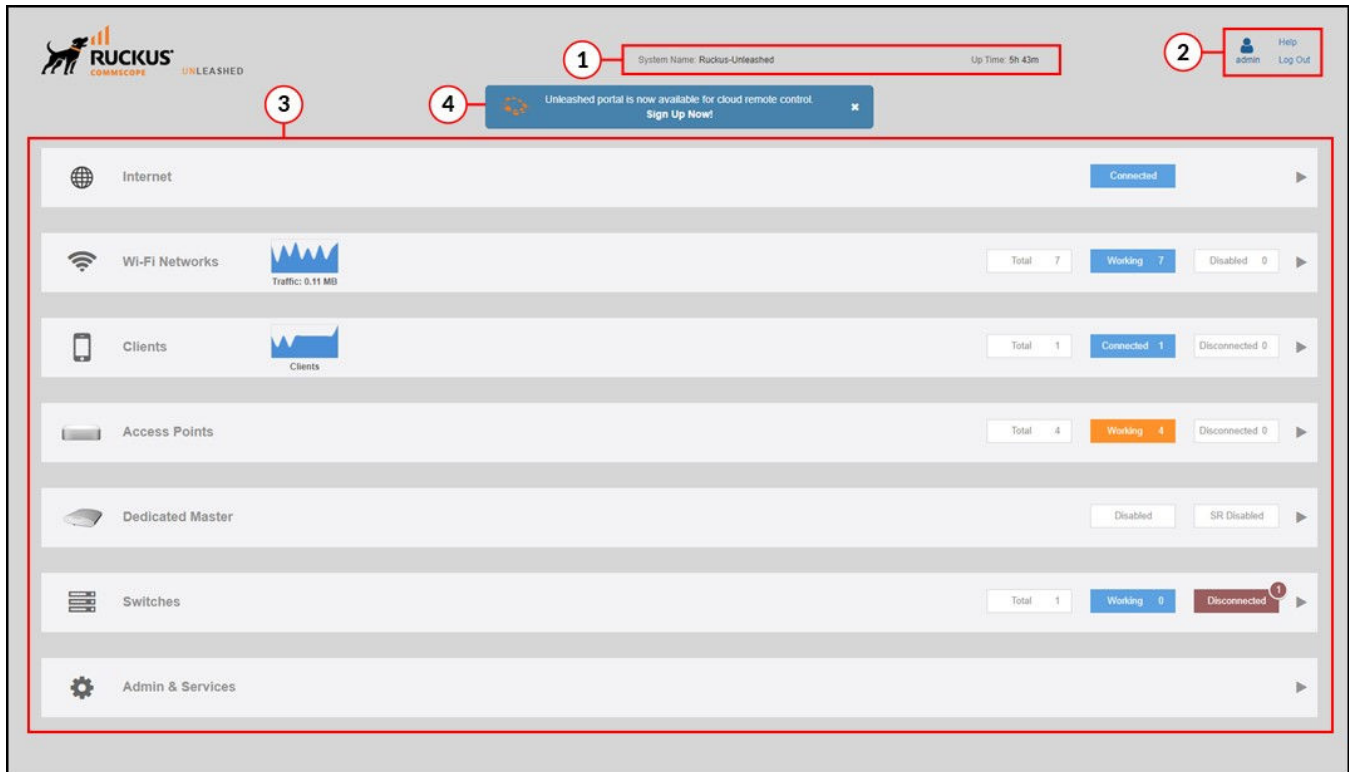


Table 1. Dashboard Sections

Number	Component	Description
1	System Name and Uptime	Displays the system name that you configured and the uptime since the last reboot.
2	Admin Info	Displays currently logged-in Admin name and a link to this Online Help .
3	Dashboard Components	Provide general overview of each component. Click any of the components to expand for more detailed information and configuration options. Refer to Using the Dashboard Components .
4	Signup popup	Click Sign Up Now! to log in to the remote portal. Refer to Remote Portal Overview for more information.

Parent topic: [Using the Admin Interface](#)


Using the Dashboard Components

Each of the Dashboard components can be expanded by clicking the component name to display more detailed information and links to configuration options for that component.

Internet

The **Internet** component provides details on the Master AP's upstream connection to the Internet, including IP address, DNS servers, Gateway address, and the Ethernet port being used as the WAN port.

Figure 1. Internet Component

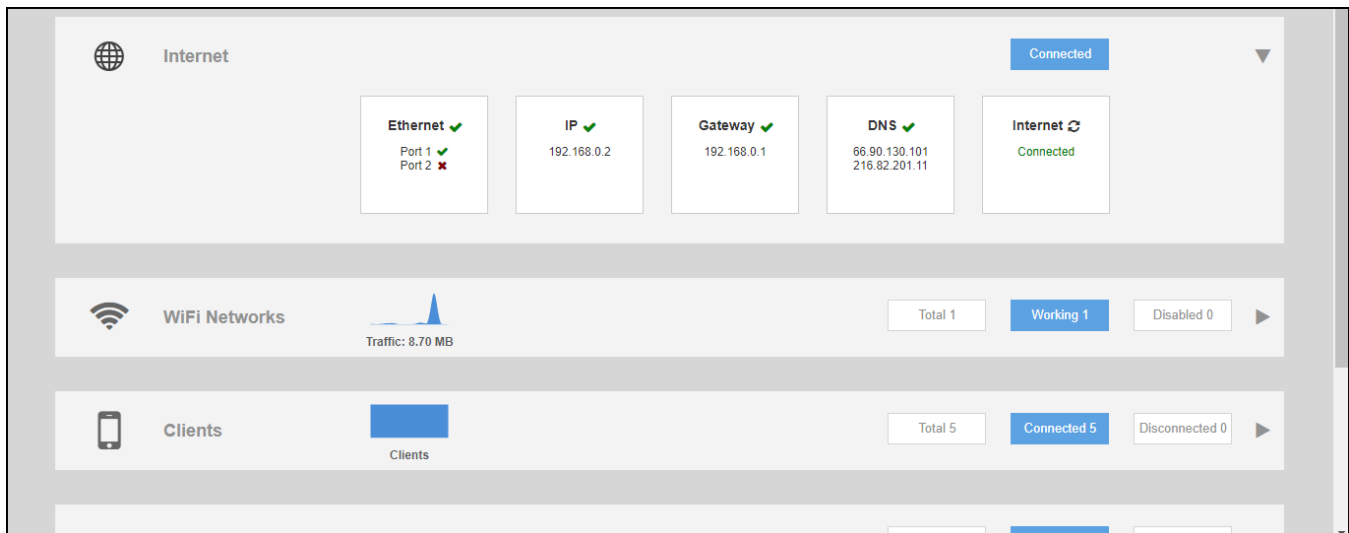


The Internet connection status indicator is not displayed if the "internet-check" feature has been disabled using a CLI command.

Dedicated Master

The **Dedicated Master** component displays status and information about Dedicated Master and Smart Redundancy.

- 🔹 **Note:** The **Enable Dedicated Master** option can be enabled only when the Master AP is an R750 AP, R770 AP, or R850 AP.

Figure 2. Dedicated Master Component

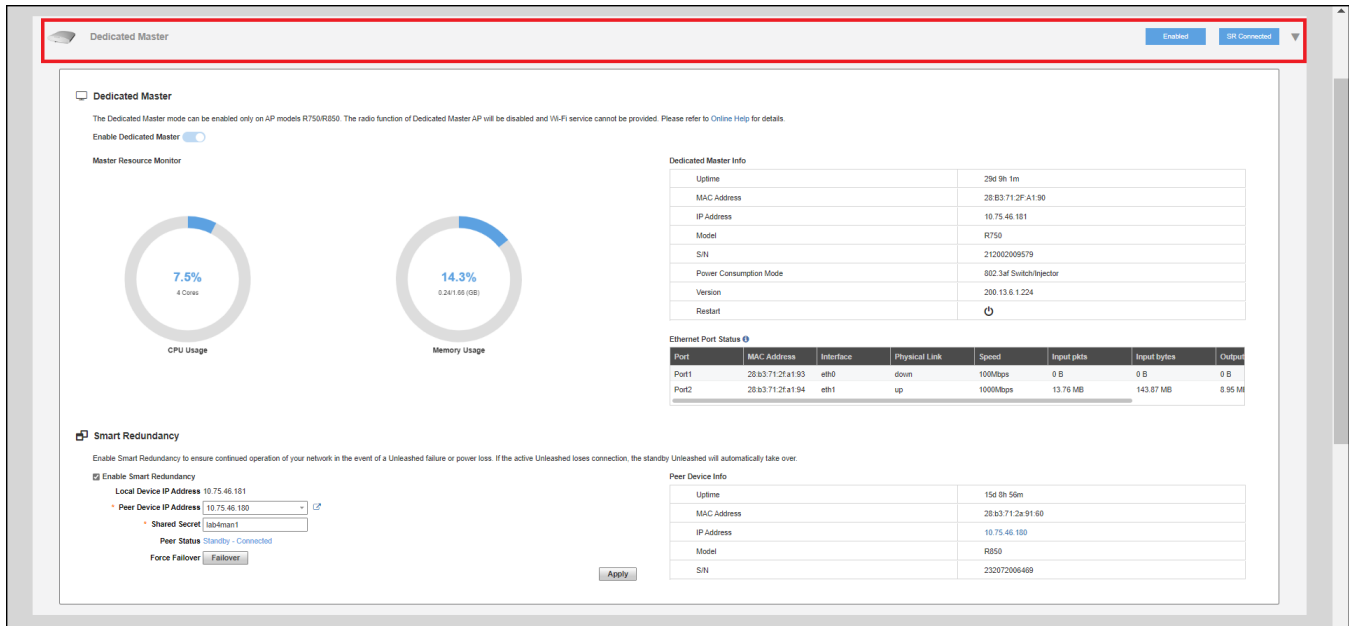


WiFi Networks

The **WiFi Networks** component displays an overview of the wireless LANs that you have deployed. It displays the total number of wireless LANs, the number that are currently in the Working state, and those that are in the Disabled state.

Each of the three categories can be selected to view a detailed list of the WLANs in the Total, Working, or Disabled category.

Figure 3. WiFi Networks Component

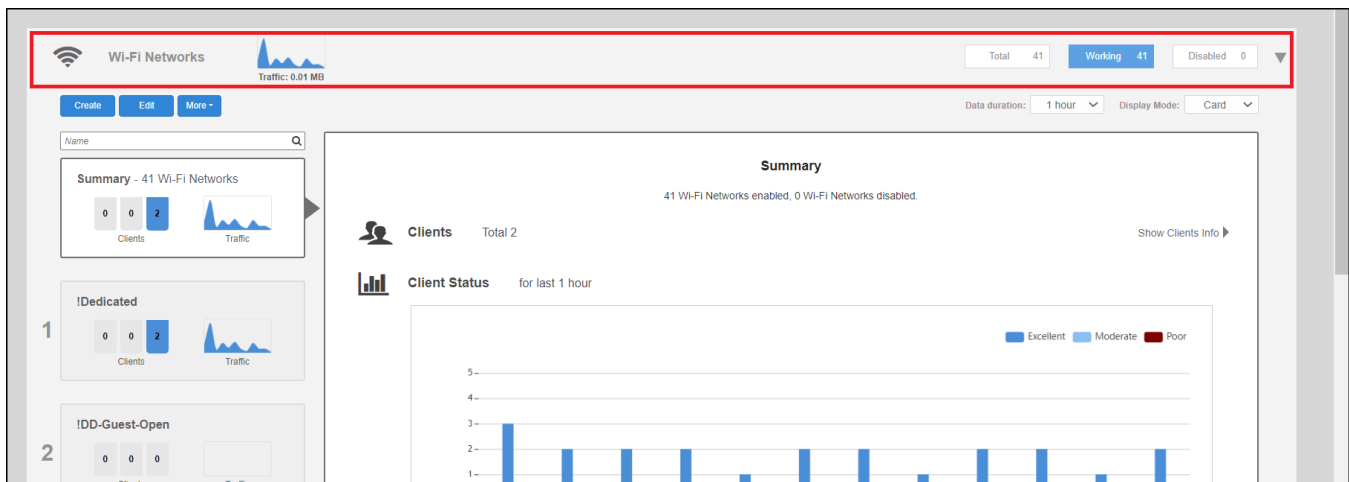

Clients

The **Clients** component provides an overview of the number of Total, Connected, and Blocked clients.

The Clients sub-component provides additional options to search for a client by MAC address, to show details on a client, to temporarily delete a client, or to permanently block a client.

Figure 4. Clients Component

5 clients connected, 0 clients disconnected.

Wired Clients 0 wired clients connected

Wireless Clients 5 wireless clients connected

Show details Rename ★ Mark Favorite ☆ Unmark Favorite Troubleshooting More ▾ Search 🔍

★	Mac Address	IP Address	OS	Name	User	AP Name	WLAN	S
	c8:3a:6b:db:1a:3e	192.168.0.6	N/A	Roku		Unleashed	Unleashed	E
	88:71:e5:a8:7a:d3	192.168.0.14	N/A			Unleashed	Unleashed	E
	48:a4:72:9f:13:bb	192.168.0.10	Windows	LP-JFILES		Unleashed	Unleashed	E
	f0:03:8c:fb:73:38	192.168.0.4	N/A	Roomba-3143C90C41834720		RuckusAP	Unleashed	E
	04:b1:67:47:c4:20	192.168.0.8	Android	Xiaomi Mi A1		Unleashed	Unleashed	E

1-5 of 5 shown 1


Access Points

The **Access Points** component provides an overview of the APs in your network, and is divided into three subsections: Total, Working and Disconnected. Click any of the three subsection buttons to expand the Access Points component and display a list of APs in that category.

The **Access Points** component displays a list of all of the APs being managed by your Master AP. The list includes all APs, including the Master AP itself, currently connected member APs, as well as any APs that have previously joined but are currently disconnected.

Each AP (whether working or disconnected) is represented by one of the large boxes on the left side of the screen. Click one of the AP boxes to display details about that specific AP.


Figure 5. Access Points Component

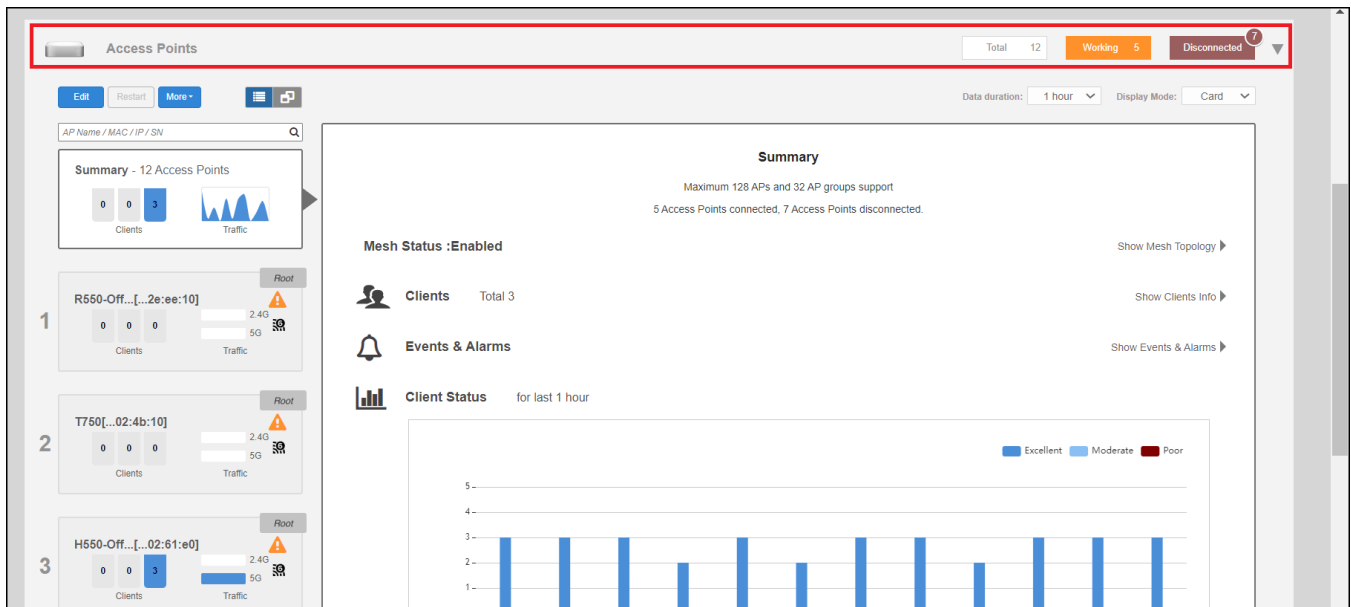

Switches

The Switches component provides an at-a-glance overview of the status of any RUCKUS ICX switches managed by the RUCKUS Unleashed Master AP.

Figure 6. Switches Component

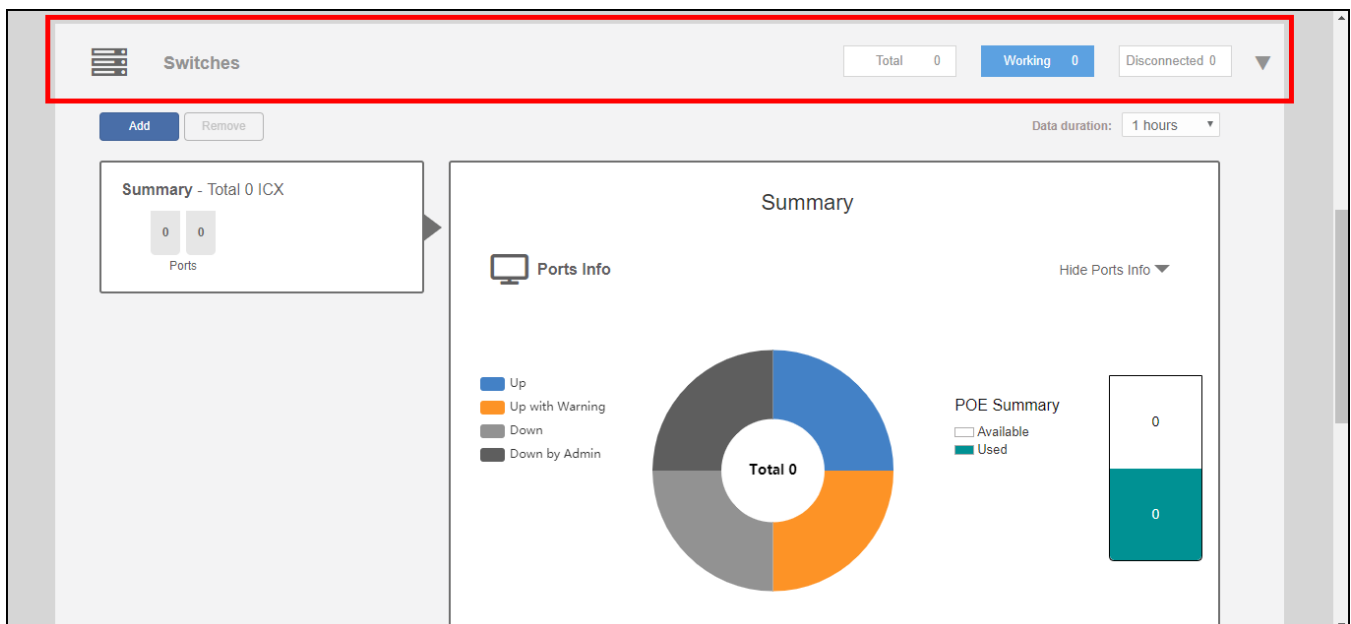

Admin & Services

The **Admin & Services** component provides options for configuring system settings and services, such as system IP address, Dynamic PSK, Bonjour Gateway, Application Recognition, Guest Access, Hotspot service, Radio Control settings and Wireless Intrusion Prevention Services (WIPS).

Figure 7. Admin & Services Component

The screenshot displays the 'Admin & Services' configuration page. On the left, a sidebar menu is visible with the following sections: 'System' (expanded), 'Services', and 'Administer'. Under 'System', the options are 'System Info' (selected), 'IP Settings', 'System Time', 'Country Code', 'Roles', 'Users', and 'Mesh'. Under 'Services', there is an option for 'Services'. Under 'Administer', there is an option for 'Administer'. The main content area is divided into three sections: 'System Info', 'Preferred Master', and 'Email Server'. The 'System Info' section contains fields for 'Name' (Unleashed), 'System Version' (200.7.10.2.294), and 'Unleashed ID' (un9418490011251546969169799), with a 'Generate' button next to the ID field and an 'Apply' button at the bottom right. The 'Preferred Master' section features a 'Preferred Master' dropdown menu set to 'No Preference', followed by a paragraph explaining that applying this change will make the selected AP a Master AP, rebooting the previous Master AP to a Member AP, which may cause a brief network disruption. An 'Apply' button is at the bottom right. The 'Email Server' section has a checkbox for 'Enable Email Server' which is currently unchecked, and a 'From Email Address' field.

System Info

Name: Unleashed

System Version: 200.7.10.2.294

Unleashed ID: un9418490011251546969169799 **Generate**

Apply

Preferred Master

Preferred Master: No Preference

Upon applying this change, the selected AP will become a Master AP if it's not a Master AP currently and the previous Master AP will be rebooted to become a Member AP. As a result, there may be a brief network disruption.

Apply

Email Server

☐ **Enable Email Server**

From Email Address:

Parent topic: [Using the Admin Interface](#)

Dedicated Master Configuration

[Dedicated Master Overview](#)

[Converting an Unleashed Master AP to Dedicated Master](#)

[Joining a Member AP to the Dedicated Master Network](#)

[Dedicated Master AP or Member AP Behind NAT](#)

[Checking Dedicated Master Status in the Unleashed Web Interface](#)

[Smart Redundancy Configuration](#)

Dedicated Master Overview

As a replacement for the ZoneDirector 1200, Dedicated Master is introduced in Unleashed 200.13.

🔗 **Note:** Only the R750 AP, R770 AP, and the R850 AP can be elected as a Dedicated Master AP. The R770 AP is supported from Unleashed 200.16.

As compared to Unleashed bridge mode, the following features are supported in Dedicated Master mode:

- Cross-network segment networking
- Dedicated Master VLAN and AP VLAN
- Smart Redundancy
- Maximum capacity limit to 4,000 clients (compared to Unleashed bridge mode)
- Tunnel WLAN
- ZoneDirector AP migration to Unleashed network

Parent topic: [Dedicated Master Configuration](#)

Converting an Unleashed Master AP to Dedicated Master

Complete the following steps to convert an Unleashed Master AP to Dedicated Master:

- [Checking Whether the Current Active Master AP is an R750, R770, or R850](#)
- [Converting an Active Master AP to Dedicated Master](#)

Checking Whether the Current Active Master AP is an R750, R770, or R850


The **Enable Dedicated Master** option can be enabled only when the current Master AP is an R750 AP, R770 AP, or R850 AP. Otherwise, the system displays the following warning message:

Current Master AP does not support the Dedicated Master mode, please go to 'System Info -> Preferred Master' to select the specified AP model as Preferred Master.

For more information, refer to [Designating a Preferred Master AP](#).

If the current Master AP is not an R750 AP, R770 AP, or R850 AP, the **Enabled Dedicated Master** option appears dimmed.


Figure 1. Warning Message

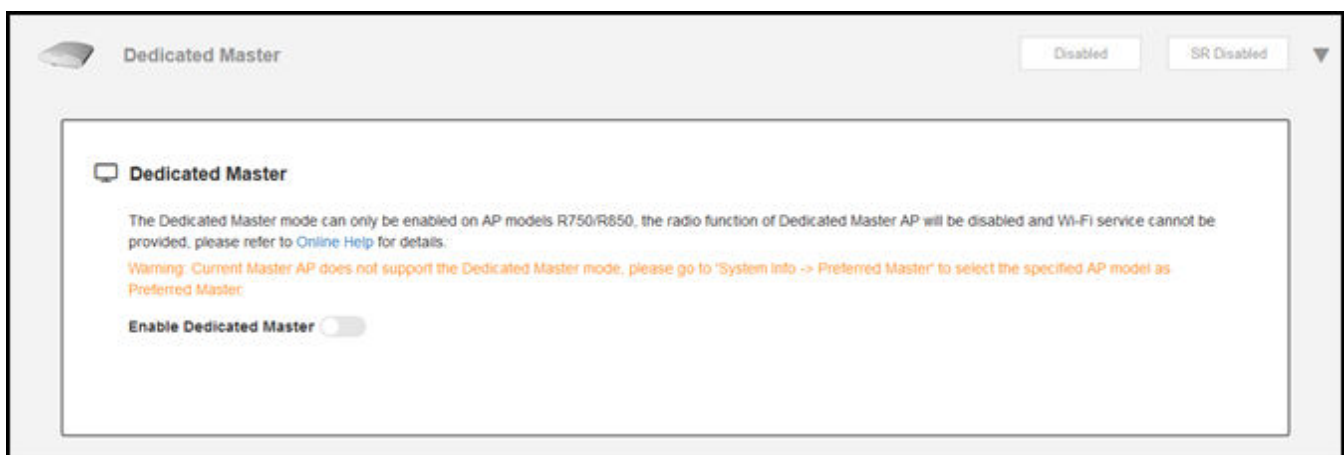

Converting an Active Master AP to Dedicated Master

1. From the Unleashed dashboard, select **Dedicated Master** and click the **Enable Dedicated Master** check box.


Figure 2. Enabling Dedicated Master Mode

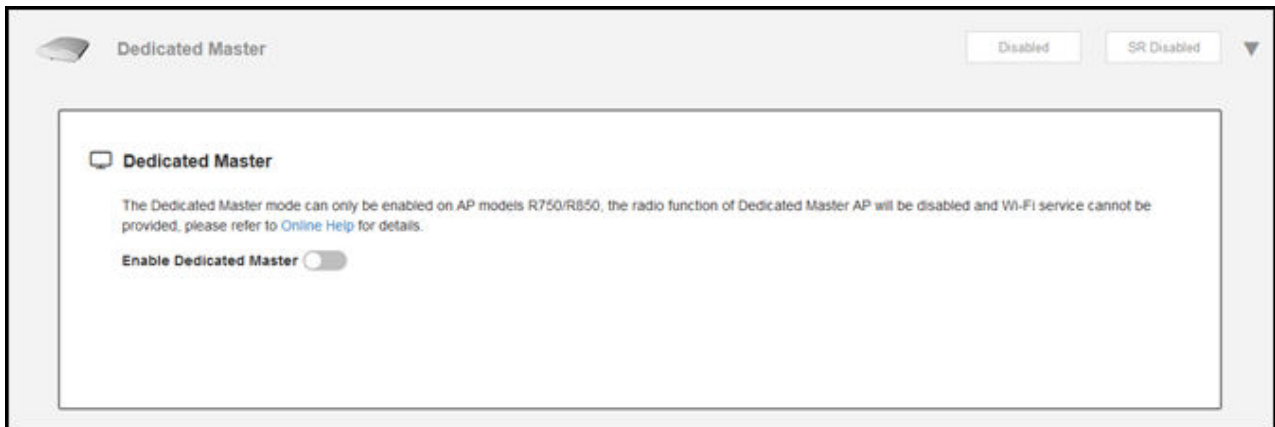

The system displays the following warning message:

Enabling Dedicated Master will reboot the AP. Once enabled, it cannot be disabled unless restoring Unleashed to factory settings. Do you want to continue?

Figure 3. Warning Message: Enabling Dedicated Master

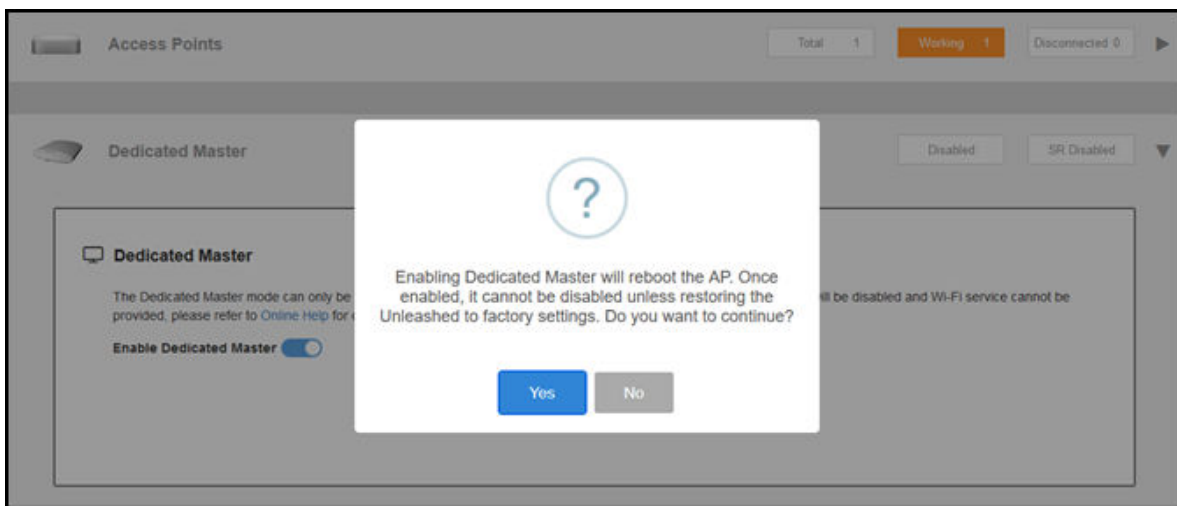

2. Click **Yes** to reboot the AP.

Parent topic: [Dedicated Master Configuration](#)

Joining a Member AP to the Dedicated Master Network

You can use the following ways to join a member AP to the Dedicated Master network:

- [Joining a Member AP to Dedicated Master Using Option 43 \(Recommended\)](#)

- [Placing a Member AP in the Same Network as Dedicated Master](#)
- [Setting the Dedicated Master IP Address in the Member AP CLI](#)


Parent topic: [Dedicated Master Configuration](#)

Joining a Member AP to Dedicated Master Using Option 43 (Recommended)

 **Note:** Before you begin, ensure that Dedicated Master setup has been completed.

1. Select **Admin & Services > System > System Info > Access Point Policies**.
2. Select the **Approval** check box.
3. For **Dedicated Master Discovery Policy**, select **Use DHCP OPTION 43 or auto discovery on same subnet (AP settings will be ignored)**.

Figure 1. Member AP Joining Dedicated Master Using Option 43

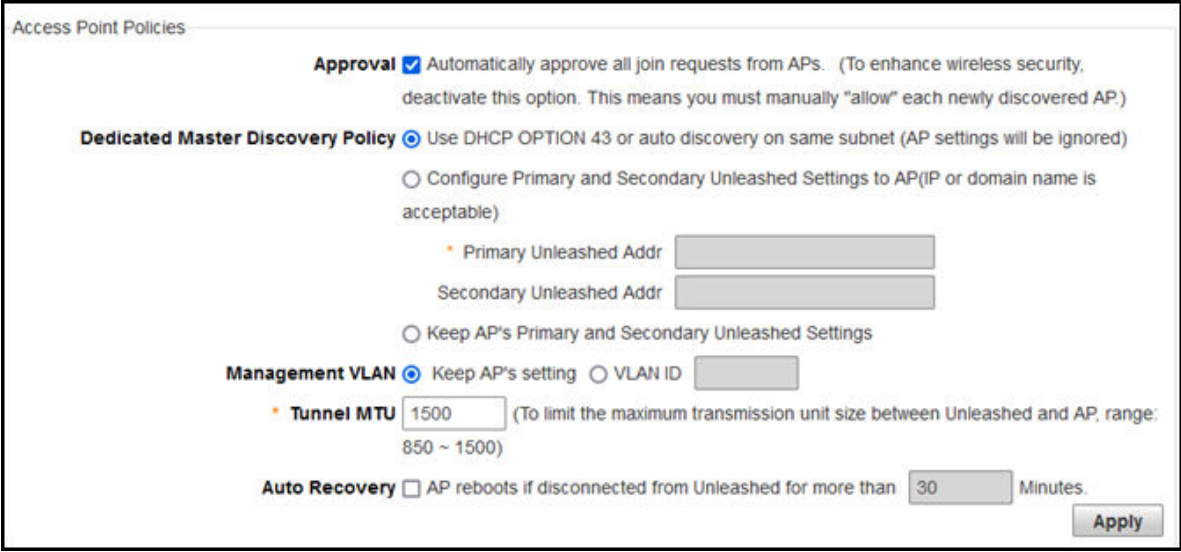

Access Point Policies

Approval ☒ Automatically approve all join requests from APs. (To enhance wireless security, deactivate this option. This means you must manually "allow" each newly discovered AP.)

Dedicated Master Discovery Policy ☒ Use DHCP OPTION 43 or auto discovery on same subnet (AP settings will be ignored)

☐ Configure Primary and Secondary Unleashed Settings to AP(IP or domain name is acceptable)

* Primary Unleashed Addr

Secondary Unleashed Addr

☐ Keep AP's Primary and Secondary Unleashed Settings

Management VLAN ☒ Keep AP's setting ☐ VLAN ID

* Tunnel MTU (To limit the maximum transmission unit size between Unleashed and AP, range: 850 ~ 1500)

Auto Recovery ☐ AP reboots if disconnected from Unleashed for more than Minutes.

Apply

4. Add the Option 43 setting under DHCP server in the Linux DHCP server.

```
#Ruckus Option 43 configuration as below:
option space ruckus_info;
option ruckus_info.zdiplist code 3 = text;
vendor-option-space ruckus_info;
option ruckus_info.zdiplist "10.223.26.121";
```

5. Power on the member AP to retrieve the IP address from DHCP.
The member AP automatically joins Dedicated Master.

Parent topic: [Joining a Member AP to the Dedicated Master Network](#)

Placing a Member AP in the Same Network as Dedicated Master

Note: Before you begin, ensure that Dedicated Master setup has been completed.

1. Go to **Admin & Services > System > System Info > Access Point Policies**.
2. Select the **Approval** check box.
3. Under **Dedicated Master Discovery Policy**, select **Use DHCP OPTION 43 or auto discovery on same subnet (AP settings will be ignored)**.

Figure 1. Placing Member AP in Same Network as Dedicated Master

Access Point Policies

Approval ☒ Automatically approve all join requests from APs. (To enhance wireless security, deactivate this option. This means you must manually "allow" each newly discovered AP.)

Dedicated Master Discovery Policy ☒ Use DHCP OPTION 43 or auto discovery on same subnet (AP settings will be ignored)

☐ Configure Primary and Secondary Unleashed Settings to AP (IP or domain name is acceptable)

 * Primary Unleashed Addr

 Secondary Unleashed Addr

☐ Keep AP's Primary and Secondary Unleashed Settings

Management VLAN ☒ Keep AP's setting ☐ VLAN ID

* Tunnel MTU (To limit the maximum transmission unit size between Unleashed and AP, range: 850 ~ 1500)

Auto Recovery ☐ AP reboots if disconnected from Unleashed for more than Minutes.

Apply

4. Place the member AP in the same network as Dedicated Master and power on the AP. The member AP automatically joins the Dedicated Master.

Parent topic: [Joining a Member AP to the Dedicated Master Network](#)

Setting the Dedicated Master IP Address in the Member AP CLI

Note: Before you begin, ensure that Dedicated Master setup has been completed.

1. Go to **Admin & Services > System > System Info > Access Point Policies**.
2. Select the **Approval** check box.

3. For **Dedicated Master Discovery Policy**, select **Keep AP's Primary and Secondary Unleashed Settings**.
Figure 1. Maintaining the Unleashed Settings of the AP

Access Point Policies

Approval ☒ Automatically approve all join requests from APs. (To enhance wireless security, deactivate this option. This means you must manually "allow" each newly discovered AP.)

Dedicated Master Discovery Policy ☐ Use DHCP OPTION 43 or auto discovery on same subnet (AP settings will be ignored)

☐ Configure Primary and Secondary Unleashed Settings to AP(IP or domain name is acceptable)

• Primary Unleashed Addr

Secondary Unleashed Addr

☒ Keep AP's Primary and Secondary Unleashed Settings

Management VLAN ☒ Keep AP's setting ☐ VLAN ID

• Tunnel MTU (To limit the maximum transmission unit size between Unleashed and AP, range: 850 ~ 1500)

Auto Recovery ☐ AP reboots if disconnected from Unleashed for more than Minutes.

Apply

4. Power on the AP and set the Dedicated Master IP address in the member AP CLI.

```
ruckus>
ruckus> en
ruckus#
ruckus# ap-mode
You have all rights in this mode.
ruckus(ap-mode)#
ruckus(ap-mode)# set director ip 2.2.2.2
** Please reboot for this change to take effect
OK
ruckus(ap-mode)#
```

After reboot, the member AP automatically joins Dedicated Master.

Parent topic: [Joining a Member AP to the Dedicated Master Network](#)

Dedicated Master AP or Member AP Behind NAT

In the Dedicated mode, a Dedicated Master AP or member AP working behind NAT is supported.

Basic NAT Topologies

You can follow three basic NAT topologies:

- Member AP behind NAT
- Dedicated Master AP behind NAT
- Both Dedicated Master AP and member AP behind NAT

Configuration Requirements for Ports or IP Addresses for NAT Topologies

You must configure the following port mapping for the service to work properly for NAT topologies:

- Member AP behind NAT: Port configuration is not required.
- Dedicated Master AP behind NAT:
 - UDP port 12222, 12223, 60000 and TCP port 443 are configured to the private IP address of the Dedicated Master AP in the NAT mapping table.
 - The member AP must connect to the WAN IP address of NAT by Layer 3 (that is, the public IP address in the NAT mapping table of the Dedicated network).
- Both Dedicated Master AP and Member AP behind NAT:
 - UDP port 12222, 12223, 60000 and TCP port 443 are configured to the private IP address of the Dedicated Master AP in the NAT mapping table.
 - The member AP must connect to the WAN IP address of NAT by Layer 3 (that is, the public IP address in the NAT mapping table of the Dedicated network).


Parent topic: [Dedicated Master Configuration](#)

Checking Dedicated Master Status in the Unleashed Web Interface

Complete the following steps to check the Dedicated Master status after the wizard setup or conversion of Unleashed to Dedicated Master.

1. Log in to the Unleashed web interface by entering the administrator username and password. Click **Unleash**.
2. Under **Dedicated Master**, check the status and information about Dedicated Master and Smart Redundancy.

Figure 1. Dedicated Master and Smart Redundancy Information

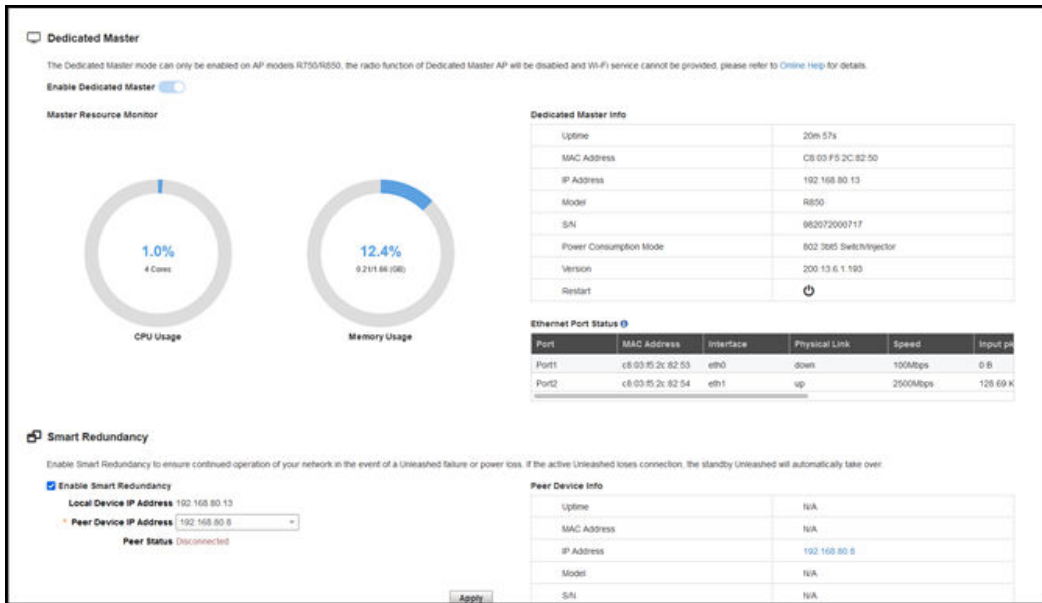

Parent topic: [Dedicated Master Configuration](#)

Smart Redundancy Configuration

When Unleashed is switched to Dedicated Master mode, Unleashed supports Smart Redundancy ability as ZoneDirector.

Smart Redundancy feature allows configuration of two Dedicated Masters as a redundant pair, with one unit actively managing your network while the other serving as a backup in the standby mode and ready to take over if the first unit fails or loses power.

Each Dedicated Master will either be in an active or standby state. If the active Dedicated Master fails, the standby device becomes active. When the original active device recovers, it automatically assumes the standby state as it discovers an already active Dedicated Master on the network.

The Dedicated Master in an active state manages all the APs and client connections. The Dedicated Master in the standby state is responsible for monitoring the health of the active unit and periodically synchronizing its settings to match that of the active device. The Dedicated Master in the standby state will not respond to discovery requests from the APs, and changing from an active to standby state will release all the associated APs.

When a failover occurs, all the associated APs will continue to provide wireless service to the clients during the transition, and will associate to the newly active Dedicated master within approximately one minute.

When two Dedicated Masters are connected in a Smart Redundancy configuration, the standby Dedicated Master will send heartbeats and the active Dedicated Master will send discovery messages at 6-second intervals. After 15 seconds, if there is no response, each controller will assume disconnection from its peer, and the standby Dedicated Master will change to an active state. At this point, both the devices are in an active state and will accept join requests from the APs.

When the two Dedicated Masters are communicating again, one active Dedicated Master will change to the standby state and an auto-synchronization process will be started. A timestamp is used to determine which Dedicated Master is active and synchronizes its latest configuration changes to its peer.

Parent topic: [Dedicated Master Configuration](#)

Smart Redundancy Setup Overview

Complete the following steps to set up Smart Redundancy.

1. Install the Dedicated Unleashed Master AP. Refer to [Setting Up an Unleashed Wi-Fi Network](#).
2. Configure the Dedicated Unleashed Master AP. Refer to [Configuring Dedicated Master for Smart Redundancy](#).
3. Set up Smart Redundancy with the following components:
 - Member R750 AP, R770 AP, or R850 AP
 - Other Dedicated Master
4. Check Smart Redundancy status. Refer to [Checking the Standby Dedicated Master](#).

Parent topic: [Smart Redundancy Configuration](#)

Configuring Dedicated Master for Smart Redundancy

You can set up Smart Redundancy on Dedicated Master using the following options:

- [Smart Redundancy Setup Through Auto Mode](#)
- [Smart Redundancy Setup Through Manual Mode](#)
- [Smart Redundancy Setup Through the Command Line Interface](#)

Parent topic: [Smart Redundancy Configuration](#)

Smart Redundancy Setup Through Auto Mode

Complete the following steps to set up Smart Redundancy through auto mode.

1. Connect the member R750 AP, R770 AP, or R850 AP to the Dedicated Master network.
2. Log in to the web interface of Dedicated Master.
3. On the **Dedicated Master** page under **Smart Redundancy**, select the **Enable Smart Redundancy** check box.

Figure 1. Enabling Smart Redundancy: Auto Mode

Smart Redundancy

Enable Smart Redundancy to ensure continued operation of your network in the event of a Unleashed failure or power loss. If the active Unleashed loses connection, the standby Unleashed will automatically take over.

☒ **Enable Smart Redundancy**

Local Device IP Address 192.168.184.127

Peer Device IP Address 192.168.183.126

Peer Status N/A

Peer Device Info


Uptime	N/A
MAC Address	N/A
IP Address	N/A
Model	N/A
S/N	N/A

Apply

- From the **Peer Device IP Address** list, select the IP address of the member R750 AP, R770 AP, or R850 AP.

Note: Only an online root R750 AP, R770 AP, or R850 AP can be selected as a peer device.


- Click **Apply**. A confirmation message is displayed.

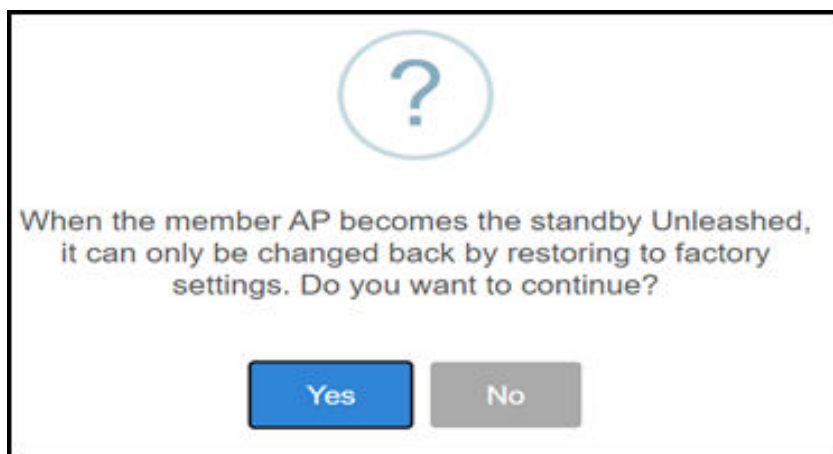Figure 2. Confirmation Message for Selecting Peer Device

The selected member AP syncs the configuration from Dedicated Master and changes to the standby Master AP after reboot.

If Smart Redundancy is established successfully, the peer status shows **SR Connected** and the details of the peer device are displayed in the **Peer Device Info** table.

Figure 3. Checking Smart Redundancy Status

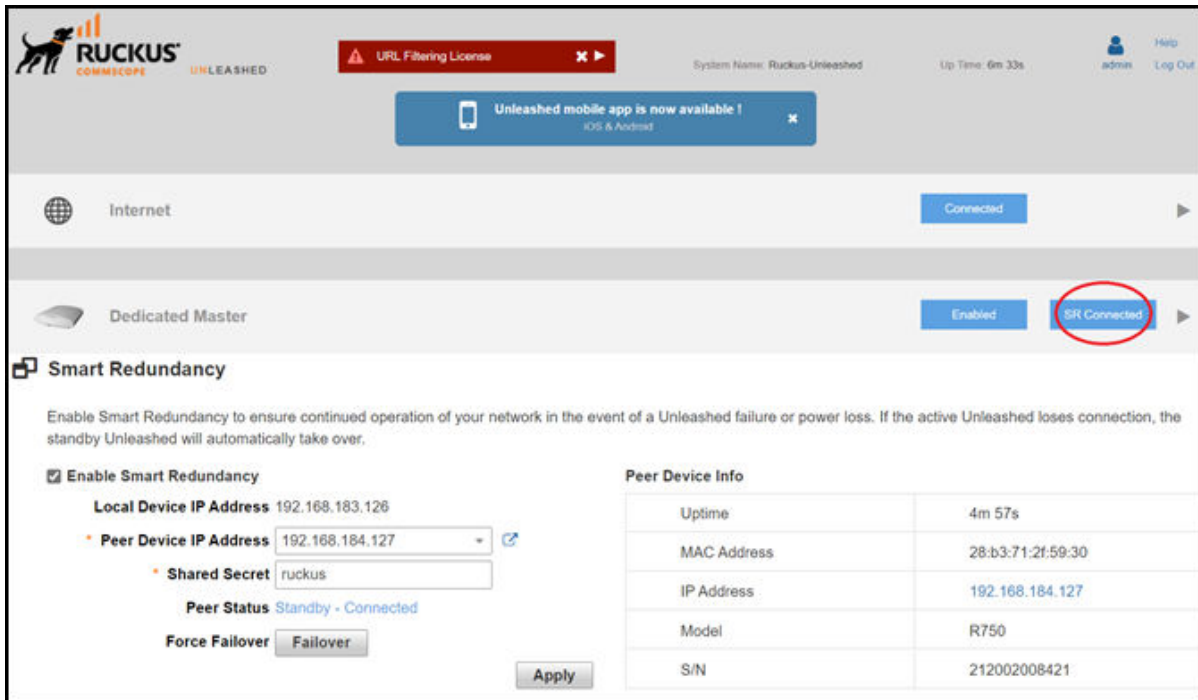

- Note:** If the active and standby Dedicated Master APs are on different IP subnets, the APs must know the IP addresses of both Master APs to quickly find the active Master AP after a Smart Redundancy failover. You can configure the IP addresses of both devices. Go to **Admin & Services > System > System Info > Dedicated Master Discovery Policy**. For **Dedicated Master Discovery Policy**, specify one Dedicated Master AP as primary and the other as secondary. Alternatively, you can also specify the IP addresses of both Dedicated Master APs using DHCP Option 43.
- Note:** If you disable Smart Redundancy after it has been enabled, both Dedicated Master APs will revert to the active state, which could result in unpredictable network topologies. Therefore, it is recommended to reset the standby Dedicated Master AP to factory settings before disabling Smart Redundancy.
- Note:** Smart Redundancy supports synchronization of SSL certificate.
- Note:** If an active or standby Master with Smart Redundancy enabled is deployed on different subnets, management IP address must be on a separate management VLAN and both the Masters must be the members of this management VLAN.
- Note:** The member R750 AP, R770 AP, or R850 AP is removed from the AP list when it changes to standby Dedicated Master.

Parent topic: [Configuring Dedicated Master for Smart Redundancy](#)

Smart Redundancy Setup Through Manual Mode


Complete the following steps to set up Smart Redundancy through manual mode.

1. Install two Dedicated Master networks in the same subnet or different subnets.
2. Log in to the web interface of the primary Dedicated Master (preferred as the primary).
3. From the **Dedicated Master** page under **Smart Redundancy**, select the **Enable Smart Redundancy** check box.
4. For **Peer Device IP Address**, enter the IP address of the secondary Dedicated Master.
5. For **Shared Secret**, enter a password for two-way communication between the two Dedicated Master networks.

The password can contain up to a maximum of 15 characters and cannot include "" (grave accent) or "\$(".

 **Note:** A dollar sign (\$) and an opening parenthesis (()) can be used separately in the password.

Figure 1. Enabling Smart Redundancy: Manual Mode

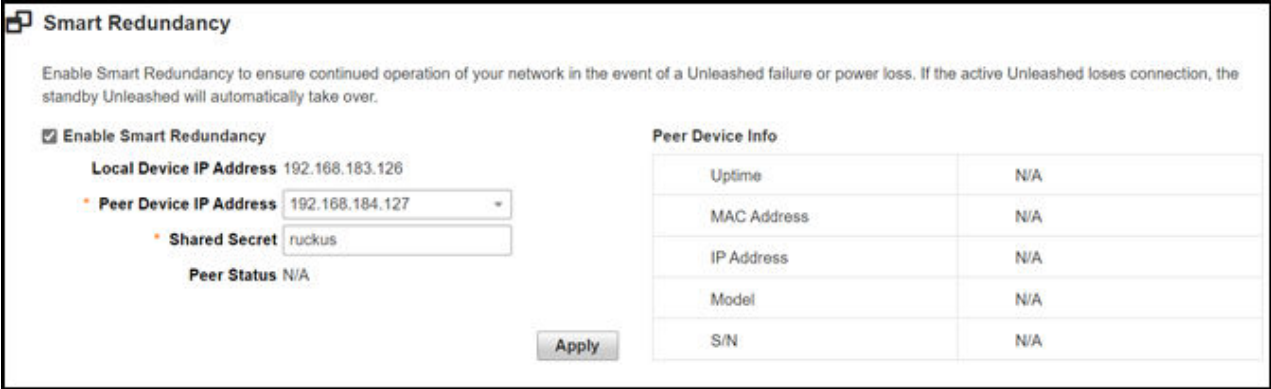

Smart Redundancy

Enable Smart Redundancy to ensure continued operation of your network in the event of a Unleashed failure or power loss. If the active Unleashed loses connection, the standby Unleashed will automatically take over.

☒ **Enable Smart Redundancy**

Local Device IP Address 192.168.183.126

Peer Device IP Address 192.168.184.127

Shared Secret ruckus

Peer Status N/A

Peer Device Info

Uptime	N/A
MAC Address	N/A
IP Address	N/A
Model	N/A
S/N	N/A

Apply

6. Click **Apply** to save changes.

 **Note:** The versions of local and peer devices must match.

7. Log in to the web interface of the secondary Dedicated Master (preferred as the backup).
8. On the **Dedicated Master** page under **Smart Redundancy**, select the **Enable Smart Redundancy** check box.
9. For **Peer Device IP Address**, enter the IP address of the primary Dedicated Master.
10. For **Shared Secret**, enter the same password as entered in Step 5.

11. Click **Apply** to save changes.

If an active Dedicated Master is discovered, the secondary Dedicated Master assumes the standby state. The **Sync to peer** and **Sync from peer** buttons are displayed on both Dedicated Masters to prompt configuration synchronization between local and peer devices.

Figure 2. Syncing Configuration Between Local and Peer Devices

Smart Redundancy

Enable Smart Redundancy to ensure continued operation of your network in the event of a Unleashed failure or power loss. If the active Unleashed loses connection, the standby Unleashed will automatically take over.

☒ **Enable Smart Redundancy**

Local Device IP Address 192.168.183.126

Peer Device IP Address 192.168.184.127

Shared Secret ruckus

Peer Status Pending

Smart Redundancy is not fully operational yet. Select which correct configuration to synchronize.

Sync to peer (last updated on 2022/07/12 17:37:18)

Sync from peer (last updated on 2022/07/12 17:41:49)

Apply


Peer Device Info

Uptime	1m 29s
MAC Address	28:b3:71:2f:59:30
IP Address	192.168.184.127
Model	R750
S/N	212002008421

12. Choose one of the following options:
 - Click **Sync to peer** on the primary Dedicated Master.

A confirmation message is displayed.

Figure 3. Confirmation Message: Sync to Peer

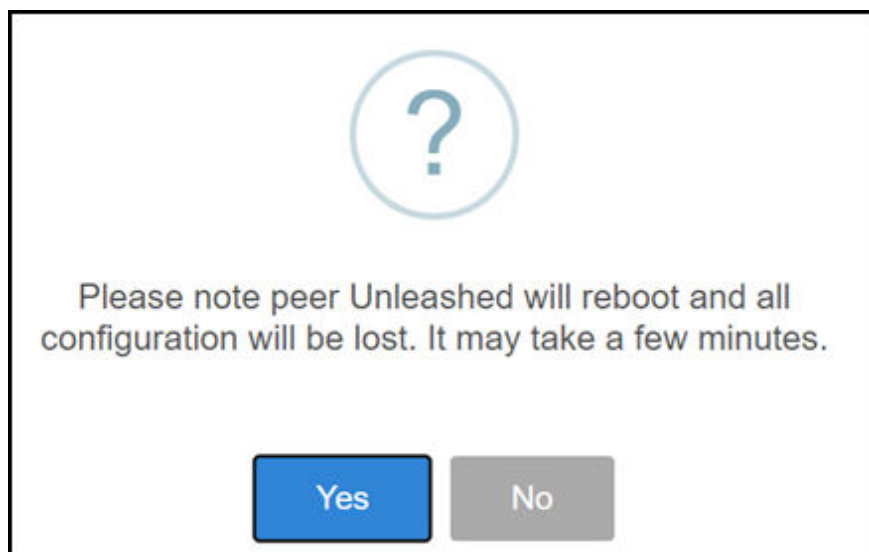


Click **Yes** to proceed.

The primary Dedicated Master syncs the configuration to the peer. The secondary Dedicated Master reboots and all its configuration is lost.

- Click **Sync from peer** on the primary Dedicated Master.

A confirmation message is displayed.

Figure 4. Confirmation Message: Sync from Peer

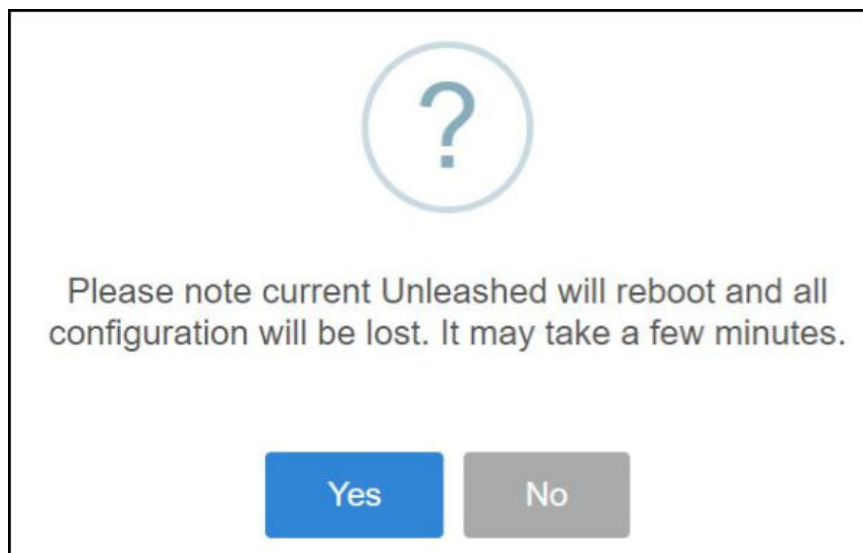

Click **Yes** to proceed.

The primary Dedicated Master syncs the configuration from the peer. The current Dedicated Master reboots and all its configuration is lost. The primary Dedicated Master and secondary Dedicated Master switch roles.


- 🔗 **Note:** To avoid a primary Dedicated Master reboot and the switch from the primary Dedicated Master to the secondary Dedicated Master, it is recommended to select the **Sync to peer** option on the primary Dedicated Master and synchronize the configuration from the local to the peer device.

13. Log in to the standby Dedicated Master web interface after it boots up.

The secondary Dedicated Master enters the standby mode.

14. Check the Smart Redundancy status on the primary Dedicated Master.

Figure 5. Checking the Status of Smart Redundancy

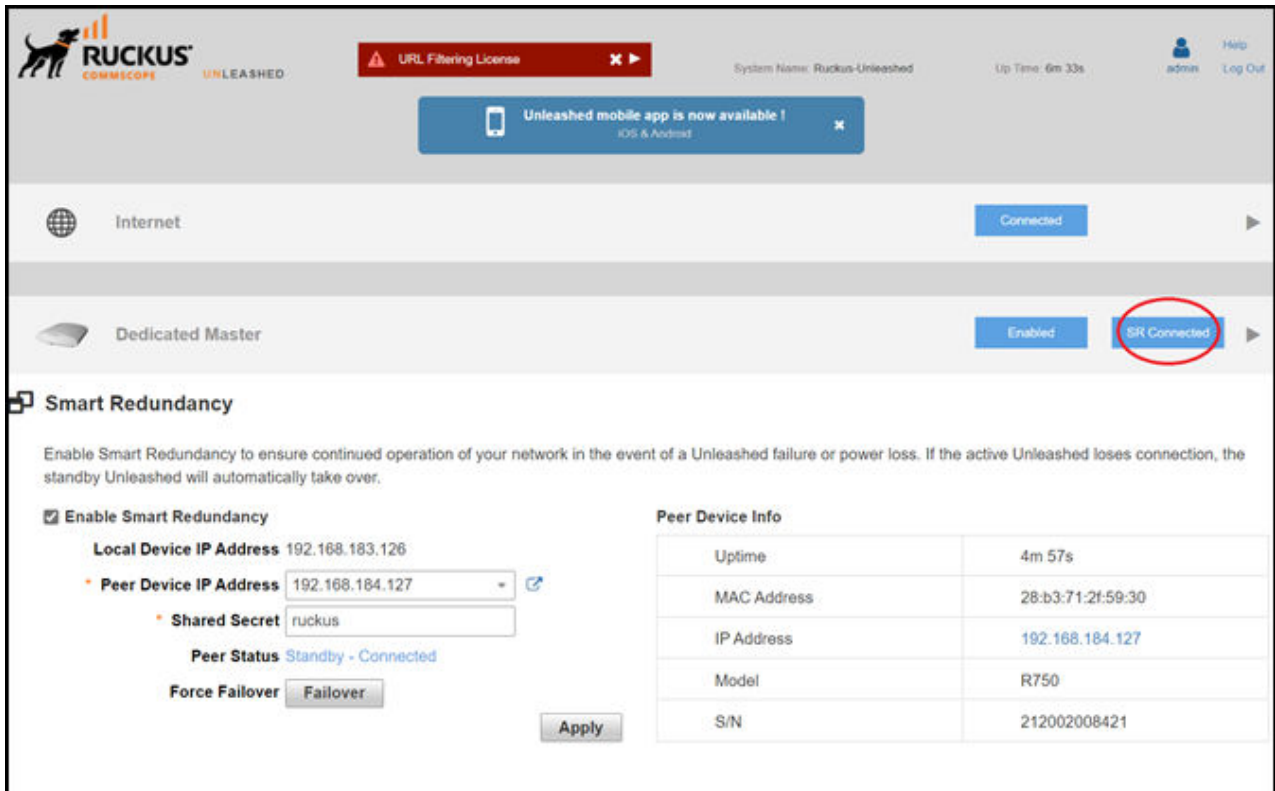

- **Note:** Smart Redundancy fails to establish a connection if the Unleashed versions are not the same.
- **Note:** Use the **Force Failover** option to switch the active and standby states.
- **Note:** If the active and standby Dedicated Master APs are on different IP subnets, the APs must know the IP addresses of both Master APs to quickly find the active Master AP after a Smart Redundancy failover. You can configure the IP addresses of both devices. Go to **Admin & Services > System > System Info > Dedicated Master Discovery Policy**. For **Dedicated Master Discovery Policy**, specify one Dedicated Master AP as primary and the other as secondary. Alternatively, you can also specify the IP addresses of both Dedicated Master APs using DHCP option 43.
- **Note:** If you disable Smart Redundancy after it has been enabled, both the Dedicated Master APs will revert to the active state, which could result in unpredictable network topologies. Therefore, it is recommended to reset the standby Dedicated Master AP to factory settings before disabling Smart Redundancy.
- **Note:** Smart Redundancy supports synchronization of SSL certificate.
- **Note:** If an active or standby Master that is enabled with Smart Redundancy is deployed on different subnets, the management IP address must be on a separate management VLAN and both the Masters must be the members of this management VLAN.

- **Note:** Active and standby Master APs are not displayed on the AP list; they are displayed in the AP table of the **Admin & Services > Administration > Upgrade** page.

Parent topic: [Configuring Dedicated Master for Smart Redundancy](#)

Smart Redundancy Setup Through the Command Line Interface

Complete the following steps to set up Smart Redundancy through CLI.

1. Use SSH to access the CLI of Dedicated Master preferred as the primary.
2. Enable Smart Redundancy, and configure the peer device IP address and the shared secret.

Figure 1. Enabling Smart Redundancy Through the CLI for the Primary Dedicated Master

```
Please login:
Please login: admin
Password:
Welcome to Ruckus Unleashed Network Command Line Interface
ruckus> ena
ruckus# config
You have all rights in this mode.
ruckus(config)# system
ruckus(config-sys)# smart-redundancy
ruckus(config-sys-smart-redundancy)# peer-addr 192.168.184.127
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-sys-smart-redundancy)# secret ruckus
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-sys-smart-redundancy)# show
Smart Redundancy:
  Status= Disabled
  Peer IP/IPv6 Address=
  Shared Secret=

ruckus(config-sys-smart-redundancy)# end
The smart redundancy settings have been updated.
Your changes have been saved.
ruckus(config-sys)# smart-redundancy
ruckus(config-sys-smart-redundancy)# show
Smart Redundancy:
  Status= Enabled
  Local Connect Status= Disconnected
  Peer IP Address      = 192.168.184.127
  Peer Connect Status = Disconnected
  Shared Secret= ruckus
```

3. Use SSH to access the CLI of the Dedicated Master preferred as the secondary.
4. Enable Smart Redundancy, and configure the peer device IP address and the shared secret.

Figure 2. Enabling Smart Redundancy Through the CLI for the Backup Dedicated Master

```

login as:
Please login: admin
Password:
Welcome to Ruckus Unleashed Network Command Line Interface
ruckus> ena
ruckus# config
You have all rights in this mode.
ruckus(config)# system
ruckus(config-sys)# smart-redundancy
ruckus(config-sys-smart-redundancy)# peer-addr 192.168.183.126
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-sys-smart-redundancy)# secret ruckus
The command was executed successfully. To save the changes, type 'end' or 'exit'.
ruckus(config-sys-smart-redundancy)# end
The smart redundancy settings have been updated.
Your changes have been saved.
ruckus(config-sys)# smart-redundancy
ruckus(config-sys-smart-redundancy)# show
Smart Redundancy:
  Status= Enabled
  Local Connect Status= Disconnected
  Peer IP Address      = 192.168.183.126
  Peer Connect Status = Disconnected
  Shared Secret= ruckus
ruckus(config-sys-smart-redundancy)#

```

5. Log in to the primary Dedicated Master web interface and click **Sync to peer** to synchronize the configuration from the local to the peer device (as shown in the *Smart Redundancy Setup Through Manual Mode*).

 **Note:** Command line interface does not support Smart Redundancy setup through auto mode; only Smart Redundancy setup through manual mode is supported.


6. Check the Smart Redundancy status on the primary Dedicated Master.

Parent topic: [Configuring Dedicated Master for Smart Redundancy](#)

Checking the Standby Dedicated Master

Log in to the standby Dedicated Master web interface using the device IP address https://StandbyMaster_ip or open the web interface of the standby Dedicated Master from the web interface of the primary Dedicated Master by clicking the icon next to **Peer Device IP Address**.

Figure 1. Opening the Standby Dedicated Master Web Interface

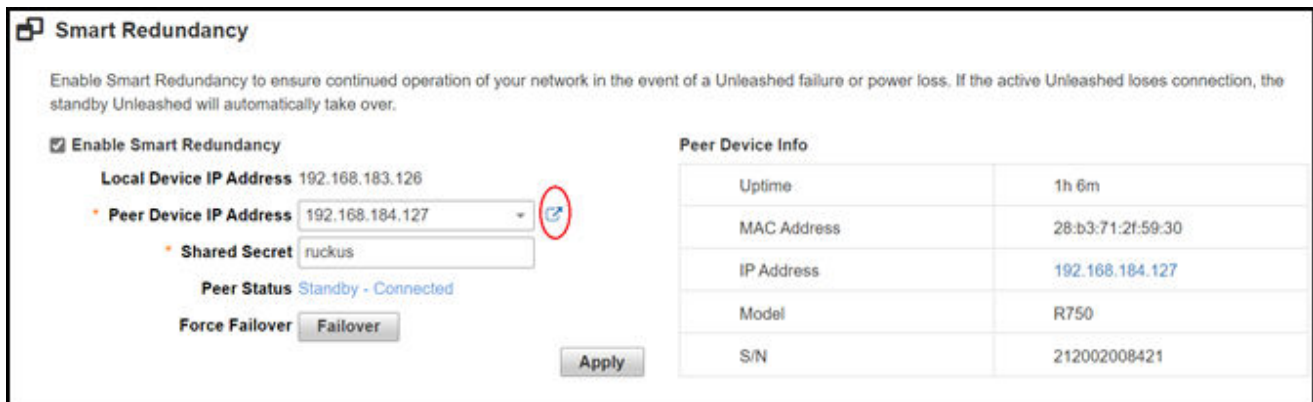

Smart Redundancy

Enable Smart Redundancy to ensure continued operation of your network in the event of a Unleashed failure or power loss. If the active Unleashed loses connection, the standby Unleashed will automatically take over.

☒ **Enable Smart Redundancy**

Local Device IP Address 192.168.183.126

Peer Device IP Address 192.168.184.127

Shared Secret ruckus

Peer Status Standby - Connected


Force Failover

Peer Device Info

Uptime	1h 6m
MAC Address	28:b3:71:2f:59:30
IP Address	192.168.184.127
Model	R750
S/N	212002008421

The standby mode information is displayed.

Figure 2. Standby Dedicated Master Information

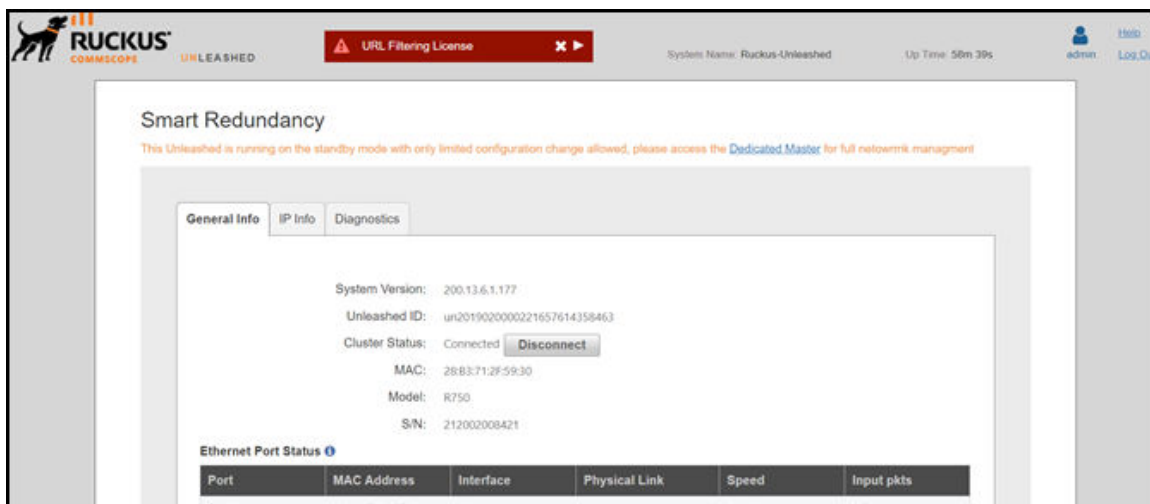

RUCKUS COMMSCOPE UNLEASHED

URL Filtering License

System Name: Ruckus-Unleashed Up Time: 56m 39s

Smart Redundancy

This Unleashed is running on the standby mode with only limited configuration change allowed, please access the [Dedicated Master](#) for full network management

General Info IP Info Diagnostics

System Version: 200.13.6.1.177

Unleashed ID: un2019020000221657614358463

Cluster Status: Connected

MAC: 28:B3:71:2F:59:30

Model: R750

S/N: 212002008421

Ethernet Port Status

Port	MAC Address	Interface	Physical Link	Speed	Input pkts

Parent topic: [Smart Redundancy Configuration](#)

Disabling Smart Redundancy

You can disable Smart Redundancy using the following options:

- [Disabling Smart Redundancy from Primary Dedicated Master](#)
- [Disabling Smart Redundancy from Standby Dedicated Master](#)


Parent topic: [Smart Redundancy Configuration](#)

Disabling Smart Redundancy from the Primary Dedicated Master

Complete the following steps to disable Smart Redundancy from the primary Dedicated Master.

1. Clear the **Enable Smart Redundancy** check box.

Figure 1. Disabling Smart Redundancy from the Primary Dedicated Master

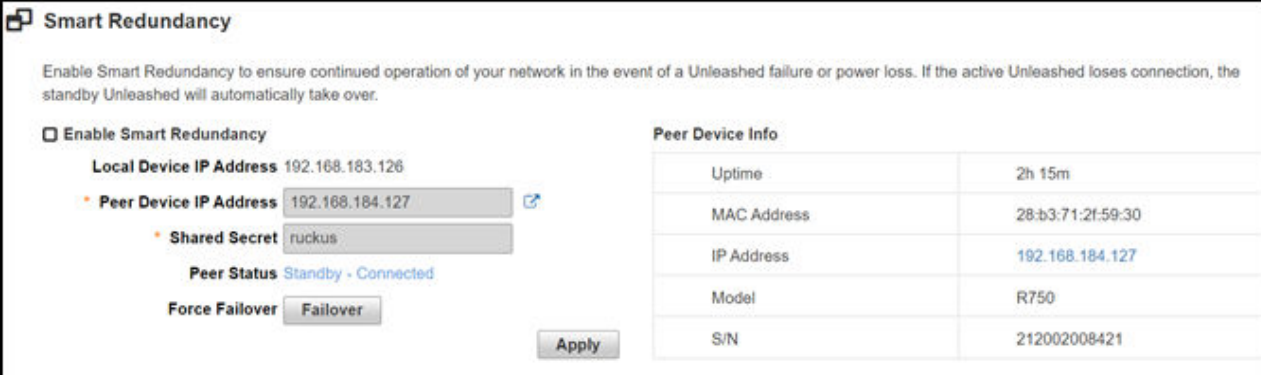

Smart Redundancy

Enable Smart Redundancy to ensure continued operation of your network in the event of a Unleashed failure or power loss. If the active Unleashed loses connection, the standby Unleashed will automatically take over.

☐ Enable Smart Redundancy

Local Device IP Address 192.168.183.126

Peer Device IP Address 192.168.184.127

Shared Secret ruckus

Peer Status Standby - Connected

Force Failover Failover

Apply


Peer Device Info

Uptime	2h 15m
MAC Address	28:b3:71:2f:59:30
IP Address	192.168.184.127
Model	R750
S/N	212002008421

- Click **Apply** to save the changes.

A confirmation message is displayed.

Figure 2. Confirmation Message: Disabling Smart Redundancy

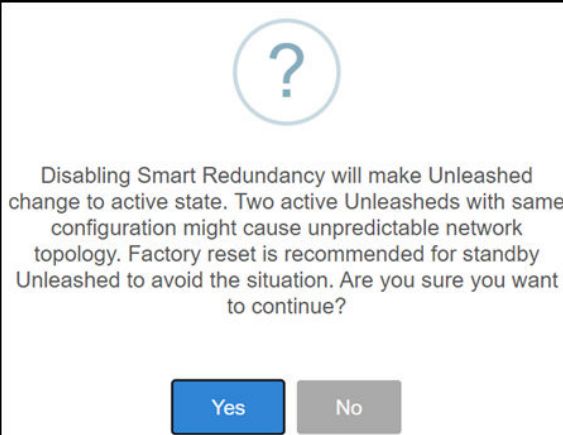

?


Disabling Smart Redundancy will make Unleashed change to active state. Two active Unleasheds with same configuration might cause unpredictable network topology. Factory reset is recommended for standby Unleashed to avoid the situation. Are you sure you want to continue?

Yes No

- Click **Yes** to confirm.

- Check the Smart Redundancy status.

Figure 3. Checking Smart Redundancy Status After Disabling

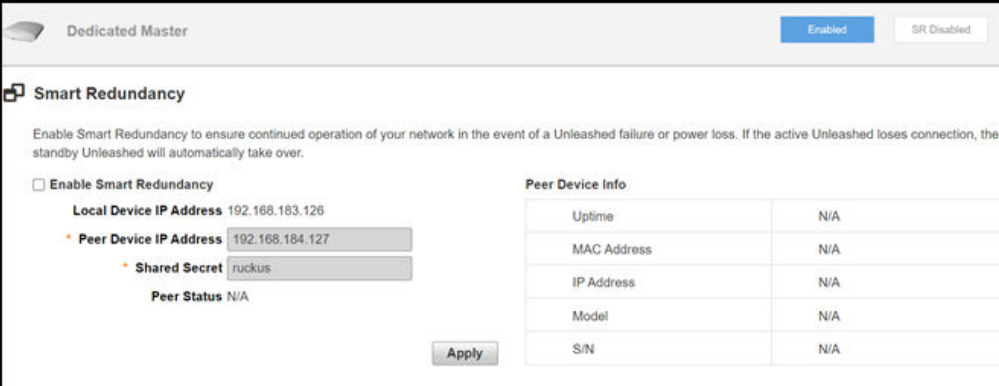

Dedicated Master

Enabled SR Disabled

Smart Redundancy

Enable Smart Redundancy to ensure continued operation of your network in the event of a Unleashed failure or power loss. If the active Unleashed loses connection, the standby Unleashed will automatically take over.

☐ Enable Smart Redundancy

Local Device IP Address 192.168.183.126

Peer Device IP Address 192.168.184.127

Shared Secret ruckus

Peer Status N/A

Apply

Peer Device Info

Uptime	N/A
MAC Address	N/A
IP Address	N/A
Model	N/A
S/N	N/A


Parent topic: [Disabling Smart Redundancy](#)

Disabling Smart Redundancy from the Standby Dedicated Master

Complete the following steps to disable Smart Redundancy from the standby Dedicated Master.


1. From the standby Dedicated Master web interface on the **General Info** tab, click the **Disconnect** button in **Cluster Status**.

Figure 1. Disabling Smart Redundancy from the Standby Dedicated Master

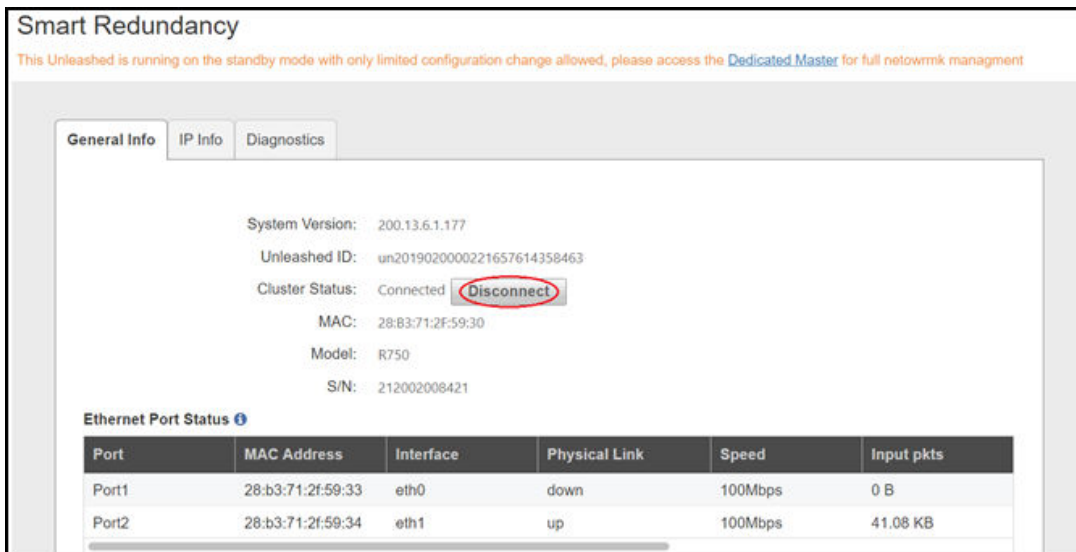

2. Click **Apply** to save the changes.
 A confirmation message is displayed.

Figure 2. Confirmation Message: Disabling Smart Redundancy

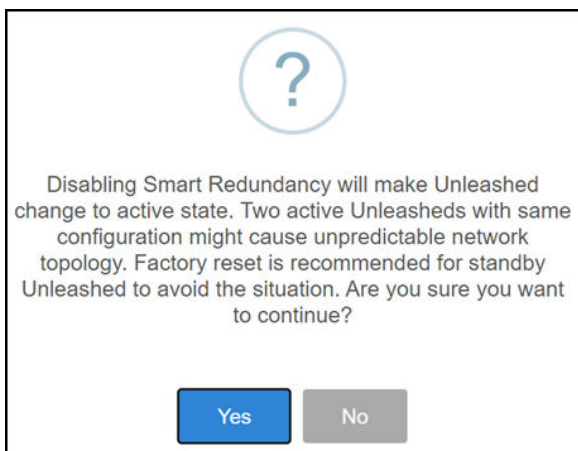

3. Click **Yes** to confirm.

The standby Dedicated Master web interface auto-refreshes and switches to active mode.

Parent topic: [Disabling Smart Redundancy](#)

WLAN Configuration

WLAN Configuration Overview

WLAN Usage Types

Creating a New WLAN

802.1X EAP WLANs

Guest WLANs

Hotspot WLANs

Configuring Global WLAN Settings

Editing an Existing WLAN

Using a QR Code to Join a Wi-Fi Network

Deleting a WLAN

Disabling a WLAN Temporarily

WLAN Configuration Overview

The **Wi-Fi Networks** component of the RUCKUS Unleashed dashboard provides tools for managing all aspects of your RUCKUS Unleashed wireless local area networks (WLANs).

It contains options for creating new WLANs, modifying or deleting existing WLANs, and configuring global wireless settings for deployment on all WLANs.

The **Wi-Fi Networks** component offers two display modes:


- Card display mode
- Table display mode

The **Wi-Fi Networks** component offers the following options:

- Search field: Search WLANs in card or table display mode.
- **Summary** Wi-Fi Network box: Click this box to view a summary of all WLAN clients, signal quality, and traffic statistics.

- **Individual Wi-Fi network boxes:** Click any of these boxes to view details specific to the indicated WLAN.
 - **Data Duration:** Select the duration of time interval (10 minute, 1 hour, and 12 hours) to view the client status and traffic information of the indicated WLAN.
 - **Display Mode:** Switch between card and table display modes. If there are more than 20 WLANs, they are displayed in table mode automatically. The display mode returns to the default (card mode) when the web interface is refreshed.
-  **Note:** You can configure 64 WLANs in Dedicated mode and 16 WLANs in local bridge mode from the web interface, CLI, and mobile app.
- **Show Clients Info:** Click this link to view a table of currently connected clients.
 - **Client Status** bar chart: This chart displays the number of connected clients and the client signal quality across all connected WLANs at one-minute intervals (over the last 10 minutes), 5-minute intervals (over the last one hour), and one-hour intervals (over the last 12 hours) respectively.
 - **Traffic** graph: This graph displays the Received (Rx), Transmitted (Tx), and Total traffic values as per the time interval selected for **Data Duration**.


Figure 1. Wi-Fi Networks Component: Table Display Mode

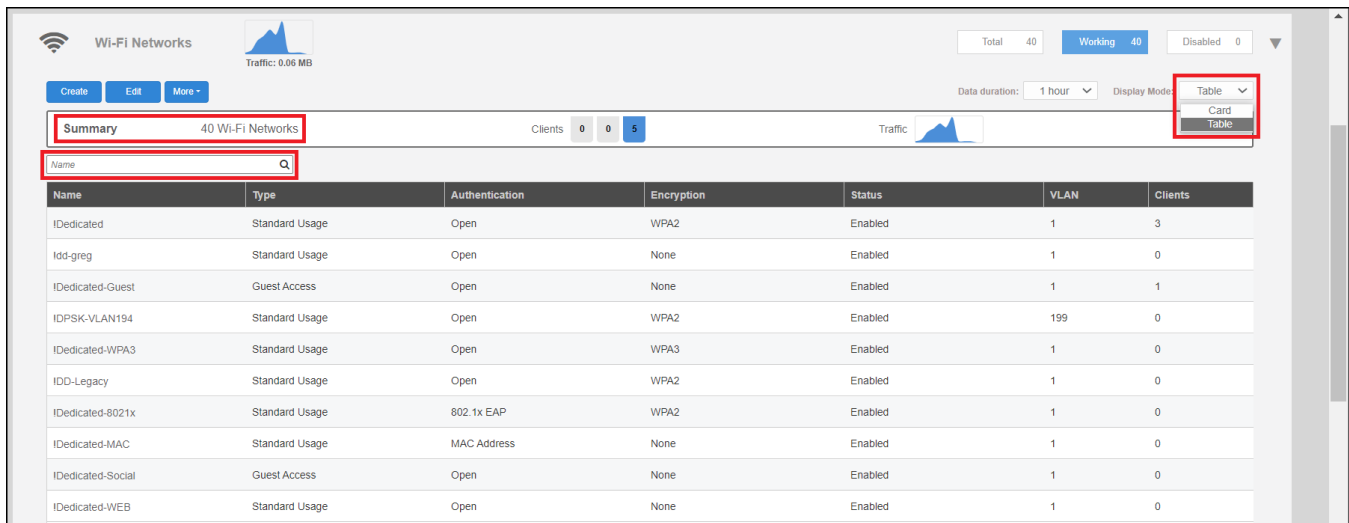

You can sort the items in the table by clicking the **Name**, **Type**, **Authentication**, **Encryption**, **Status** column headings.

In the table display mode, you can click individual rows to view information about the clients and traffic associated with the selected WLAN.

Figure 2. Viewing Individual WLAN Information in Table Display Mode

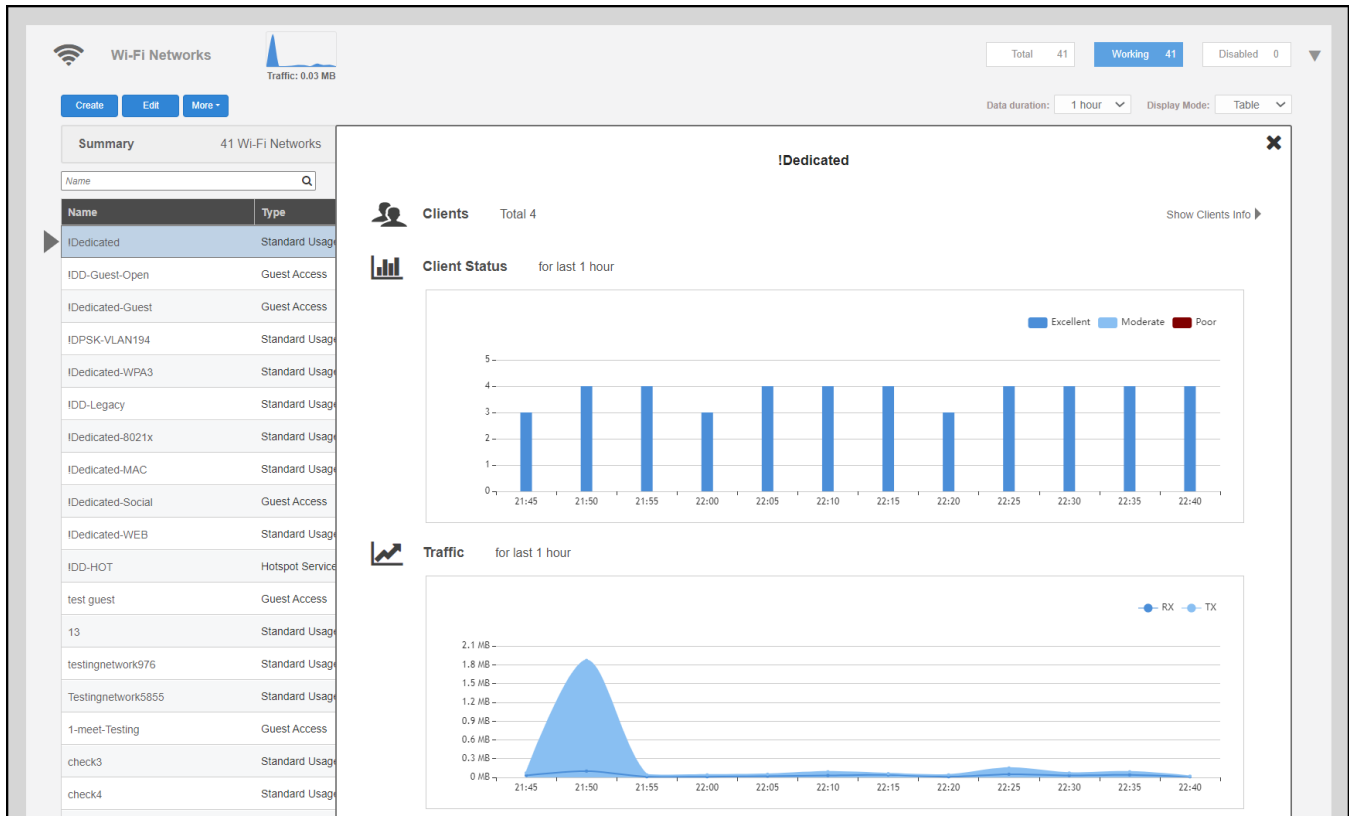

Parent topic: [WLAN Configuration](#)

WLAN Usage Types

Each WLAN must be configured as one of the following usage types:

- **Standard Usage:** To create a WLAN with specific options, choose "Standard Usage."
- **Guest Access:** Use this WLAN type for a guest WLAN. Guest access policies and access controls will be applied. For more information, see [Guest WLANs](#).
- **Note:** Beginning with Unleashed 200.7, Social Media WLANs are a subset of guest WLANs, and are configured using the guest WLAN settings. Social media WLANs require a visitor to log in using a social media account before being granted Internet access. For more information, refer to [Social Media WLANs](#).
- **Hotspot Service:** Use this WLAN type for a Hotspot (also known as, WISPr) WLAN. If Hotspot is used, a Hotspot Service must first be configured on the **Admin & Services > Services > Hotspot Service** page (or from the **Wi-Fi Networks > Create WLAN > Create Service** page). For more information, see [Hotspot Services](#).

Authentication Methods

Each WLAN must be configured using one of the following authentication methods:

- **Open:** No authentication method is used. Open authentication allows the use of WPA2, WPA3, WPA2/WPA3-Mixed, OWE, or None encryption. Open authentication and WPA2 encryption (also known as WPA-PSK) is the most common type of WLAN encryption method and should be the default configuration if there are no special requirements for authentication or encryption.
- **802.1X EAP:** Authenticates against either the internal database or an external RADIUS server. The 802.1X EAP authentication method (also known as WPA2-Enterprise) provides effective authentication regardless of the encryption method, and requires a back-end (RADIUS) authentication server. WPA2-Enterprise provides secure connectivity by ensuring that every device must authenticate to an authentication server before it is allowed access to network resources. Authentication can be based on digital certificates, and granular policies can be designed to govern the level of access and to provide visibility and control over devices on the network. 802.1X EAP authentication allows the use of WPA2, WPA3, or WPA2/WPA3-Mixed encryption.
- **MAC Address:** Authenticates using the client MAC address against an external RADIUS server or internal database.

 **Note:** Beginning with Unleashed 200.7, MAC address authentication using the local database is available.


Parent topic: [WLAN Configuration](#)

Creating a New WLAN

In addition to the initial WLAN you created during the setup process, you can create new WLANs using the **WiFi Networks** component.

1. In the **WiFi Networks** component, click **Create**.

Figure 1. Creating New WLAN

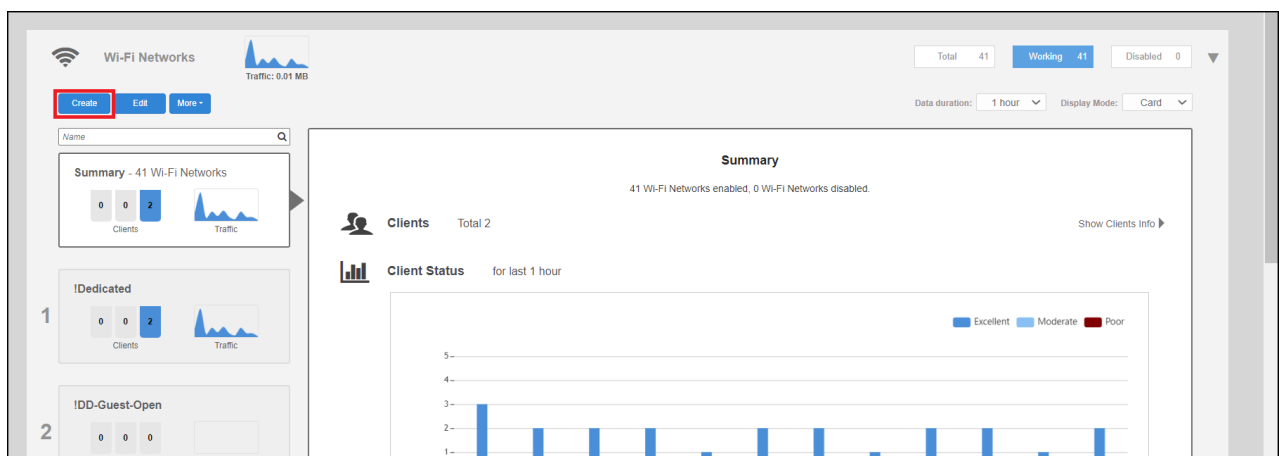

The **Create WLAN** page is displayed.

Figure 2. New WLAN Settings

The screenshot shows the 'Create WLAN' configuration page. At the top, the 'Name' field is set to '120011'. Below it, the 'Usage Type' section has three radio buttons: 'Standard' (selected), 'Guest Access', and 'Hotspot Service'. The 'Authentication Method' section has three radio buttons: 'Open' (selected), '802.1X EAP', and 'MAC Address'. The 'Encryption Method' section has five radio buttons: 'WPA2' (selected), 'WPA3', 'WPA2/WPA3-Mixed', 'OWE', and 'None'. A 'Password' field is masked with dots, with links for 'Show password' and 'Show QR Code'. Below the password field is a checkbox for 'Allow Legacy Devices to connect to this WLAN by previous password.' with a note 'It only works for online Legacy Devices.' The 'Accounting Server' is set to 'Disabled' with a dropdown arrow, a plus icon, and an edit icon. At the bottom of the form, there is a field 'Send Interim-Update every' set to '10' minutes. At the very bottom of the page, there is a 'Show Advanced Options' link with a right-pointing triangle, and two buttons: 'OK' and 'Cancel'.

2. Enter a **Name** for this wireless network.
3. Select the WLAN **Usage Type** from the following options:
 - **Standard:** Creates a WLAN for most regular wireless network usage.
 - **Guest Access:** Guest access policies and access controls will be applied. For more information, refer to [Guest WLANs](#). For information on social media WLANs, refer to [Social Media WLANs](#).
 - **Hotspot Service:** Deploys a Hotspot (also known as WISPr) WLAN. To deploy a Hotspot WLAN, you must first configure a Hotspot Service. For more information, refer to [Hotspot Services](#).
4. For **Authentication Method**, select one of the following options:
 - **Note:** Unless using an external authentication server (RADIUS server), select Open authentication, and combine with **WPA2** encryption for secure Wi-Fi access.
 - **Open:** No authentication method is used.
 - **802.1X EAP:** Authenticates against either the internal database or an external RADIUS server.

- **MAC Address:** Authenticates using the client MAC address against an external RADIUS server or internal database.

🔗 **Note:** Beginning with Unleashed 200.7, MAC address authentication using the local database is available.

5. Under **Encryption Method**, select one of the following options:

- **WPA2:** Encrypts traffic using the WPA2 standard. The WPA2 encryption method complies with the 802.11i security standard. Announced in 2004, WPA2 encryption remains mandatory for all new products that bear the Wi-Fi trademark.
- **WPA3:** You can enable 802.11r FT roaming for open authentication and WPA3 encryption. Announced in January 2018, the WPA3 standard replaces WPA2 with several security enhancements.
- **WPA2/WPA3-Mixed:** Allows mixed networks of WPA2- and WPA3-compliant devices. SAE FT and AKM PSK SHA256 is supported for Open authentication + WPA2/WPA3-Mixed encryption. **Enable 802.11r FT Roaming** is configurable for open authentication and WPA2/WPA3-Mixed encryption and 802.1X EAP authentication + WPA2/WPA3-Mixed encryption under **Advanced Options > Radio Control**. Refer to [Radio Control Settings](#) for more information.
- **OWE:** Opportunistic Wireless Encryption (OWE) provides encrypted communications for open networks.
- **None:** No encryption; communications are sent in clear text.

🔗 **Note:** Only **WPA3** (with WPA3-Mixed) or **OWE** encryption method is supported on the 6 GHz radio and the AP must support 6 GHz radio.

6. For **Password**, enter a password (WPA2), an SAE Password (WPA3), or both for a WPA2/WPA3-Mixed WLAN. If the Encryption method is **OWE** or **None**, no password is required.

Click **Show QR Code** to display the QR code page. The user can save or print the QR code.

Figure 3. Displaying QR Code Page



(Optional) Select the **Allow Legacy devices to connect to this WLAN by previous password** check box.

This option is available only for wireless clients that are marked as legacy devices in the **Clients > Wireless Clients** page. For more information, refer to "Marking a Client as a Legacy Device". If the **Allow Legacy devices to connect to this WLAN by previous password** check box is selected, under **Advanced Options > Zero-IT & DPSK**, **Dynamic PSK** is selected as **Internal**. You can change the password and Unleashed generates DPSK keys for all connected legacy devices with the previous password of the WLAN. For more information about internal DPSK, refer to [Enabling DPSK for a WLAN](#). You can view all the generated DPSK keys in the **Admin & Services > Services > Dynamic PSK > Generated Dynamic PSKs** page.

7. Choose whether a **Web Authentication (Captive Portal)** will be used for web-based authentication.
8. Click **OK** to save your changes and deploy the new WLAN.

 **Note:** For advanced WLAN configuration options, refer to [Advanced WLAN Configuration](#).

Parent topic: [WLAN Configuration](#)

802.1X EAP WLANs

802.1X EAP (Extensible Authentication Protocol), or "WPA-Enterprise," is an IEEE Standard that provides a flexible and extensible authentication mechanism for devices attempting to connect to wired and wireless LANs.

802.1X provides secure connectivity by ensuring that every device must authenticate to an authentication server before it is allowed access to network resources. Authentication can be based on digital certificates, and granular policies can be designed to govern the level of access, and provide visibility and control over devices on the network.

The RUCKUS 802.1X implementation provides a means for the controller to connect to the RADIUS server after entering the server's IP address and shared secret. Specific instructions for RADIUS server configuration vary depending on the RADIUS server software used, and are therefore beyond the scope of this document.

Parent topic: [WLAN Configuration](#)

802.1X WLAN Survivability

The WLAN Survivability feature allows 802.1X end users to continue to authenticate successfully and access the internet even when the external RADIUS server is unreachable for a configurable period of time.


With this feature enabled, the RUCKUS device caches the user's credentials for reuse in the event of disconnection from the AAA server.

 **Note:** Enabling this feature on the Unleashed web interface will not work unless the relevant configuration is also performed on the RADIUS server. This procedure assumes the reader has a high level of competence in RADIUS customization. Specifically, the user will need the ability to write scripts or code to recognize our RUCKUS RADIUS attributes and respond with the correct values by properly calculating the password and challenge strings.

To configure WLAN Survivability for 802.1X WLAN clients:

1. Go to **WiFi Networks > Create/Edit WLAN**.
2. In **Usage Type**, select **Standard**.
3. In **Authentication Method**, select **802.1X EAP**.
4. In **Authentication Server**, select or create a new RADIUS server to authenticate with.
5. In **WLAN Survivability**, select **Enabled**.
6. In **Cache Time**, enter a value in hours (1-128) to cache the user credentials.
7. Click **OK** to save your changes.

Figure 1. Enable 802.1X WLAN survivability

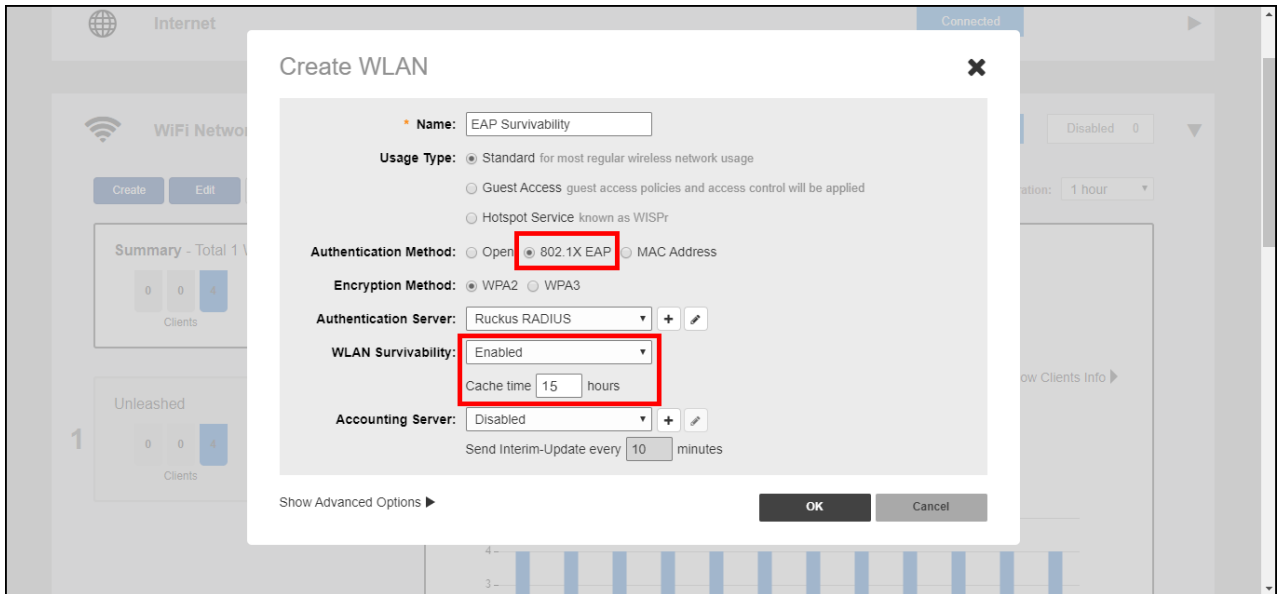

8. The RUCKUS controller will send the RADIUS request with the attribute:
RADIUS_RUCKUS_AUTH_SURVIVABILITY = 15 after enabling the survivability feature.
9. The RADIUS server must have the capability of recognizing the request and answering with the following attributes in the access-accept message: **RADIUS_RUCKUS_USER_NAME = 16** , **/*Survivability-Usr-Name*/** **RADIUS_RUCKUS_PASSWORD_NT_HASH = 17** / **/*Survivability-MD5-NT-Passwd*/** .
10. How the RADIUS server calculates the two new attributes:
 - **RADIUS_RUCKUS_USER_NAME**: This is the user name created in the RADIUS server.
 - **RADIUS_RUCKUS_PASSWORD_NT_HASH**: This is a 32 byte binary data value. RADIUS uses the following steps to create this attribute:
 - a. The server generates a Windows NT hash of the user's password using the MS_CHAPv2 algorithm.
 - b. It uses the first random 16 bytes as an authenticator and the shared secret to encrypt the data generated by the previous step via MD5 as a user password does (refer to RFC 2865, Chapter 5.2). The following is a code snippet of the user password encryption algorithm:

```

struct radius_attr_hdr *
radius_msg_add_attr_user_password(struct radius_msg *msg,
                                TAC_U8 *data, size_t data_len,
                                TAC_U8 *secret, size_t secret_len)
{
    TAC_U8 buf[128];
    int padlen, i, pos;
    MD5_CTX context;
    size_t buf_len;
    TAC_U8 hash[16];

    if (data_len > 128)
        return NULL;

```

```

memcpy(buf, data, data_len);
buf_len = data_len;

padlen = data_len % 16;
if (padlen) {
    padlen = 16 - padlen;
    memset(buf + data_len, 0, padlen);
    buf_len += padlen;
}

MD5Init(&context);
MD5Update(&context, secret, secret_len);
MD5Update(&context, msg->hdr->authenticator, 16);
MD5Final(hash, &context);

for (i = 0; i < 16; i++)
    buf[i] ^= hash[i];
pos = 16;

while (pos < buf_len) {
    MD5Init(&context);
    MD5Update(&context, secret, secret_len);
    MD5Update(&context, &buf[pos - 16], 16);
    MD5Final(hash, &context);

    for (i = 0; i < 16; i++)
        buf[pos + i] ^= hash[i];

    pos += 16;
}

return radius_msg_add_attr(msg, RADIUS_ATTR_USER_PASSWORD,
                           buf, buf_len);
}

```

- c. Replace `msg->hdr->authenticator` with that first 16 bytes of random data.
- d. Place the results into the second 16 bytes.

 **Note:** This feature is unavailable when a Backup RADIUS server is configured.

Parent topic: [802.1X EAP WLANs](#)

Guest WLANs

By creating a guest WLAN, visitors to your organization can be allowed limited (or unlimited) access to your wireless network, with configurable guest access policies.

Visitors can be given the option to self-activate their devices using social media login, a self-service Guest Pass, or to self-authenticate to any of your internal WLANs using Zero-IT activation by way of the BYOD Onboarding Portal.

The following options are available for different types of guest WLANs:

- No authentication (open WLAN): Any client can connect, and no password is required.
- Social media login: Visitors log in using an existing social media account to access the wireless network.

- Authentication with shared key: Any client can connect using the same shared password.
- Authentication with unique key (Guest Pass): Guest Pass keys must be generated for each guest, either by an administrator (each Guest Pass must be generated by a Guest Pass operator), or using the self-service Guest Pass.

Self-service Guest Pass users can self-authenticate their clients to the guest WLAN in one of two ways:

- No sponsor approval: No restrictions. Any client can request a Guest Pass, and it will be provided immediately.
- Sponsor approval: Guests are required to request a Guest Pass, which must be approved by a sponsor before being delivered to the user by way of email or SMS.

Parent topic: [WLAN Configuration](#)

Deploying a Guest WLAN

You can customize the guest wireless networks in terms of how users connect and what access privileges are given once connected.

Complete the following steps to deploy a guest WLAN.

1. Go to **Wi-Fi Networks > Create**.

2. Enter a name for the guest WLAN.

Figure 1. Creating a New Guest WLAN

The screenshot shows the 'Create WLAN' configuration window. The 'Usage Type' section has three options: 'Standard' (selected by default), 'Guest Access' (highlighted with a red box), and 'Hotspot Service Known as WISPr'. The 'Guest Access' option is selected. Below this, the 'Onboarding Portal' section has 'Enable Zero-IT device registration from the Guest Portal' unchecked. The 'Guest Authentication' section has 'Guest Pass and Social Login' selected. The 'Guest Password' section has 'Unique password for each guest' selected, with a link to create unique passwords. The 'Guest Friendly Key' section has 'Enable' checked. The 'Grace Period' section has 'Allow users to reconnect without re-authentication for' set to 480 minutes. The 'Authentication Method' section has 'Open' selected. The 'Encryption Method' section has 'WPA2' selected. The 'Accounting Server' section has 'Disabled' selected. The 'Send Interim-Update every' is set to 10 minutes.

3. For **Usage Type**, select **Guest Access**.

4. In **Onboarding Portal**, select whether to allow guests the option to register their devices on your internal (non-guest) WLANs using the Onboarding Portal. For more information, refer to [Using the BYOD Onboarding Portal](#).
5. For **Guest Authentication**, select **Guest Pass and Social Login** (allows social media login and Guest Pass), **Social Login only** (social media login only), or **None** (no password required).
6. For **Guest Password**, if you selected **Guest Pass and Social Login** for **Guest Authentication**, select one of the following options:
 - **Unique password for each guest:** Guest Passes must first be generated, in batch or individually, for each visitor before they will be able to log in using a Guest Pass. For more information, refer to [Working with Guest Passes](#).
 - **Single shared password among all guests:** This option allows you to skip the Guest Pass requirement, and simply provide a single password for all visitors.

Figure 2. Selecting a Single Shared Password or Unique Password for Each Guest

The screenshot shows the 'Create WLAN' configuration interface. The 'Usage Type' is set to 'Guest Access'. Under 'Guest Authentication', 'Guest Pass and Social Login' is selected. In the 'Guest Password' section, 'Unique password for each guest' is selected and highlighted with a red box. Below this option, a text box contains the following instructions: 'Please go to the following link and log in as guest pass admin to create unique password: <https://unleashed.ruckuswireless.com/guestpass> or <https://192.172.10.233/guestpass>'. The 'Single shared password among all guest' option is also visible but not selected. Other settings like 'Guest Friendly Key' (enabled), 'Grace Period' (480 minutes), and 'Authentication Method' (Open) are also visible.

7. For **Guest Friendly Key**, select **Enable** to include only numbers in the guest-friendly key.
 - **Note:** By default, the guest-friendly key is enabled when a user creates a new WLAN with guest access (**Guest Authentication** is set to **Guest pass** and **Social login**).
 - **Note:** The guest-friendly key is disabled in the guest access WLAN during migration.
8. For **Grace Period**, enter a value in minutes to allow users to reconnect without re-authentication. Clear the check box to disable the grace period.

9. For **Authentication Method**, **Open** is the only option available for Guest WLAN and is selected by Default.
 - **Open**: No authentication method is used. Open authentication allows the use of WPA2, WPA3, WPA2/WPA3-Mixed, OWE, or no encryption. Open authentication + WPA2 encryption (also known as WPA-PSK) is the most common type of WLAN encryption method and should be the default configuration if there are no special requirements for authentication or encryption.
10. For **Encryption Method**, select one of the following options:
 - **WPA2**: Encrypts wireless traffic with WPA2 encryption. If this option is selected, users will still be required to enter the WPA2 passphrase to access the open guest WLAN, even with **None** selected as the guest authentication type.
 - **WPA3**: Announced in January 2018, the WPA3 standard replaces WPA2 with several security enhancements.
 - **WPA2/WPA3-Mixed**: Allows mixed networks of WPA2- and WPA3-compliant devices.
 - **OWE**: Opportunistic Wireless Encryption (OWE) provides encrypted communications for open networks.
 - **None**: Without encryption, anyone can access this WLAN with no passphrase or Guest Pass login required. (Guests may still be required to visit a captive portal landing page, if configured.)
11. For **Accounting Server**, select an accounting server from the list or click the + icon to create a new RADIUS accounting server entry.
12. (Optional) Click **Show Advanced Options**, and configure any advanced options, such as restricted subnet access, WLAN priority, access controls, application visibility, and so on. Refer to [Advanced WLAN Configuration](#) for more information.
13. Click **Next**.
14. Customize the guest WLAN by configuring the following options:

Figure 3. Configuring the Guest WLAN

Social Media Logins: ☐ Facebook Wi-Fi
☐ Google/Google+
☐ LinkedIn
☐ Microsoft

GuestPass Self-Service: ☐ Enable guestpass self service

Validity Period: ☒ Effective from first use
 Expire new guest passes if not used within days
☐ Effective from the creation time

User Redirection URL: ☒ Redirect to website user intends to visit
☐ Redirect user to this website


Terms and Conditions: ☐ Show terms and conditions

Guest Portal Language:

Language Switch: ☒ Allow to switch to English

Insert WiFi4EU Snippet: ☐ Insert WiFi4EU snippet in head tag of Portal page


Customize Captive Portal: Click on edit area to change each part of captive portal & preview to check the result

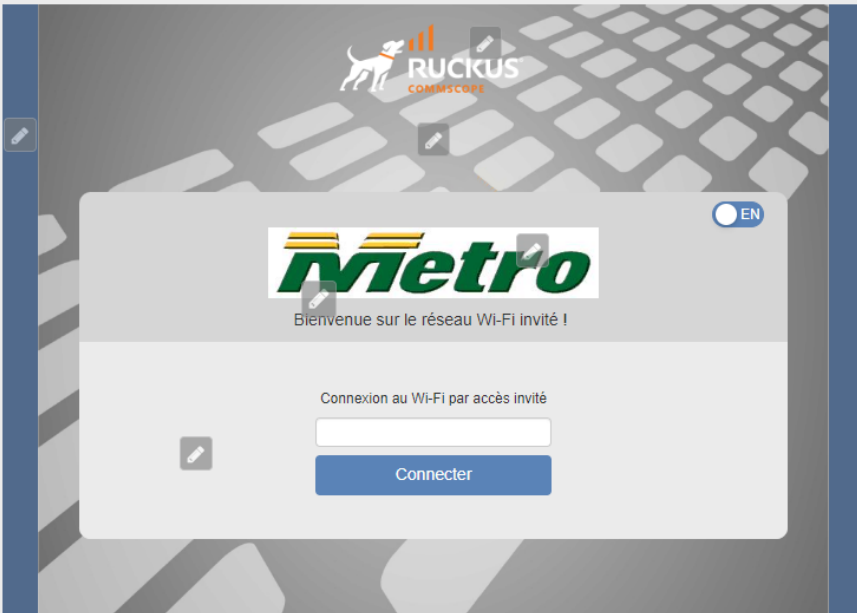

- **Social Media Logins:** Allow users to log in using their social media accounts. Refer to [Social Media WLANs](#).
- **Guest Pass Self-Service:** Allow users to self-authenticate their clients to your guest WLAN using a Guest Pass generated automatically for each guest user. For more information, refer to [Guest Pass Self-Service](#).
- **Validity Period:** Click **Effective from first use** to make the Guest Pass valid on first use or click **Effective from the creation time** to make the Guest Passes valid from the time they are created. If you select

Effective from first time, enter a value for the number of days after which the Guest Passes will expire if not used.

- **User Redirection URL:** Click **Redirect to website user intends to visit** to redirect to the website the user intended to visit after successful login or click **Redirect user to this website** to redirect the user to a specified URL. If you select **Redirect user to this website**, enter the URL of the website in the field.
 - **Terms and Conditions:** Choose whether to display the terms and conditions before guests can access your network. You can also edit the default terms and conditions by clicking **Edit**, and replacing the default text with any text you choose.
 - **Guest Portal Language:** Select your preferred guest portal language for guest WLAN configuration.
- 🔗 **Note:** The default language is the same as the system language. The guest portal preview page and the guest portal page will follow the guest portal language in the WLAN. The guest portal language will not work on customized text.
- 🔗 **Note:** The portal language is not applicable for the following two types of guest WLANs:
- A Facebook login for the guest WLAN only.
- 🔗 **Note:** The portal language is supported if the Facebook login method is combined with other login options.
- A no-authentication guest WLAN without **Terms and Conditions** and **Customize Captive Portal**.
- **Language Switch:** This option is available only when the selected guest portal language is not English and this option is selected by default. Only when the **Language Switch** option is selected, the **English (EN)** toggle switch will be displayed in the guest portal page. You can change the portal language between the default language and English.
 - **Insert WiFi4EU Snippet:** Select the check box to insert a WiFi4EU snippet in the head tag of the web authentication portal page. This allows the WLAN to be used by members of the WiFi4EU "digital single market" for EU member states.
- Figure 4.** Inserting a WiFi4EU Snippet

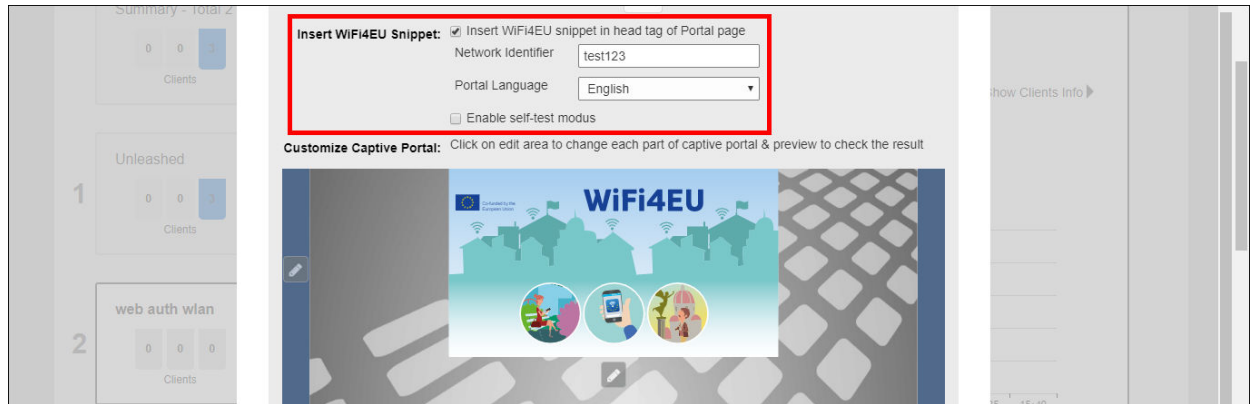

- **Customize Captive Portal:** Click the edit icons to customize the banner, background image, background color, logo, welcome message, and opacity level. Click **Preview** to choose the preview device and dimensions of the preview screen and click **OK** to save your changes.


15. Click **OK** to save your changes on the **Create WLAN** screen.

The **Share Wi-Fi QR Code** pop-up appears. You can save or print the QR code to share it with your users. Close the pop-up if you prefer to view the QR code later (**Wi-Fi Networks > More > Show QR Code**). Refer to [Using a QR Code to Join a Wi-Fi Network](#) for more information.

16. The next screen prompts you to begin the configuration for email and SMS delivery of Guest Passes. Click **Yes** to configure email and SMS settings, or click **No** to skip this step.


You can configure these settings later from the **Admin & Services** page, if you prefer. Refer to [Configuring Email Server Settings](#) for more information.

Figure 5. Configuring Email and SMS Delivery Settings

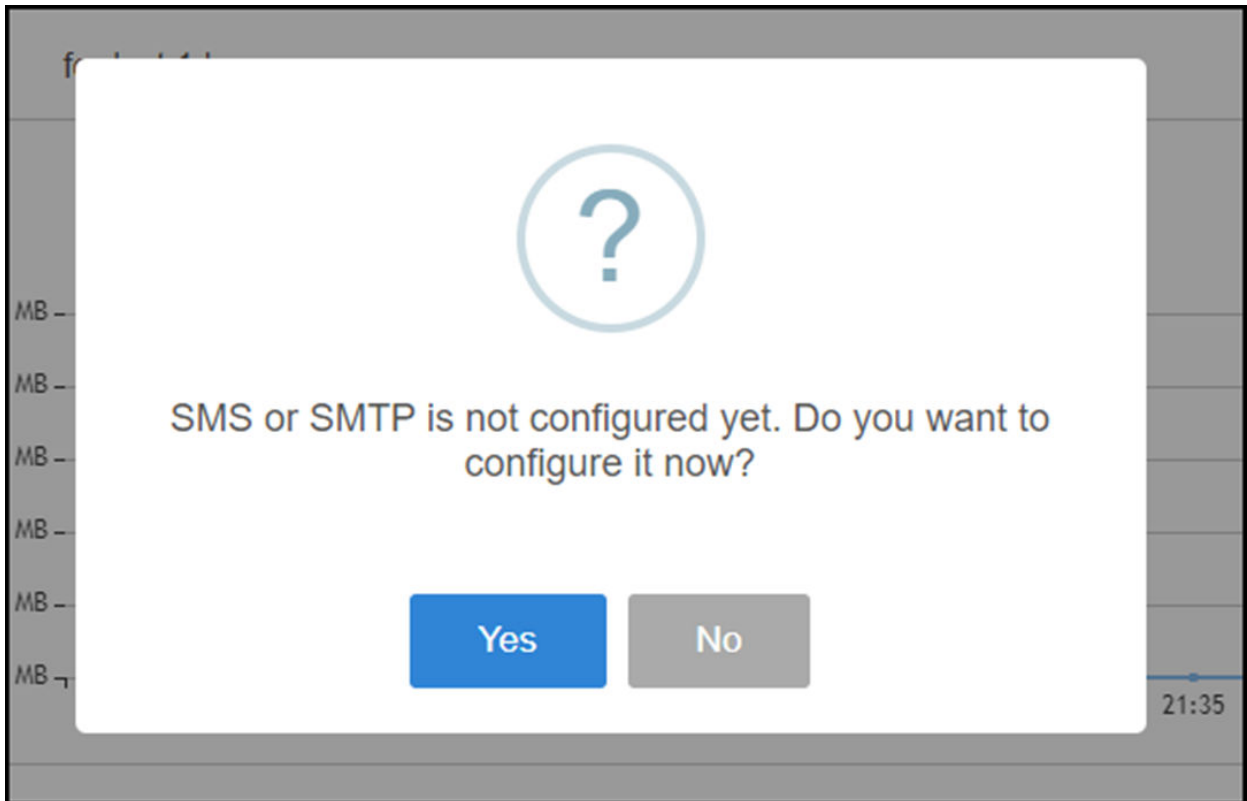

After completing the email and SMS server settings, the **Guest Pass Management** page is displayed as shown.

Figure 6. Creating a Guest Pass Now

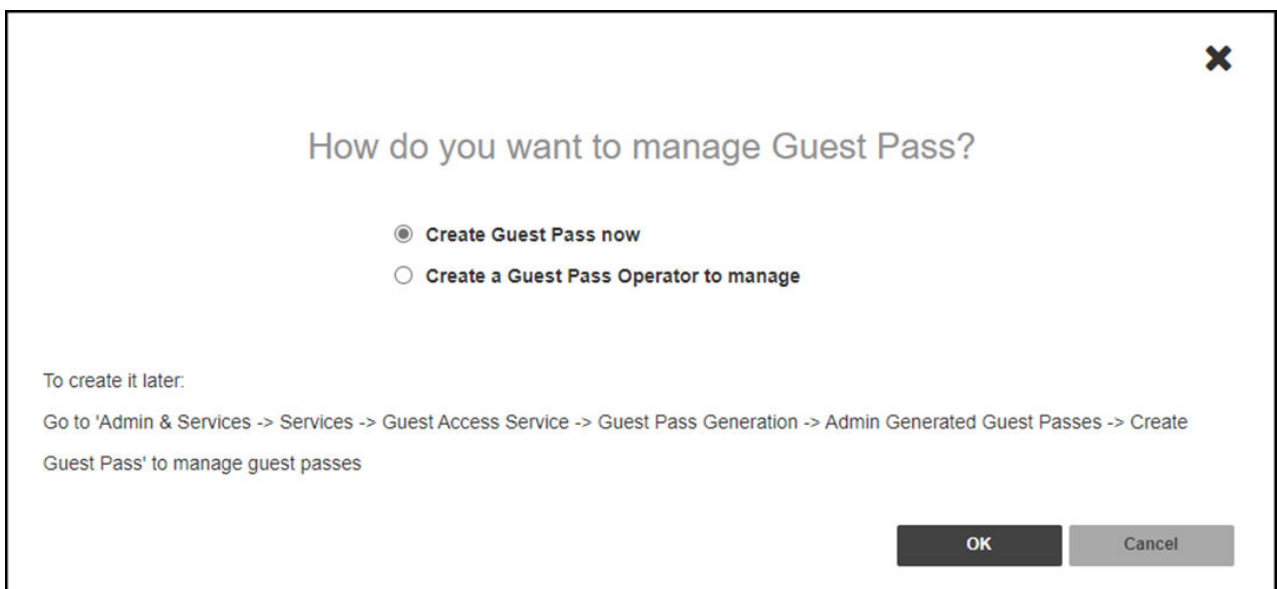

17. If you select **Create Guest Pass now** and click **OK**, you are redirected to the **Guest Pass Generation** page. You can create Guest Passes by clicking **Create** in the **Admin Generated Guest Passes** section. Refer to [Generating a Guest Pass](#) for more information.

Figure 7. Admin-Generated Guest Passes

18. If you select **Create a Guest Pass Operator to manage** and click **OK**, you must configure the Guest Pass operator role settings. Refer to [Creating a Guest Pass Operator](#) for more information.

Parent topic: [Guest WLANs](#)

Configuring Email Server Settings

In order for Unleashed to send guest pass codes to guest users via email, it needs to have an email server configured.

To configure email server SMTP settings:

1. Go to **Admin & Services > System > System Info**.
2. In the **Email Server** section, enable the **Enable Email Server** check box, and then enter the following:
 - **From email address:** Type the email address from which Unleashed will send email messages.
 - **SMTP Server name:** Type the full name of the server provided by your ISP or mail administrator. Often, the SMTP server name is in the format smtp.company.com.
 - **SMTP Server port:** Type the SMTP port number provided by your ISP or mail administrator. Often, the SMTP port number is 465 or 587. The default SMTP port value is 587.
 - **SMTP Authentication username:** Type the user name provided by your ISP or mail administrator. This might be just the part of your email address before the @ symbol, or it might be your complete email address. If you are using a free email service (such as Hotmail or Gmail), you typically have to type your complete email address.
 - **SMTP Authentication password:** Type the password that is associated with the user name above.

- **Confirm SMTP Authentication password:** Retype the password you typed above to confirm.
 - **SMTP Encryption Options:** If your mail server uses TLS encryption, click the SMTP Encryption Options link, and then select the TLS check box. Additionally, select the STARTTLS check box that appears after you select the TLS check box. Check with your ISP or mail administrator for the correct encryption settings that you need to set.
3. To verify that Unleashed can send email messages using the SMTP settings you configured, click the **Test** button.
 - If Unleashed is able to send the test message, the message **Success !** appears at the bottom of the Email Notification page.
 - If Unleashed is unable to send the test message, the message **Failed !** appears at the bottom of the Email Notification page. Go back to the previous step, and then verify that the SMTP settings are correct.
 4. Click **Apply**. The email server settings you configured become active immediately.

Figure 1. Email Server settings

The screenshot shows the 'Administration' page in the RUCKUS Unleashed 200.17 interface. The 'Email Server' section is expanded, showing the following settings:

- Switch Approval:** Approval ☒ Automatically approve all join requests from switches. (Apply button)
- Email Server:**
 - ☒ Enable Email Server
 - From Email Address: test@example.com
 - SMTP Server Name: smtp.example.com
 - SMTP Server Port: 587
 - SMTP Authentication Username: username
 - SMTP Authentication Password: [masked]
 - Confirm SMTP Authentication Password: [masked]
 - [SMTP Encryption Options](#)
 - (Test button) (Apply button)
- SMS Settings:**
 - ☐ Enable SMS Server
 - ☒ Country Code
 - ☐ No default and ask user to input
 - ☐ Use default +12 and allow user to change
 - ☐ Use default +12 and disallow user to change
 - ☐ Twilio account information

Parent topic: [Guest WLANs](#)

Parent topic: [System Info Settings](#)

Configuring SMS Server Settings

In order for Unleashed to send guest pass codes to guest users via SMS, it needs to have an SMS server configured.

To configure SMS server settings:

1. Go to **Admin & Services > System > System Info**.
2. In the **SMS Settings** section, enable the **Enable SMS Server** check box.
3. In **Country Code**, select one of the following options:
 - **CountryCode**: This option is only available with "Customized Server" SMS server type (for Twilio and Clickatell, the country code is mandatory and cannot be unchecked). When unchecked, the guest registration page does not support country code input.
 - **No default and ask user to input**: The guest registration page does not provide a default country code and the guest user is asked to input one.
 - **Use default and allow user to change**: The guest registration page provides a default country code and allows the guest user to change it.
 - **Use default and disallow user to change**: The guest registration page provides a default country code and the guest user is not allowed to change it.
4. Select **Twilio**, **Clickatell**, or **Customized Server**, depending on your SMS service provider.
5. Enter your **Account SID**, **Auth Token** and **From Phone Number** (Twilio) or your **User Name**, **Password** and **API ID** (Clickatell), or **Method** (Get or Post) and the URL for a custom SMS service provider.
6. Click the **Test** button to test your settings.
7. Once confirmed, click **Apply** to save your changes.

Figure 1. Configuring SMS settings

SMTP Encryption Options

Test Apply

SMS Settings

☒ Enable SMS Server

☒ Country Code

☒ No default and ask user to input
☐ Use default +12 and allow user to change
☐ Use default +12 and disallow user to change

☒ Twilio account information

Account SID [\[register a new Twilio account\]](#)

Auth Token

From PhoneNumber

☐ Clickatell account information

User Name [\[register a new Clickatell account\]](#)

Password

API Id

From PhoneNumber

☐ Customized Server

Method

URL

Parent topic: [Guest WLANs](#)

Parent topic: [System Info Settings](#)


Creating a Guest Pass Operator

Guest Pass operators are individuals within an organization who have the authority to generate Guest Passes for visitors.

This task describes how to create a user role for a category of user that is allowed to generate and manage Guest Passes.

1. After configuring Email and SMS settings, you will be prompted to configure a Guest Pass operator.

Figure 1. Configuring a Guest Pass Operator

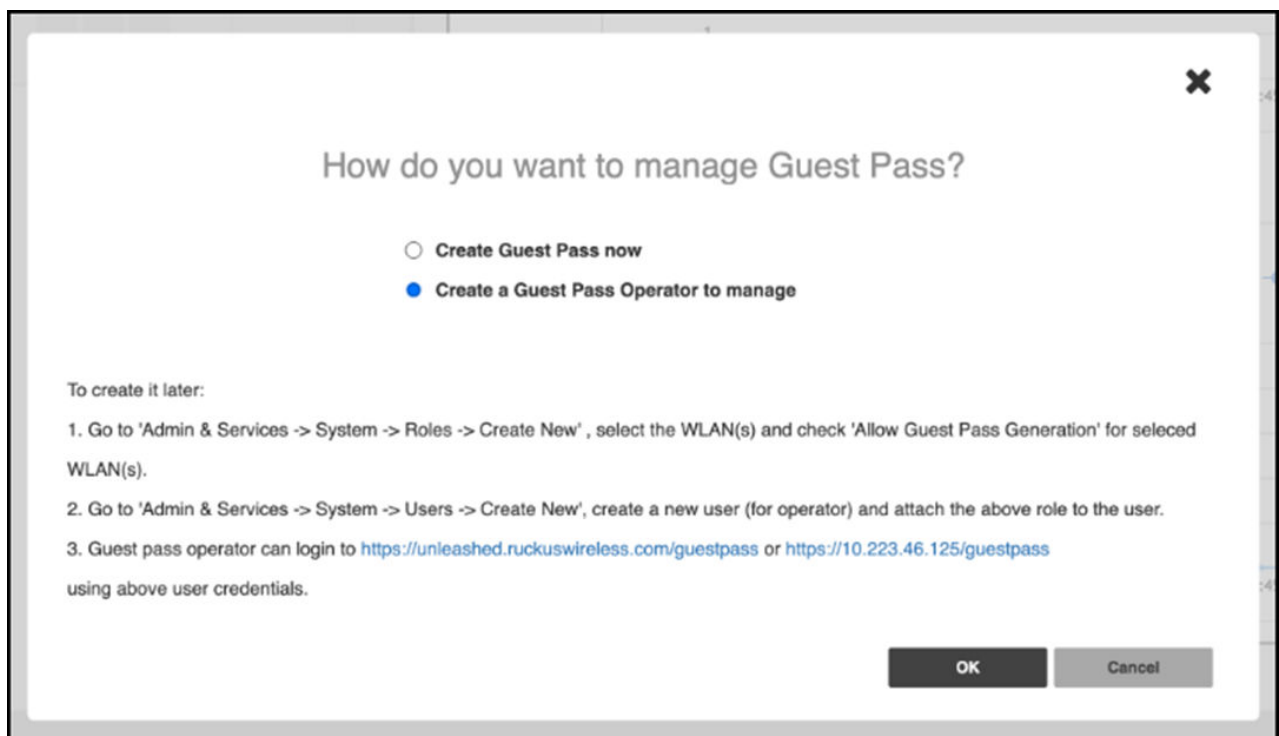

2. Click **OK** to configure the Guest Pass operator role or click **Cancel** to configure these settings later. Refer to [Configuring User Roles](#) for more information.

Note: To configure additional operator roles, select **Settings > System > Roles > Create New**. Select the guest WLANs to allow and check **Allow Guest Pass Generation** for the selected WLANs.

3. Configure the following settings to create a role for the Guest Pass operator:
 - **Name:** Enter a unique name for the operator role.
 - (Optional) **Description:** Enter a brief description for the role.

- (Optional) **Group Attributes:** Used by AAA servers to authenticate the user.
- **Available WLANs:** The list of available WLANs that the operator is allowed to choose from.
- **Selected WLANs:** The list of WLANs for which the operator can issue guest passes.

Figure 2. Create Guest Pass Operator - Step 1

Guest Pass Operator

Step 1 - Create Role
create a role for guest pass operator, essentially assign any other guest WLAN this user can guest pass for.

* **Name:** unique name for this role

Description: description of the role

Group Attributes: this is used by other AAA servers to authenticate the user

Available WLAN's :

- ☐ Guest WLAN 1

***Selected WLAN's : (0)**

→

4. Use the arrows to move WLANs to/from the list of **Available WLANs** to **Selected WLANs** for which the Guest Pass Operator will be allowed to issue guest passes. (The list of available WLANs only includes unique password type guest WLANs.)
5. Click **Next** to continue.

Figure 3. Moving WLANs from Available to Selected

*** Name:** unique name for this role

Description: description of the role

Group Attributes: this is used by other AAA servers to authenticate the user

Available WLAN's :

*** Selected WLAN's : (1)**

Guest WLAN 1

CAPS LOCK: ON

6. On the next screen that appears, **Guest Pass Operator - Step 2: Create User**, enter a user name and password to create a user with this role.

Figure 4. Create Guest Pass Operator - Step 2

Guest Pass Operator

Step2-Create User

create a role for guest pass operator, essentially assign any other guest wlan this user can guest pass for.

*** User Name:** unique name for the user

Full Name: full name for the user

*** Password:**

*** Confirm Password:**


Back Finish Cancel

19:19 19:20 19:21 19:22 19:23 19:24 19:25 19:26 19:27 19:28

The confirmation screen displays the URL where this user can create guest passes.

- Note:** Users with the Guest Pass operator role can login to [https://\[host_ip_address\]/guestpass](https://[host_ip_address]/guestpass) using the above user credentials.

Figure 5. Guest Pass Link

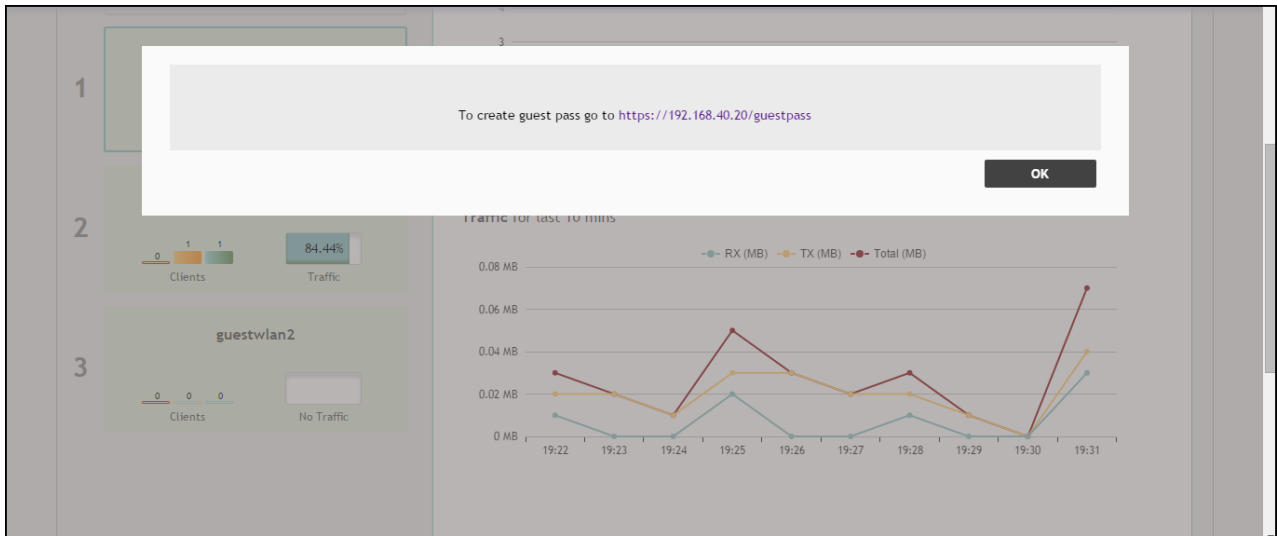

7. Select **Admin & Services > System > Users > Create New** to create additional users for the operator role.

Parent topic: [Guest WLANs](#)

Configuring Guest Subnet Restrictions

By default, Guest Pass users are automatically blocked from the network subnet (format: A.B.C.D/M) and the subnet of the AP to which the guest user is connected.

If you want to create additional rules that allow or restrict guest users from specific subnets, use the **Restricted Subnet Access** tab.


You can create up to 21 subnet access rules, which will be enforced on both the Master AP and all connected member APs.

Complete the following steps to create a guest access rule for a subnet:

1. Go to **Wi-Fi Networks** and click **Create** to create a new guest WLAN or **Edit** to modify an existing guest WLAN.
2. For **Usage Type**, ensure that **Guest Access** is selected.
3. Click the arrow next to **Show Advanced Options** to expand the advanced options section.
4. Click the **Restricted Subnet Access** tab.
5. Click **Create New** to create a new subnet restriction. Text boxes are displayed under the table columns in which you can enter parameters that define the access rule.
6. Under **Description**, enter a name or description for the access rule that you are creating.

7. Under **Type**, select **Deny** if this rule will prevent guest users from accessing certain subnets, or select **Allow** if this rule will allow them access.
8. Under **Source Address**, enter the IP address and subnet mask (format: A.B.C.D/M) from which you want to allow or deny users access.
9. Under **Destination Address**, enter the IP address and subnet mask (format: A.B.C.D/M) to which you want to allow or deny users access.
10. If you want to allow or restrict subnet access based on the application, protocol, or source or destination port used, click the **Advanced Options** link, and then configure the settings.
11. Click **Save** to save the subnet access rule.
12. Repeat Steps 5 through 11 to create up to 21 subnet access rules.

Figure 1. Configuring Guest Restricted Subnet Access

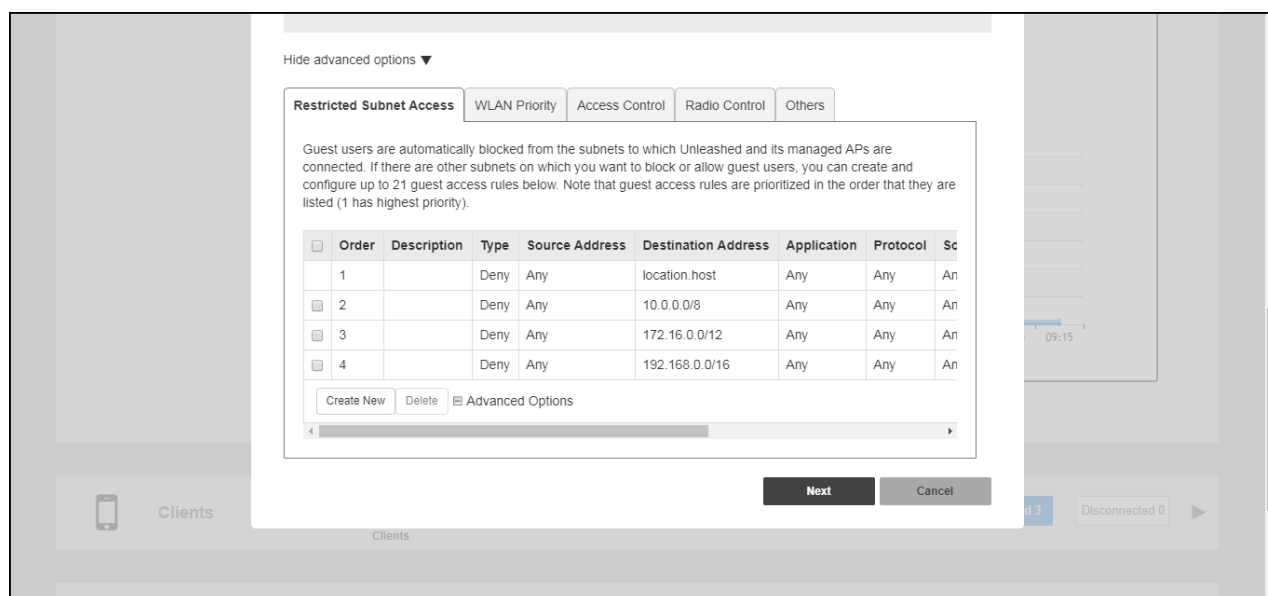

Parent topic: [Guest WLANs](#)

Using the BYOD Onboarding Portal

The Onboarding Portal feature provides a series of intuitive option screens allowing mobile users to choose whether to connect devices to a Guest WLAN or to self-configure their mobile devices to authenticate to an internal WLAN using Zero-IT activation.


To enable the Onboarding Portal for mobile devices:

1. Expand the **Wi-Fi Networks** section of the Dashboard.
2. Select an existing guest WLAN and click **Edit** or click **Create** to configure a new guest WLAN.

3. Enable the check box next to **Onboarding Portal** to enable Zero-IT device registration from the Guest Portal.
4. Select one of the following options to display when connecting to the Onboarding Portal:
 - **Guest Pass + Device Registration:** Show both buttons.
 - **Device Registration:** Show Zero-IT Device Registration button only.
5. If **Guest Pass** is enabled, configure Guest Pass options as described in [Working with Guest Passes](#).
6. Click **Next** to continue to the next guest WLAN configuration page.
7. Optionally, configure additional guest WLAN settings, and click **OK** to apply.

 **Note:** For information on these settings, see [Deploying a Guest WLAN](#).

Figure 1. Enabling Onboarding Portal

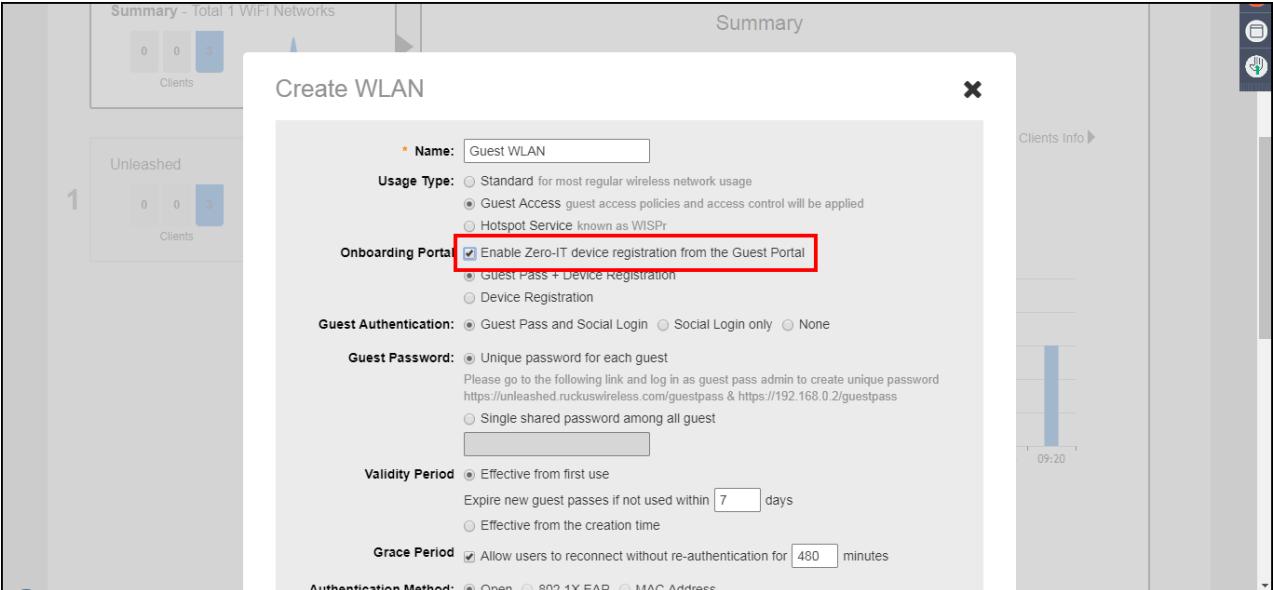


The screenshot shows the 'Create WLAN' configuration window in the RUCKUS Unleashed interface. The 'Onboarding Portal' section is highlighted with a red rectangle, indicating that the checkbox 'Enable Zero-IT device registration from the Guest Portal' is selected. Other configuration options visible include:

- Name:** Guest WLAN
- Usage Type:** Guest Access (selected), Standard, Hotspot Service
- Guest Authentication:** Guest Pass and Social Login (selected), Social Login only, None
- Guest Password:** Unique password for each guest (selected), Single shared password among all guest
- Validity Period:** Effective from first use (selected), Expire new guest passes if not used within 7 days
- Grace Period:** Allow users to reconnect without re-authentication for 480 minutes (checked)

When a client connects to the open Guest WLAN for the first time, the RUCKUS **Onboarding Portal** page is displayed. The screen displays one or both of the following options, depending on your choice in Step 4 above:


- **Guest Access:** Connect this device to a guest WLAN.
- **Register Device:** Download a Zero-IT activation file to register this device for access to one or more internal WLANs.

Figure 2. The Onboarding Portal for Mobile Devices

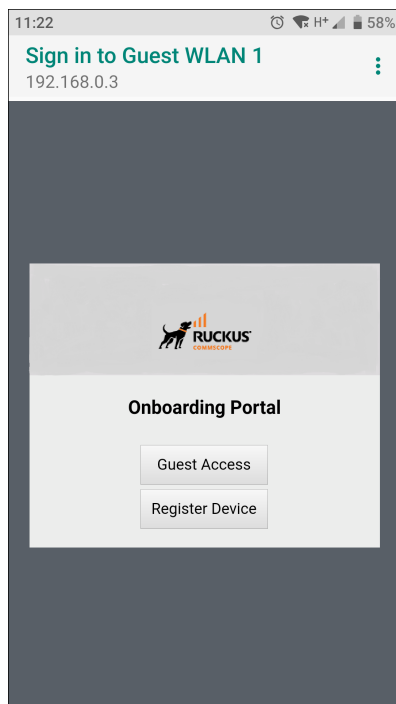


If the user clicks the **Guest Access** button, the process is the same as when connecting to a Guest WLAN and all settings on the **Guest Access** configuration page will be put into effect.

Figure 3. Guest Access Welcome Page

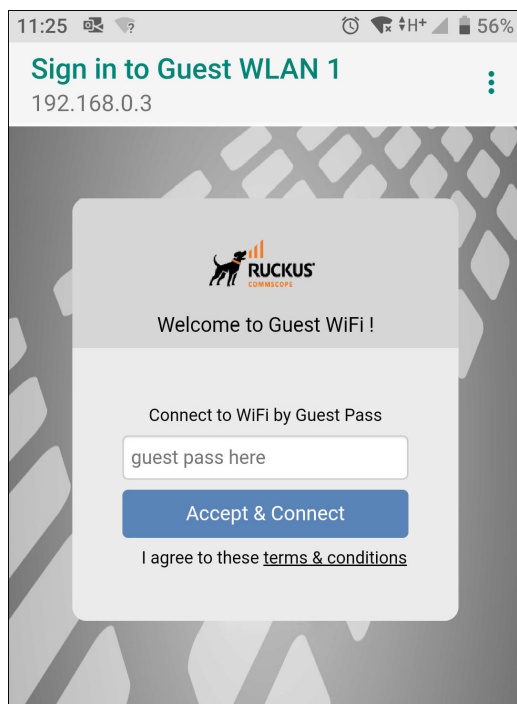


If the user clicks the **Register Device** button, the web page will be redirected to the **WLAN Connection Activation** page, from which the user can enter user name and password to activate this device. A Zero-IT activation file is generated for download once the client device is registered with Unleashed.

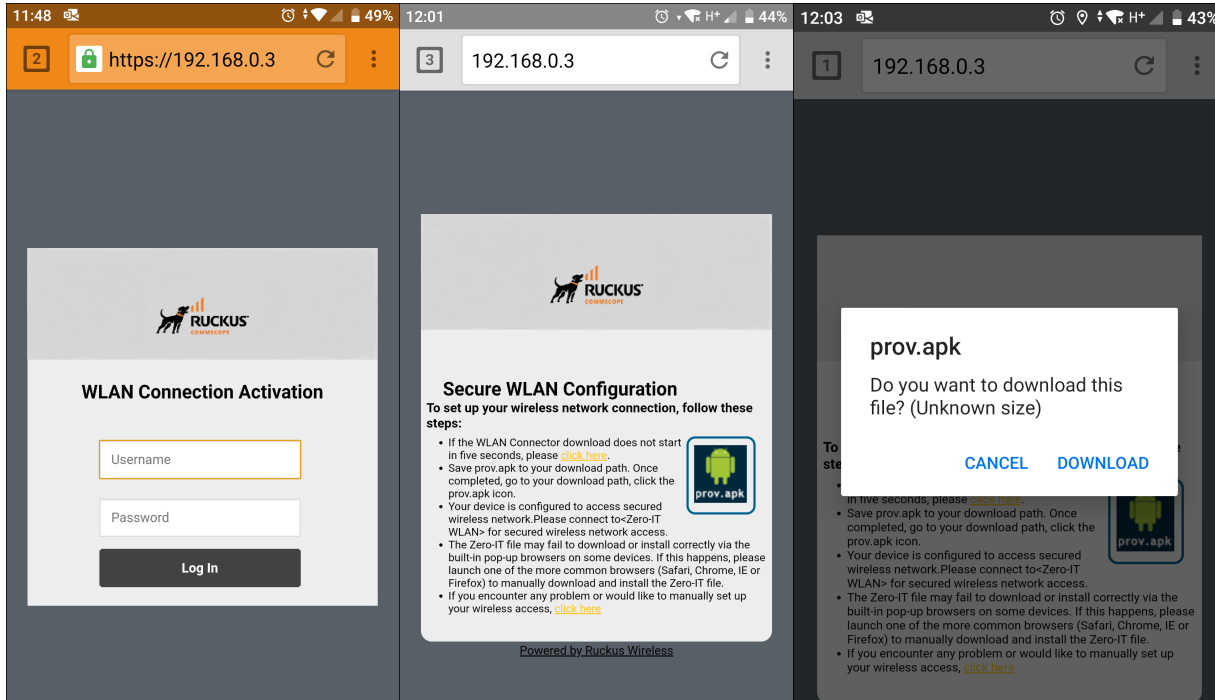Figure 4. Activating the Device Using the WLAN Connection Activation Screen, and Downloading Activation File

After running the downloaded Zero-IT file, the device will be configured with the settings to automatically connect to the secure internal/corporate WLAN.

- **Note:** You may need to manually switch from the guest WLAN to the secure WLAN after activation (on some mobile devices).
- **Note:** You may need to manually delete any previously installed Zero-IT activation files before a new one can be run. On some devices (including some Android versions), the activation file will not run if an older existing package of the same name with a conflicting signature is already installed.

Figure 5. If Zero-IT activation file cannot be run, manually copy/paste the Network Key

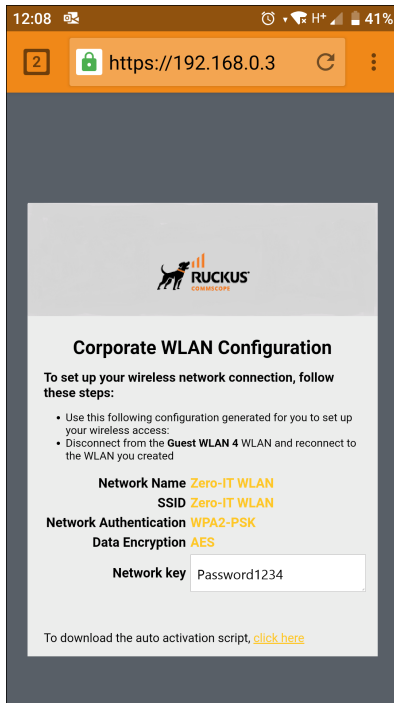

Parent topic: [Guest WLANs](#)

Working with Guest Passes

Guest passes are temporary privileges granted to guests to allow access your wireless LANs.

Unleashed provides many options for customizing guest passes, controlling who is allowed to issue guest passes, and controlling the scope of access to be granted.

With Guest Pass authentication enabled, guests are required to enter a guest pass code when connecting to a guest WLAN. Temporary guest passes can be issued for single users, multiple users, one-time login, time-limited multiple logins for a single guest user, or can be configured so that a single guest pass can be shared by multiple users. Additionally, they can be batch generated if many short-term guest passes need to be created at once.

Guest passes can be delivered in any of the following ways:

- Printout
- Send SMS with guest credentials
- Send email with guest credentials

Note: To enable guest pass delivery via email or SMS, you must first configure an email server or an SMS delivery account (Twilio or Clickatell) from the **Email** tab or the **SMS** tab.

Parent topic: [Guest WLANs](#)

Generating a Guest Pass

Using the **Guest Access Service > Admin Generated Guest Passes** page, Unleashed administrators can create guest passes from within the UI.

Complete the following steps to generate a guest pass.

1. From the dashboard, select **Admin & Services > Services > Guest Access Service**.
2. Under **Admin Generated Guest Passes**, click **Create** to create a guest pass.

Figure 1. Creating a Guest Pass

3. For **Number of Guest Passes**, select one of the following options:
 - **Single:** Generate a single guest pass. Refer to [Generating and Delivering a Single Guest Pass](#).
 - **Multiple:** Generate multiple guest passes. Refer to [Generating and Printing Multiple Guest Passes at Once](#).
 - **By Profile:** Import a guest pass profile. Refer to [Creating a Guest Pass Profile](#).
4. Enter the guest name.
5. For **Guest WLAN**, select the WLAN for which the guest pass will be issued. To create a guest WLAN, refer to [Deploying a Guest WLAN](#).
6. In **Valid For**, enter a number and select a time interval (**Hours**, **Days**, or **Weeks**) for which the guest pass will remain valid.

7. (Optional) Enter a guest email address and guest phone number. If these options are entered, and the email server and SMS delivery method have been configured (from **Admin & Services > System > System Info**), you can deliver the guest pass to the guest using email or SMS.
8. (Optional) Under **Advanced Options**, configure the following options:
 - **Enable Session Timeout:** Select the check box and select a time interval (**Minutes, Hours, Days, or Weeks**) after which guests are required to log in again. If **Session Timeout** is disabled, the connected users are not required to log in again until the guest pass expires.
 - **Enable Shared Pass:** Allow multiple users to share a single guest pass.
9. Click **Generate** to create the guest pass.
10. On the **Create Guest Pass** page, select a delivery method:
 - Single
 - **Print passes now using Default template:** Print the guest pass to a printer.
 - **Text the pass to [phone]:** Deliver the guest pass code by way of an SMS text message to the phone number entered.
 - **Email the pass to [email]:** Deliver the guest pass code by way of an email message to the email address entered.
 - Multiple
 - **Print the passes now**
 - **Download all passes now**
 - **Show me all passes and let me decide to print/SMS/email passes**

Parent topic: [Working with Guest Passes](#)

Guest Pass Self-Service

The Guest Pass Self-Service feature allows guests to your organization to self-activate their devices to access your guest WLANs.

The Guest Pass Self-Service feature allows guests to connect to a guest SSID and submit basic information (name, email address and mobile phone number) to receive a guest pass code. The guest then enters this code to gain access to the internet, with no IT involvement required.

Using the default settings, a guest user connects to a self-service guest WLAN and enters his contact information to receive a guest pass code. The user then activates the guest pass, and can now freely use the internet.

Additional configuration options allow the administrator to set the guest pass delivery method (either displayed directly on the device screen, or sent to the user via email, SMS, or both) to set session length and access duration, and to require "sponsor approval" prior to providing a guest pass to the new guest user.

Parent topic: [Working with Guest Passes](#)

Enabling Guest Pass Self-Service

Use the following procedure to allow visitors to self-activate their devices to your Guest WLAN(s).

To enable Guest Pass Self-Service for a Guest WLAN:

1. Go to **Wi-Fi Networks**, and click **Create** to create a new guest WLAN, or **Edit** to edit an existing WLAN.
2. Enter a **Name** for the WLAN, and in **Usage Type**, select **Guest Access**.
3. Click **Next**. The second WLAN creation screen appears.
4. Locate the **Guest Pass Self-Service** option and select the **Enable guest pass self service** button. Additional options appear.

Figure 1. Select Enable Guest Pass Self Service

The screenshot shows the configuration page for a Guest WLAN. On the left, there are statistics for Clients (0), Unleashed (0), and Clients (0). The main configuration area includes:

- Social Media Logins:** FacebookWiFi, Google/Google+, LinkedIn, Microsoft, WeChat (all unchecked).
- GuestPass Self-Service:** ☒ Enable guestpass self service (highlighted with a red box).
- Access Duration:** Default guestpass lifetime 1 Days (highlighted with a red box).
- Session:** ☐ Terminate user session after [] Mins (highlighted with a red box).
- Sponsor Approval:** ☐ Enable guestpass registration approval (highlighted with a red box).
- Sponsor Authentication Server:** Local Database (highlighted with a red box).
- Max Device:** unlimited devices share one single guestpass (highlighted with a red box).
- Notification Method:** Device Screen (highlighted with a red box).
- Validity Period:** ☒ Effective from first use (highlighted with a red box).
- User Redirection URL:** ☒ Redirect to website user intends to visit (highlighted with a red box).

5. Configure the following options as required:

- **Access Duration:** Select the default access time provided with one guest pass in days, hours or weeks. (Default is one day.)
- **Session:** Optionally, enable the session limitation to require guest pass users to re-login after the specified time period.
- **Max Device:** Allow multiple devices to share a single guest pass. (Default is unlimited.)

- **Sponsor Approval:** Select this option to require email approval for issuing self-service guest passes. (See [Requiring Sponsor Approval for Self-Service Guest Pass Authentication](#).)
- **Notification Method:** Select whether the guest pass will be delivered via email, SMS, or displayed directly on the device screen. When Sponsor Approval is selected, the Device Screen option is not allowed.

6. Click **OK** to save your changes.

Parent topic: [Guest Pass Self-Service](#)

Requiring Sponsor Approval for Self-Service Guest Pass Authentication

If the **Sponsor Approval** option is enabled, when the user connects to the WLAN, registration information must be submitted along with a sponsor's email address to await sponsor approval.

The Sponsor receives the email request and clicks a link to allow this user access to the guest WLAN. After the registration is approved, RUCKUS Unleashed generates a guest pass and sends it to the user through email or SMS (or both) using the contact information the user provided.

- 🔗 **Note:** If using sponsor approval, RUCKUS Unleashed must be configured with your SMTP settings for email delivery, or with a valid Twilio or Clickatell account to deliver guest passes through SMS. Refer to [Customizing the Guest Pass Email Content](#) and [Customizing the Guest Pass SMS Content](#) for more information.

To configure sponsor approval, select the **Sponsor Approval** check box, select a sponsor authentication server (default is local database), and optionally enter a **Default Sponsor Email** address.


Figure 1. Enabling Sponsor Approval for Guest Pass Self-Service

The screenshot displays the 'GuestPass Self-Service' configuration page in the RUCKUS Unleashed web interface. On the left, there are two summary cards: 'Unleashed' showing 0 clients and 'Guest WLAN 2' showing 0 clients. The main configuration area includes the following settings:

- GuestPass Self-Service:** ☒ Enable guestpass self service
- Access Duration:** Default guestpass lifetime: 1 Days
- Session:** ☐ Terminate user session after: Mins
- Sponsor Approval:** ☒ Enable guestpass registration approval
 - Sponsor Authentication Server: Local Database (dropdown menu)
 - Default Sponsor Email: sponsor@example.com (text field)
- Max Device:** 1 (dropdown menu) devices share one single guestpass
- Notification Method:** Mobile (dropdown menu). Note: To notify via Mobile or Email, please go to "Admin & Services" -> "System Info" page and configure the system SMS/SMTP services.
- Validity Period:** ☒ Effective from first use. Expire new guest passes if not used within 7 days. ☐ Effective from the creation time.
- User Redirection URL:** ☒ Redirect to website user intends to visit. ☐ Redirect user to this website.
- Terms and Conditions:** ☐ Show terms and conditions. Edit

When a user connects to a guest WLAN with Sponsor Approval enabled, the **Welcome to Guest WiFi** page allows the guest to request a self-service guest pass by clicking the **Help with a guest pass** link.


Figure 2. Requesting Help with a Guest Pass

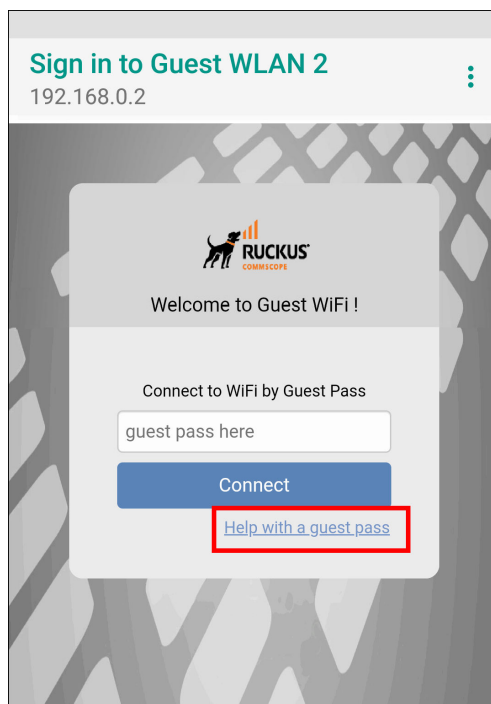

Complete the following steps to request, approve, and activate a sponsor-approved guest pass:


1. On the **What would you like to do** screen, select **Register and get a new guest pass**, and click **Next**.

Figure 3. Requesting a New Guest Pass

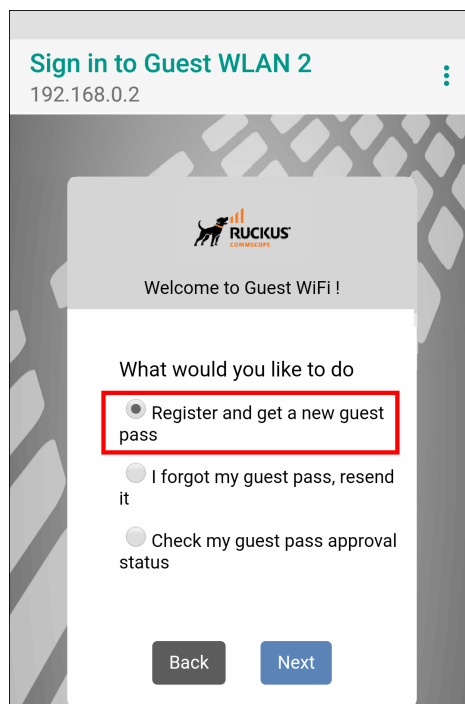

2. Enter a username, an email address or phone number to which the guest pass key will be sent, and the sponsor's email address, and click **Next**.

Figure 4. Registering as a Guest

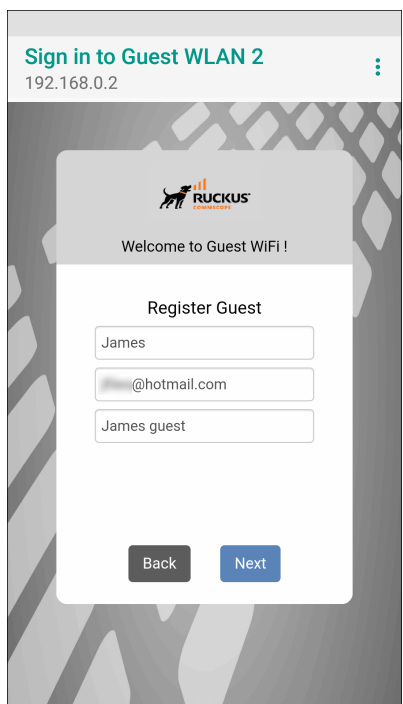

The screenshot shows a mobile interface for "Sign in to Guest WLAN 2" with the IP address 192.168.0.2. The Ruckus logo is at the top, followed by "Welcome to Guest WiFi!". Below this is a "Register Guest" form with three input fields: "James", "@hotmail.com", and "James guest". At the bottom of the form are "Back" and "Next" buttons.

A guest pass request email is sent to the sponsor's address, and a message that the guest access request has been submitted is displayed.


Figure 5. Guest Pass Request Submitted Message



This screenshot shows the same mobile interface as Figure 4, but with a confirmation message displayed below the "Register Guest" header. The message reads: "A request for Guest Pass has been sent to @hotmail.com. Once approved you will get an email at @hotmail.com". The "Back" and "Next" buttons remain at the bottom.

The sponsor will then receive an email requesting approval for guest pass activation.


Figure 6. Sponsor Accept Email

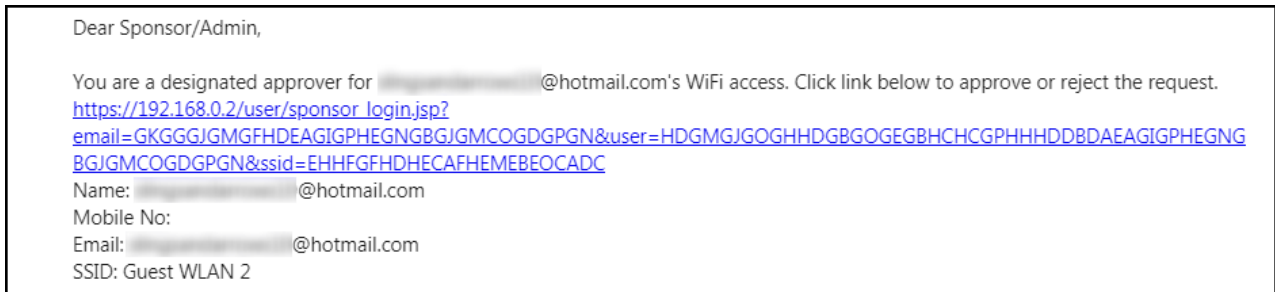

3. As the sponsor opens the email and clicks the link to open the **Sponsor/Approver Authentication** page.
4. On the **Sponsor/Approver Authentication** page, enter a valid **User Name** and **Password** and click **Log in** to continue.

 **Note:** This username and password must exist on the authentication server (Local Database, Active Directory, or RADIUS) configured for this guest access service.

Figure 7. Sponsor/Approver Login Page

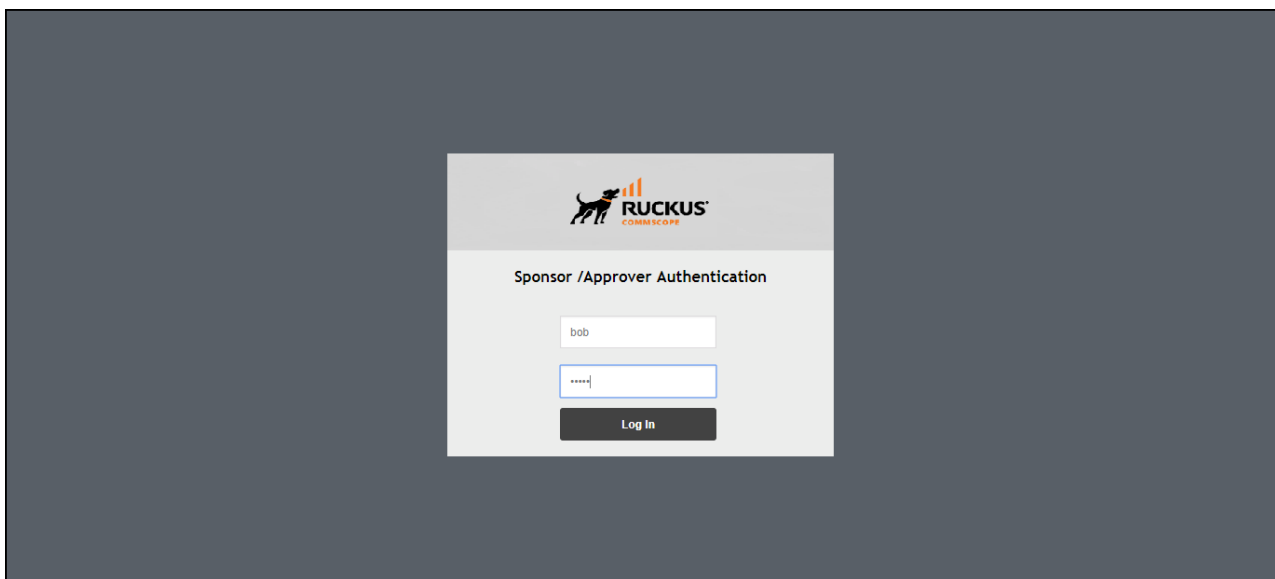

5. Upon successful login, the **Guest Pass Approval** page displays the name, phone number, and email addresses of all pending guest pass requests. Select the check box next to each guest pass you wish to approve, set the **Duration** for each, and click **Approve** to approve them.

Figure 8. Guest Pass Approval


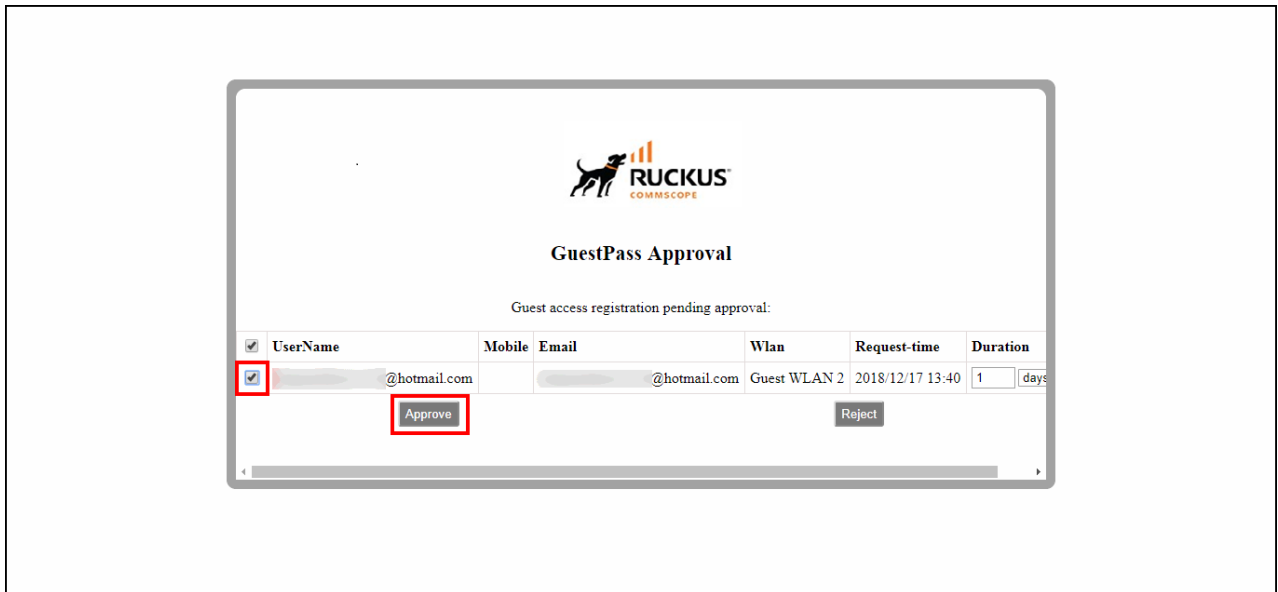



Figure 9. Guest Pass Approved Message

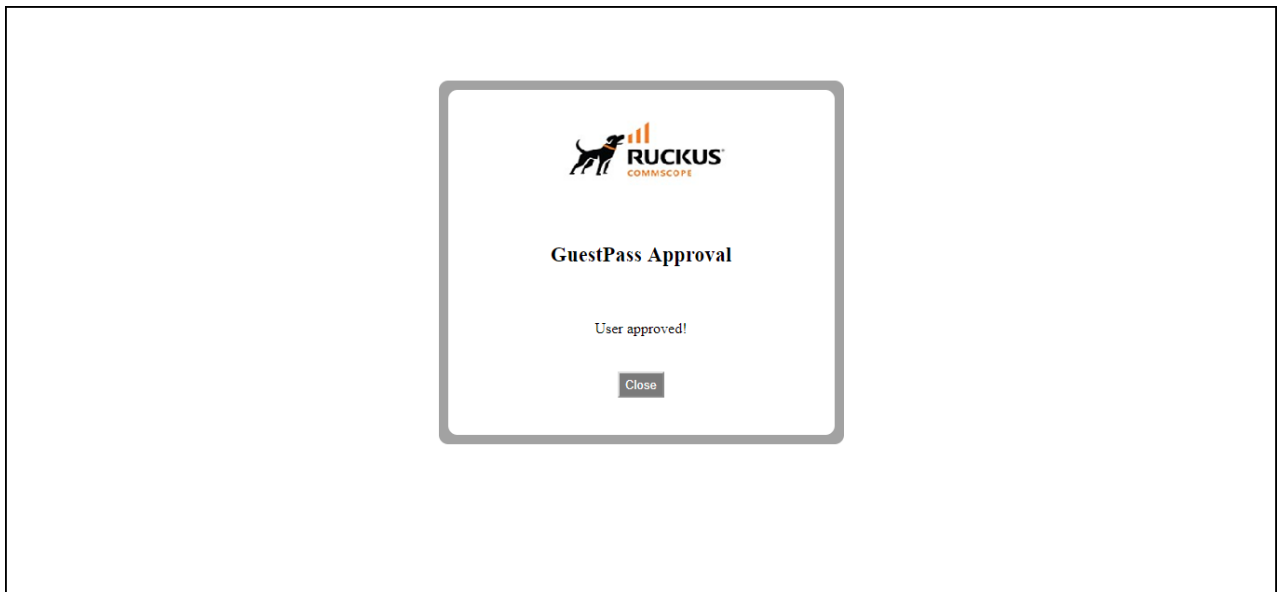

Approving a guest pass triggers delivery of an email or SMS (or both) message containing the guest pass code to the guest.


- As a guest user, open the guest pass activation email message and copy the Guest Pass code to the clipboard.

Figure 10. Guest Pass Activation Email Message

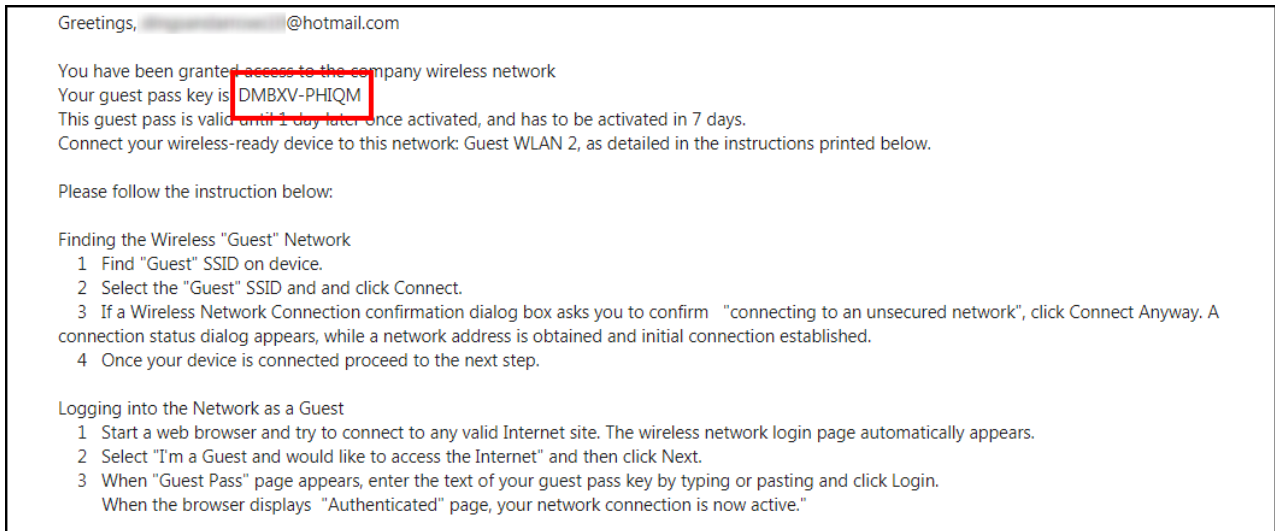

7. Launch a web browser and browse to any URL. You will be redirected to the **Welcome** login page.
8. Enter the Guest Pass code received in the activation email (or SMS), and click **Connect**.

Figure 11. Entering Guest Pass Code

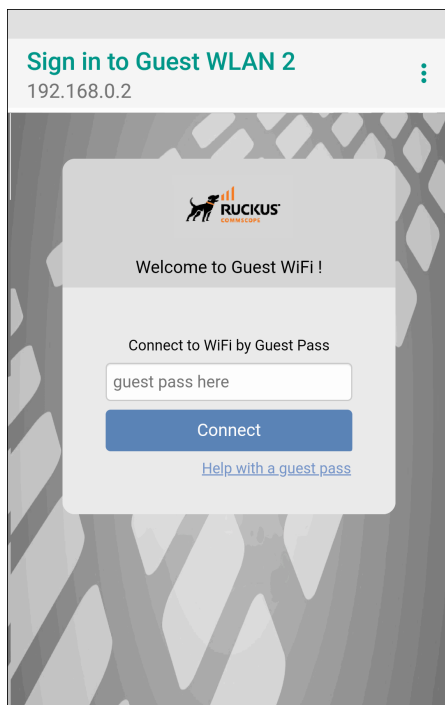

You have successfully authenticated to this guest network using the guest pass provided.

Parent topic: [Enabling Guest Pass Self-Service](#)

Controlling Guest Pass Generation Privileges

By default, guest pass generation privileges are given to all authenticated users in the Default user role.

In order to change the guest pass generation privileges for a group of users, refer to [Configuring User Roles](#).

For more information on creating a Guest Pass Operator role, refer to [Creating a Guest Pass Operator](#).

Parent topic: [Working with Guest Passes](#)

Generating and Delivering a Single Guest Pass

The following instructions apply to users with Guest Pass generation privileges.

A single Guest Pass can be used for one-time login, time-limited multiple logins for a single guest user, or configured so that a single Guest Pass can be shared by multiple users.

- 🔗 **Note:** The user generating the Guest Pass must have Guest Pass generation privileges, as described in [Controlling Guest Pass Generation Privileges](#).
- 🔗 **Note:** For instructions on how to generate multiple Guest Passes, refer to [Generating and Printing Multiple Guest Passes at Once](#).
- 🔗 **Note:** If printing the Guest Pass, make sure that your computer is connected to a local or network printer before starting.


Complete the following steps to generate a single Guest Pass.

1. Enter the URL of the Guest Pass request page in your web browser.

```
https://unleashed-hostname-or-ipaddress/guestpass
```

2. Enter your username and password and click **Log in**.

Figure 1. Requesting a Guest Pass

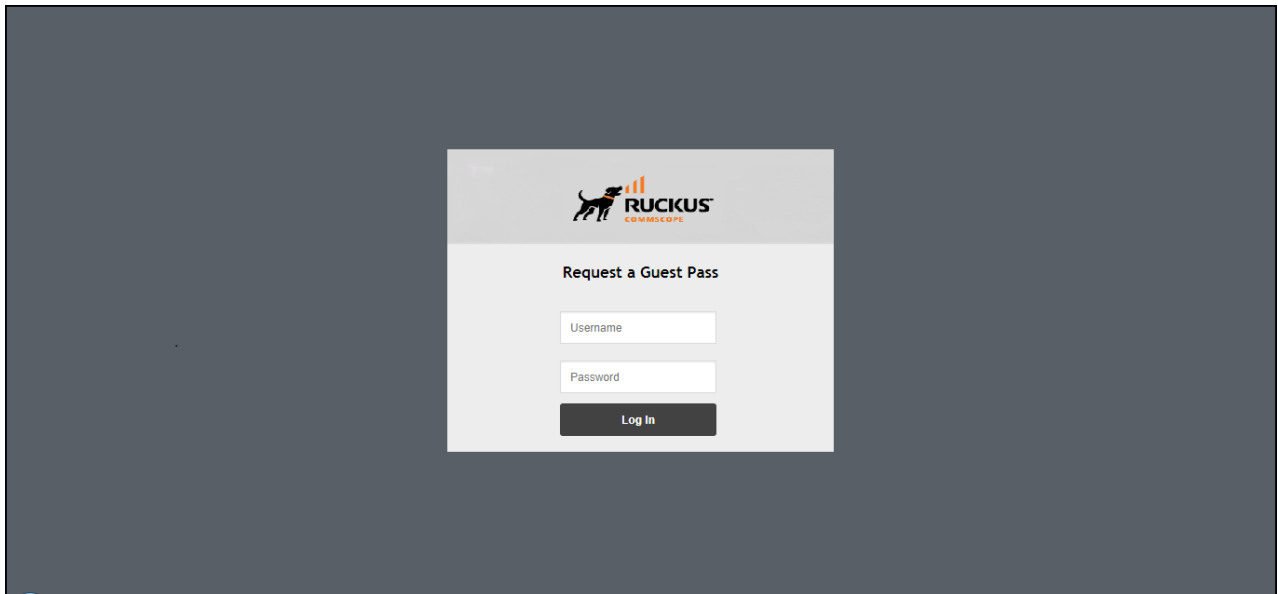


The **Guest Information** page is displayed.

3. On the **Guest Information** page, fill in the following options:

- **Creation Type:** Click **Single** to generate a single Guest Pass. To generate multiple Guest Passes in a batch, refer to [Generating and Printing Multiple Guest Passes at Once](#).
 - **Full Name:** Enter the name of the guest user for whom you are generating the Guest Pass.
 - **Valid for:** Enter a number in the **Valid for** field and select a time unit (**Hours**, **Days**, or **Weeks**) to specify the time period when the Guest Pass will be valid.
 - **WLAN:** Select the WLAN for this guest (typically, a guest WLAN).
 - **Email:** (Optional) Enter the email address for this user.
 - **Phone Number:** (Optional) Enter a phone number for this user.
 - **Key:** Leave as is if you want to use the random key that RUCKUS Unleashed generates. If you want to use a key that is easy to remember, delete the random key, and enter a custom key. For example, if RUCKUS Unleashed generated the random key OVEGS-RZKKE, you can change it to "joe-guest-key". Customized keys must be from 2 through 16 ASCII characters in length.
- 🔑 **Note:** Each Guest Pass key must be unique and is distributed on all guest WLANs. Therefore, you cannot create the same Guest Pass for use on multiple WLANs.
- **Remarks:** (Optional) Enter any notes or comments. For example, if the guest user is a visitor from a partner organization, you can enter the name of the organization.

- **Sharable:** Use this option to allow multiple users to share a single Guest Pass.
- **Session:** Select the check box and enter an increment of time after which guests must log in again. If the **Session** check box is not selected, connected users will not be required to log in again until the Guest Pass expires.

Figure 2. Creating a Single Guest Pass

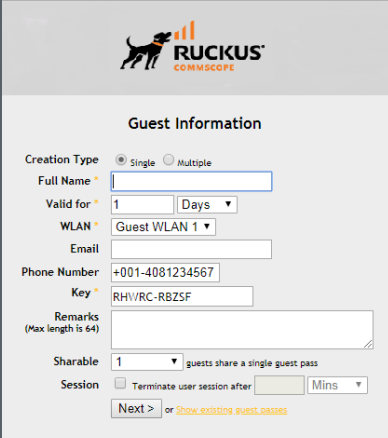


The screenshot shows the 'Guest Information' form in the Ruckus Unleashed interface. The form is titled 'Guest Information' and includes the following fields and options:

- Creation Type:** Radio buttons for 'Single' (selected) and 'Multiple'.
- Full Name:** A text input field.
- Valid for:** A dropdown menu showing '1' and 'Days'.
- WLAN:** A dropdown menu showing 'Guest WLAN 1'.
- Email:** A text input field.
- Phone Number:** A text input field showing '+001-4081234567'.
- Key:** A text input field showing 'RHVRC-RBZSF'.
- Remarks:** A text area with a note '(Max length is 64)'.
- Sharable:** A dropdown menu showing '1' and the text 'guests share a single guest pass'.
- Session:** A checkbox labeled 'Terminate user session after' followed by a dropdown menu showing 'Mins'.
- Buttons:** 'Next >' and 'Show existing guest passes'.

- Click **Next**. The **Guest Pass Generated** page is displayed and presents the Guest Pass key and options for delivering this key to your guests. Delivery options include **Email** (if you entered an email address for the guest), **SMS** (if you configured a phone number for the guest), and **Print Instructions**.

Figure 3. Guest Pass Generated Page

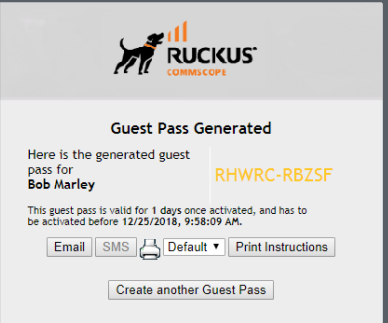

The screenshot shows the 'Guest Pass Generated' page in the Ruckus Unleashed interface. The page displays the generated guest pass information and delivery options:

- Header:** 'Guest Pass Generated'.
- Text:** 'Here is the generated guest pass for Bob Marley'.
- Pass Key:** 'RHVRC-RBZSF'.
- Validity:** 'This guest pass is valid for 1 days once activated, and has to be activated before 12/25/2018, 9:58:09 AM.'
- Delivery Options:** Buttons for 'Email', 'SMS', 'Default' (selected), and 'Print Instructions'.
- Footer:** 'Create another Guest Pass' button.

5. If you want to print the guest access instructions, select the Guest Pass instructions that you want to print from the menu. If you did not create custom Guest Pass printouts, select **Default**.
6. Click **Print Instructions**. A new page displays the Guest Pass instructions and the **Print** dialog box is displayed.
7. Select the printer that you want to use, and click **Print** to print the Guest Pass instructions.

Figure 4. Sending Guest Pass Key through Email Entered on the Guest Information Screen

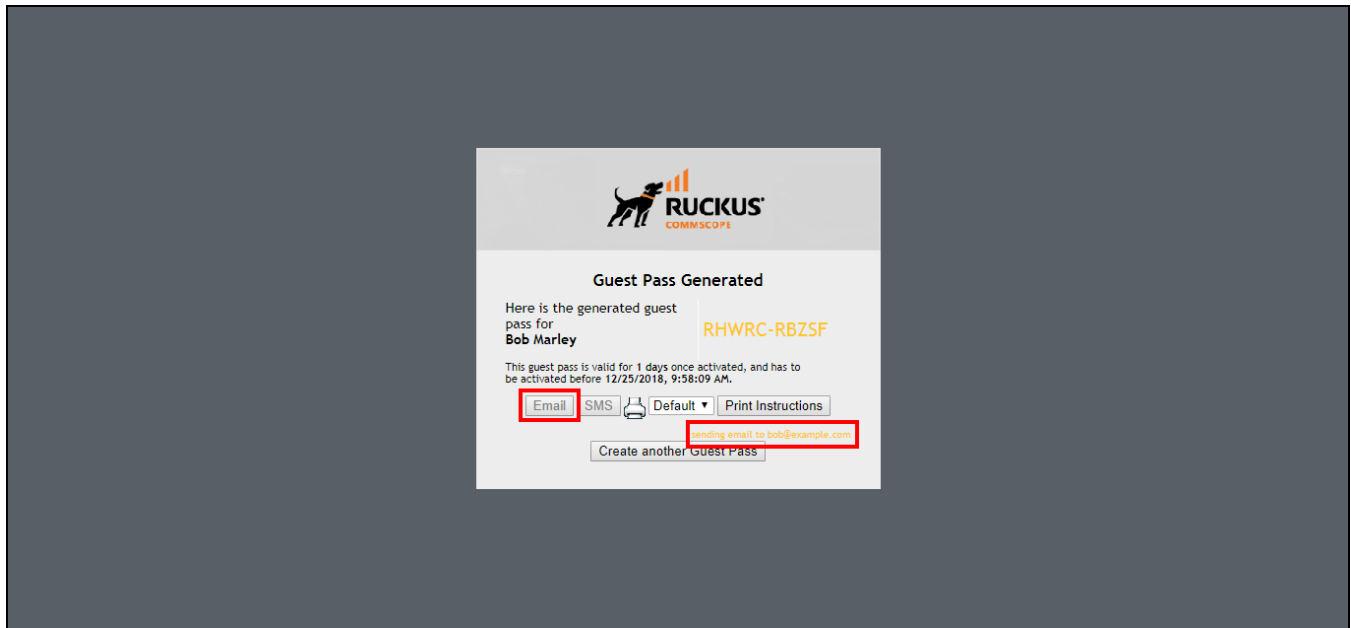


Figure 5. Sample Guest Pass Printout

Connecting as a Guest to the Corporate Wireless Network



Greetings, **Bob Marley**

You have been granted access to the company wireless network, which you can use to access both the World Wide Web and Internet, and to check your personal email.

Your guest pass key is **RHWRC-RBZSF**

This guest pass is valid for **1 days** once activated, and has to be activated before **12/25/2018, 9:58:09 AM**

Connect your wireless-ready PC to this network: **Guest WLAN 1**, as detailed in the instructions printed below.

Before you start, please review the following requirements.

Requirements

- A wireless-network-ready computer
- The corporate "guest" network name
- The guest pass (a text "key")

Connecting

Using your guest pass to connect requires a series of two procedures: (1) connecting your PC to the company "guest" network, then (2) logging in as a qualified guest.

Finding the Wireless "Guest" Network

- 1 On your PC/Windows desktop, check the system tray for a Wireless Connection icon (the tool tip reads "Wireless Network Connection/[name]").
- 2 Right-click this icon and choose **View Available Wireless Networks**.
- 3 When the Wireless Network Connection window appears, the "guest" WLAN will be listed.
- 4 Select the WLAN "guest" network (various "neighbor nets" may also be listed) and click **Connect**.
- 5 If a Wireless Network Connection confirmation dialog box asks you to confirm "connecting to an unsecured network", click **Connect Anyway**.

A connection status dialog appears, while a network address is obtained and initial connection established.

- 6 When the Wireless Network Connection window displays "**Connected**", you can close this window and proceed to the next procedure.

Logging into the Network as a Guest

- 1 Start a web browser and try to connect to any valid Internet site. The wireless network login page automatically appears.
- 2 Select "I'm a Guest and would like to access the Internet" and then click **Next**.
- 3 When the Unleashed WebUI "Guest Pass" page appears, enter the text of your guest pass key (by typing or pasting) and click **Login**.

When the browser displays a Unleashed WebUI "Authenticated" page, your connection is active.

- 4 You can now check your personal email and browse the Web.

Important

If you want to create additional Guest Passes one by one, click **Create Another Guest Pass**. Alternatively, you can generate multiple Guest Passes in batch, as described in [Generating and Printing Multiple Guest Passes at Once](#).

Parent topic: [Working with Guest Passes](#)

Generating and Printing Multiple Guest Passes at Once

The following instructions apply to users with guest pass generation privileges.

- 🔗 **Note:** For instructions on how to generate a single guest pass, refer to [Generating and Delivering a Single Guest Pass](#).
- 🔗 **Note:** If printing the guest pass, make sure that your computer is connected to a local or network printer before starting.

Complete the following steps to generate and print multiple guest passes at the same time:

1. Enter the URL of the Guest Pass Generation page in your web browser.

```
https://{unleashed-hostname-or-ipaddress}/guestpass
```

2. Enter your username and password, and click **Log In**.

The **Guest Information** page appears. On this page, you need to provide information about the guest users to enable RUCKUS Unleashed to generate the guest passes.

3. On the **Guest Information** page, fill in the following options:

- **Creation Type:** Click **Multiple**.
- **Valid for:** Enter a number in the **Valid for** field and select a time unit (**Hours**, **Days**, or **Weeks**) to specify the time period that the Guest Passes will be valid.
- **WLAN:** Select one of the existing WLANs with which the guest users will be allowed to associate.
- **Number:** Select the number of guest passes that you want to generate. RUCKUS Unleashed automatically populates the names of each user (Batch-Guest-1, Batch-Guest-2, and so on) to generate the guest passes.
-  **Note:** Each guest pass key must be unique and is distributed on all guest WLANs. Therefore, you cannot create the same guest pass for use on multiple WLANs.
- **Profile (*.csv):** If you have created a Guest Pass profile (refer to Creating a Guest Pass Profile), click **Choose File** to import the file.
- **Sharable:** Configure this option if you want to allow multiple users to share a single guest pass (default: 1; not shared).
- **Session:** Select the check box and enter an increment of time after which guests must log in again. If the **Session** check box is not selected, connected users will not be required to log in again until the Guest Pass expires.

Figure 1. Generating Multiple Guest Passes

RUCKUS COMMUSCOPE

Guest Information

Creation Type: ☐ Single ☒ Multiple

Valid for: Days

WLAN:

Number: or specified by profile below

Profile (*.csv): No file chosen

To download sample profile, [click here](#)

Sharable: guests share a single guest pass

Session: ☐ Terminate user session after Mins

or [Show existing guest passes](#)

Note: If you want to be able to identify the guest pass users by their names (for example, for monitoring or auditing purposes in a hotel setting), click **Choose File**, and upload a guest pass profile instead. Refer to [Creating a Guest Pass Profile](#) for more information.

- Click **Next**. The **Guest Pass Generated** page appears and displays the guest pass user names and expiration dates.

Figure 2. Multiple Guest Passes Generated

RUCKUS COMMUSCOPE

Guest Pass Generated

Here are the generated guest passes:

Select a template for Guest Pass Instructions:

- Latest generated guest passes: [Print All Instructions Below](#)

Guest Name	Expires	Action
Guest-6	2018/12/25 10:10:58	
Guest-2	2018/12/25 10:10:58	
Guest-3	2018/12/25 10:10:58	
Guest-4	2018/12/25 10:10:58	
Guest-5	2018/12/25 10:10:58	

- [click here](#) to download the generated Guest Passes record.
- You also have these generated guest passes:

- For **Select a template for Guest Pass instructions**, select the guest pass instructions that you want to print from the menu. If you did not create custom guest pass printouts, select **Default**.
- Print the instructions for a single guest pass or print all of them:

- To print instructions for all guest passes, click **Print All Instructions** below.
- To print instructions for a single guest pass, click the printer icon in the **Action** column in the same row as the guest pass for which you want to print instructions.

A new browser page appears and displays the guest pass instructions and the **Print** dialog box is displayed.

7. Select the printer that you want to use and click **Print** to print the guest pass instructions.

You have completed generating and printing multiple guest passes for your guest users. If you want to save a record of the guest passes that you have generated, click the **Click here** link in **Click here to download the generated Guest Passes record**. Download and save the CSV file to your computer.


Parent topic: [Working with Guest Passes](#)

Creating a Guest Pass Profile

Complete the following steps to create a Guest Pass profile.

1. Log in to the guest pass generation page.
2. For **Creation Type**, click **Multiple**.
3. For **Profile (*.csv)**, click the **click here** link in **To download a profile sample, click here**.

Figure 1. Downloading a Sample Profile

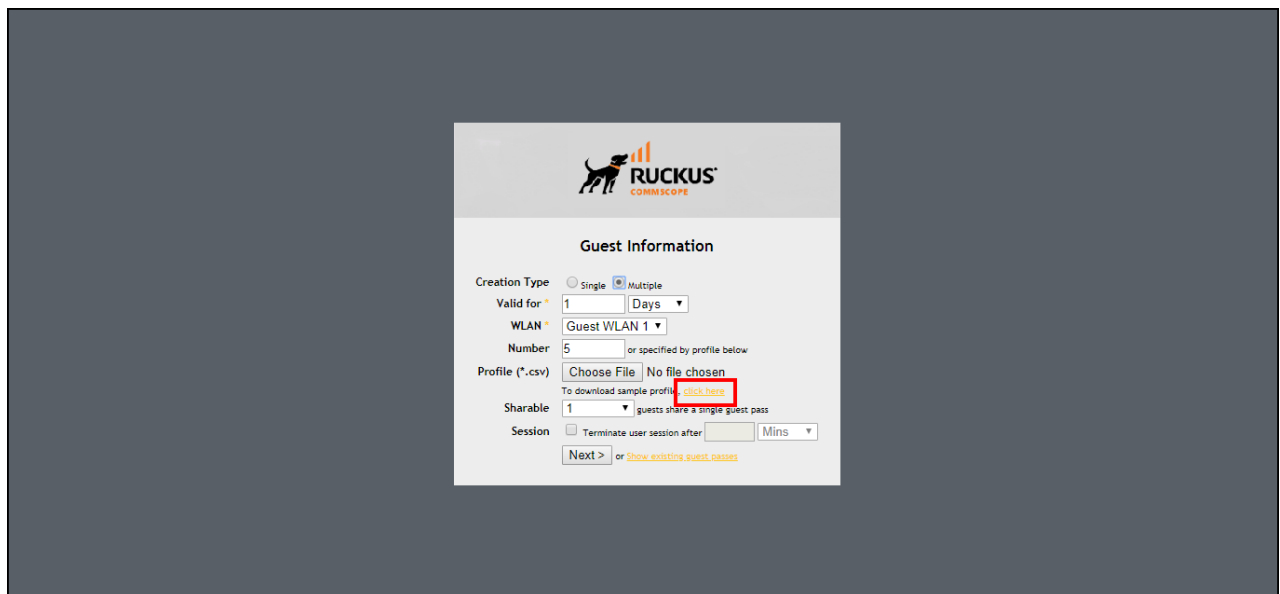

4. Save the sample guest pass profile (in CSV format) to your computer.
5. Using a spreadsheet application, open the CSV file and edit the guest pass profile by filling out the following columns:


- **#Guest Name:** Enter the name of the guest user (one name per row).
- **Remarks:** (Optional) Enter any note or remarks about the guest pass.
- **Key:** Enter a guest pass key consisting from 1 through 16 alphanumeric characters. If you want RUCKUS Unleashed to generate the guest pass key automatically, leave this column blank.

Figure 2. Editing the CSV File in a Spreadsheet Application

	A	B	C	D	E	F	G
1	#Guest Name (Must)	Remarks	Key (Empty implies random key)	Email Address	Phone Number		
2	Batch-Guest-1	Batch generation	AAAAAAA	someone@example.com	14081234567		
3	Batch-Guest-2	Batch generation	AAAAAAB	someone1@example.com			
4	Batch-Guest-3	Batch generation		someone2@example.com			
5	Batch-Guest-4	Batch generation		someone3@example.com			
6	Batch-Guest-5	Batch generation		someone4@example.com			
7							
8							
9							
10							
11							
12							
13							
14							
15							
16							
17							
18							
19							
20							
21							
22							

- Return to the **Guest Information** page, and complete step 3 through step 7 in [Generating and Printing Multiple Guest Passes at Once](#) to upload the guest pass profile and generate multiple guest passes.

Figure 3. Importing Batch Generation CSV File

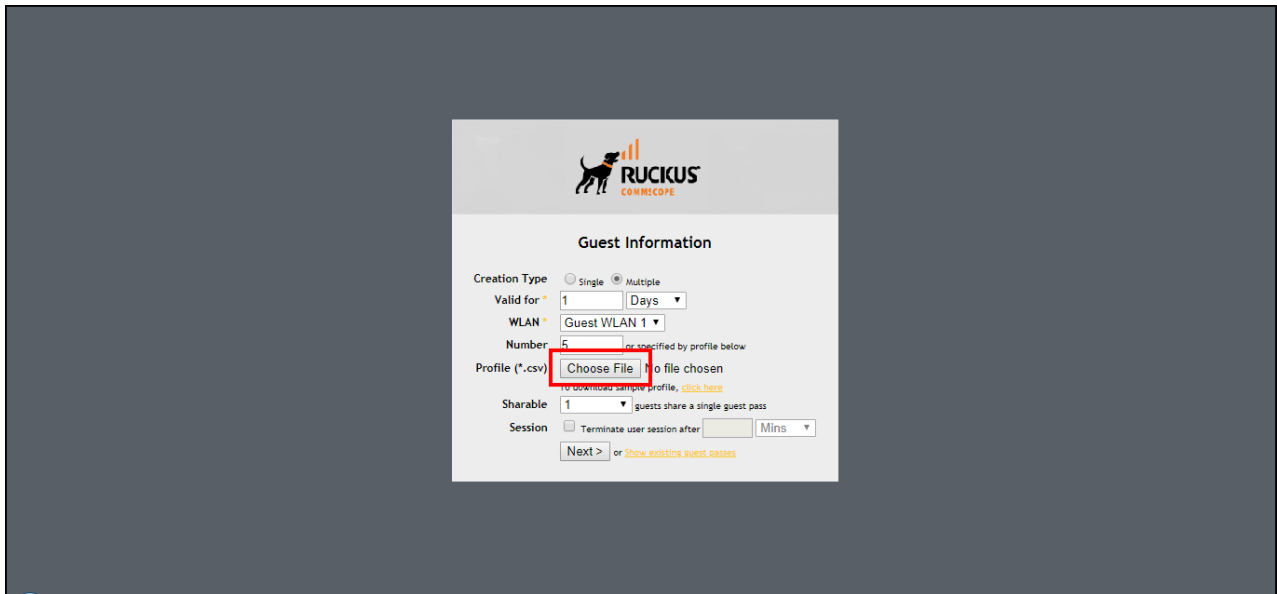

Parent topic: [Working with Guest Passes](#)

Monitoring Generated Guest Passes

Once you have generated guest passes for your visitors, you can monitor and, if necessary, delete them to revoke the guests' access privileges.

1. Go to **Admin & Services > Services > Guest Access Service > Guest Pass Generation**.
2. Review the generated guest passes in the **Admin Generated Guest Passes** and **Self-Service Generated Guest Passes** tables.
3. To remove a guest pass, select the check box for the guest pass, and click the **Delete** button. Click **Delete All** to delete all generated guest passes at once.

Figure 1. Viewing generated Guest Passes

Guest Pass Generation | Guest Pass Printout Customization | Email | SMS

Guest Pass Generation

Authenticated users can generate guest passes at the URL shown below.

Guest Pass Generation URL <https://192.168.0.2/guestpass>

Authentication Server Local Database

Admin Generated Guest Passes

These tables list the generated guest passes. You can review the guest passes generated for your users. You may also remove them if necessary.

☐	Guest Name	Role	Key	Email	Phone Number	Remarks	Create Time	Expires
☐	Bob Marley	Default	RHWRC-RBZSF	bob@example.com	+001-4081234567		2018/12/18 09:58:09	2018/12/25
☐	Guest-2	Default	KQJPH-FDGBL		+001-4081234567	Batch generation	2018/12/18 10:10:58	2018/12/25
☐	Guest-3	Default	HBQQA-NTUWB		+001-4081234567	Batch generation	2018/12/18 10:10:58	2018/12/25

Parent topic: [Working with Guest Passes](#)

Creating a Custom Guest Pass Printout

The guest pass printout is a printable HTML page that contains instructions for the guest pass user on how to connect to the wireless network.


The authenticated user who is generating the guest pass will need to print out this HTML page and provide it to the guest pass user. A guest pass in English and one in French are included by default.

As administrator, you can create custom guest pass printouts. For example, if your organization receives visitors who speak different languages, you can create guest pass printouts in other languages.

To create a custom guest pass printout:


1. Go to **Admin & Services > Services > Guest Access Service > Guest Pass Printout Customization**.
2. Click the **click here** link to download an example of an existing printout.

Figure 1. Guest Pass Printout Customization

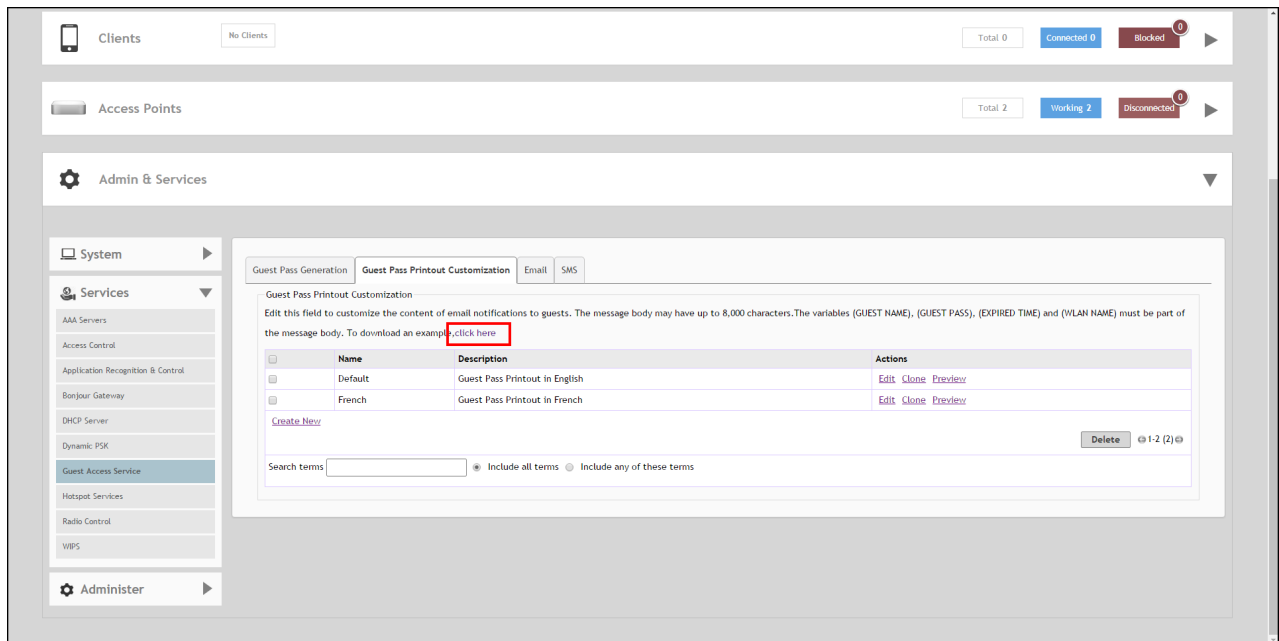

3. Save the HTML file to your computer.
 4. Using a text or HTML editor, customize the guest pass printout. Note that only ASCII characters can be used. You can do any or all of the following:
 - Reword the instructions
 - Translate the instructions to another language
 - Customize the HTML formatting
- Note:** The guest pass printout contains several tokens or variables that are substituted with actual data when the guest pass is generated. When you customize the guest pass printout, make sure that these tokens are not deleted. For more information on these tokens, see [Guest Pass Printout Tokens](#).
5. Go back to the **Guest Pass Printout Customization** screen, and then click **Create New**. The **Create New** form appears.

Figure 2. Creating New Guest Pass Printout File

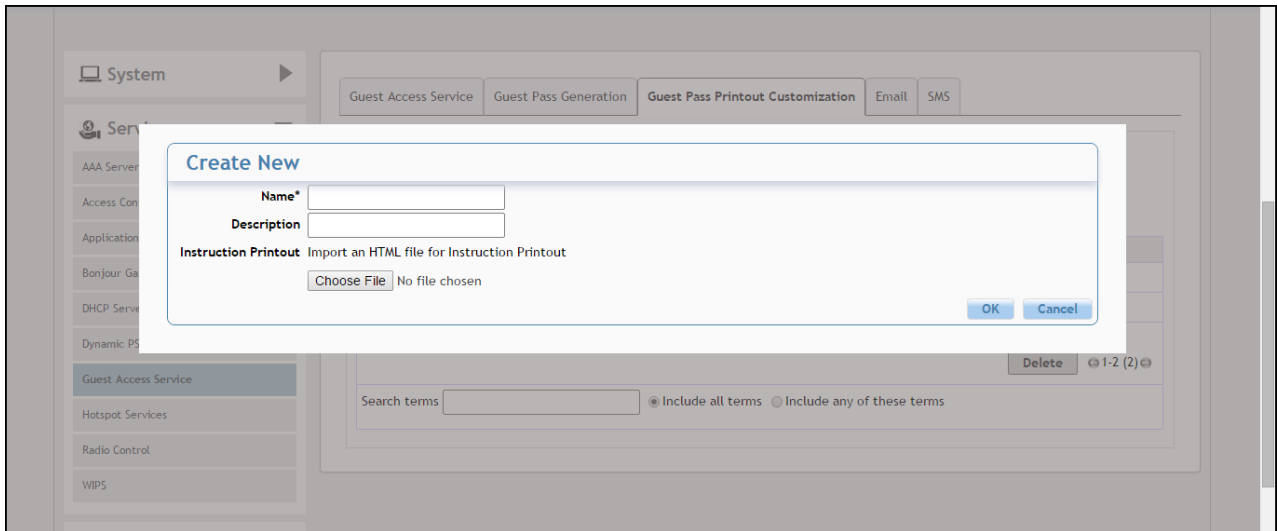

6. In **Name**, type a name for the guest pass printout that you are creating. For example, if this guest pass printout is in Spanish, you can type **Spanish**.
7. In **Description** (optional), add a brief description of the guest pass printout.
8. Click **Choose File**, select the HTML file that you customized earlier, and then click **Open**. Unleashed copies the HTML file to its database.
9. Click **Import** to save the HTML file to the Unleashed AP.

You have completed creating a custom guest pass printout. When users generate a guest pass, the custom printout that you created will appear as one of the options that they can print.

Parent topic: [Working with Guest Passes](#)

Guest Pass Printout Tokens

The following table lists the tokens that are used in the guest pass printout. Make sure that they are not accidentally deleted when you customize the guest pass printout.

Table 1. Guest Pass Printout Tokens

Token	Description
{GP_GUEST_NAME}	Guest pass user name.
{GP_GUEST_KEY}	Guest pass key.
{GP_IF_EFFECTIVE_FROM_CREATION_TIME}	If you set the validity period of guest passes to Effective from the creation time (in the Guest Pass Generation section), this token shows when the guest pass was created and when it will expire.

Token	Description
{GP_ELSEIF_EFFECTIVE_FROM_FIRST_USE}	If you set the validity period of guest passes to Effective from first use (in the Guest Pass Generation section), this token shows the number of days during which the guest pass will be valid after activation. It also shows the date and time when the guest pass will expire if not activated.
{GP_ENDIF_EFFECTIVE}	This token is used in conjunction with either the {GP_ELSEIF_EFFECTIVE_FROM_FIRST_USE} or {GP_ENDIF_EFFECTIVE} token.
{GP_VALID_DAYS}	Number of days for which the guest pass is valid.
{GP_VALID_TIME}	Date and time when the guest pass expires.
{GP_GUEST_WLAN}	Name of WLAN that the guest user can access.

Parent topic: [Creating a Custom Guest Pass Printout](#)


Customizing the Guest Pass Email Content

The Unleashed guest pass email content can be customized to suit your preferences.

- **Note:** To allow Unleashed to deliver guest passes via email, you must first configure an email account (and its SMTP settings) from which Unleashed will send the emails. For information on configuring the email server, see [Configuring Email Server Settings](#).

Use the following procedure to customize the content of the email in which the guest pass keys will be delivered:

1. Go to **Admin & Services > Services > Guest Access Service > Email**.
2. Replace the content in the text box, while ensuring that the following variables remain intact and unchanged:
 - (GUEST NAME)
 - (GUEST PASS)
 - (EXPIRED TIME)
 - (WLAN NAME)
3. To download a sample of the email, click the **click here** link.
4. Click **Apply** to save your changes.

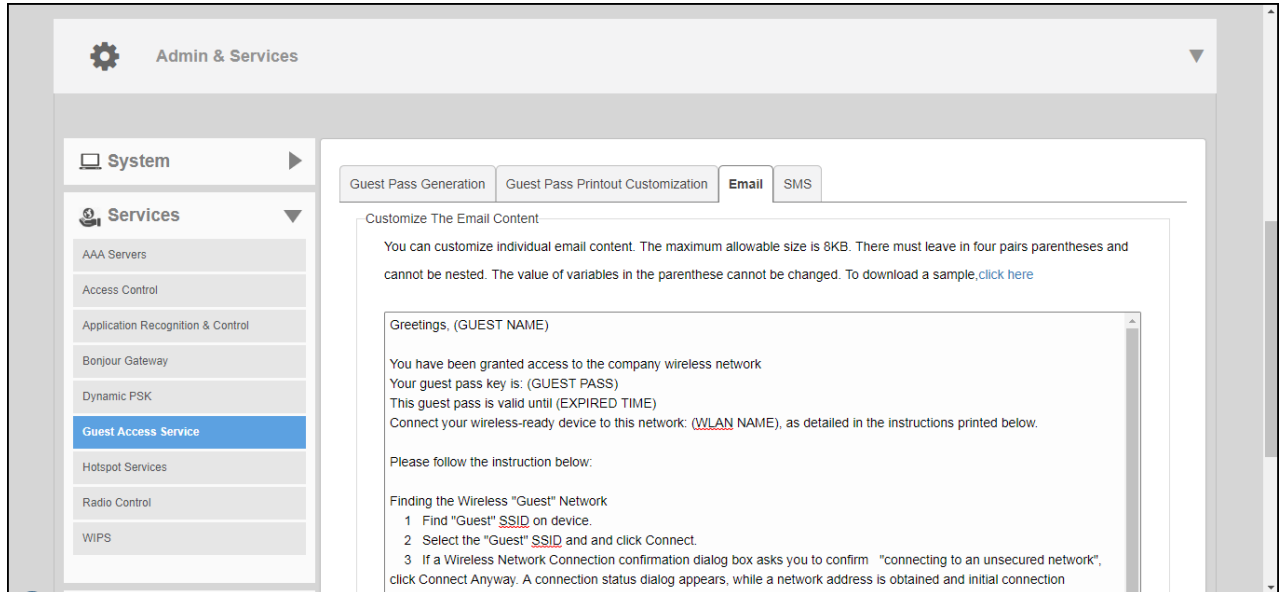Figure 1. Customize guest pass email content

Parent topic: [Working with Guest Passes](#)


Customizing the Guest Pass SMS Content

The Unleashed guest pass SMS content can be customized to suit your preferences.

Note: To allow Unleashed to deliver guest passes via SMS, you must first configure an SMS delivery account from which Unleashed will send the SMS messages. For information on configuring the SMS server settings, see [Configuring Email Server Settings](#).

Use the following procedure to customize the content of the SMS messages in which the guest pass keys will be delivered:

1. Go to **Admin & Services > Services > Guest Access Service > SMS**.
2. Replace the content in the text box, while ensuring that the following variables remain intact and unchanged:
 - (WLAN NAME)
 - (GUEST PASS)
 - (EXPIRED TIME)
3. To download a sample of the SMS message, click the **click here** link.
4. Click **Apply** to save your changes.

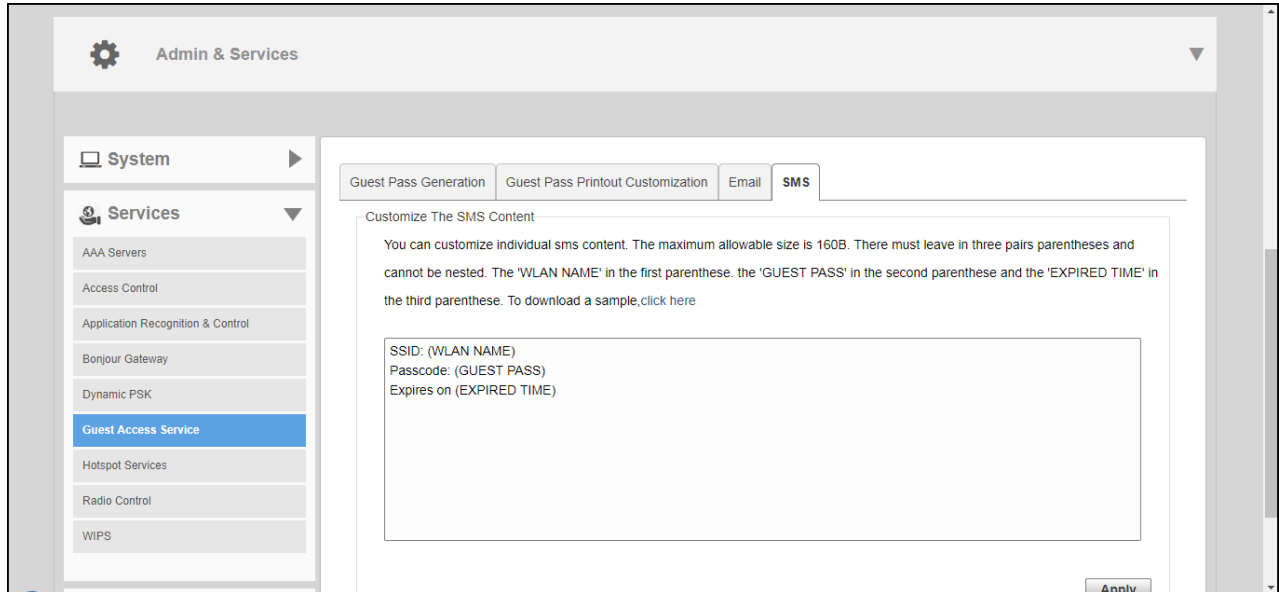Figure 1. Customize guest pass SMS content

Parent topic: [Working with Guest Passes](#)

Social Media WLANs

Social media WLANs allow guest users to access the Internet using a social media account instead of using a WPA password or Guest Pass to log in.

The following social media login methods are currently supported:

- [Facebook](#)
- [Google/Google+](#)
- [LinkedIn](#)
- [Microsoft Live](#)

For each of these social media WLAN options, you must create an application or activate a service on the respective social media website before your users will be able to log in using their social media accounts.

Note: Beginning with release 200.6, multiple social media login types can be enabled for the same WLAN.

Figure 1. Creating a Social Media WLAN

Name: social-media

Usage Type: ☐ Standard for most regular wireless network usage
☒ **Guest Access** Guest access policies and access control will be applied
☐ Hotspot Service known as WISPr

Onboarding Portal: ☐ Enable Zero-IT device registration from the Guest Portal

Guest Authentication: ☒ **Guest Pass and Social Login** ☐ Social Login only ☐ None

Guest Password: ☒ Unique password for each guest
 Please go to the following link and log in as guest pass admin to create unique password
<https://unleashed.ruckuswireless.com/guestpass> & <https://192.168.0.4/guestpass>
☐ Single shared password among all guest

Validity Period: ☒ Effective from first use
 Expire new guest passes if not used within days
☐ Effective from the creation time

Grace Period: ☒ Allow users to reconnect without re-authentication for minutes

Authentication Method: ☒ Open ☐ 802.1X EAP ☐ MAC Address

Encryption Method: ☐ WPA2 ☒ None

Accounting Server: Disabled
 Send Interim-Update every minutes

Figure 2. Selecting Social Media Logins

Create WLAN

Social Media Logins: ☐ Google/Google+
☐ LinkedIn
☐ Microsoft
☐ Facebook

GuestPass Self-Service: ☐ Enable guestpass self service

Validity Period: ☒ Effective from first use
 Expire new guest passes if not used within days
☐ Effective from the creation time

User Redirection URL: ☒ Redirect to website user intends to visit
☐ Redirect user to this website

Terms and Conditions: ☐ Show terms and conditions

Guest Portal Language: English

Insert WiFi4EU Snippet: ☐ Insert WiFi4EU snippet in head tag of Portal page

Customize Captive Portal: Click on edit area to change each part of captive portal & preview to check the result

Parent topic: [Guest WLANs](#)

Facebook

The Facebook social media login complies with the OAuth 2.0 specification (the industry-standard protocol for authorization).

To create a Facebook social media WLAN, you need an OAuth 2.0 client ID and secret. RUCKUS Unleashed provides a default internal Facebook client ID.

- **Note:** After upgrade to Unleashed 200.15, WLANs previously configured to support only Facebook social media login will be disabled. WLANs configured to support multiple authentication methods (such as guest pass and Facebook), will still be enabled, but the Facebook option will be disabled. In either case, you must manually re-enable the Facebook option and configure a client ID and client secret.

Complete the following steps to use Facebook social media login.

1. For **Social Media Logins**, select the **Facebook** check box and the **Use my own client ID** option appears.
2. You have two options for configuring the Facebook client ID:
 - Leave the **Use my own client ID** option cleared if you want the system to use the default, built-in Facebook client ID.
 - Click the **Use my own client ID** option and enter your **Facebook Client ID** and **Client Secret**.

- **Note:** If you do not already have a **Facebook Client ID** and **Client Secret**, click the link in **Click here to generate one** to generate client ID and client secret. Refer to [OAuth Setup Procedure for Facebook Social Media Login](#) for more information.

Figure 1. Logging in Using Facebook ID

Social Media Logins: ☐ Google/Google+ ☐ LinkedIn ☐ Microsoft

☒ Facebook

☒ Use my own client ID

Input existing client ID/secret or click [here](#) to generate one

* Facebook Client ID:

* Client Secret:

GuestPass Self-Service: ☐ Enable guestpass self service

Validity Period: ☒ Effective from first use

Parent topic: [Social Media WLANs](#)

OAuth Setup Procedure for Facebook Social Media Login

Facebook social media WLANs require an OAuth 2.0 client ID and password, which can be generated using the following procedure.

As a prerequisite, you must register your Facebook account on the Meta Developers Apps website. Refer to <https://developers.facebook.com/docs/development/register/> for more information.

Complete the following steps to create a project ID in the Facebook Developers Console.


1. Go to the Facebook Developers Apps website (<https://developers.facebook.com/apps>) and select **Log In**.

 **Note:** Alternatively, click the **Click here** link to open the Developers App Facebook page from within the RUCKUS Unleashed guest access settings.

2. Log in using your facebook credentials and click **My Apps**.

The **Apps** page is displayed.


Figure 1. Creating a New App on Facebook

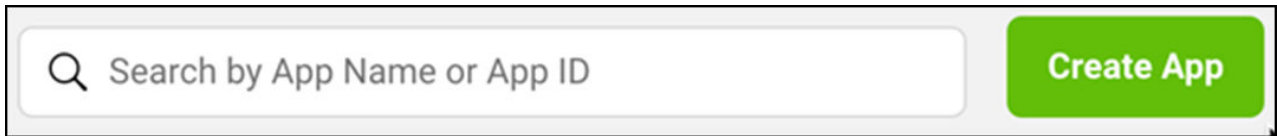

A search bar with a magnifying glass icon and the text "Search by App Name or App ID". To the right of the search bar is a green button with the text "Create App".

- Click **Create App** to create a Facebook application.
- In the **Create an App** window, select **Authenticate and request data from users with Facebook Login** and click **Next**.

Figure 2. Adding OAuth Use Case

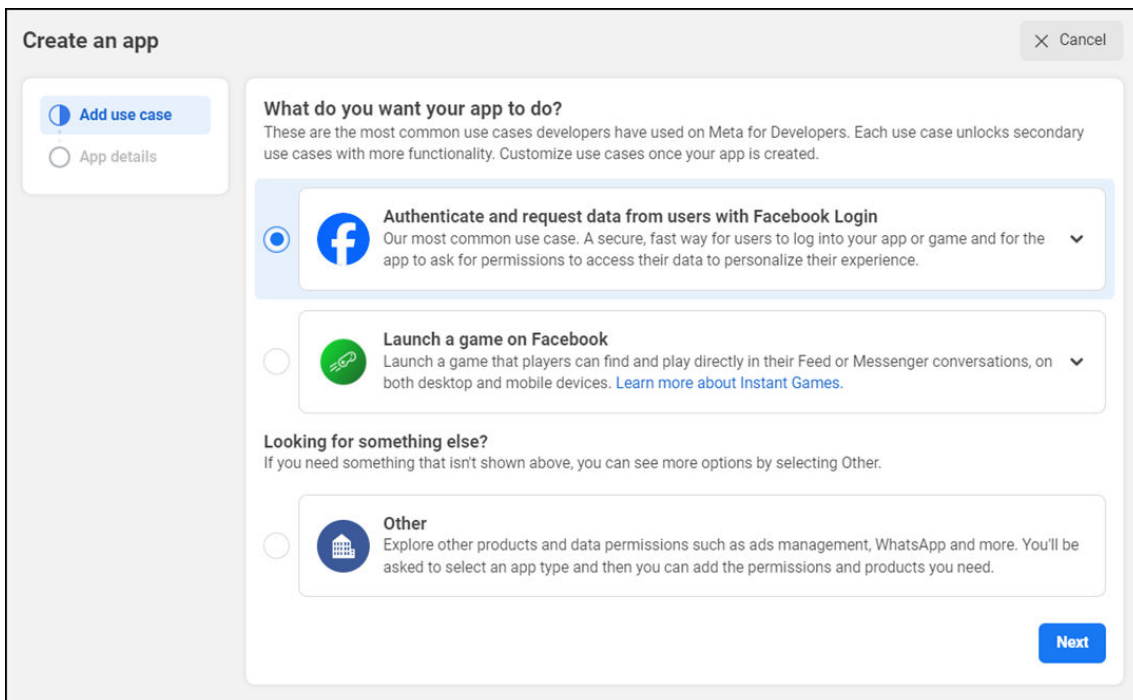


The "Create an app" window shows the "Add use case" step. On the left, there are two tabs: "Add use case" (selected) and "App details". The main area is titled "What do you want your app to do?" and lists three options:

- Authenticate and request data from users with Facebook Login** (selected): Our most common use case. A secure, fast way for users to log into your app or game and for the app to ask for permissions to access their data to personalize their experience.
- Launch a game on Facebook**: Launch a game that players can find and play directly in their Feed or Messenger conversations, on both desktop and mobile devices. [Learn more about Instant Games.](#)
- Other**: Explore other products and data permissions such as ads management, WhatsApp and more. You'll be asked to select an app type and then you can add the permissions and products you need.

At the bottom right is a blue "Next" button. A "Cancel" button is in the top right corner.

- Under **Login type**, for **Are you building a game?**, select **No** and click **Next**.

Figure 3. Selecting Login Type

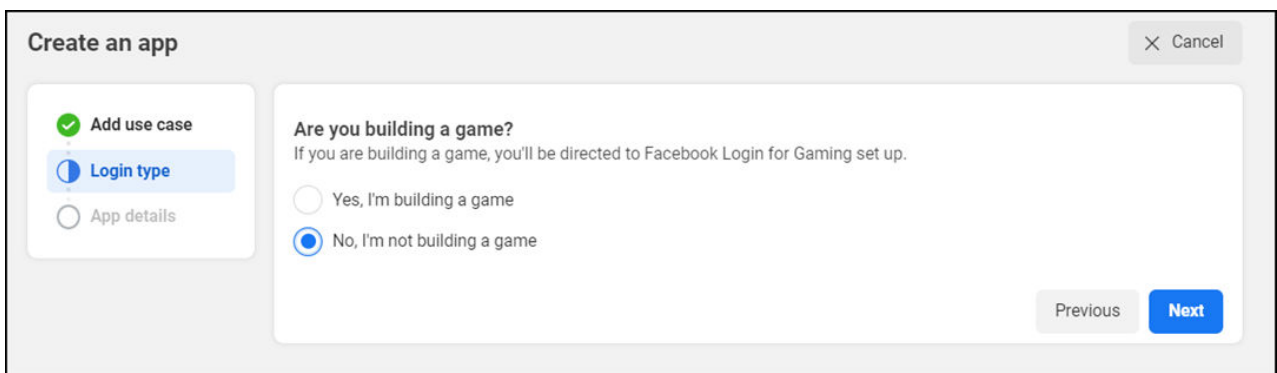

The "Create an app" window shows the "Login type" step. On the left, there are three tabs: "Add use case" (checked), "Login type" (selected), and "App details". The main area is titled "Are you building a game?" and has two radio button options:

- Yes, I'm building a game** (unselected): If you are building a game, you'll be directed to Facebook Login for Gaming set up.
- No, I'm not building a game** (selected)

At the bottom right are "Previous" and "Next" buttons. A "Cancel" button is in the top right corner.

- Under **App Details**, enter the application name, application contact email address, and optionally select a business account from the list.

- **Note:** A business account may be required in a production environment; individual Facebook accounts can make up to 200 calls per hour.

Figure 4. Adding Application Details

Create an app ✕ Cancel

Add use case (checked)
App details (selected)

Add an app name
This is the app name that will show on your My Apps page and associated with your app ID. You can change the name later in Settings.
unleashed-test 14/30


App contact email
This is the email address we'll use to contact you about your app. Make sure it is an address you check regularly. We may contact you about policies, app restrictions or recovery if your app is deleted or compromised.
[redacted]@commscope.com

Business Account - Optional
Connecting a Business Account to your app is only required for certain products and permissions. You'll be asked to connect a Business Account when you request access to those products and permissions.
No Business Manager account selected

By proceeding, you agree to the [Meta Platform Terms](#) and [Developer Policies](#). Previous Create app

7. Click **Create App**, if prompted for security purposes, enter your Facebook login credentials. The **Dashboard** screen is displayed.

Figure 5. Facebook App Dashboard

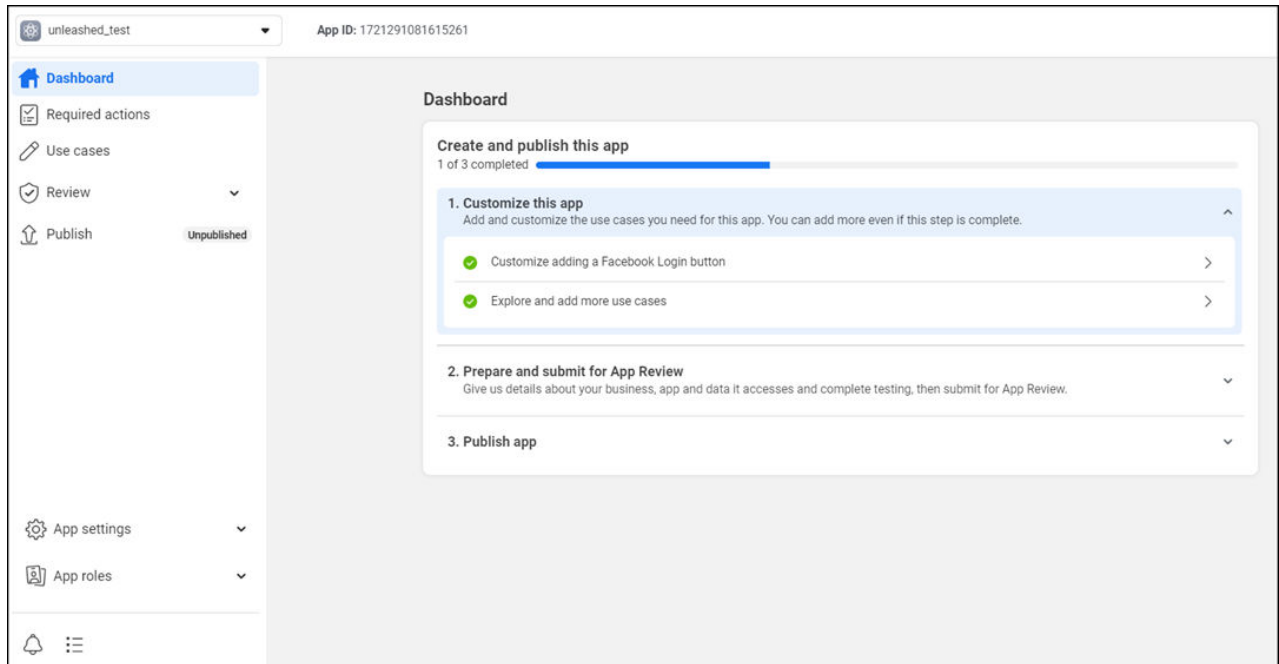

8. Under **Customize this app**, click **Customize adding a Facebook Login button**. The **Customize Facebook login and requesting user data** page is displayed.
- Figure 6.** Customizing Facebook Login and Requesting User Data

Use cases > Customize

Customize Facebook login and requesting user data

Customize your use case so your app works the way you need it to. [Go back](#)



Facebook Login
Our most common use case. A secure, fast way for users to log into your app or game and for the app to ask for permissions to access their data to personalize their experience. [Read docs](#)

Settings [Go to settings](#)

Quickstart [Go to quickstart](#)

Permissions

These are the permissions available in this use case. Some permissions are required for the use case to work and can't be removed. Most permissions must be approved in App Review before you can publish your app and go live.

Permissions ↑	API Calls ⓘ ↑↓	Status ↑↓	Action
email The email permission allows your app to read a person's primary email address. ⓘ Full Description ⓘ Requirements	—	—	Add
public_profile The public_profile permission allows an app to read the Default Public Profile Fields on the User node. This permission is automatically granted to all apps. ⓘ Full Description ⓘ Requirements	0	Ready for testing	

9. Under **Facebook Login**, for **Settings**, click **Go to settings**.

10. In the **Facebook Login Settings** page, configure the **Client OAuth settings** as follows:

- For **Client OAuth login** and **Web OAuth login**, toggle the switch to **Yes**.
- For **Valid OAuth Redirect URIs**, enter the URL **`https://unleashed.ruckuswireless.com/user/auth.jsp`**.

 **Note:** If you have imported a certificate with a fully qualified domain name (FQDN) to RUCKUS Unleashed, you must use the FQDN. For example, if the FQDN is “mydomain.com”, the **Valid OAuth Redirect URIs** will be “<https://mydomain.com/user/auth.jsp>”.

Figure 7. Configuring Client OAuth Settings

Use cases > Customize > Settings

Facebook Login settings

Customize your use case so your app works the way you need it to. [Go back](#)

Facebook Easily add Facebook Login to your app with our [Quickstart](#)

Client OAuth settings

☒ **Client OAuth login**
Enables the standard OAuth client token flow. Secure your application and prevent abuse by locking down which token redirect URIs are allowed with the options below. Disable globally if not used. [\[?\]](#)

☒ **Web OAuth login**
Enables web-based Client OAuth Login. [\[?\]](#)

☐ **Force Web OAuth reauthentication**
When on, prompts people to enter their Facebook password in order to log in on the web. [\[?\]](#)

☒ **Use Strict Mode for redirect URIs**
Only allow redirects that exactly match the Valid OAuth Redirect URIs. Strongly recommended. [\[?\]](#)

☒ **Enforce HTTPS**
Enforce the use of HTTPS for Redirect URIs and the JavaScript SDK. Strongly recommended. [\[?\]](#)

☐ **Embedded Browser OAuth Login**
Enable webview Redirect URIs for Client OAuth Login. [\[?\]](#)

Valid OAuth Redirect URIs

A manually specified redirect_uri used with Login on the web must exactly match one of the URIs listed here. This list is also used by the JavaScript SDK for in-app browsers that suppress popups. [\[?\]](#)

Valid OAuth redirect URIs

[Copy to clipboard](#)

☐ **Login from Devices**
Enables the OAuth client login flow for devices like a smart TV [\[?\]](#)


☐ **Login with the JavaScript SDK**
Enables Login and signed-in functions with the JavaScript SDK. [\[?\]](#)

[Discard](#) [Save changes](#)

c. Click **Save Changes**.

The updated settings are saved.

11. Use the **Go back** option to return to the **Dashboard** page.
 12. Under **Customize this app**, click **Explore and add more use cases** to add additional available use cases as needed. Alternately, you can also click **Use cases** from the menu.
- Figure 8.** Adding Use Cases

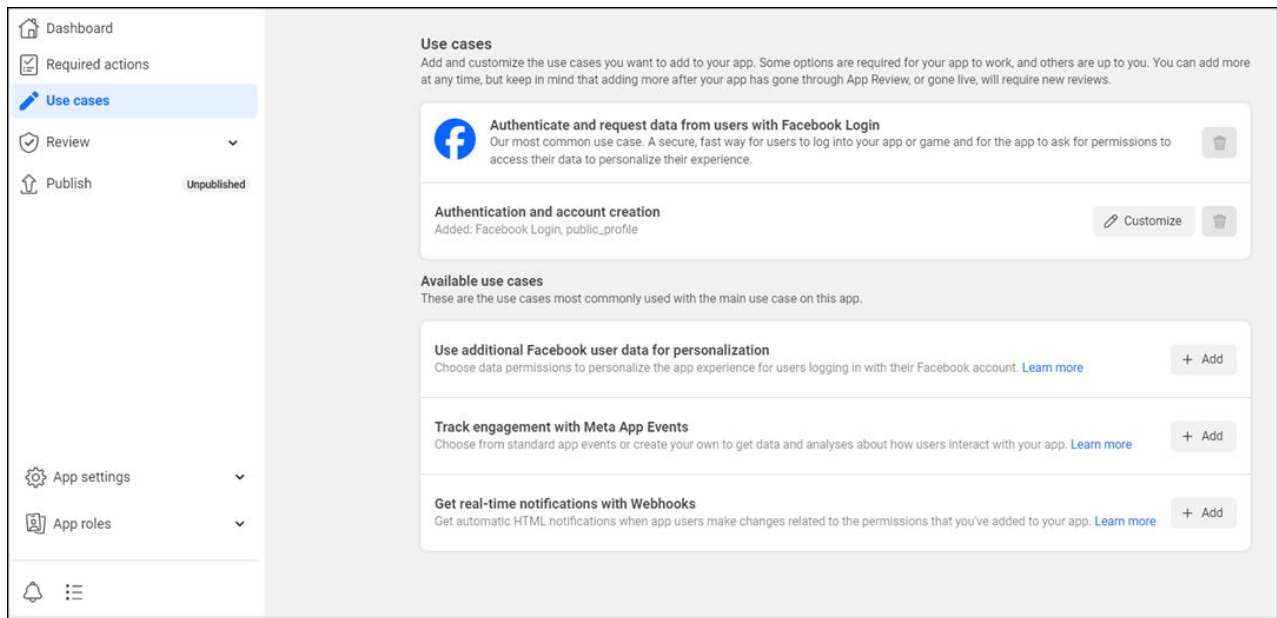

13. From the menu, click **Dashboard** and select **Prepare and submit for app review**, and complete the following steps. Alternately, you can click **Review** from the menu.


a. **Review and complete testing requirements**

b. **Business Verification**

c. **Data handling questions**

14. Under **Publish App**, click **Make sure all requirements are complete, then publish your app**. Review the use cases you have added to your app. Ensure that all the required settings are completed.

Figure 9. Publishing the App

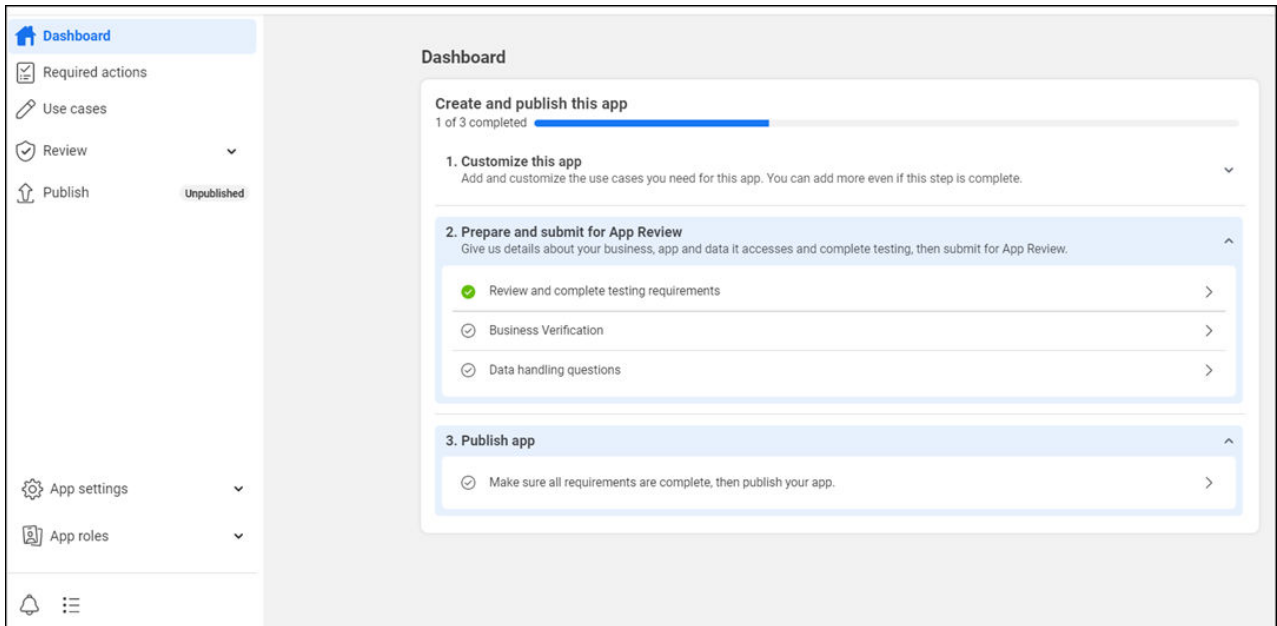

15. Click **Publish**.

Note: If the app is not published, "App is not activated" message is displayed whenever a Facebook account tries to log in to this Facebook OAuth SSID.

16. From the menu, click **App Settings > Basic** and note the App ID and App secret because you must enter these values in the RUCKUS Unleashed web interface as the client ID and client secret. Refer to [Facebook](#) for more information.

Figure 10. App ID and App Secret

The screenshot shows a configuration page for an application. The fields are organized into two columns:

- App ID:** 1106164010560913
- App secret:** [Masked] [Show](#)
- Display name:** Unleashed-Test
- Namespace:** [Empty]
- App domains:** [Empty]
- Contact email:** [Masked]@commscope.com
- Privacy Policy URL:** Privacy policy for Login dialog and app details
- Terms of Service URL:** Terms of Service for Login dialog and App Details
- App icon (1024 x 1024):** [Icon placeholder]
- Category:** [Dropdown menu]
- User data deletion:**
 - Data deletion instructions URL [Dropdown menu]
 - You can also provide a link [Text input]

At the bottom right, there are two buttons: [Discard](#) and [Save changes](#).

Parent topic: [Facebook](#)

Google/Google+

The Google/Google+ social media login complies with the OAuth 2.0 specification. To create a Google/Google+ social media WLAN, you need an OAuth 2.0 client ID, which is used when requesting an OAuth 2.0 access token.

RUCKUS Unleashed provides a default internal Google client ID. After selecting **Google/Google+**, clear the **Use my own client ID** check box if you do not have or do not want to create your own client ID.

Click the **Use my own client ID** check box if you want to use your own client ID and password, and enter your Google ID and password in the provided fields.

Select **Enable HTTPS** or **Enable HTTP**.

Click the **Only allow users from following hosted domains** check box to limit the Google/Google+ login to a specific domain or several domains, and enter the domain names, separated by commas, in the text box.

For example, if a company that uses Gmail accounts wants to limit access to the WLAN to Google accounts that match the company's domain name, click the **Only allow users from following hosted domains** check box and

enter the company's Google domain (company-name.gmail.com). enable **Only allow users from the following hosted domains** and enter the company's Google domain (company_name.gmail.com). This prevents any other gmail.com accounts from being used to access this WLAN.

Refer to the Google documentation for instructions on configuring your Google/Google+ account to provide social media login details. For information on Google OAuth 2.0 setup instructions, refer to <https://support.google.com/cloud/answer/6158849>.

For more information on OAuth 2.0, refer to <https://en.wikipedia.org/wiki/OAuth>.

Figure 1. Logging In Using Google ID

Parent topic: [Social Media WLANs](#)

OAuth Setup Procedure for Google+ Social Media Login


Google+ social media WLANs require a client ID and password, which can be automatically generated or manually entered. You can manually generate an OAuth 2.0 client ID for Google+ social media WLANs using the following procedure.

Complete the following steps to create a project ID in the Google Developers Console.

1. Go to the Google OAuth Console (<https://console.developers.google.com/projectselector2/apis/credentials>), and click **CREATE PROJECT**.

 **Note:** Alternatively, click the **Click here** link to create a new application or project link from within the RUCKUS Unleashed guest access settings (refer to [Google/Google+](#))

Figure 1. Creating a New Project on the Google OAuth Console

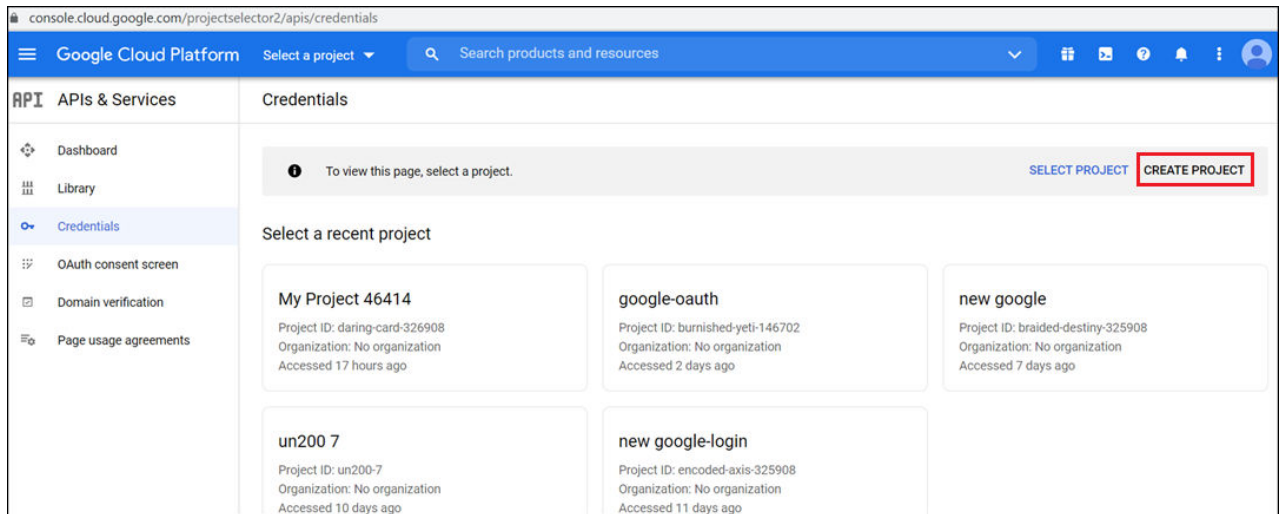

2. Enter **Project Name** and **Location**, and click **Create**.

Figure 2. Entering the Project Name


The screenshot shows the 'New Project' form in Google Cloud Platform. At the top, there's a warning message: 'You have 19 projects remaining in your quota. Request an increase or delete projects. [Learn more](#)'. Below this is a link to 'MANAGE QUOTAS'. The form has the following fields:

- Project name ***: A text input field containing 'unleased-test'. This field is highlighted with a red box.
- Project ID**: A label indicating the ID is 'unleased-test' and cannot be changed later, with an 'EDIT' link.
- Location ***: A dropdown menu showing 'No organization' with a 'BROWSE' button.
- Parent organization or folder**: A text input field.

 At the bottom, there are 'CREATE' and 'CANCEL' buttons.

3. Once the project has been created, go to the **OAuth consent screen**, and select **External** and click **Create**.

Figure 3. Configuring OAuth Consent Screen

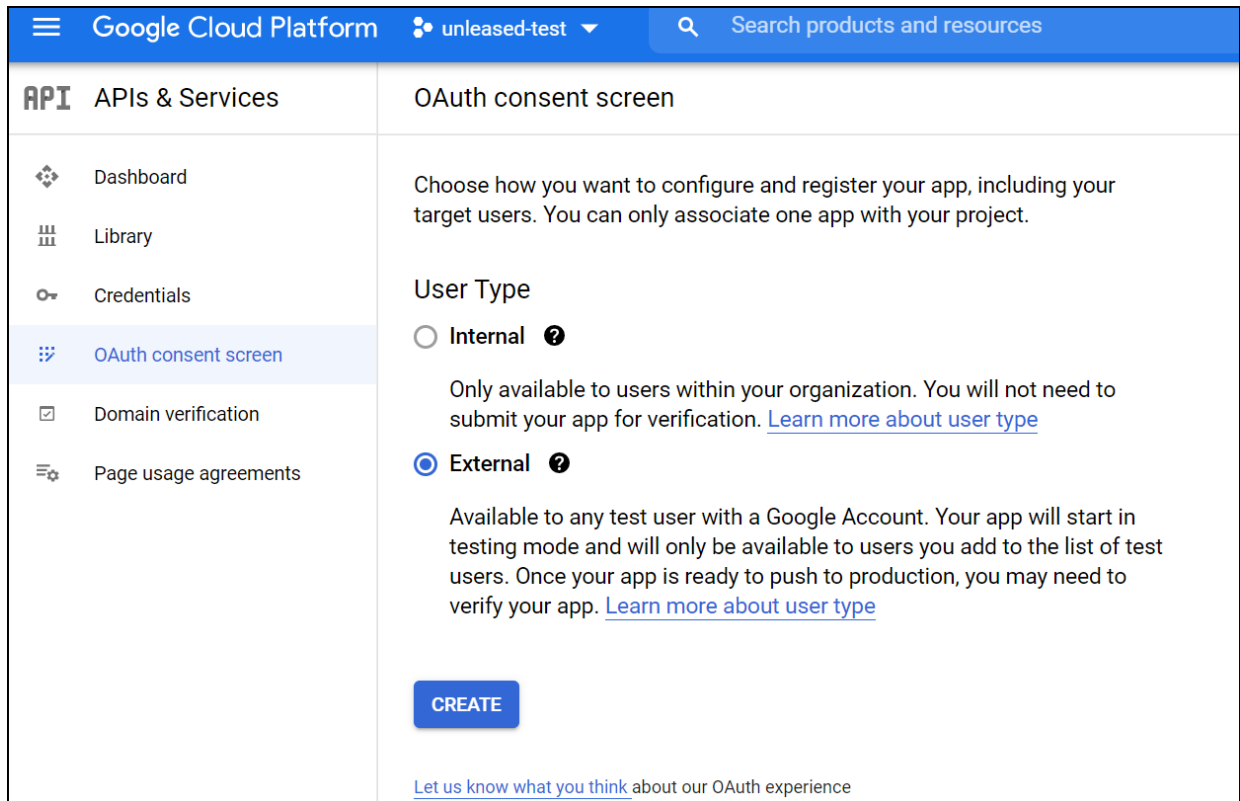

4. Under **App information**, complete the following steps:
- For **App name**, enter the application name.
 - For **User support email**, select an email address from the list.

Figure 4. Entering App Information

API	APIs & Services	Edit app registration
Dashboard Library Credentials OAuth consent screen Domain verification Page usage agreements	1 OAuth consent screen 2 Scopes 3 Test users 4 Summary	App information This shows in the consent screen, and helps end users know who you are and contact you App name * oauth-test The name of the app asking for consent User support email * vicky.f.zhang@gmail.com For users to contact you with questions about their consent App logo BROWSE Upload an image, not larger than 1MB on the consent screen that will help users recognize your app. Allowed image formats are JPG, PNG, and BMP. Logos should be square and 120px by 120px for the best results.


5. For **Developer contact information**, enter valid email addresses and click **SAVE AND CONTINUE**.

Figure 5. Entering Developer Contact Information


Credentials OAuth consent screen Domain verification Page usage agreements	Provide users a link to your home page Application privacy policy link Provide users a link to your public privacy policy Application terms of service link Provide users a link to your public terms of service Authorized domains ? When a domain is used on the consent screen or in an OAuth client's configuration, it must be pre-registered here. If your app needs to go through verification, please go to the Google Search Console to check if your domains are authorized. Learn more about the authorized domain limit. + ADD DOMAIN Developer contact information Email addresses * someone@test.com ✕ These email addresses are for Google to notify you about any changes to your project.
--	---

6. In the **Edit app registration > Scopes** page, click **SAVE AND CONTINUE**.
7. In the **Edit app registration > Test users** page, click **SAVE AND CONTINUE**.
8. On the **OAuth consent screen**, click **PUBLISH APP**.

Figure 6. Publishing the App

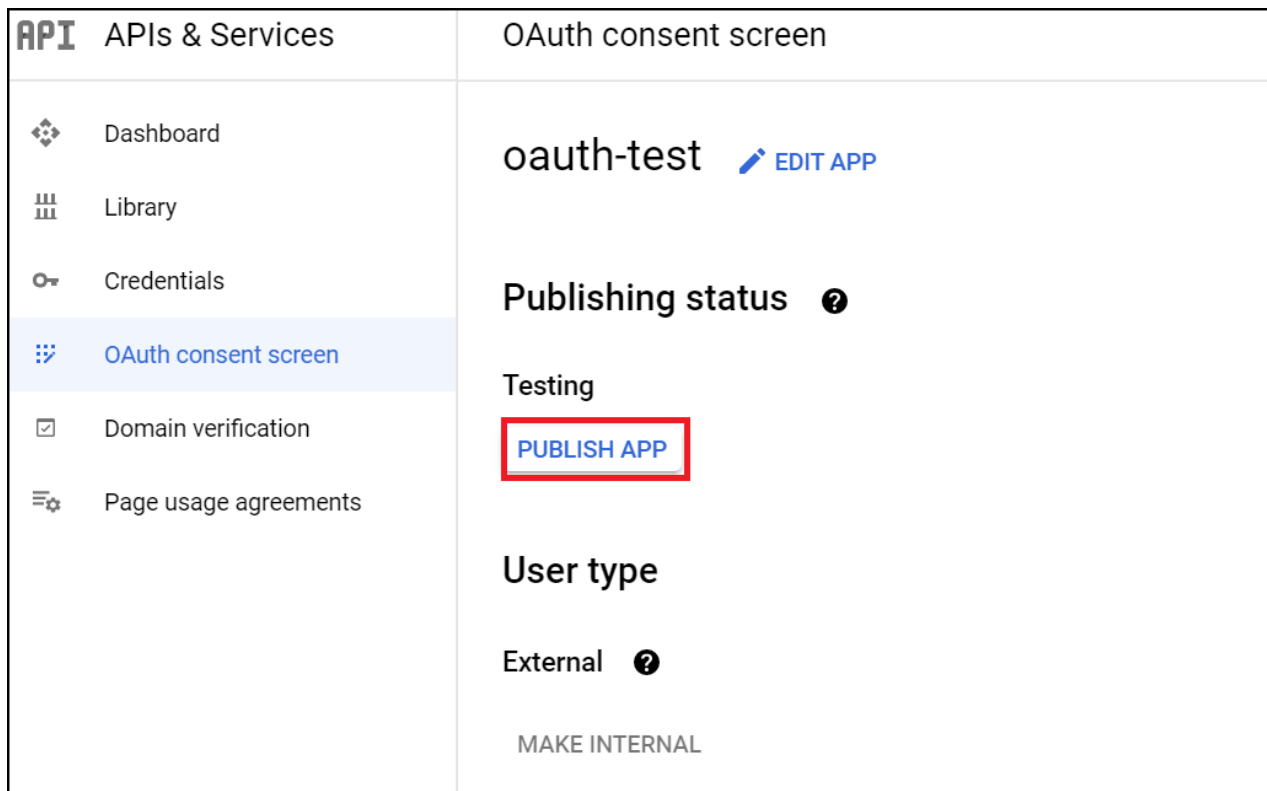

In the **Push to production** dialog box, click **Confirm**.

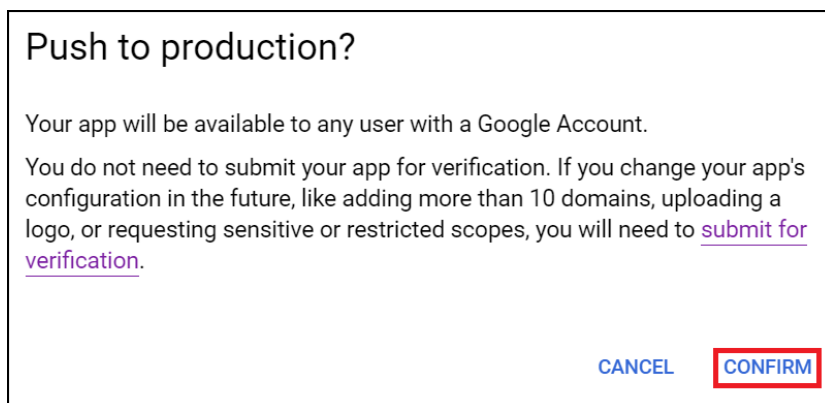

9. Under **Publishing status**, change the status to **In production**.

Figure 7. Changing the Publishing Status

Dashboard

Library

Credentials

OAuth consent screen

Domain verification

Page usage agreements

oauth-test [EDIT APP](#)

Verification Status

Verification not required

Your consent screen is being shown, but your app has not been reviewed so your users may not see all of your information, and you will not be able to request certain OAuth scopes. [Learn more](#)

Publishing status ?

In production

[BACK TO TESTING](#)

User type

External ?

10. Go to the **Credentials** page and click **CREATE CREDENTIALS** and select **OAuth client ID**.
- Figure 8.** Creating Credentials: OAuth Client ID

APIs & Services

Credentials [+ CREATE CREDENTIALS](#) [DELETE](#)

Create credentials to access your API

Remember to

API key
Identifies your project using a simple API key to check quota and access

OAuth client ID
Requests user consent so your app can access the user's data [CONFIGURE CONSENT SCREEN](#)

Service account
Enables server-to-server, app-level authentication using robot accounts

Help me choose
Asks a few questions to help you decide which type of credential to use

API Keys

Name	Creation date	Type	Client ID	Actions
No API keys to display				

OAuth 2.0 Client IDs

Name	Creation date	Type	Client ID	Actions
No OAuth clients to display				

Service Accounts

Email	Name	Actions
No service accounts to display		

[Manage service accounts](#)

11. For **Application type**, select **Web application** and for **Authorized redirect URIs**, enter **https://unleashed.ruckuswireless.com/user/auth.jsp**.

Note: If you have imported a certificate with a fully qualified domain name (FQDN) to RUCKUS Unleashed, you must use the FQDN. For example, if the FQDN is “mydomain.com”, the **Authorized redirect URIs** will be “<https://mydomain.com/user/auth.jsp>”.

Figure 9. Selecting Web Application and Entering Authorized Redirect URI

APIs & Services

- Dashboard
- Library
- Credentials**
- OAuth consent screen
- Domain verification
- Page usage agreements

Create OAuth client ID

A client ID is used to identify a single app to Google's OAuth servers. If your app runs on multiple platforms, each will need its own client ID. See [Setting up OAuth 2.0](#) for more information. [Learn more](#) about OAuth client types.

Application type *
Web application

Name *
Web client 1

The name of your OAuth 2.0 client. This name is only used to identify the client in the console and will not be shown to end users.

The domains of the URIs you add below will be automatically added to your OAuth consent screen as authorized domains.

Authorized JavaScript origins ?

For use with requests from a browser

[+ ADD URI](#)

Authorized redirect URIs ?

For use with requests from a web server

URIs *

<https://unleashed.ruckuswireless.com/user/auth.jsp>

[+ ADD URI](#)

12. Click **Create**. If successful, Google displays the **Client ID** and **Client Secret**, as shown in the following figure.
- Figure 10.** OAuth Client ID and Client Secret

OAuth client created

The client ID and secret can always be accessed from Credentials in APIs & Services

i OAuth is limited to 100 [sensitive scope logins](#) until the [OAuth consent screen](#) is verified. This may require a verification process that can take several days.

Your Client ID

195963350142-14s5og8ifeo5epbtpj57mpoma7ictq8p.apps.gc

Your Client Secret

yi-4t2rRHijLUCbh466_S-F9

OK

Take note of the client ID and client secret because you must enter these values into the RUCKUS Unleashed web interface.

Parent topic: [Google/Google+](#)

LinkedIn

To configure a LinkedIn social media WLAN, you must first configure an application on the LinkedIn developer apps website.

For information on LinkedIn developer network, refer to: <https://www.linkedin.com/developer/apps>.


Parent topic: [Social Media WLANs](#)

OAuth Setup Procedure for LinkedIn Social Media Login

Complete the following steps to configure an application on the LinkedIn developers apps website.

1. Go to the LinkedIn My Applications page (<https://www.linkedin.com/developer/apps>) and click **Create App**.

Figure 1. LinkedIn My Applications

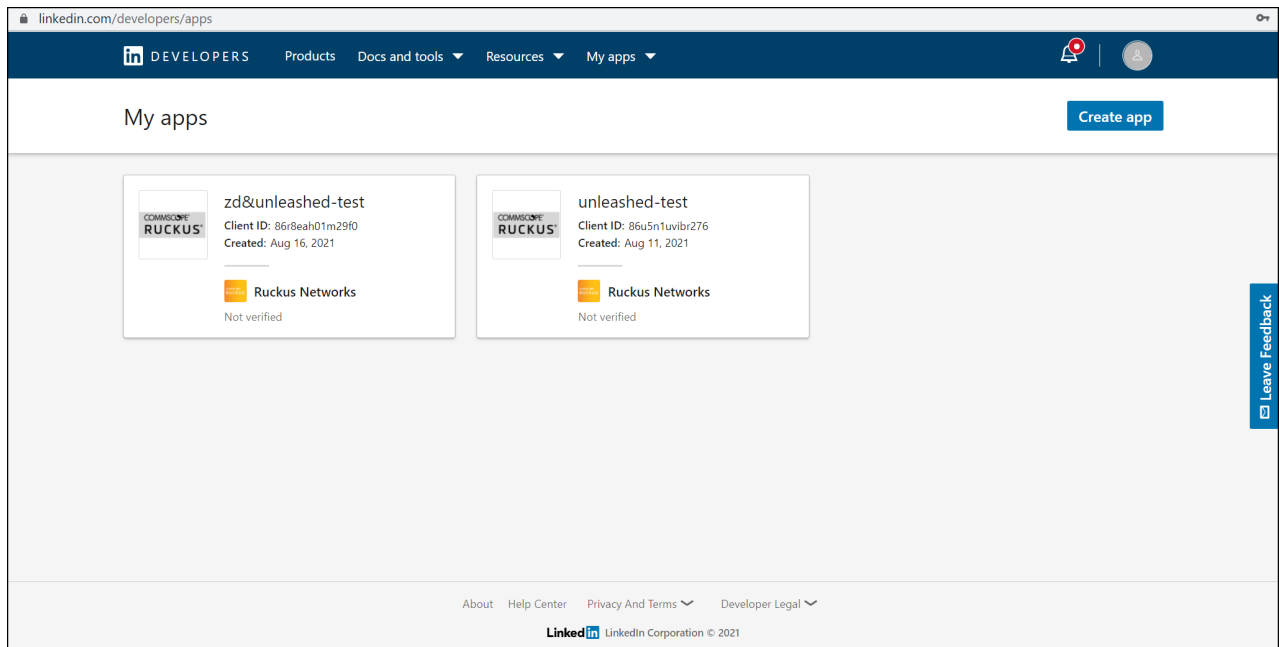

2. On the **Create an app** page, enter the required information and click **Create app**.

Figure 2. Creating a New LinkedIn Application

Create an app

App name *

LinkedIn Page *

ⓘ This action can't be undone once the app is saved.



Ruckus Networks
 Information Technology & Services; 501-1000 employees

×

The LinkedIn Page you select will be associated with your app. Verification can be done by a Page Admin. [Learn more](#)

Privacy policy URL

App logo *

This is the logo displayed to users when they authorize with your app



Square image recommended. At least one dimension should be at least 100px.


Legal agreement

When you develop on our platform, you are agreeing to be bound by our [API Terms of Use](#).

☒ I have read and agree to these terms

- Under the **Auth** tab, LinkedIn displays the client ID and client secret.

Figure 3. LinkedIn Authentication Keys

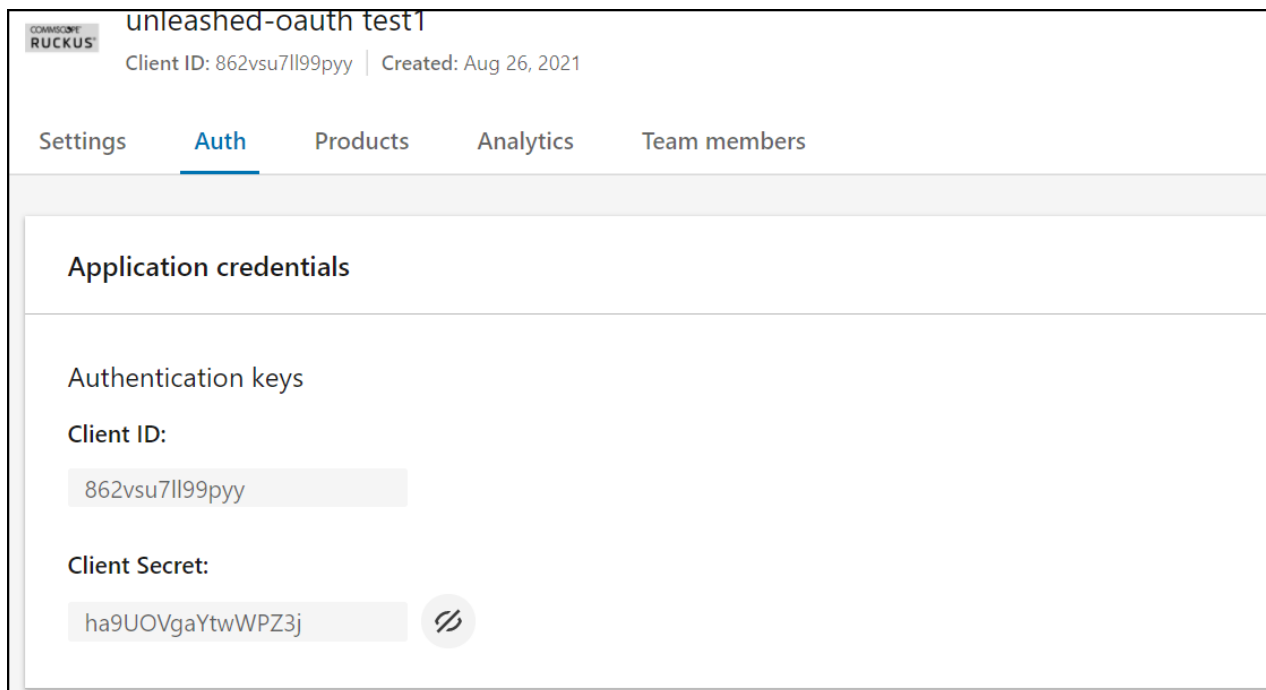

- Under **OAuth 2.0 settings**, in **Authorized Redirect URLs**, enter a valid redirect callback URL and click **Update**.

Note: If you have imported a certificate with a fully qualified domain name (FQDN) to RUCKUS Unleashed, you must use the real FQDN. For example, if the FQDN is “mydomain.com”, the **Authorized redirect URLs** will be “<http://mydomain.com/user/auth.jsp>”.

Figure 4. Entering the Authorized Redirect URI

OAuth 2.0 settings

Token time to live duration

Access token: **2 months** (5184000 seconds)

Authorized redirect URLs for your app



[+ Add redirect URL](#)

Cancel
Update

- Under **Product** tab, select the options **Share on LinkedIn** and **Sign In with LinkedIn using OpenID Connect**.
Figure 5. Sharing and Signing with LinkedIn

[Settings](#)
[Auth](#)
[Products](#)
[Analytics](#)
[Team members](#)

Products

Added products



Share on LinkedIn

Default Tier

Amplify your content by sharing it on LinkedIn

[View docs](#) | [View endpoints](#)



Sign In with LinkedIn using OpenID Connect


Standard Tier

Using the OpenID Connect standard

[View docs](#) | [View endpoints](#)

- Under **Auth** tab, check if the following permissions are added successfully to use the app for LinkedIn login.

Figure 6. Checking the Permissions Added for LinkedIn Login

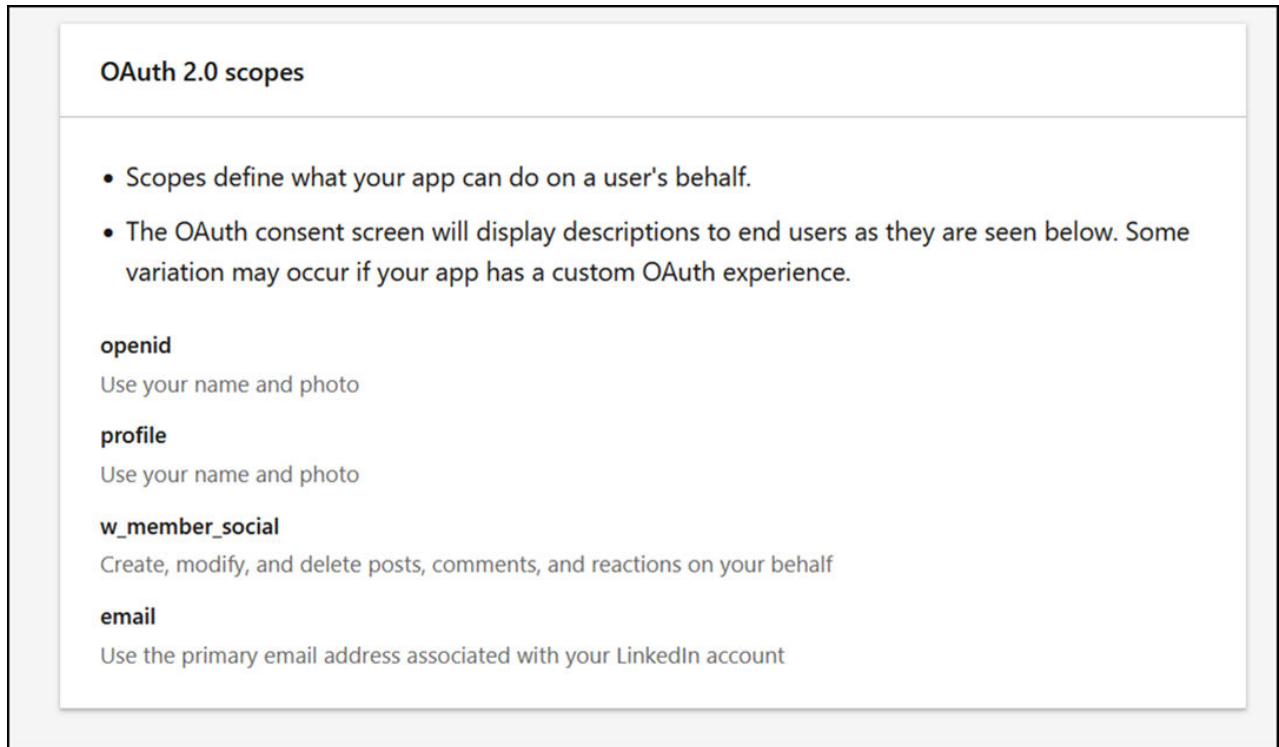

Parent topic: [LinkedIn](#)

Microsoft Live

To create a Microsoft Live social media WLAN, you must first create an application on the Microsoft Live developer application page.

For information on creating an application on the Microsoft Live development dashboard, refer to https://portal.azure.com/#blade/Microsoft_AAD_RegisteredApps/ApplicationsListBlade.


Parent topic: [Social Media WLANs](#)

OAuth Setup Procedure for Microsoft Live Social Media Login

Complete the following steps to generate an OAuth 2.0 ID for Microsoft Live social media WLAN login.

1. Go to the Microsoft Live development dashboard (https://portal.azure.com/#blade/Microsoft_AAD_RegisteredApps/ApplicationsListBlade), and click **New registration**.


Figure 1. Creating a New App Registration

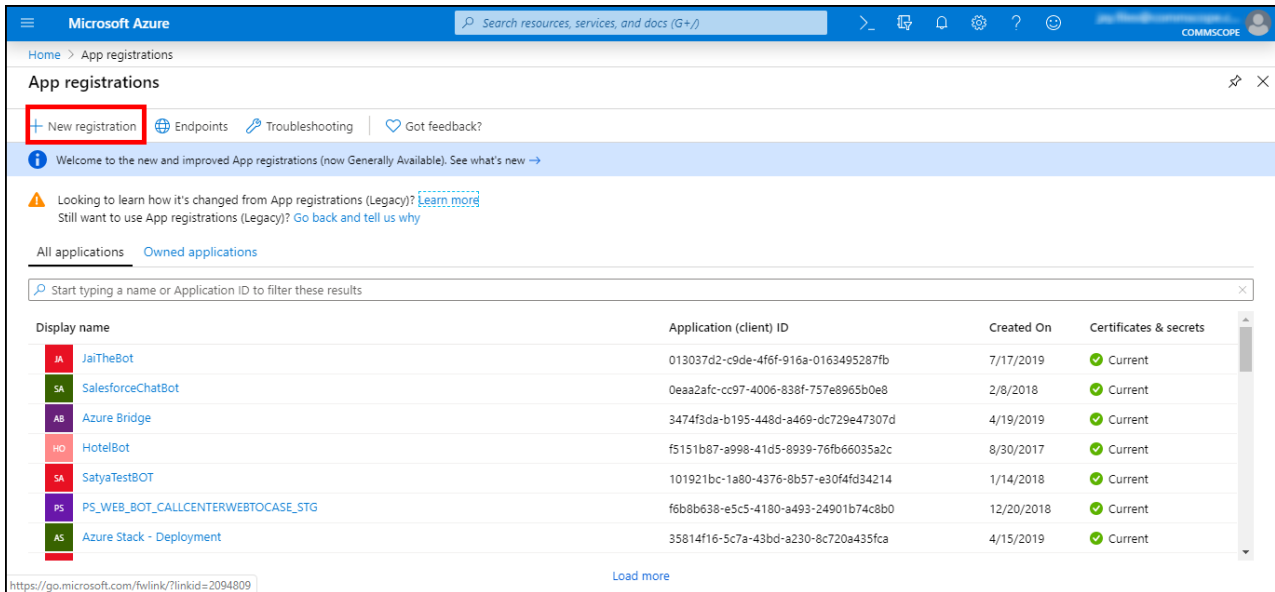

2. Enter a name for the application.
3. For **Support Account Types**, select **Accounts in any organizational directory and personal Microsoft accounts** (refer to Figure 2).
4. Under **Redirect URI**:, enter a valid redirect callback URL.

Note: If you have imported an SSL certificate with a fully qualified domain name (FQDN) to RUCKUS Unleashed, you must use the FQDN. For example, if the FQDN is mydomain.com, the **Redirect URI** will be http://mydomain.com/user/auth.jsp.


Figure 2. Registering an Application: Configuration Settings

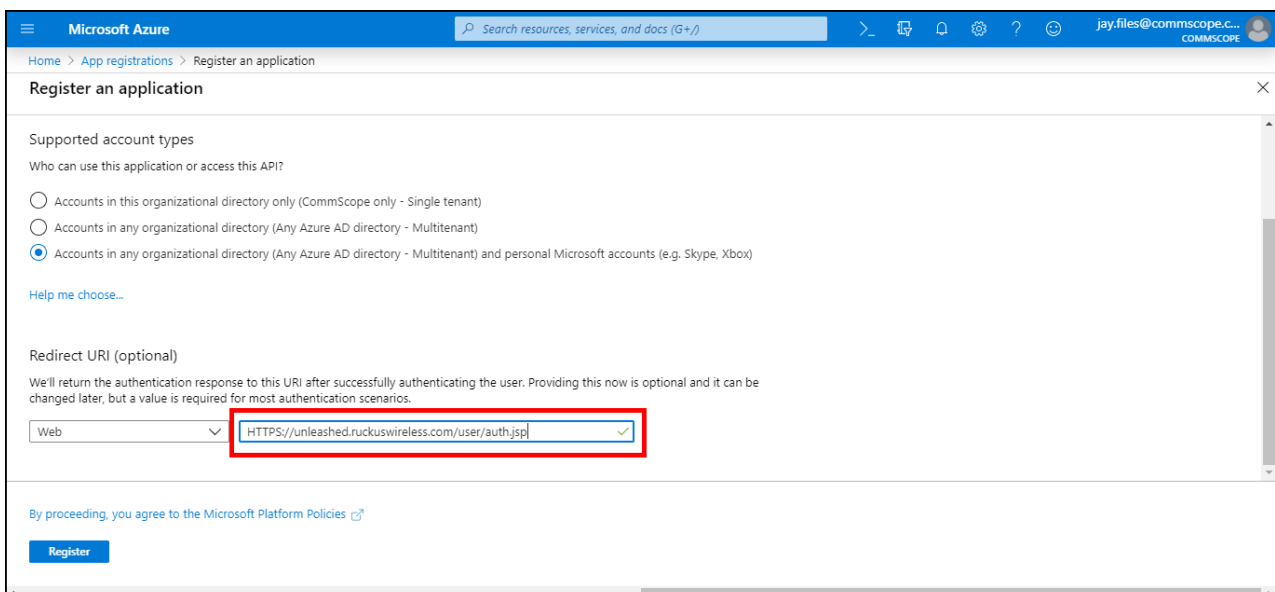

5. Click **Register**.

Microsoft provides you with the **Application (client) ID**. Take note of this value, as you must enter it into the web interface later.

Figure 3. Noting the Application (Client) ID

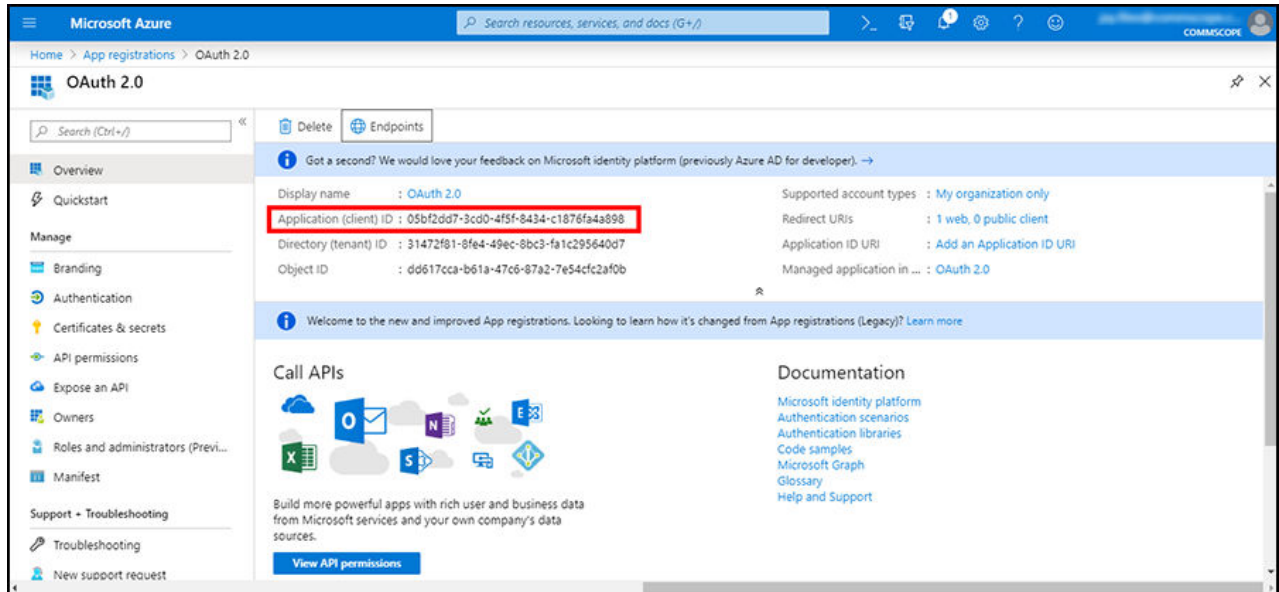

6. Create a client secret using the following steps:

- Under **Manage**, select **Certificates & secrets**.
- Click **New client secret**.
- Enter a value in **Description**, select an option for **Expires**, and click **Add**.
- Copy and save the client secret because you must enter this value when you log in to the web interface.

Figure 4. Noting the Client Secret



7. In the web interface, use the following settings on the **Create WLAN** configuration screen:

- Under **Social Media Logins**, select **Microsoft**.
- Select **Enable HTTPS**.
- Under **Microsoft Client ID**, enter the application (client) ID, as shown in [Figure 3](#).

- Under **Client Password**, the client secret, as shown in [Figure 4](#).

Figure 5. Microsoft Social Media Login Configuration

The screenshot shows the 'Create WLAN' configuration page. Under the 'Social Media Logins' section, the 'Microsoft' checkbox is selected. Below it, there is a text input field for 'Client ID' containing the placeholder text 'Client ID' and another text input field for 'Client Password' containing the placeholder text 'Password'. There are also checkboxes for 'FacebookWiFi', 'Google/Google+', 'LinkedIn', and 'WeChat'. The 'Enable HTTPS' radio button is selected. Below the 'Social Media Logins' section, there is a 'GuestPass Self-Service' section with a checkbox for 'Enable guestpass self service'. The 'Validity Period' section has two radio buttons: 'Effective from first use' (selected) and 'Effective from the creation time'. A text input field for 'Expire new guest passes if not used within' contains the value '7' and is followed by the word 'days'.

Parent topic: [Microsoft Live](#)

Guest Access Walled Garden

A walled garden is a list of network destinations (URLs or IP addresses) that users can access without going through authentication.

A common use case for this feature is to allow unauthenticated guests to access a company's website or other specific locations prior to entering guest pass or social media login information.

To create a guest access walled garden entry, go to **WiFi Networks > Create/Edit (WLAN) > Advanced Options > Walled Garden**. Click **Create New** to create a new rule, and enter the destination IP address or domain name in the field.

Figure 1. Enter domain name or IP addresses to allow access to unauthenticated users

The screenshot displays the 'Walled Garden' configuration page in the RUCKUS Unleashed interface. At the top, the 'Grace Period' is set to 480 minutes with a checkbox for 'Allow users to reconnect without re-authentication for'. Below this, the 'Authentication Method' is set to 'Open', and the 'Encryption Method' is set to 'None'. The 'Accounting Server' is set to 'Disabled'. A 'Send Interim-Update every 10 minutes' option is also visible. A 'Hide Advanced Options' dropdown is present. The 'Walled Garden' tab is selected among other tabs like 'Restricted Subnet Access', 'WLAN Priority', 'Access Control', 'Radio Control', and 'Others'. The main content area shows a table for 'Unauthenticated users are allowed to access the following destinations:'. The table has columns for 'Order', 'Destination Address', and 'Action'. One entry is shown with 'Order' 1 and 'Destination Address' '*.mydomain.com'. 'Save' and 'Cancel' buttons are next to the entry. 'Create New' and 'Delete' buttons are at the bottom of the table.

Parent topic: [Guest WLANs](#)

Hotspot WLANs

A hotspot is a venue or area that provides Internet access to devices with wireless networking capability. Hotspots are commonly available in public venues such as hotels, airports, coffee shops and shopping malls.

Unleashed supports Hotspot WLANs that conform to the WISPr (Wireless Internet Service Provider roaming) standard. For more information on Hotspot services, see [Hotspot Services](#).


Parent topic: [WLAN Configuration](#)

Configuring Global WLAN Settings

Complete the following steps to configure global settings for all WLANs.

1. In the **Wi-Fi Networks** section, select the **Summary** WLAN box, and click **Edit**.

Figure 1. Configuring Global Settings for All WLANs

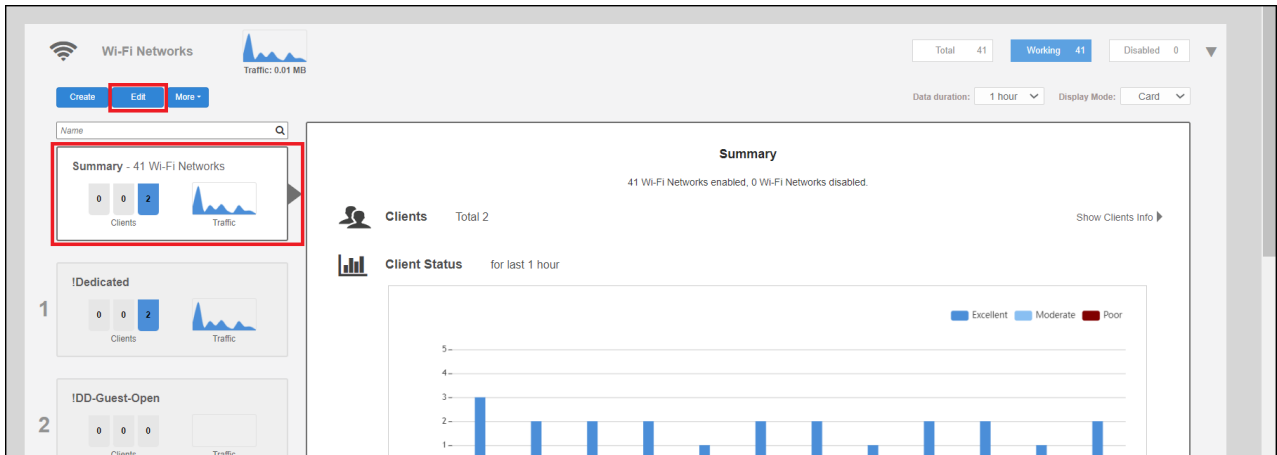


2. From the **Global Configuration** dialog box, select one of the following tabs to configure settings for all WLANs:

- **Zero-IT Activation:** Select an Authentication Server from the list, or click **Create Service** to create a new one. Refer to [AAA Servers](#) for more information.
- **Default Web Portal Logo:** Replace the RUCKUS logo with your own logo to be displayed on the login page when clients connect to a Web Auth WLAN.
- **Note:** The recommended image size is 138 x 40 pixels. The maximum file size is 20 KB.
- **Users:** Create new users on the internal database. Refer to [Adding New Users to the Local Database](#) for more information.
- **Others:** By default, **SONOS Compatibility** is enabled, ensuring seamless integration and optimal performance of Sonos devices within the Unleashed network.

If you disable **SONOS Compatibility**, then **Directed DHCP** is enabled and the controller will drop the DHCP proxy packets if the Layer 2 MAC address does not match the chaddr (Client Hardware Address) field in the DHCP packet.

3. Click **Apply** to save your changes.

Figure 2. Global Configuration Settings for All WLANs

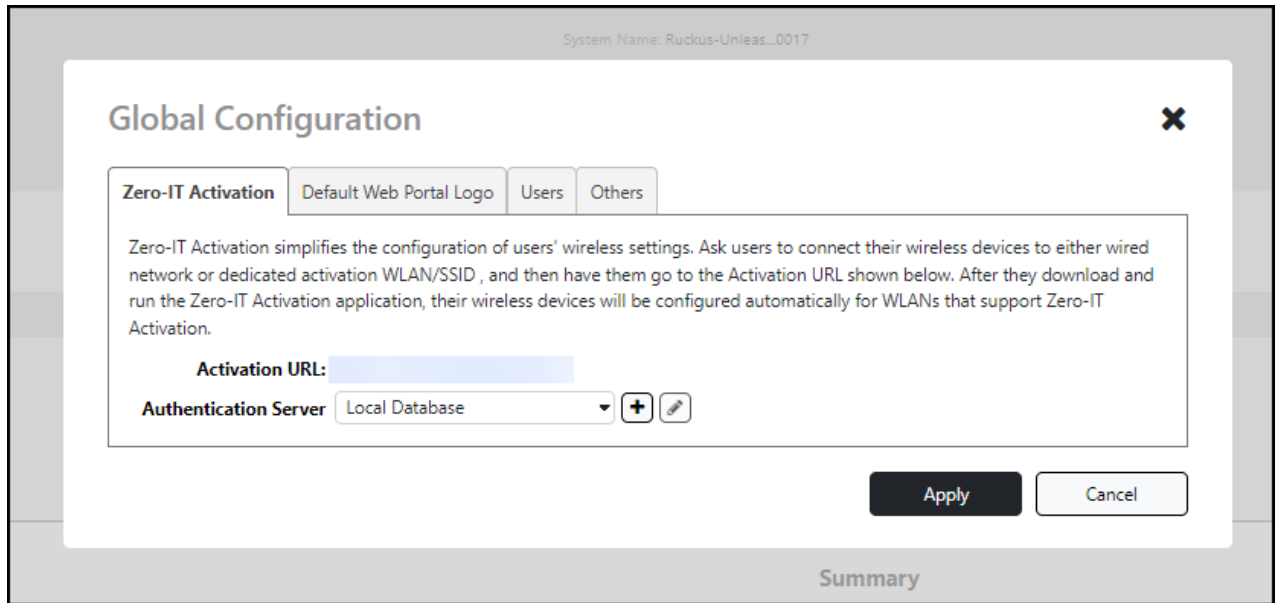

Parent topic: [WLAN Configuration](#)

Editing an Existing WLAN

To edit an existing WLAN, expand the **Wi-Fi Networks** section, click on the **WLAN** that you want to configure, and click **Edit**.

Figure 1. Click Edit to edit an existing WLAN

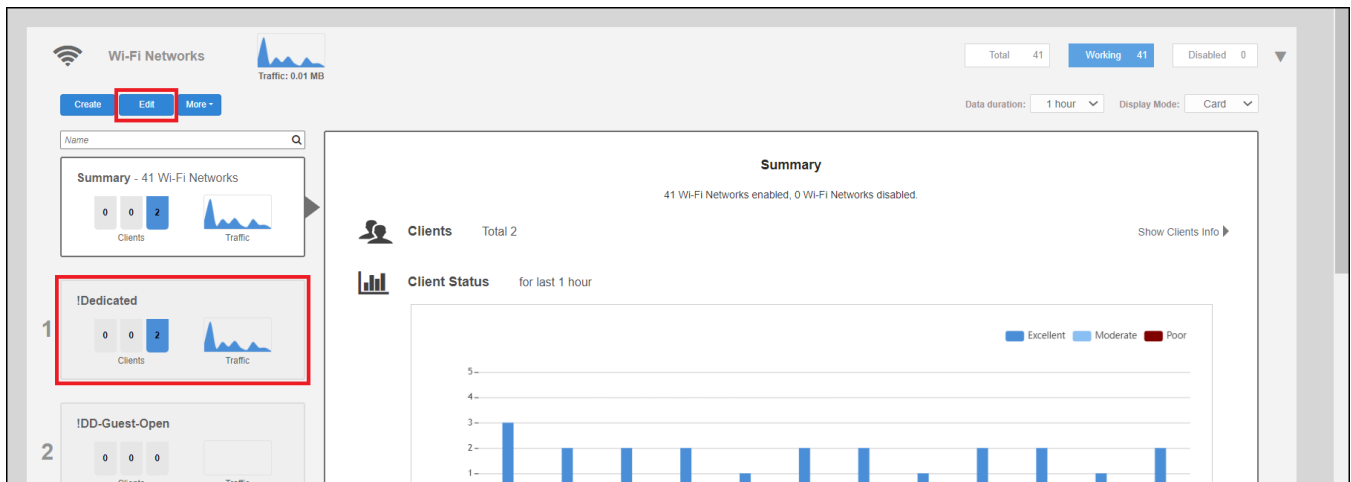


Figure 2. Modify WLAN settings

Edit WLAN

* **Name:**

Usage Type: ☒ Standard For most regular wireless network usage

Authentication Method: ☒ Open ☐ 802.1X EAP ☐ MAC Address

Encryption Method: ☒ WPA2 ☐ WPA3 ☐ WPA2/WPA3-Mixed ☐ OWE ☐ None

* **Password:** [Show password](#) [Show QR Code](#)

☐ Allow Legacy Devices connect to this WLAN by previous password.
It only works for online Legacy Devices.

Accounting Server:

Send Interim-Update every minutes

Show Advanced Options ►

OK **Cancel**

If you made any changes, click **OK** to confirm your changes.

Parent topic: [WLAN Configuration](#)


Using a QR Code to Join a Wi-Fi Network

Instead of entering a Wi-Fi password manually, you can join a Wi-Fi network using a QR code.

Complete the following steps to join a Wi-Fi network using a QR code.

1. From the **Unleashed Dashboard**, expand the **Wi-Fi Networks** and select a WLAN. Select **More > Show QR Code**.

Figure 1. Joining a WLAN Using a QR Code

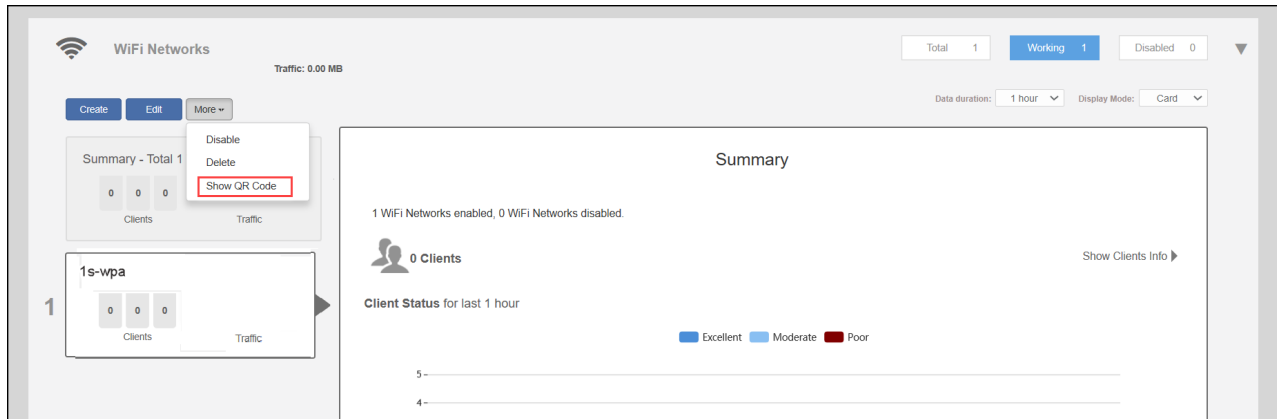

- In the **QR Code** page, click **Print** to print the QR code or scan the QR code using a smartphone camera.
- Figure 2. QR Code Page**



The **Show QR Code** option is not supported across all WLAN types. Refer to the following table for more information.

Table 1. QR Code Support for WLAN Types

WLAN Type	QR Code Support
Open/None	Yes
Open WPA2	Yes
Open WPA3	No
Open WPA2/WPA3-Mix	No
Open OWE	No


WLAN Type	QR Code Support
802.1x + WPA2	No
802.1x + WPA3	No
802.1x + WPA2/WPA3-Mix	No
MAC + WPA2	Yes
MAC + WPA3	No
MAC + WPA2/WPA3-Mix	No
MAC + None	Yes

Parent topic: [WLAN Configuration](#)

Deleting a WLAN

To delete a WLAN, in the **Wi-Fi Networks** section, select the **WLAN box** from the list on the left side that you want to delete, and click **More > Delete**.

Figure 1. Deleting a WLAN

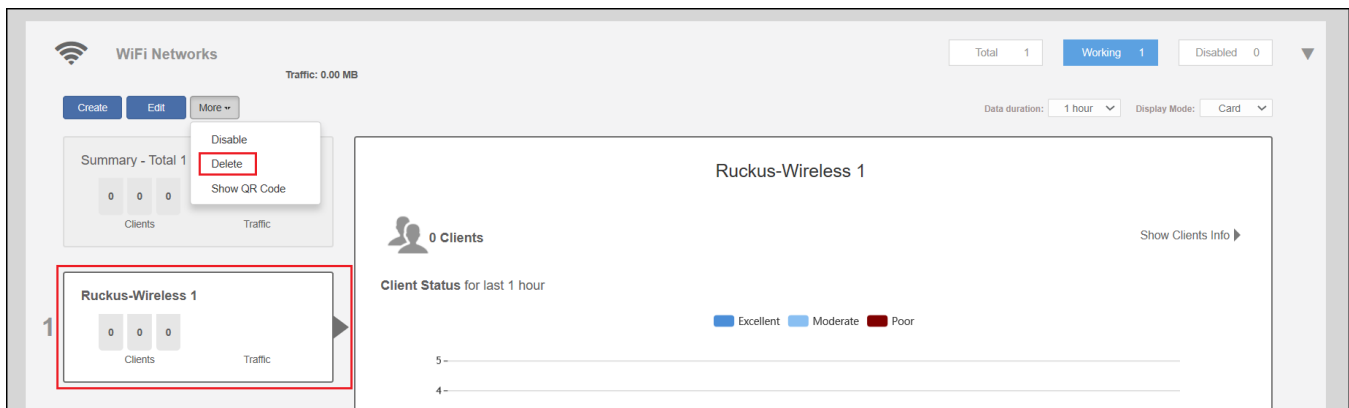

Click **OK** when prompted to delete the selected WLAN.

Parent topic: [WLAN Configuration](#)


Disabling a WLAN Temporarily

Complete the following steps to temporarily disable a WLAN:

1. In the **Wi-Fi Networks** section, select the WLAN that you want to disable, and click **More > Disable**.
2. Click **OK** when prompted to disable the selected WLAN.

3. Click **Enable** to re-enable the WLAN.

Figure 1. Disabling a WLAN Temporarily

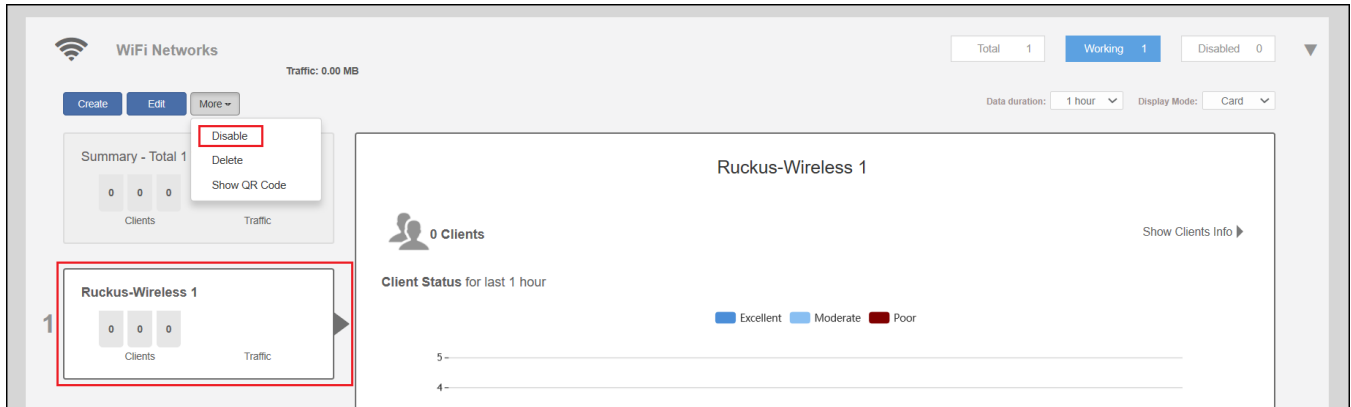

Parent topic: [WLAN Configuration](#)

Advanced WLAN Configuration

[Advanced WLAN Configuration Overview](#)

[Configuring Advanced WLAN Options](#)

[Zero-IT and DPSK Settings](#)

[WLAN Priority Settings](#)

[Access Control Settings](#)

[Application Policies](#)

[Radio Control Settings](#)

[Other Advanced WLAN Settings](#)

Advanced WLAN Configuration Overview

The WLAN Advanced options include settings such as Zero-IT and Dynamic PSK options, WLAN priority, VLAN, access controls, rate limiting, application policies, URL filtering controls, radio controls and other advanced settings.


The advanced WLAN options available vary depending on the authentication and encryption methods chosen as well as the WLAN usage type.

Parent topic: [Advanced WLAN Configuration](#)

Configuring Advanced WLAN Options

Complete the following steps to edit the advanced options for a WLAN.


1. Select the WLAN you want to configure from the **WiFi Networks** component and click **Edit**, or click **Create** to create a new custom WLAN.
 2. Click the arrow next to **Show Advanced Options** to expand the advanced options section.
- Figure 1.** Showing Advanced Options

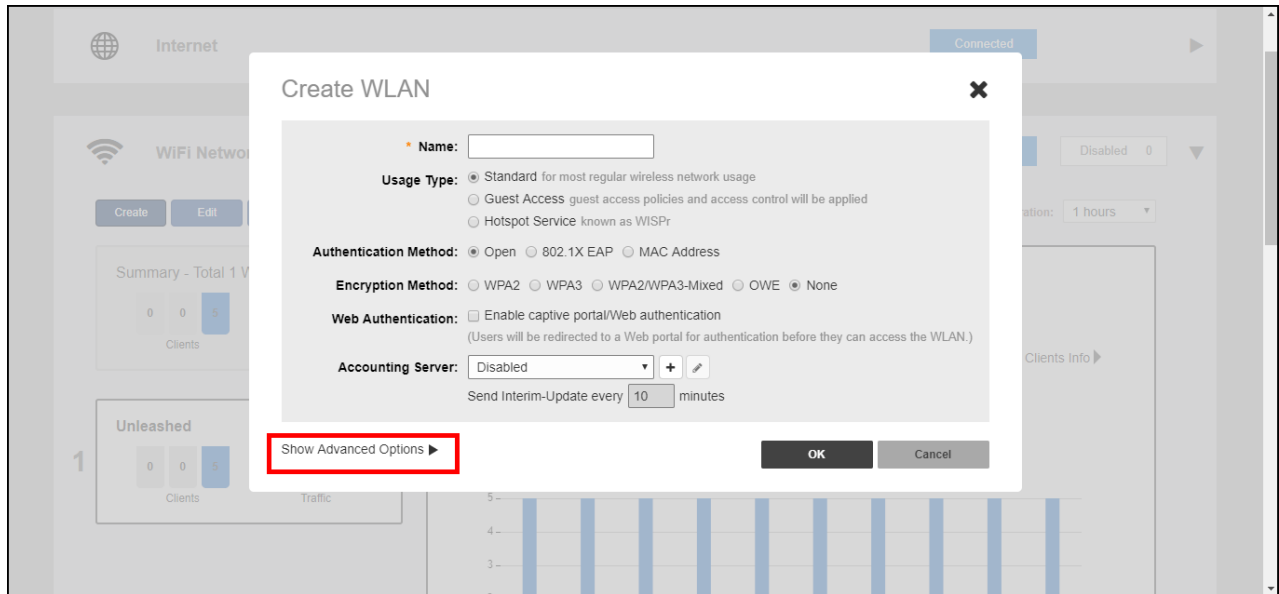

3. Use the following tabs to configure the advanced options according to your preferences:

- **Zero-IT & DPSK:** Enable and configure Zero-IT and Dynamic PSK settings for the WLAN. See [Zero-IT and DPSK Settings](#).
- **WLAN Priority:** Contains options for setting the WLAN's priority level, WLAN visibility, VLAN, maximum number of clients and service schedule. Refer to [WLAN Priority Settings](#).
- **Access Control:** Contains options for configuring Call Admission Control, rate limiting, access controls, application visibility policies, and URL filtering. Refer to [Access Control Settings](#).
- **Radio Control:** Contains options for configuring radio settings including 802.11k radio resource management, background scanning, load balancing, and band balancing. Refer to [Radio Control Settings](#).
- **Others:** Contains options for configuring force DHCP, inactivity timeout, wireless client isolation, and enabling the Bypass Apple CNA. Refer to [Other Advanced WLAN Settings](#).

Figure 2. Advanced WLAN Options

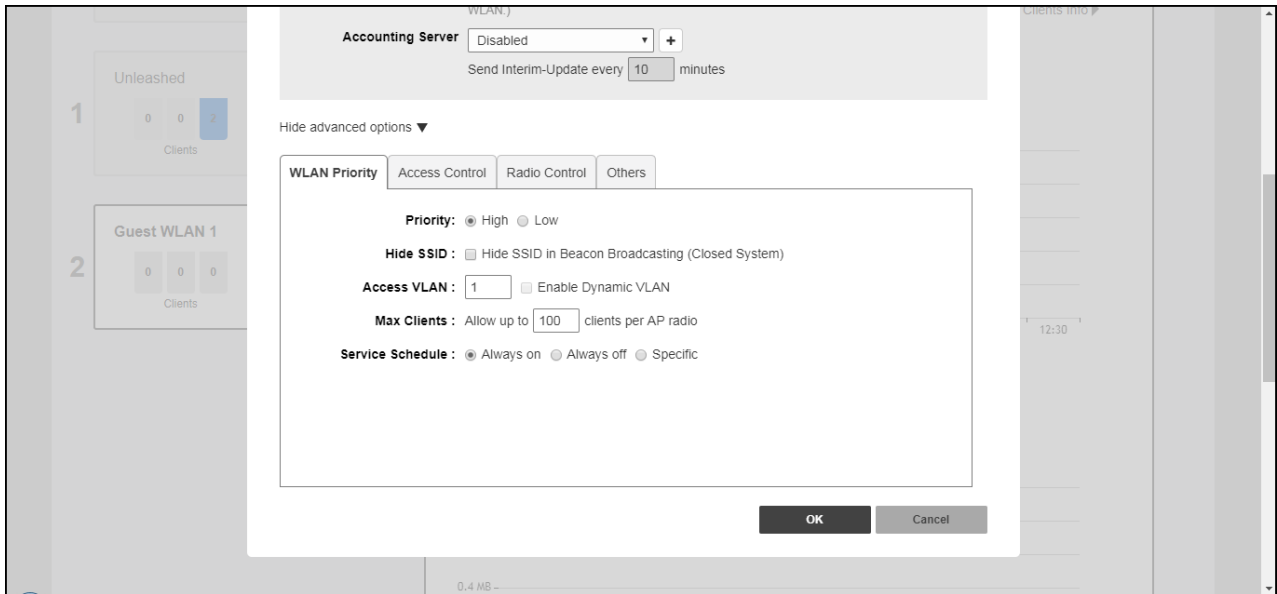

4. Click **OK** to save your changes.

Parent topic: [Advanced WLAN Configuration](#)

Zero-IT and DPSK Settings

Zero-IT and Dynamic Pre-Shared Key (DPSK) are two unique RUCKUS technologies that provide enhanced security, improved user credentials maintenance, and reduced IT support requirements for client wireless configuration.

Zero-IT


Zero-IT Activation allows network users to self-activate their devices for secure access to your wireless networks with no manual configuration required by the network administrator.

Once your Unleashed network is set up, you need only direct users to the **Activation URL**, and they will be able to automatically activate their devices to securely access your wireless LAN.

At the activation URL, users must first enter a valid user name and password to be granted this access. Users can be authenticated against either an internal database (manually configured for each user), or against an external authentication server, such as Active Directory or RADIUS. For smaller deployments, you can manually create user accounts on the internal user database from the Admin & Services > Users screen. If an external server is used, you must configure Unleashed with the IP address and login for the external auth server.

Once authentication is successful, a Zero-IT Activation file is downloaded and run on the client device, automatically configuring the device's wireless connection settings.

Figure 1. Enabling Zero-IT for a WLAN

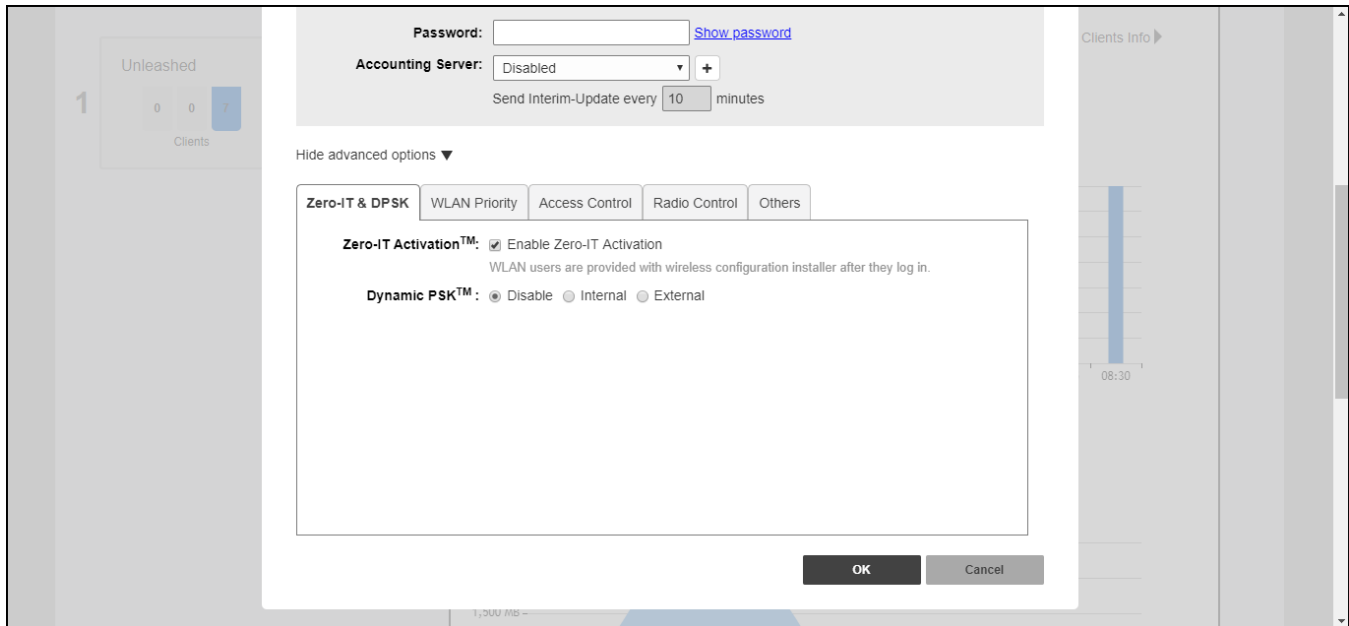

Dynamic PSK

Dynamic PSK (DPSK) is a unique RUCKUS feature that enhances the security of normal Pre-Shared Key (PSK) wireless networks. Unlike typical PSK networks, which share a single key amongst all devices, a DPSK network assigns a unique key to every authenticated user. Therefore, when a person leaves the organization, network administrators do not need to change the key on every device.

RUCKUS DPSK offers the following benefits over standard WPA2-PSK security:

- Every device on the WLAN has its own unique DPSK that is valid for that device only (by default).
- Each DPSK is bound to the MAC address of an authorized device; even if that PSK is shared with another user, it will not work for any other machine.
- Since each device has its own DPSK, you can associate a user (or device) name with each key for easy reference.
- Each DPSK may also have an expiration date; after that date, the key is no longer valid and will not work.
- DPSKs can be created and removed without impacting any other device on the WLAN.
- If a hacker manages to crack the DPSK for one client, it does not expose other devices that are encrypting their traffic with their own unique DPSKs.

DPSKs can be created in bulk and manually distributed to users and devices, or they can be sent as part of the Zero-IT automatic provisioning file that is sent when a client connects to the network for the first time using Zero-IT Activation.

 **Note:** Zero-IT and DPSK features are only available on WLANs with WPA2 encryption.

Parent topic: [Advanced WLAN Configuration](#)

Enabling Zero-IT for a WLAN

To enable Zero-IT for a WLAN:

1. Expand the **Wi-Fi Networks** section, and click **Create** (or **Edit** an existing WLAN).
2. Select **Standard** for **Usage Type**, and either **Open** or **802.1X EAP** for **Authentication Method**, and **WPA2** for **Encryption Method**.
3. Click **Show advanced options**, then select the **Zero-IT & DPSK** tab.
4. Enable the **Zero-IT Activation** check box.
5. Optionally, enable **Dynamic PSK** to allow Zero-IT auto-configuration with Dynamic Pre-Shared Keys for each client. (See [Enabling DPSK for a WLAN](#) for more information).
6. Click **OK** to save.

This WLAN is now ready to allow users to self-configure their client devices using a Zero-IT auto-configuration file that will be provided once a user successfully logs in to the WLAN.

Parent topic: [Zero-IT and DPSK Settings](#)


Enabling DPSK for a WLAN

Complete the following steps to enable DPSK for a WLAN.

1. Expand the **Wi-Fi Networks** section, and click **Create** to configure a new WLAN (or **Edit** for an existing WLAN).
2. For **Usage Type**, select **Standard**.
3. For **Authentication Method**, select **Open**.
4. For **Encryption Method**, select **WPA2**.
5. Click **Show advanced options** and select the **Zero-IT & DPSK** tab.
6. For **Dynamic PSK**, choose one of the following options:
 - **Internal:** Use the internal database for client authentication.
 - **External:** Use an external AAA (RADIUS) server for client authentication.

7. If using an external RADIUS server for authentication, select the authentication server from the list and click **OK** to save.

Figure 1. Using an External RADIUS Server for DPSK Authentication

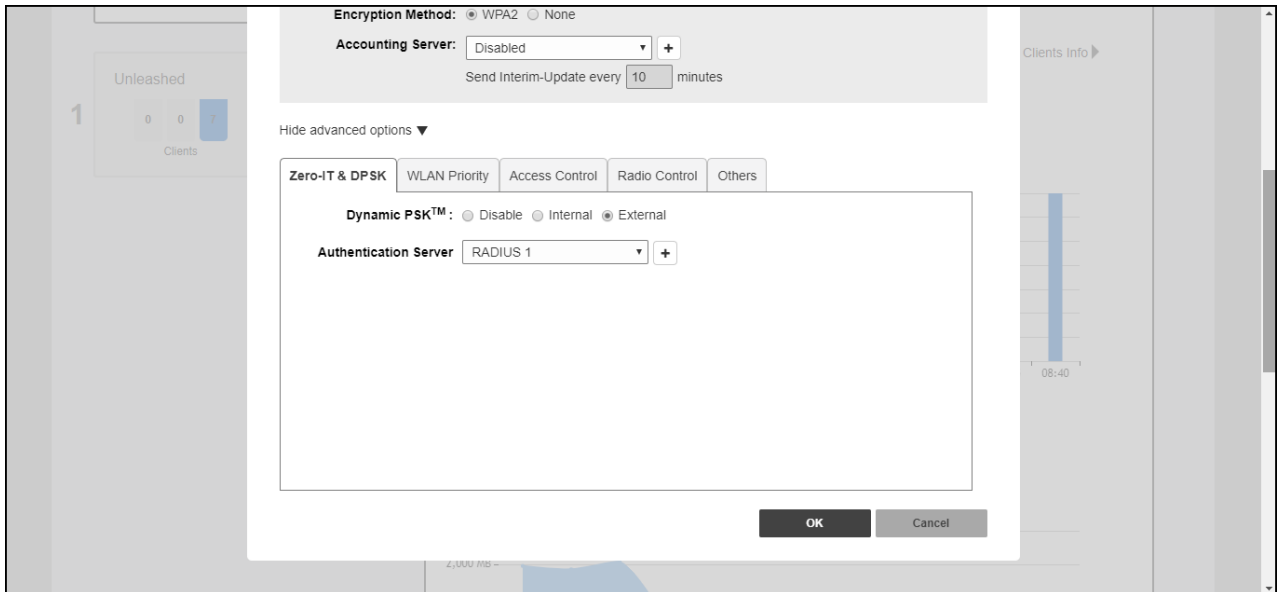

If using an internal database, continue with the following steps.

8. For **DPSK Type**, select one of the following options:
 - **Secure D-PSK:** Includes almost all printable ASCII characters, including periods, hyphens, dashes, and so on. This option is more secure; however it may be difficult to use for mobile clients whose keyboards may not contain the entire set of printable ASCII characters.
 - **Mobile Friendly D-PSK:** Select this option if this WLAN is used for mobile clients. This range of characters is limited to lowercase letters, uppercase letters, and numbers that makes it easier for users to input the DPSK when activating a mobile client to a Zero-IT WLAN. (You may also want to limit the DPSK length to 8 characters for the convenience of your mobile client users.)
 - **User Friendly D-PSK:** This option includes numbers only. By default, the DPSK length is set to 8 characters automatically and the maximum DPSK length is 62 characters.

Note: All generated DPSK keys (only numbers) must also be unique within the same WLAN and MAC address (bound or unbound).

9. For **DPSK Length**, enter a PSK passphrase length (from 8 through 62 characters).

10. **Expire D-PSK:** Set the time interval from when the DPSK must expire. For **Validity Period**, select whether the DPSK expiration period will start from first use or the creation time.
11. **Limit D-PSK:** By default, each authenticated user can generate multiple DPSKs. Select this option to limit the number of DPSKs that each user can generate across multiple devices (1 through 4).
12. **Shared D-PSK:** Enable this option to allow a single user to share a single DPSK across multiple devices. By default, each DPSK is unique and mapped to a single MAC address; the **Shared D-PSK** option allows the administrator to override this rule and allow a user to share a single DPSK across multiple devices.
13. Click **OK** to save your changes.

This WLAN is now ready to authenticate users using DPSKs once their credentials are verified against either the internal database or an external AAA server.

Figure 2. Using the Internal Database for DPSK Authentication

Hide Advanced Options ▼

Zero-IT & DPSK | WLAN Priority | Access Control | Radio Control | Others

Zero-IT Activation™: ☒ Enable Zero-IT Activation
WLAN users are provided with wireless configuration installer after they log in.

Dynamic PSK™ : ☐ Disable ☒ Internal ☐ External

All generated D-PSK of the WLAN could be removed if configurations related to D-PSK are changed, for more detail, please refer to help document.

DPSK Type : ☐ Secure D-PSK The key will include nearly all printable ASCII characters.
☐ Mobile Friendly D-PSK The key will include numbers, lower case and upper case letters.
☒ User Friendly D-PSK The key will only include numbers.

DPSK Length : character passphrase.

Expire D-PSK Set when the D-PSK should expire ▼

Validity Period: ☒ Effective from first use ☐ Effective from creation time

Limit D-PSK ☐ Limit D-PSK generation per user to devices.
Currently allow 1~4 devices per user.

Shared D-PSK ☐ Enable one D-PSK to share with devices(2~2048).

OK **Cancel**

Note: For information on DPSK management and batch generation, refer to [Dynamic PSK](#).

Parent topic: [Zero-IT and DPSK Settings](#)

DPSK Functionality for Legacy and Non-Legacy Devices

The following use cases apply to DPSK functionality for legacy and non-legacy devices:

- If you change the name of the **WLAN SSID**, Unleashed deletes all the DPSKs of legacy and non-legacy devices.
- If **Dynamic PSK** is changed from **Internal** to **External** or **Disable**, Unleashed deletes all the DPSKs of legacy and non-legacy devices.
- If **DPSK Validity Period** or **Shared DPSK** options are changed, Unleashed deletes all the DPSKs of non-legacy devices only.
- If **Allow Legacy Devices to connect to WLAN by previous password** is disabled, Unleashed deletes DPSKs of legacy devices only.
- If the legacy device is unmarked, Unleashed deletes the DPSK of this legacy device.
- If the legacy device is deleted from the UI, Unleashed does not delete the DPSKs of this legacy device.

Parent topic: [Enabling DPSK for a WLAN](#)

Using External DPSK with RADIUS Authentication


Using an external AAA server for managing Dynamic Pre-Shared Keys provides several advantages to internal DPSKs stored on the AP or controller.

The external DPSK feature allows customers to exceed the maximum number of DPSKs that can be stored on the controller, and provides the option to store and manage DPSKs on the AAA server for distribution to multiple controllers.

To enable external DPSK using an external authentication server:

1. Go to **WiFi Networks > Create/Edit WLAN > Advanced Options > Zero-IT & DPSK**.
2. In **Dynamic PSK**, select **External**.
3. In **Authentication Server**, select or create an AAA server entry.
4. Click **OK**.

Figure 1. External DPSK

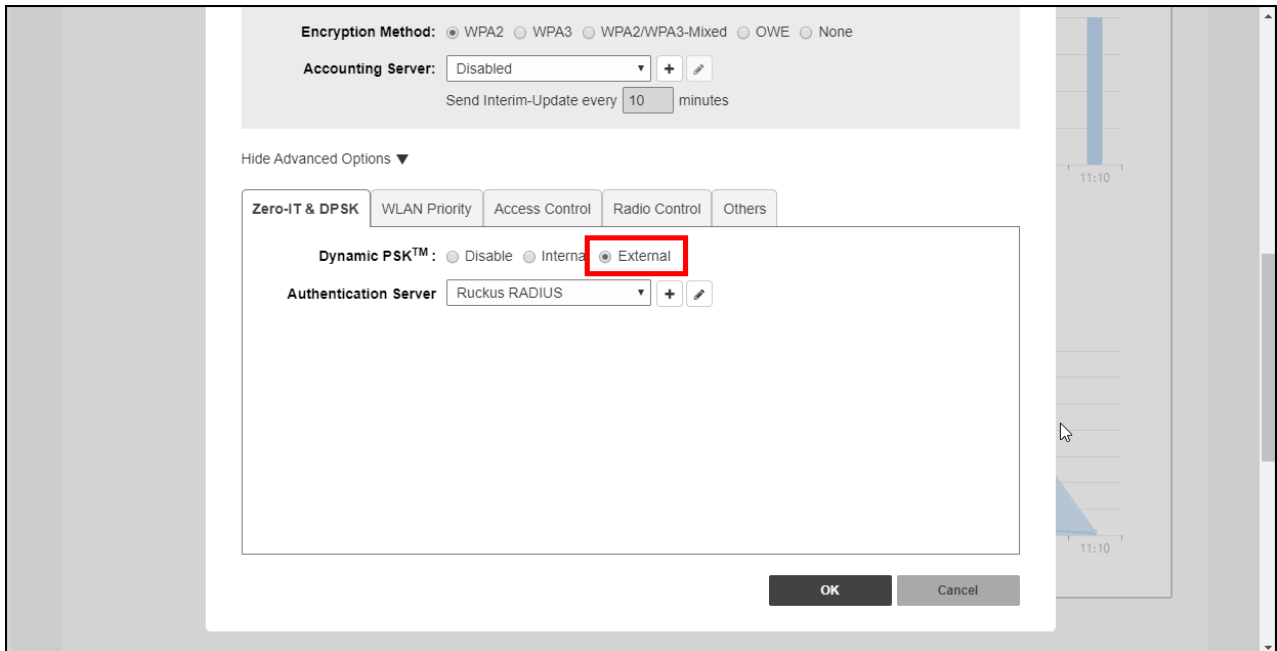

5. The controller will send Access-Request messages to the RADIUS server with following attributes: Ruckus-SSID, Ruckus-BSSID, User-Name, Ruckus-Dpsk-Params.
6. The AAA server sends back a RADIUS Access-Accept or Access-Reject message with the following attributes: Access-Accept: Calling-station-id, Tunnel-Type, Tunnel-Medium-Type, Tunnel-Private-Group-Id, MS-MPPE-Recv-Key, Session-Timeout, Ruckus-User-Groups, User-Name. The MS-MPPE-Recv-Key is mandatory.
 - **Note:** If the User-Name attribute is empty in the Access-Accept packet of external Radius server, the column **User** in the web UI uses the User-name attribute from the Access-Request packet of Unleashed.
7. The AAA server generates a DPSK key (PMK) for each wireless station. This key is encrypted and entered in the attribute MS-MPPE-Recv-Key: $PMK = PBKDF2_SHA1(PassPhrase, Wlan-SSID, Wlan-SSID-Len, 4096, 32)$. See RFC2548 Chapter 2.4.3.
 - **Note:** The WLAN-SSID attribute will exist in the authentication request. The AAA server can use this value to generate the PSK or the AAA server can be pre-configured with WLAN-SSID value.
8. The AAA server calculates the wireless station's Pairwise Transient Key (PTK) from the Ruckus-Dpsk-Params attribute (AKM Suite, Cipher, Anonce, EAPOL-Key-Frame) in the Access-Request message and generates the PMK key, and finally verifies the Key MIC of the station. If it matches, the RADIUS server will send back an Access-Accept message with the MS-MPPE-Recv-Key attribute.

9. With the DPSK keys generated managed by the AAA server, the controller's internal max DPSK limits are avoided and an unlimited number of DPSKs can be generated.

Parent topic: [Enabling DPSK for a WLAN](#)

External DPSK RADIUS Attribute Value Pairs

The RADIUS Attribute Value Pairs (AVP) and Vendor Specific Attributes (VSA) used in external DPSK generation are listed in the following table.

The following parameters are used in access-request messages.

Table 1. Access-Request Message Parameters

	Parameter	AVP / VSA name	Comment
1	SSID	Ruckus-SSID	Since DPSK passphrases are bound to SSIDs, it's expected that AAA server will have the PMK lists indexed by SSID value.
2	UE's MAC address	User-Name	This AVP chosen for backward compatibility with MAC Authentication use case. The AAA server can override this value with a real (human or account) user-name when User-Name AVP is included in an Access-Accept or Access-Reject message.
3	AP's BSSID	Ruckus-BSSID	Note: the AAA Interface Document needs to be updated. Currently it states, "BSSID for each WLAN in each radio"; however, only a single BSSID (the one the client has associated with) is included in the VSA.
4	Anonce	Ruckus-DPSK-params	This is a new RUCKUS VSA, defined below.
5	Snonce	Ruckus-DPSK-params	The Snonce is parsed from the EAPOL Key Frame field of Ruckus-dpsk-params.

	Parameter	AVP / VSA name	Comment
6	MIC	Ruckus-DPSK-params	The MIC is parsed from the EAPOL Key Frame field of Ruckus-dpsk-params.
7	4WHS-M2 EAPOL Key frame	Ruckus-DPSK-params	The EAPOL-Key-Frame is used for the MIC calculation.
8	Cipher	Ruckus-DPSK-params	If the UE has negotiated TKIP-based encryption (this would be a really old device), then the key integrity algorithm is different than AES (Advance Encryption Standard, the encryption algorithm currently in use). In this case, AAA server also has to use the same algorithm as the UE in order to properly identify the PMK. TKIP is indicated according to the Cipher octet (see below). Note that two different integrity algorithms are used: HMAC-SHA1 and HMAC-MD5.
9	AKM Suite	Ruckus-DPSK-params	The use of the AES key integrity and key hierarchy is indicated by the AKM Suite value. If the UE has negotiated FT encryption (FT - fast transition, aka 802.11r), generating the PTK from the PMK uses a different algorithm than AES. In this case, AAA server also has to use the same algorithm as the UE in order to properly identify the PMK. The AKM Suite value indicates whether FT is used.

The following parameters are used in access-accept/access-reject messages.

Table 2. Access-accept/Access-reject Message Parameters

	Parameter	RADIUS AVP or VSA name	Mandatory / Optional	Comment
1	MS-MPPE-Recv-Key	MS-MPPE-Recv-Key	Mandatory	Included whenever the AAA server has found a matching PMK (for either bound or unbound case).
2	PMK-time	Session-Timeout	Mandatory	Included whenever the AAA server has found a matching PMK, this is PMK expired time for the controller. Its range could be 0-14400 minutes.
3	User-name	User-name	Optional	Included if admin desires the username to be included in syslog events generated by the controller.
4	VLAN assignment	The following triplet of AVPs: 1. Tunnel-Type 2. Tunnel-Medium-Type 3. Tunnel-Private-Group-Id	Optional	Included if admin requires dynamic VLAN assignment. Note: the Tag field in all three AVPs is set to the same value (see RFC-2868). 1. Tunnel-Type is set to the value "VLAN". Note: the AVP encodes this enumeration as an integer set to the value of 13 (see RFC-3580).

	Parameter	RADIUS AVP or VSA name	Mandatory / Optional	Comment
				2. Tunnel-Medium-Type is set to the string value of "802" 3. Tunnel-Private-Group-Id is set to the value "<VLAN ID>". VLAN ID has a value between 1 and 4094 and is encoded as a string (see RFC-3580).
5	Ruckus-User-Groups	Ruckus-User-Groups	Optional	Ruckus-User-Groups is used as Role of UE, It is the same as "Group Attributes" in ZD WebUI Configuration "Roles and Policies".
6	Authorization reason	Reply-message	Optional	Included if AAA server sends an Access-Accept in the workflow for DPSK passphrase renewal. When included, the ZD shall copy the contents of this AVP to the relevant syslog message (event ID 206 clientAuthorization).

Parent topic: [Using External DPSK with RADIUS Authentication](#)

WLAN Priority Settings

From the **WLAN Priority** tab, you can set a WLAN's priority level, visibility, VLAN, maximum number of clients allowed per AP radio, and service schedule.

- **BSS Priority:** Set the priority of this WLAN to **Low** if you would prefer that other WLAN traffic takes priority. For example, if you want to prioritize internal traffic over guest WLAN traffic, you can set the priority in the guest WLAN configuration settings to **Low**. By default, all WLANs are set to **High**.
 - **Hide SSID:** Select this option if you do not want the ID of this WLAN advertised at any time. This will not affect performance or force the WLAN user to perform any unnecessary tasks.
 - **Access VLAN:** By default, all wireless clients are placed into a single VLAN (with VLAN ID 1). If you want to tag this WLAN traffic with a different VLAN ID, enter a valid VLAN ID (from 2 through 4094) in the field.
 - **Enable Dynamic VLAN:** Dynamic VLAN can be used to automatically and dynamically assign wireless clients to different VLANs based on the RADIUS attributes. **Enable Dynamic VLAN** option is only available for 802.1X EAP WLANs with a RADIUS server configured.
 - **Max Clients:** Limit the number of clients that can associate with this WLAN per AP radio (default is 100 clients, and the maximum is 256 clients).
 - **Service Schedule:** Use the Service Schedule tool to control which hours of the day or days of the week to enable or disable the WLAN service. For example, a WLAN used for students at a school can be configured to provide wireless access only during school hours. Click a day of the week to enable or disable this WLAN for the entire day. Colored cells indicate when the WLAN is enabled. Click and drag to select specific times of day. You can also disable a WLAN temporarily, for example, for testing purposes.
- 🔧 **Note:** The Service Schedule tool will not work properly if the RUCKUS Unleashed network does not have the correct time. To ensure the correct time is always maintained, configure an NTP server and point the RUCKUS Unleashed Master AP to the NTP server's IP address, as described in [Configuring the System Time](#).
- 🔧 **Note:** Beginning with RUCKUS Unleashed 200.15, the WLAN service schedule functionality is no longer based on the browser time zone.
- The WLAN service schedule is based on the configured RUCKUS Unleashed system time.
 - You can change the system time from the **Admin & Services > System > System Time** screen.
 - The WLAN service schedule configurations are migrated based on the RUCKUS Unleashed system time zone instead of the browser time zone.

Figure 1. Configuring a Specific Service Schedule for a WLAN

WLAN Priority | Access Control | Radio Control | Others

BSS Priority: ☒ High ☐ Low

Hide SSID: ☐ Hide SSID in Beacon Broadcasting (Closed System)

Access VLAN: ☐ Enable Dynamic VLAN

Max Clients: Allow up to clients per AP radio

Service Schedule: ☒ Always on ☐ Always off ☐ Specific

OK Cancel

Parent topic: [Advanced WLAN Configuration](#)

BSS Priority

Basic Service Set (BSS) Priority configures virtual access points (VAPs) to receive less airtime compared to others on the same radio, optimizing network performance and resource allocation.

Feature Overview

The Airtime Fairness (ATF) functionality ensures that all VAPs and their clients on a radio receive equal airtime. VAPs refer to the capability of a single physical access point (AP) to support multiple, distinct wireless networks by broadcasting multiple Service Set Identifiers (SSIDs). BSS Priority allows the configuration of lower priority for specific VAPs, thus reducing their clients' airtime compared to those connected to higher-priority VAPs. The ATF feature calculates the total number of clients per radio and shares airtime equally. However, with BSS Priority, clients on lower priority VAPs receive further reduced airtime units, ensuring higher priority VAPs and their clients get more airtime.

- Note:** By default, when a VAP is created on a WLAN, it is initially categorized as a high-priority VAP, meaning it will receive a larger share of airtime compared to lower-priority VAPs on the same AP. For more information refer to

Functional Requirements

- **Integration with ATF:** BSS Priority works hand-in-hand with ATF to manage and allocate airtime fairly across different VAPs on the same radio.
- **Periodic and Event-Driven Evaluation:** Airtime units are recalculated every second and whenever a client joins or leaves a VAP, ensuring dynamic and responsive airtime management.
- **Storage in Peer Structure:** The allocated airtime for each client is stored in their respective peer structures, facilitating efficient tracking and management of airtime distribution.

Platform Requirements

Implementing BSS Priority requires compatible hardware (APs and controllers), support for IEEE Std. 802.11ac and QoS, integration with the ATF functionality, and effective configuration and monitoring tools. Ensuring these platform requirements are met will enable efficient and effective use of BSS Priority to optimize airtime allocation and network performance.

Limitations of Current ATF Implementation

- **Lapsing of Unused Airtime Units for High Priority VAP Clients:** Unused airtime units for clients connected to high-priority VAPs are not carried over or reallocated. This could lead to inefficiencies, as valuable airtime is wasted if not used by high-priority clients.
- **Reallocation of Unused Airtime Units for Low Priority VAP Clients:** Unused airtime units for clients connected to low-priority VAPs can be utilized by high-priority VAP clients. While this helps in utilizing available airtime, it can lead to a scenario where low-priority clients might consistently receive less airtime if high-priority clients always consume the extra available airtime.
- **Applicability Only to Downlink (DL) Traffic:** This implementation only applies to downlink traffic (from AP to clients). Uplink traffic (from clients to AP) is not affected by these airtime allocation rules, which may result in inconsistent performance improvements.
- **Client Count-Based Allocation:** Airtime allocation is based purely on the number of connected clients. This approach does not account for the actual data requirements or usage patterns of the clients, which can lead to suboptimal allocation in real-world usage scenarios where client demands vary significantly.
- **Lack of Fairness for Low Priority Clients:** Low-priority VAP clients may consistently receive less airtime, especially in environments with heavy traffic from high-priority VAP clients. This could result in poor performance for clients connected to low-priority VAPs.

Best Practices

BSS Priority complements the IEEE 802.11ac standard by allowing finely tuned control over airtime allocation among VAPs on the same radio. This ensures that the advanced capabilities of IEEE 802.11ac are used efficiently to provide the best possible performance for different types of users and applications in a Wi-Fi network.

Prerequisites

BSS Priority in a Wi-Fi network has several prerequisites to ensure proper functionality and integration. The key prerequisites are listed below:

- Compatible APs with the latest firmware supporting BSS Priority
- APs must comply with IEEE 802.11ac standards
- Support for ATF functionality for managing airtime allocation
- Ability to support multiple VAPs and a large number of clients

Parent topic: [WLAN Priority Settings](#)

Access Control Settings

The **Access Control** tab provides the following options:

- **Call Admission Control:** Disabled by default. Enable Wi-Fi Multimedia Admission Control (WMM-AC) to support Polycom/Spectralink Voice Interoperability for Enterprise Wireless (VIEW) certification. When enabled, the AP announces in beacons if admission control is mandatory for various access categories and admits only the traffic streams it can support based on available network resources. When network resources are not sufficient to provide this level of performance, the new traffic stream is not admitted. Call Admission Control is effective only when both the AP and the client support WMM-AC. RUCKUS APs are capable of handling hundreds of simultaneous clients, but when it comes to VoIP traffic, the number of VoIP calls must be policed to ensure adequate voice and video quality. RUCKUS recommends limiting bandwidth allocation to six calls (four active calls and two reserved for roaming) on the 2.4 GHz radio and ten calls on the 5 GHz radio (seven active calls and three reserved for roaming). Enable this feature if you want this WLAN to serve as a VoIP WLAN to support Spectralink phones.
- **Rate Limit:** Rate limiting controls fair access to the network. When enabled, the network traffic throughput of each network device (that is, a client) is limited to the rate specified in the traffic policy, and that policy can be applied on either the uplink or downlink. Use the **Per Station Uplink** and **Per Station Downlink** lists to limit the rate at which WLAN clients upload and download data. The "Disabled" state means rate limiting is disabled; thus, traffic flows without prescribed limits.

 **Note:** If SSID rate limiting is enabled, per Station rate limiting is not configurable.

- **Access Control:** Use the **Layer 2 MAC ACL**, **Layer 3/4 ACL**, and **Device Policy** lists to apply to the VLAN. An access control entry or a device policy must be created before being available here. For more information, refer to [Access Control](#).
- **Application Visibility:** Enable Application Visibility to allow APs to collect client application data, which can then be consolidated for use by the application recognition and control pie charts (refer to [Application](#)

[Recognition and Control](#)), and can be used to deny access or rate limit application traffic based on administrator-configured application policies.

- **Apply Policy Group:** This option allows the administrator to deny application access or rate limit application traffic based on predefined or user-defined applications. Using application policies, administrators can block specific applications if they are seen to be consuming excessive network resources, or enforce network usage policies such as blocking social media sites. For more information, refer to [Application Policies](#).
- **URL Filtering:** Enable URL Filtering and select a URL Filtering Profile from the list (or create a new one). For more information, see [URL Filtering](#).
- **WiFi Calling:** Enable Wi-Fi Calling, which is a service for Android and iOS smartphones that allows clients to make and receive voice phone calls over a Wi-Fi connection. For more information, see [Wi-Fi Calling](#).
- **QoS Mirroring:** For each WLAN, you can choose one of the following settings to manage Quality of Service (QoS) Mirroring. By default, Enabled via Protocol is enabled.
 - **Disabled:** QoS mirroring is disabled for all clients on this WLAN.
 - **Enabled via Protocol:** QoS mirroring is enabled only for clients that send Mirrored Stream Classification Service (MSCS) requests during the handshake process. Legacy clients are not supported with this QoS preference.
 - **Enabled for All:** Unilateral mode is applied for this option and QoS mirroring is enabled for all clients, including legacy clients and MSCS-supported clients, on this WLAN.

For more information, refer to [QoS Mirroring](#).

Figure 1. Advanced WLAN Settings - Access Control Configuration

WLAN Priority
Access Control
Radio Control
Others

Call Admission Control: ☐ Enforce CAC when CAC is enabled on the radio

Rate Limit: Per STA rate limiting will not work if SSID rate limiting is enabled.

☐ Enable Per Station Uplink 0 Mbps (0.1~200.0)
☐ Enable Per Station Downlink 0 Mbps (0.1~200.0)
☐ Enable Per SSID Uplink 0 Mbps (0.1~500.0)
☐ Enable Per SSID Downlink 0 Mbps (0.1~500.0)

Access Control:
Layer2 MAC ACL : No ACL +
Layer3/4 ACL : No ACL +
Device Policy : No ACL +

Application Visibility: ☐ Enable
Apply Policy Group : No_Policy +

URL Filtering: ☐ Enable (URL Filtering will not work if URL Filtering License is expired)
URL Filtering Profile : +

Wi-Fi Calling: ☐ Enable

Qos Mirroring: ☐ Disabled ☒ Enabled via Protocol ☐ Enabled for All

Parent topic: [Advanced WLAN Configuration](#)

QoS Mirroring

The Quality of Service (QoS) Mirroring feature enables the AP to apply identical traffic priorities (Voice, Video, Best Effort, or Background) to downlink flows so that they correspond to their respective uplink flows.

Feature Overview

QoS prioritizes real-time flows, such as voice, video, and gaming) over asynchronous flows (such as file downloads and movie streaming), in accordance with the associated upstream traffic flows within the WLAN. The following QoS mirroring modes are implemented depending on the WLAN QoS Mirroring configuration):

- Mirrored Stream Classification Service (MSCS) implemented as per IEEE standards:

MSCS is a Wi-Fi CERTIFIED QoS Management technology that allows each client device to request the AP to assign priorities to specified downlink traffic flows, aligning the priorities with what the client initially assigned to the corresponding uplink traffic flows. When QoS Mirroring is enabled via protocol, the client prompts the AP to initiate mirroring by sending the AP an MSCS request.

MSCS begins only when the downlink packet from the server is tagged as differentiated services code point (DSCP) 0x00 (in other words, the packet is not classified). The client devices use a dedicated frame exchange to trigger the MSCS process.

- RUCKUS Unilateral QoS mirroring implemented as a RUCKUS Proprietary functionality:

Unilateral Mirroring is an exclusive RUCKUS feature that provides QoS mirroring without requiring signaling between the AP and the client, extending the advantages of mirroring to legacy clients that lack support for MSCS. When QoS Mirroring is enabled for all clients, the AP automatically assigns an equivalent priority to each downlink flow for a legacy client, mirroring each of its flow with the priority of its corresponding uplink flow. Clients with MSCS support explicitly initiate mirroring by sending an MSCS request to the AP.

Following are the benefits of MSCS:

- Reduced latency and improved end-user experience for real-time applications

Following are the benefits of RUCKUS Unilateral QoS mirroring:

- Benefits legacy clients without MSCS support
- Mirrors downlink priorities without signaling between an AP and client
- Supports both the MSCS and non-MSCS clients

Requirements

This feature has no special hardware or software requirements for feature enablement or usage.

Considerations

QoS Mirroring is configured by default as follows:

- Disabled for existing WLANs
- Enabled via Protocol for newly created WLANs

QoS Mirroring option Enabled via Protocol does not support all clients; it supports only clients with MSCS.

Best Practices

This feature has no special recommendations for feature enablement or usage.

Prerequisites

Supported in RUCKUS Unleashed 200.16 and later versions.

Parent topic: [Access Control Settings](#)

Application Policies

For instructions on configuring Application Control Policies, see [Creating an Application Control Policy](#).

This option allows the administrator to deny application access by blocking any HTTP host name (FQDN - Fully Qualified Domain Name) or L4 port. Using application denial policies, administrators can block specific applications if they are seen to be consuming excessive network resources, or enforce network usage policies such as blocking social media sites.

The following usage guidelines need to be taken into consideration when defining application control policies:

- "www.corporate.com" – This will block access to the host web server at the organization "corporate.com" i.e., the FQDN. It will not block access to any other hosts such as ftp, ntp, smtp, etc. at the organization "corporate.com".
- "corporate.com" – This will block access to all hosts at the domain "corporate.com," i.e., it will block access to www.corporate.com, ftp.corporate.com, smtp.corporate.com, etc.
- "corporate" – This will block access to any FQDN containing the text "corporate" in any part of the FQDN. Care should be taken to use as long as possible string for matching to prevent inadvertently blocking sites that may contain a shorter string match i.e., if the rule is "net" then this will block access to any sites that have the text "net" in any part of the FQDN or ".net" as the FQDN suffix.
- *.corporate.com – This is an invalid rule. Wildcard "*" and other regular expressions cannot be used in any part of the FQDN.
- "www.corporate.com/games" - This is an invalid rule. The filter cannot parse and block access on text after the FQDN, i.e., in this example it cannot filter the microsite "/games".

- 🔗 **Note:** Many global organizations have both a ".com" suffix and country specific suffix such as ".co.uk", ".fr", ".au".etc. To block access to, for example, the host web server in all regional specific web sites for an organization, a rule like "www.corporate" could be used.
- 🔗 **Note:** Many global organizations use distributed content delivery networks such as Akamai. In such cases creating a rule such as "www.corporate.com" may not prevent access to the entire site. Further investigation of the content network behavior may need to be undertaken to fully prevent access.
- 🔗 **Note:** When using port-based rules, there is no distinction between the TCP and UDP protocols, so care should be taken if wishing to block a specific application port, as this will apply to both IP protocols and may inadvertently block another application using the other protocol.

Parent topic: [Advanced WLAN Configuration](#)

Creating an Application Control Policy

Application control policies can be used to block access to certain applications, to rate limit traffic identified as belonging to certain applications, or to perform QoS traffic shaping on traffic identified as belonging to a certain application.

 **Note:** For more information on configuring and enforcing application control policies, see [Application Policy](#).

To create an Application Control Policy:

1. Go to **WLAN > Advanced Options > Access Control**.
2. Enable **Application Visibility**.
3. In **Apply policy group**, click **Create New** to create a new policy.

 **Note:** Alternatively, go to Admin & Services > Services > Application Recognition & Control > Application Policy to configure multiple application policies and then apply them to WLANs one by one.

4. Enter a **Name** and optionally a **Description** for the policy.
5. In **Rules**, click **Create New** to create a new rule for this policy.
6. In **Rule Type**, select whether this will be a Denial policy, a Rate Limiting policy or a QoS policy.
7. In **Application Type**, Select **System Defined** or one of the user-defined application types (IP-based, port-based or application name-based).
8. In **Application**, select the user-defined application from the list, or select the application category and application name from the list of system-defined applications.
9. If the Rule Type you selected was Rate Limiting or QoS, enter the uplink and downlink speeds at which to limit this application, or the QoS traffic shaping rules to enforce if it is a QoS rule.
10. Click **Save** to save the rule, and click **OK** to save the policy.

Figure 1. Applying an Application Control Policy to a WLAN


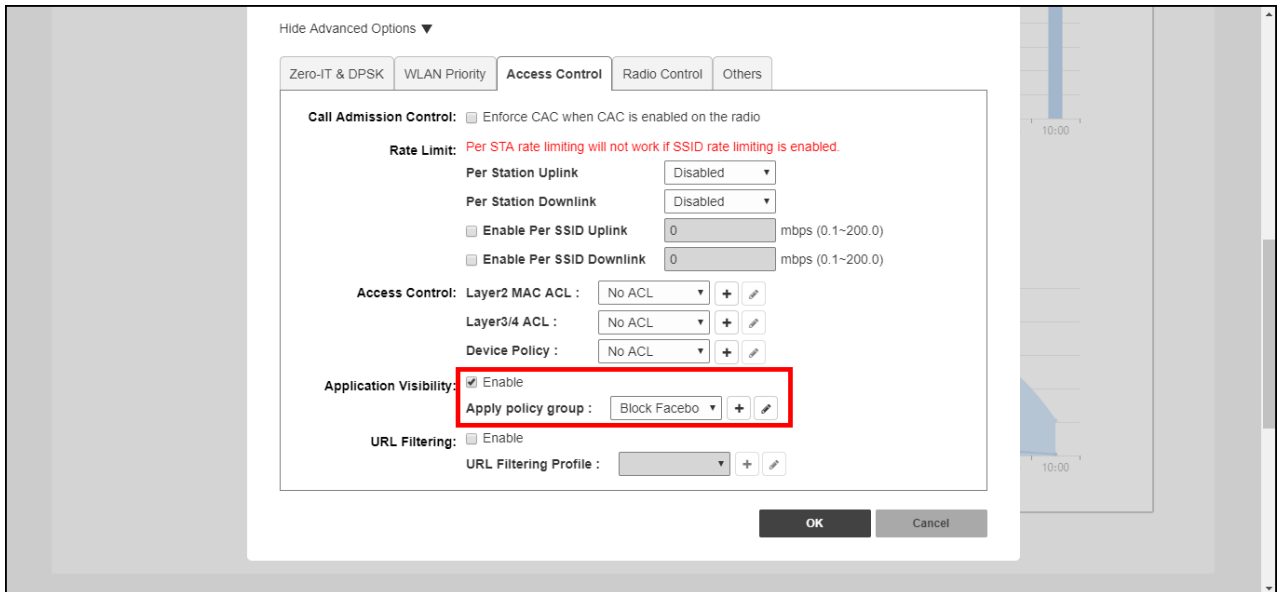


Figure 2. Creating an Application Control Policy for a specific website

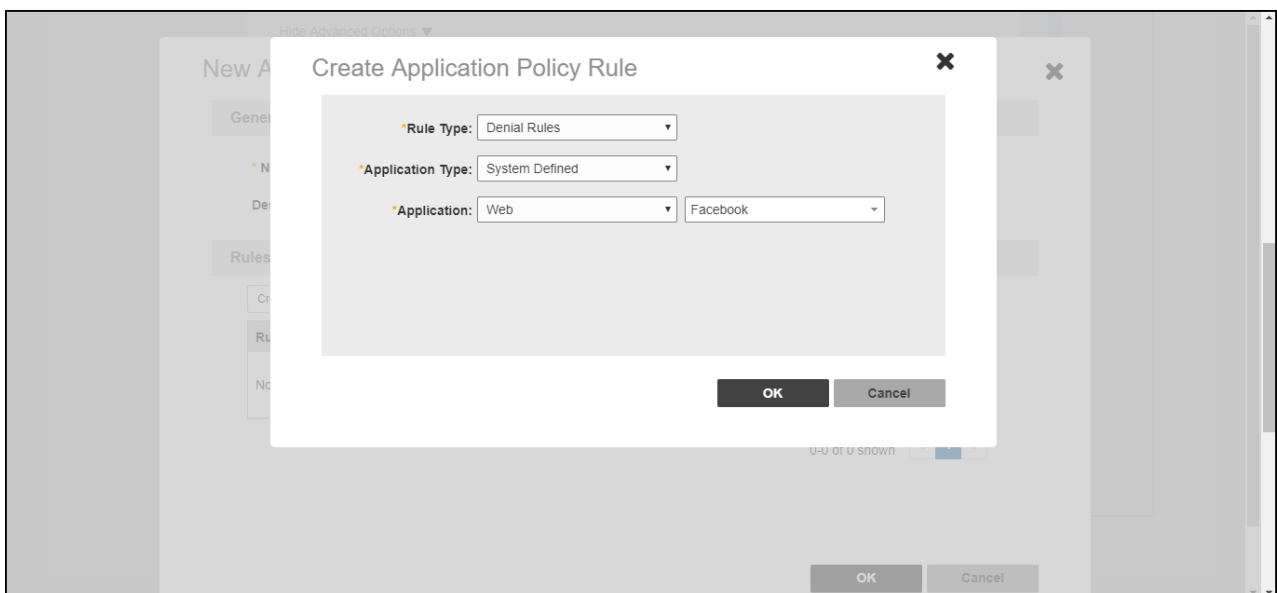

Parent topic: [Application Policies](#)

Radio Control Settings

The **Radio Control** tab provides options for configuring radio settings for the WLAN, such as load balancing, band balancing, fast BSS transition, and radio resource management.

The following options can be configured on a per-WLAN basis:

- **Fast BSS Transition:** (Disabled by default.) The Fast BSS Transition feature uses messages and procedures defined in 802.11r to allow continuous connectivity for wireless devices in motion, with fast and secure handoffs from one AP to another. A fast BSS transition is a BSS transition in the same mobility domain

that establishes the state necessary for data connectivity before the re-association rather than after the re-association. In this way, clients that support the 11r standard (including iOS devices) can achieve significantly faster roaming between APs.

- **Radio Resource Management:** (Disabled by default.) Radio Resource Management utilizes 802.11k Neighbor Reports, which are sent by the AP to inform clients of the preferred roaming target AP. The client sends a neighbor report request to an AP, and the AP returns a neighbor report containing information about known neighbor APs that are candidates for a service set transition.
 - **Background Scanning:** Background scanning regularly samples the activity in all Access Points to assess RF usage for automatic optimal channel selection, to detect rogue APs, and to determine which APs are near each other for radio resource management and load balancing. These scans sample one channel at a time in each AP so as not to interfere with network use.
 - **Load Balancing:** Enabling load balancing can improve WLAN performance by helping to spread the client load between nearby access points. The load balancing feature can be controlled from within the web interface to balance the number of clients per radio on adjacent APs. "Adjacent APs" are determined by the Master AP by measuring the RSSI during channel scans. After startup, the Master AP uses subsequent scans to update the list of adjacent radios periodically and when a new AP sends its first scan report. When an AP leaves, the Master AP immediately updates the list of adjacent radios and refreshes the client limits at each affected AP. Once the Master AP is aware of which APs are adjacent to each other, it begins managing the client load by sending desired client limits to the APs. These limits are "soft values" that can be exceeded in several scenarios, including: (1) when a client's signal is so weak that it may not be able to support a link with another AP, and (2) when a client's signal is so strong that it really belongs on this AP. The APs maintain these desired client limits and enforce them once they reach the limits by withholding probe responses and authentication responses on any radio that has reached its limit.
 - **Band Balancing:** (Enabled by default.) Band balancing balances the client load on radios by distributing clients between the 2.4 GHz, 5 GHz, and 6 GHz radios. To balance the load on a radio, the AP encourages dual-band clients to connect to the 5 GHz band when the configured percentage threshold is reached.
 - **802.11d:** (Enabled by default.) The 802.11d standard provides specifications for compliance with additional regulatory domains (countries or regions) that were not defined in the original 802.11 standard. For optimal performance of Apple iOS devices, it is recommended that you enable this option.
-  **Note:** Some legacy embedded devices (such as wireless barcode scanners) may not operate properly if the 802.11d option is enabled.
- **Enable WLAN on:** (Enabled by default on both radios.) Manually enable or disable WLAN service per radio. Select **2.4 GHz**, **5 GHz**, or **6 GHz**. This option allows you to create separate WLANs on the three radios independently.

For more information, refer to [Creating Separate WLANs for 2.4, 5, and 6 GHz Radios](#).

- **OFDM Only:** Enable this option to disable CCK rates of 1, 2, 5.5, and 11 Mbps; therefore, 802.11b-only clients cannot connect to the WLAN. Beacons and probe responses are transmitted at 6 Mbps, and data frames at 6, 9, 18, 24, 36, 48, and 54 Mbps. Enforcing higher minimum data rates increases overall

network throughput capacity, but reduces the distance at which clients are able to remain connected. **OFDM Only** is supported only on the 2.4 GHz and 5 GHz radios.

- **BSS Min Rate:** Use this option to configure the minimum transmission rate supported by the WLAN. When **OFDM Only** is enabled, **BSS Min Rate** offers three options: **Default**, **12 Mbps**, and **24 Mbps**. If set to **Default**, **Mgmt Tx rate** is fixed at 6 Mbps. This option can also be used to prevent 802.11b clients from connecting, and to allow greater client density with higher data rates. **BSS Min Rate** is supported only on the 2.4 GHz and 5 GHz radios.

 **Note:** When **BSS Min Rate** is set to a non-default value, **Mgmt Tx Rate** cannot be set manually and its value must be consistent with **BSS Min Rate**.

- **Mgmt Tx Rate:** Use this setting to configure the rate at which management frames are sent. The default is 2 Mbps. This option is only available if both **OFDM Only** and **BSS Min Rate** are disabled. (Otherwise, **Mgmt Tx Rate** is defined by those settings.)
- **Wi-Fi 6/7:** Use this setting to allow some legacy Wi-Fi 5 clients with out-of-date drivers to interoperate with a Wi-Fi 6 or Wi-Fi 7 AP. By default, **Wi-Fi 6/7** is enabled. Use this setting if you cannot ensure that all the client drivers on the network are up-to-date and free of bugs. Wi-Fi 6 or Wi-Fi 7 clients connecting to this WLAN on a Wi-Fi 6 or Wi-Fi 7 AP will not be able use Wi-Fi 6/7 features such as Orthogonal Frequency-Division Multiple Access (OFDMA), Target Wake Time (TWT), 6 GHz operation, Preamble puncturing, 320 MHz bandwidth, and Multi-Link Operation (MLO).

 **Note:** If you turn off **WiFi 6/7** mode, the 6 GHz radio will stop working.

Figure 1. Radio Control Options

Hide Advanced Options ▼

WLAN Priority Access Control **Radio Control** Others

Wireless Media Management:

Fast BSS Transition : ☐ Enable 802.11r FT Roaming
 Recommended to enable 802.11k Neighbor-list Report for assistant.

Radio Resource Management : ☒ Enable 802.11k Neighbor-list Report

Background Scanning : ☒ Enable (All radios will perform background scanning)

Load Balancing : ☐ Enable
 (Applies to this WLAN only, it may not be active on other WLANs)

Band Balancing : ☐ Enable
 Applies to this WLAN only. Band Balancing might be enabled on other WLANs

802.11d :
☒ Support for 802.11d (only applies to radios configured to operate in 2.4 GHz band)

Enable WLAN on : ☒ 2.4 GHz ☒ 5 GHz ☒ 6 GHz
 Select at least one Radio to make WLAN work properly.

Data Rate Control (2.4GHz & 5GHz):

OFDM Only: ☐ Enable OFDM Only

BSS Min Rate:

Mgmt Tx Rate:

5 GHz radio does not support CCK rates (1, 2, 5.5, 11 Mbps).

Wi-Fi 6/7: ☒ Enable

OK Cancel

Parent topic: [Advanced WLAN Configuration](#)

Creating Separate WLANs for 2.4, 5, and 6 GHz Radios


Use the **Enable WLAN on** option to configure 2.4, 5, or 6 GHz radio service on or off for the WLAN. This allows you to create separate WLANs that each operates on one or the other of the 2.4, 5, or 6 GHz radios.

In some scenarios, it may be preferable to deploy a separate WLAN/SSID for each radio; one 2.4 GHz SSID, one 5 GHz SSID, and one 6 GHz SSID. In this way, you can ensure that all 2.4 GHz-only devices connect to the 2.4 GHz WLAN only, while 5 GHz-capable devices are allowed to connect to the 5 GHz WLAN, and the 6 GHz-capable devices are allowed to connect to the 6 GHz WLAN.

Complete the following steps to create a separate WLANs for 2.4, 5, and 6 GHz radios.

1. Within the **WiFi Networks** component, select the WLAN that you want to configure, and click **Create** to create a custom WLAN.
2. Click the arrow next to **Show Advanced Options** to expand the advanced options section.
3. Click the **Radio Control** tab.
4. For **Enable WLAN on**, select one of the options: **2.5 GHz**, **5 GHz**, or **6 GHz**.

Figure 1. Enabling WLAN on the Radios

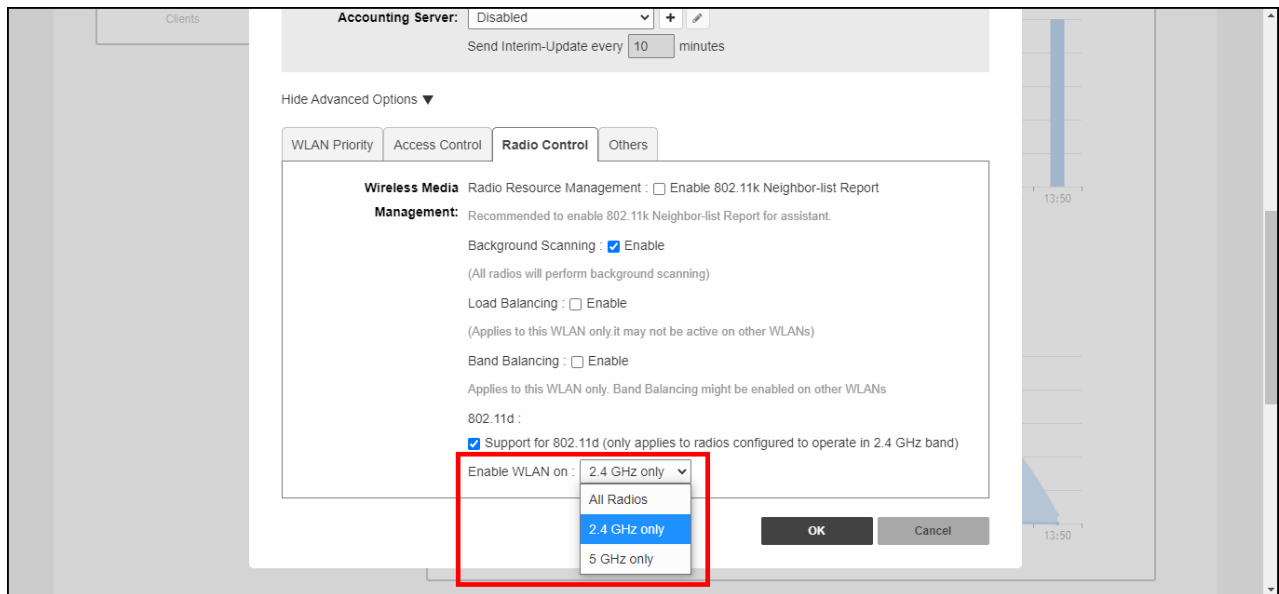

5. Click **OK** to save.

To verify that devices operating at 2.4 GHz are only connected to the 2.4 GHz WLAN, and similarly, devices operating at 5 GHz and 6 GHz are exclusively connected to the 5 GHz and 6 GHz WLANs, respectively, click the **Clients** component and view the list of connected wireless clients. Check the **WLAN** and **Radio** columns to view connection status.

Parent topic: [Radio Control Settings](#)

Other Advanced WLAN Settings

The **Others** tab provides the following options:

- **Force DHCP:** (Disabled by default) Enable this option to force clients to obtain a valid IP address from DHCP within the specified number of seconds, thereby preventing clients configured with a static IP address from connecting to the WLAN.
- **Inactivity Timeout:** Enter a value in minutes after which idle stations will be disconnected (from 1 through 500 minutes).
- **Wireless Client Isolation:** Select the level of client isolation you want to enforce:
 - **Isolate wireless client traffic from other clients on the same AP:** Enables client isolation on the same access point (clients on the same subnet but connected to other APs will still be able to communicate).
 - **Isolate wireless client traffic from all hosts on the same VLAN/subnet:** Prevents clients from communicating with any host on the same subnet or VLAN other than those listed on the client isolation allowlist. If this option is chosen, you must select an allowlist from the list. (Refer to [Configuring Client Isolation Allowlists](#).)

- **Bypass Apple CNA Feature:** With Bypass Apple CNA enabled, captive portal (web-based authentication) login must be performed by opening a browser to any unauthenticated page (HTTP) to be redirected to the login page. This option is available when you select **Usage Type** as **Guest Access** or **Hotspot Service**. (Refer to [Bypass Apple CNA](#).)
- **Tunnel Mode:** Select this check box if you want to tunnel the WLAN traffic back to the Dedicated Master. Tunnel mode enables wireless clients to roam across different APs on different subnets. If the WLAN has clients that require uninterrupted wireless connection (for example, VoIP devices), RUCKUS recommends enabling tunnel mode.
- **Note:** When tunnel mode is enabled on a WLAN, multicast video packets are blocked on that WLAN; however, multicast voice packets are allowed.
- **DTIM Interval:** Configure the Delivery Traffic Indication Message (DTIM) interval to control how often DTIM messages are transmitted. This setting affects the frequency of data transmissions per broadcast beacon. Setting the DTIM interval to a lower value results in more frequent DTIM messages, which can prevent mobile devices from going into power save mode and thereby increasing battery consumption.
- **Directed MC/BC Threshold:** Select **Enable** and enter a value to set the client count at which an AP will stop converting group-addressed data traffic to unicast traffic. This setting allows RUCKUS APs to convert incoming broadcast (BC) and multicast (MC) traffic to unicast, reducing airtime utilization and improving data throughput performance. If **Directed MC/BC Threshold** is enabled, the default threshold value is 5. If **Directed MC/BC Threshold** is disabled, the threshold value is 1.
- **Note:** During migration from earlier versions (starting from 200.7) to Unleashed 200.15, the following conditions apply:
 - If the threshold value is 0 or 1 in the earlier versions, the threshold value will be 1 and **Directed MC/BC Threshold** will be disabled in Unleashed 200.15.
 - If the threshold value is between 2 through 10 in the earlier versions, the threshold value will be between 2 through 10 and **Directed MC/BC Threshold** will be enabled in Unleashed 200.15.
 - If the threshold value is more than 10 in the earlier versions, the threshold value will be 10 and **Directed MC/BC Threshold** will be enabled in Unleashed 200.15.
- **Client Traffic Logging:** Configure options for log generation and delivery to the syslog server (refer to [Client Connection Troubleshooting](#)):
 - **Send traffic flow data to syslog server:** RUCKUS Unleashed sends client flow data only to the syslog server.
 - **Send connection records to syslog server:** RUCKUS Unleashed sends client connection event logs only to the syslog server.

Figure 1. Configuring Other Advanced WLAN Settings

Hide Advanced Options ▼

Zero-IT & DPSK WLAN Priority Access Control Radio Control **Others**

Force DHCP: ☐ Enable Force DHCP. Disconnect client if client does not obtain valid IP address in seconds.

Inactivity Timeout: Terminate idle user session after minute(s)

Wireless Client Isolation: ☐ Isolate wireless client traffic from other clients on the same AP.
☐ Isolate wireless client traffic from all hosts on the same VLAN/subnet.
 ▼ + ✎
 (Requires allowlist for gateway and other allowed hosts.)

DTIM Interval: (1-255) Defines the frequency of beacons that will include a DTIM

Directed MC/BC: ☐ Enable
 (2-10) Defines the per radio client count below which the AP will convert group-addressed data traffic to unicast

Client Traffic Logging: ☐ Send traffic flow data to syslog server
☐ Send connection records to syslog server
 also available for download at Client Connection Logs section of Admin & Services -> Administration-> Diagnostics -> Client Troubleshooting tab

OK Cancel

Parent topic: [Advanced WLAN Configuration](#)

Configuring Client Isolation Allowlists

When Wireless Client Isolation is enabled on a WLAN, all communication between clients and other local devices is blocked at the access point.

To prevent clients from communicating with other nodes, the access point drops all ARP packets from stations on the WLAN where client isolation is enabled and which are destined to IP addresses that are not part of a per-WLAN allowlist.

You can create exceptions to client isolation (for example, allowing access to a local printer) by creating client isolation allowlists.

Complete the following steps to configure a client isolation allowlist:

1. Go to **Wi-Fi Networks > Advanced Options > Others**.

2. Under **Wireless Client Isolation**, select both the options:
 - **Isolate wireless client traffic from other clients on the same AP**
 - **Isolate wireless client traffic from all hosts on the same VLAN/subnet**
3. Click **Create Allowlist**.
4. Enter a name and a description (optional) for the allowlist.
5. **Auto Allowlist** is enabled by Default, which allows the APs to auto-discover gateway devices and add them to the isolation allowlist.
6. Under **Rules**, click **Create New** to create multiple device-specific rules for each device to be allowlisted. For each rule, enter the following:
 - **Description:** Description of the device.
 - **MAC Address:** Enter the MAC address of the device.
 - **IPv4 Address:** Enter the IP address of the device.
7. Click **Save** to save the rule you created.
8. To change the order in which rules are implemented, select the order from the drop-down menu in the **Order** column. You can also edit or clone rules from the **Action** column. To delete a rule, select the check box next to the rule and click **Delete**.
9. Click **OK** to save the allowlist.

Figure 1. Creating a Client Isolation Allowlist

Parent topic: [Other Advanced WLAN Settings](#)

Bypass Apple CNA

Some Apple iOS and OS X clients include a feature called Captive Network Assistant (Apple CNA), which allows clients to connect to an open captive portal WLAN without displaying the login page.

When a client connects to a wireless network, the CNA feature launches a pre-browser login utility and it sends a request to a success page on the Apple website. If the success page is returned, the device assumes it has network connectivity and no action is taken. However, this login utility is not a fully functional browser, and does not support HTML, HTML5, PHP or other embedded video. In some situations, the ability to skip the login page for open WLANs is a benefit. However, for other guest or public access designs, the lack of ability to control the entire web authentication process is not desirable.


ZoneDirector provides an option to work around the Apple CNA feature if it is not desirable for your specific deployment. With CNA bypass enabled, captive portal (web-based authentication) login must be performed by opening a browser to any unauthenticated page (http) to get redirected to the login page.

To enable Apple CNA bypass, use the following procedure:

1. Expand the **WiFi Networks** component and select the WLAN you want to configure, then click **Edit**.
Select one of the following WLAN usage types:
 - Standard Usage with Web Auth enabled
 - Guest Access (including Social Media)

- Hotspot (WISPr)
2. Click **Show Advanced Options**.
 3. Click the **Others** tab.
 4. Select the **Enable** check box next to **Bypass Apple CNA Feature**.
 5. Click **OK** to save your changes.

Figure 1. Enable Bypass Apple CNA feature

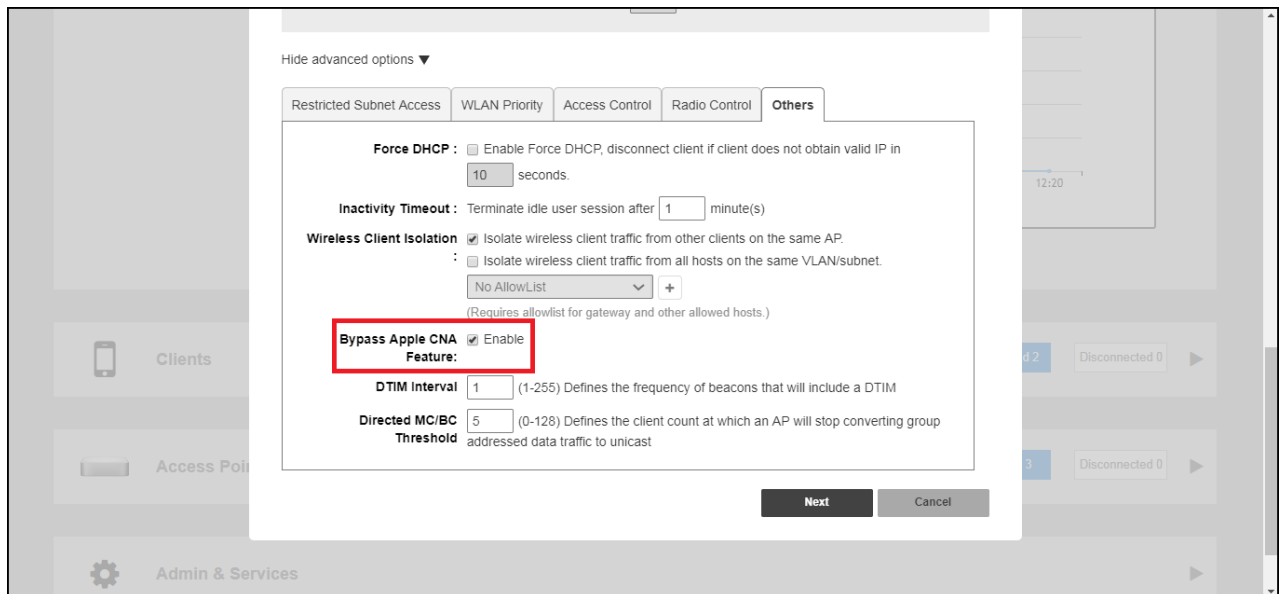

Parent topic: [Other Advanced WLAN Settings](#)

Access Point Configuration

[Access Points Configuration Overview](#)

[Show Mesh Topology](#)

[Show Client Info](#)

[Show Events and Alarms](#)

[Configuring Global AP Settings](#)

[Monitoring an Individual AP](#)

[Configuring an Individual AP](#)

[Working with AP Groups](#)

[Restarting an AP](#)

[Removing an AP](#)

Access Points Configuration Overview

The **Access Points** component provides tools for monitoring and configuring all APs at once, configuring each AP individually, or configuring multiple groups of APs with a set of common custom settings.

The **Access Points** component on the dashboard presents an overview of the connected and disconnected APs that are recognized by this RUCKUS Unleashed network.

The **Access Points** component offers two display modes:

- Card display mode
- Table display mode

The **Access Points** component offers the following options:

- **Summary** AP box: Click this box to view a summary of all AP clients, signal quality, and traffic statistics.
- Individual AP boxes: Click any of these boxes to view details specific to the indicated AP.
- View mode: Switch between AP and AP Group views. AP mode lets you view and configure APs individually, while AP Group mode lets you create and manage AP groups. For more information, refer to Working with AP Groups.

- **Data Duration:** Select the duration of time interval (10 minute, 1 hour, and 12 hours) to view the client status and traffic information of the indicated WLAN.
- **Display Mode:** Switch between card and table display modes. If there are more than 20 APs or AP groups, they are displayed in table mode automatically. The display mode returns to the default (card mode) when the web interface is refreshed.
-  **Note:** You can configure 32 AP groups in Dedicated mode and 10 AP groups in local bridge mode from the web interface, CLI, and mobile app.
- **Search field:** Search AP or AP groups in card or table display mode.
- **Sort:** Sort items with **Device Name, Clients, Mac Address, Model, SN, Version** in AP page and **Group Name, APs, Clients, WLANs** in AP group name.
- **Show Mesh Topology:** Click this link to view the Mesh topology.
- **Show Clients Info:** Click this link to view a table of currently connected clients.
- **Show Events & Alarms:** Click this link to view a table of events and alarms.
- **Client Status** bar chart: This chart displays the number of connected clients and the client signal quality across all connected APs at one-minute intervals (over the last 10 minutes).
- **Traffic** graph: This graph displays the Received (Rx), Transmitted (Tx), and Total traffic values as per the time interval selected for **Data Duration**.

Figure 1. Access Points Component: Card Display Mode

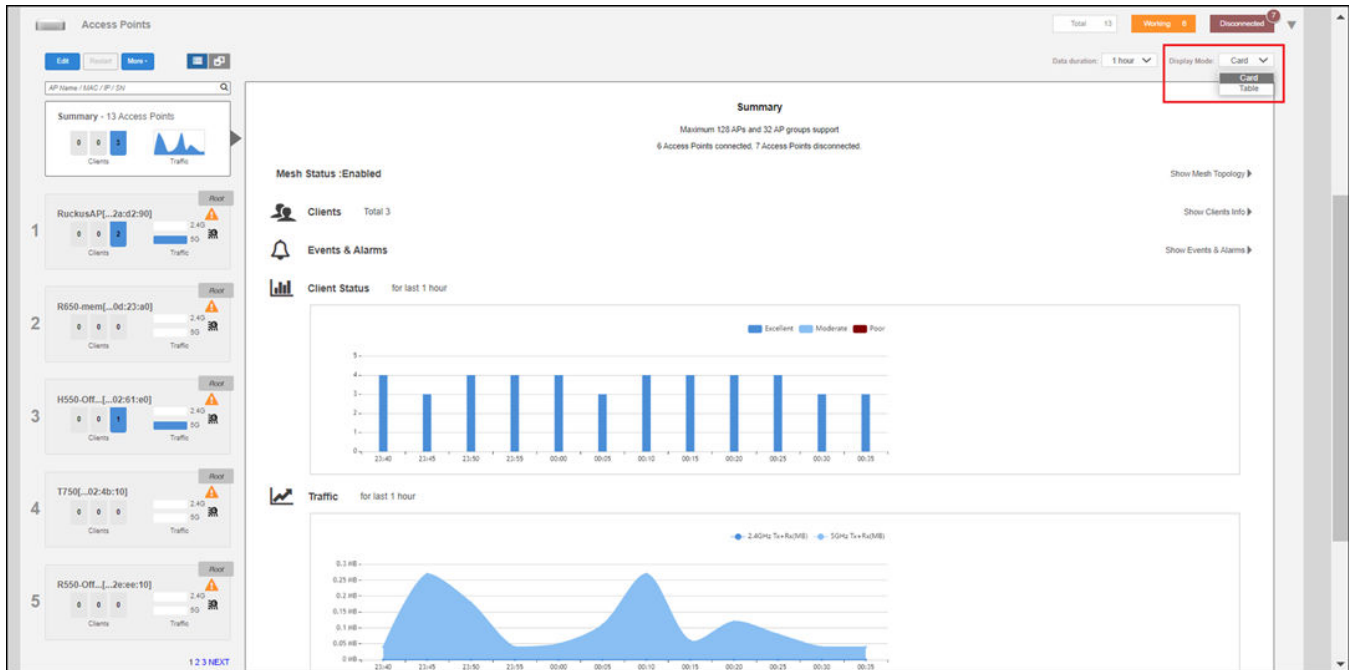


Figure 2. Access Points Component: Table Display Mode

Device Name	Clients	Clients(Excellent)	Clients(Moderate)	Clients(Poor)	Mac Address	Model	S/N	Version	Warning
R650-mem[...0d:23:a0]	2	2			c8:84:8c:0d:23:a0	R650	272239001334	200.14.6.1.166	Not enough el...
80:03:84:3f:fb:d0	0				80:03:84:3f:fb:d0	R650			
H550-Off[...02:61:e0]	1	1			94:b3:4f:02:61:e0	H550	452129001518	200.14.6.1.166	Not enough el...
T750[...02:4b:10]	0				70:ca:97:02:4b:10	T750	112072001854	200.14.6.1.166	Not enough el...
R550-Off[...2e:ee:10]	3	3			84:23:88:2e:ee:10	R550	182172004405	200.14.6.1.166	Not enough el...
T350D-ia[...08:d6:c0]	0				c8:84:8c:08:d6:c0	T350D	242202000023	200.14.6.1.166	
R850-No-...1e:fd:20]	0				28:b3:71:1e:fd:20	R850	232072006087	200.13.6.1.195	
R710[...2d:22:50]	0				0c:f4:d5:2d:22:50	R710	121704002516	200.14.6.1.115	
R320[...14:b4:20]	0				28:b3:71:14:b4:20	R320	242009001779	200.13.6.1.196	
RuckusAP[...24:ab:30]	0				20:58:69:24:ab:30	H510	951909010274	200.13.6.1.198	
[...11:a8:20]	0				ec:8c:a2:11:a8:20	T710S	311604900092	10.4.1.0.214	
RuckusAP[...3e:96:10]	0				b4:79:c8:3e:96:10	T350C	482036000075	200.13.6.1.219	

You can sort the items in the table by clicking the **Device Name**, **Clients**, **Mac Address**, **Model**, **SN**, and **Version** column headings for APs, and the **Group Name**, **APs**, **Clients**, and **WLANS** column headings for AP groups.

In the table display mode and group view mode, you can click individual rows to view information about the APs, WLANS, and clients associated with the selected AP group.

Figure 3. Viewing Individual AP Information in Table Display Mode

Access Points

Total 13 Working 6 Disconnected 1

Data duration: 1 hour Display Mode: Table

Summary 3 AP Groups

Name / MAC / IP / SN

Group Name

System Default

aaaaa

test

1-3 of 3 shown 1

test

APs Total 1

Hide Access Points

Q Search

Mac Address	IP Address	Device Name	Model	Status	Mesh Mode
ec:8c:a2:11:a8:20	172.168.1.38		t710s	Disconnected	Auto

1-1 of 1 shown 1

WLANs Total 10

Hide WLANs Info

Q Search

Name	ESSID	Authentication	Encryption	Description
IDPSK-VLAN194	IDPSK-VLAN194	open	wpa2	IDPSK-VLAN194
testingnetwork976	testingnetwork976	open	wpa3	testingnetwork976
0-neo-wpa2-test1	0-neo-wpa2-test1	open	wpa2	
TestingWP3network	TestingWP3network	open	wpa3	TestingWP3network
0-neo-wpa2-test10	0-neo-wpa2-test10	open	wpa2	
0-neo-wpa2-test11	0-neo-wpa2-test11	open	wpa2	
0-neo-wpa2-test12	0-neo-wpa2-test12	open	wpa2	
0-neo-wpa2-test13	0-neo-wpa2-test13	open	wpa2	
0-neo-wpa2-test14	0-neo-wpa2-test14	open	wpa2	
0-neo-wpa2-test15	0-neo-wpa2-test15	open	wpa2	

1-10 of 10 shown 1

Clients Total 0

Hide Clients Info

Show Details Mark Favorite Mark Legacy Troubleshooting More

Q Search

Status	Favorite	Legacy Device	Mac Address	IP Address	OS	Name	Us
No data available.							

0-0 of 0 shown 1

Parent topic: [Access Point Configuration](#)

Show Mesh Topology


Click this link to display the Mesh topology.

The **Mesh Topology** table displays the relationships between Root APs and Mesh APs in the Mesh. The table includes the following information:

- **Access Points:** Lists the APs in the Mesh by MAC address.
- **Signal:** Displays the signal quality of the Mesh link to/from the uplink AP.
- **Description:** The AP description, if configured.
- **Channel:** Displays the channel used by the Mesh link, as well as the channel width (20/40/80).
- **IP Address:** The IP address of the Root or Mesh AP.

- **Clients:** Number of clients connected to the AP.

Figure 1. Mesh Topology

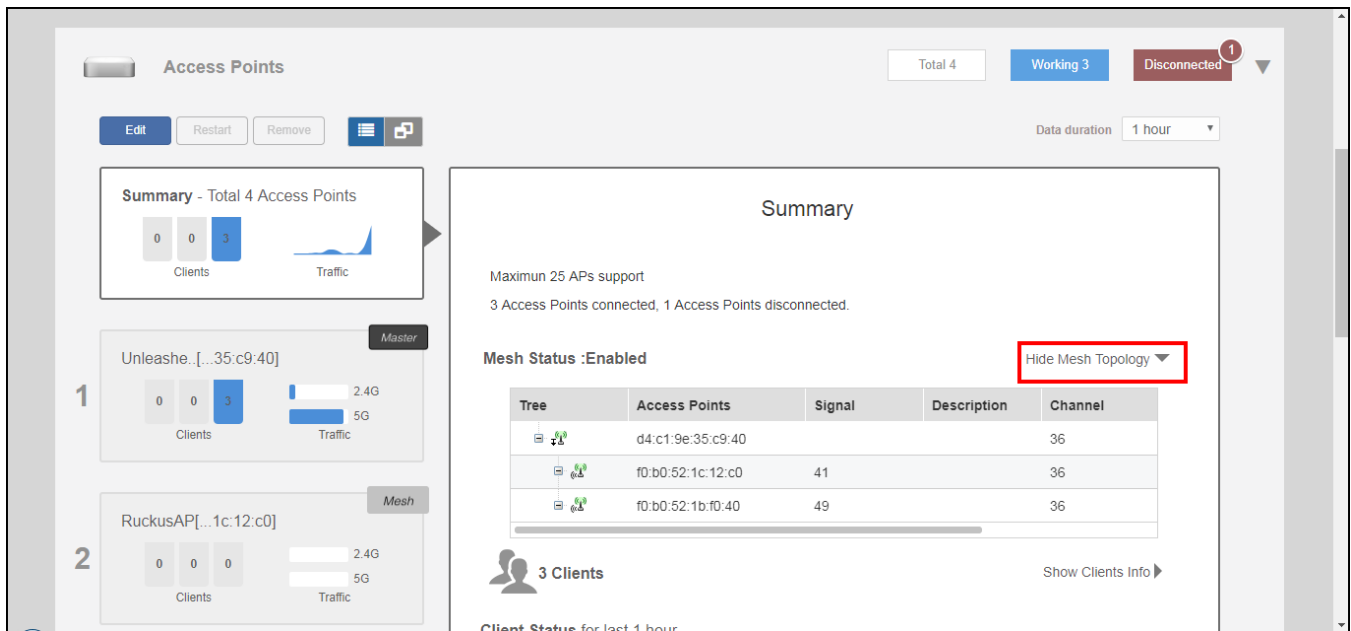


Parent topic: [Access Point Configuration](#)

Show Client Info

Click this link to display the currently connected clients list.

Figure 1. Client Info summary

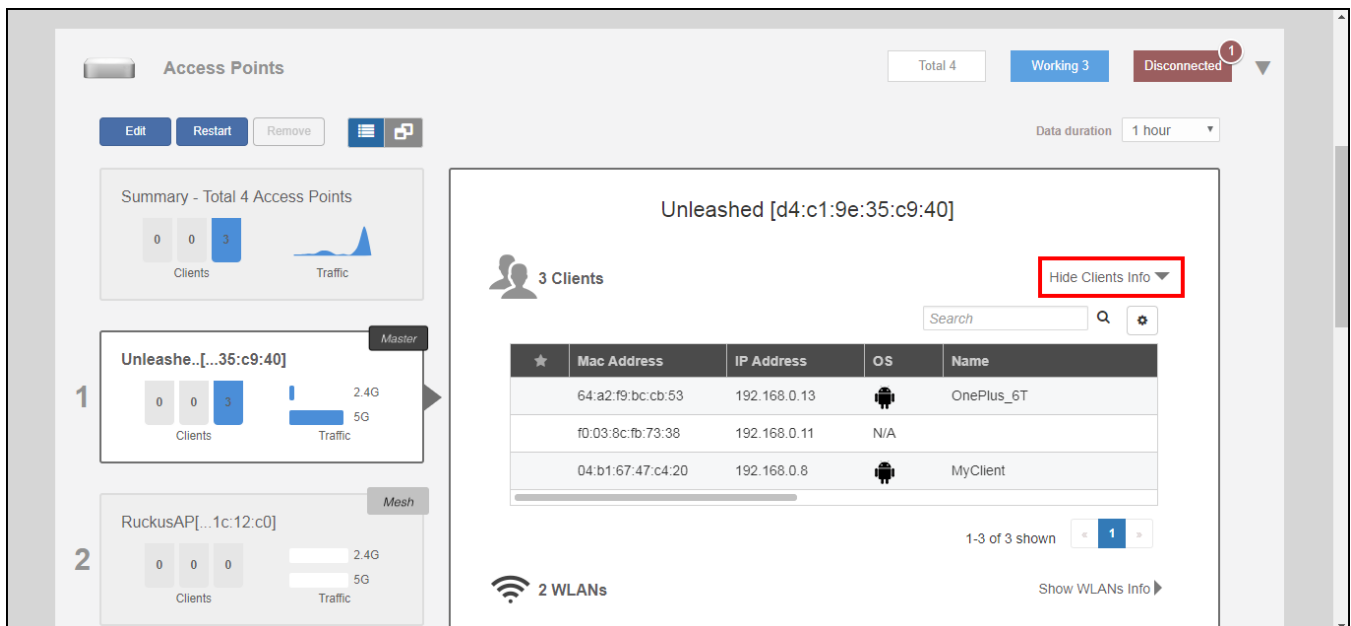


Parent topic: [Access Point Configuration](#)

Show Events and Alarms

Click this link to display a list of events and alarms for all APs or for the selected AP.

Figure 1. Show/hide Events & Alarms

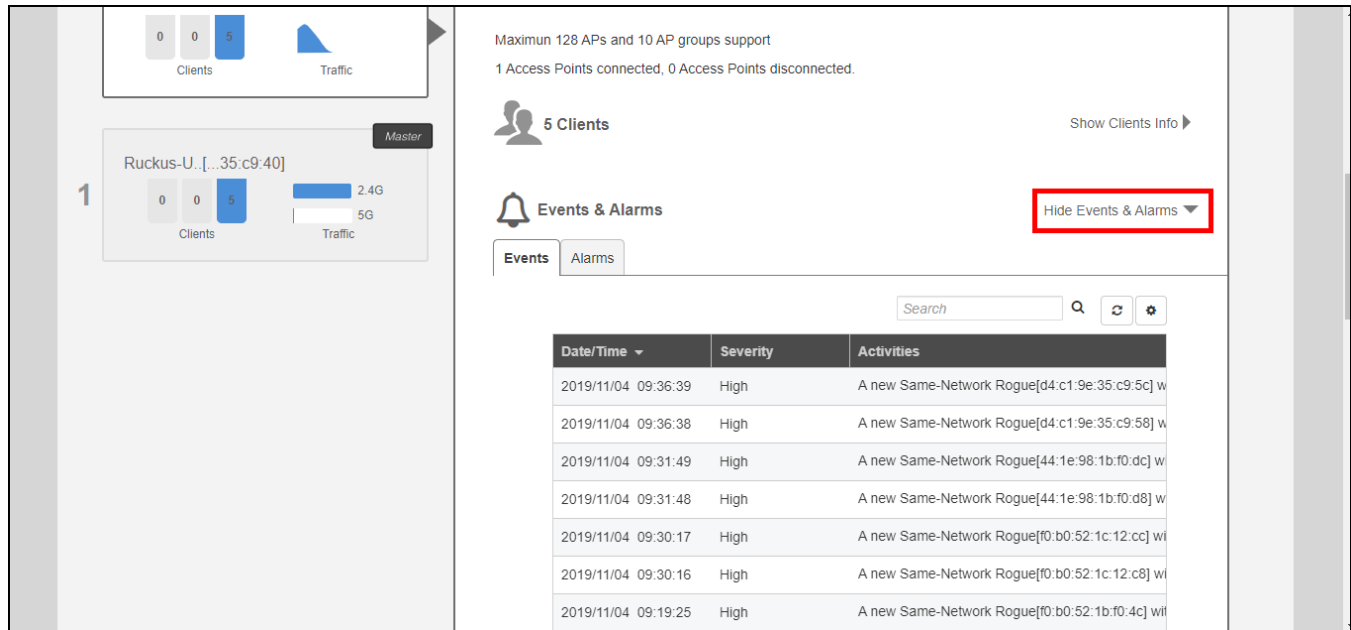

Parent topic: [Access Point Configuration](#)


Configuring Global AP Settings

Global AP settings are applied to all members of the RUCKUS Unleashed network, unless overridden by AP group or individual AP settings.

Complete the following steps to configure settings for all APs connected to the RUCKUS Unleashed network in the "System Default" AP group.

1. From the dashboard, select **Access Points**.
2. Select the **Summary** AP box and click the **Edit** button in the **Access Points** component.

Figure 1. Configuring Global AP Settings

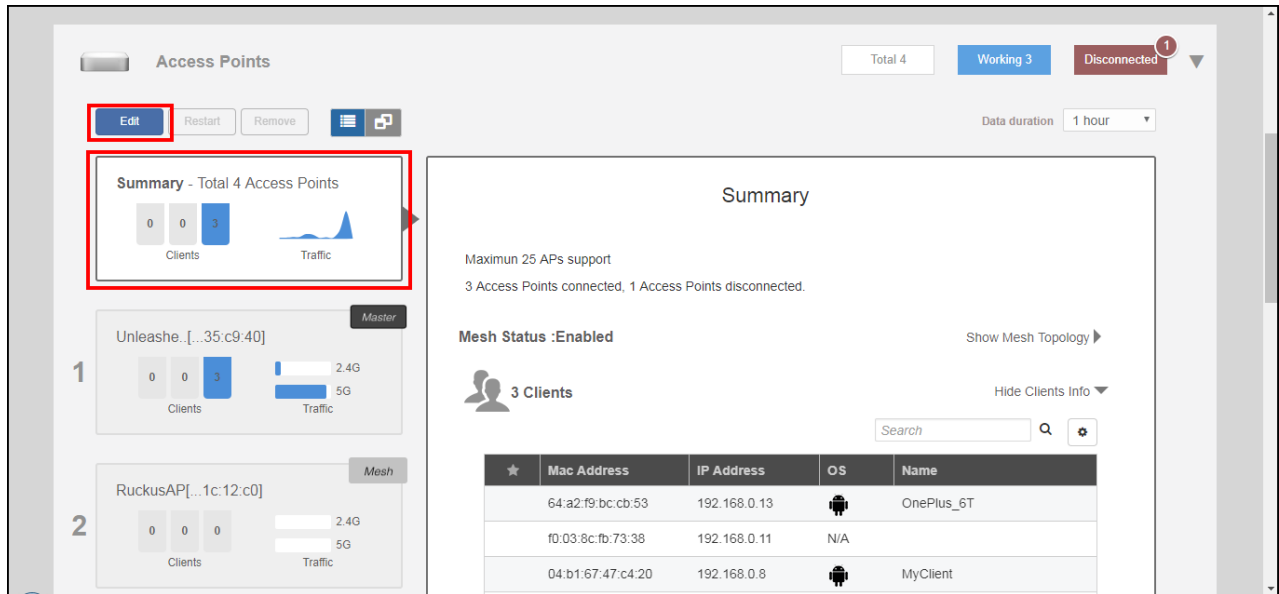

3. In the **Edit AP Group** dialog box, select **System Default** from the **AP Group** list and click **OK**.
4. Configure the global AP settings from the following tabs:
 - **WLAN Assign**: Assign WLANs to or from the System Default AP group using the left and right arrows.
 - **Radio (2.4G)**: Configure options for the 2.4 GHz radio on all APs.
 - **Radio (5G)**: Configure options for the 5 GHz radio on all APs.
 - **Radio (6G)**: Configure options for the 6 GHz radio on all APs.
 - **Other**: Configure model-specific controls, including the maximum number of clients by AP model and whether to disable status LEDs.
5. Click **OK** to save your changes.

Parent topic: [Access Point Configuration](#)

Radio (2.4G)

You can select or clear channels from which to choose during the automatic channel selection process or select a specific channel on which to operate, or enable **Call Admission Control** or **Spectralink Compatibility** for this radio.

Additionally, you can disable WLAN service for this radio entirely.

Figure 1. System Default AP Group: 2.4 GHz Radio Configuration

Edit AP(4c:b1:cd:18:e9:d0)

General **Radio 2.4 GHz** Radio 5.0 GHz Network Other

Radio 2.4 GHz ☐ Override Group Config ☒ 1 ☒ 2 ☒ 3 ☒ 4 ☒ 5 ☒ 6 ☒ 7 ☒ 8 ☒ 9 ☒ 10 ☒ 11

Channelization ☐ Override Group Config Auto

Channel ☐ Override Group Config Auto

TX Power ☐ Override Group Config Auto

Call Admission Control ☐ Override Group Config Off

WLAN Service ☒ Override Group Config Disable

Protection Mode ☐ Override Group Config RTS/CTS

OK Cancel

Parent topic: [Configuring Global AP Settings](#)

Radio (5G)

You can select or clear channels from which to choose during the automatic channel selection process or select a specific channel on which to operate, or enable **Call Admission Control** or **Spectralink Compatibility** for this radio.

Additionally, you can disable WLAN service for this radio entirely by selecting **Enable 5 GHz band** check box and enabling the **Override Group Config** toggle switch to **ON**.

Figure 1. System Default AP Group: 5 GHz Radio Configuration

Edit AP(c8:a6:08:16:26:a0)

Device Name dhcp-10-223-28-55

General Radio 2.4 GHz **Radio 5.0 GHz** Radio 6 GHz Network Other

Enable 5 GHz band ☐ Override Group Config ☒

Radio 5.0 GHz ☐ Override Group Config Lower 5G Upper 5G
36 40 44 48 149 153 157 161

Channelization ☐ Override Group Config Auto

Channel ☐ Override Group Config Auto

TX Power ☐ Override Group Config Auto

Call Admission Control ☐ Override Group Config Off

OK Cancel

If you select the **Enable 5 GHz band** check box, the 5 GHz radio is disabled.

Parent topic: [Configuring Global AP Settings](#)

Radio (6G)

Navigating to the **Radio (6G)** tab for the System Default AP Group allows you to view and manage the following information:

Enable 6 GHz band	Allows you to enable or disable 6 GHz radio settings on the third radio in these APs (default is Enabled).
Channelization	Allows selection of channel width for the 6 GHz radios (Auto, 20, 40, 80, 160, or 320 MHz). Default setting is Auto (which is 160 MHz).
Radio 6 GHz	Allows selection of the spectrum-specific channels from which to choose during the automatic channel selection process.
Channel	Allows you to select a specific channel on which to operate. (Auto allows the system to choose the best available channel).
TX Power	Allows you to manually set the transmit power on all 6 GHz radios. • Auto: Default setting that dynamically adjusts the transmit power of an AP based on real-time conditions • Full: Maximum allowable transmit power according to country regulations • Min: Minimum allowable transmit power according to country regulations
Call Admission Control	Allows you to enable or disable Wi-Fi Multimedia Admission Control (WMM-AC) to support Polycom/Spectralink Voice Interoperability for Enterprise Wireless (VIEW) certification (disabled by default).

Figure 1. System Default AP Group: 6 GHz Radio Configuration

Edit AP Group

Name: System Default

WLAN Assign Radio (2.4G) Radio (5G) **Radio (6G)** Other

Enable 6 GHz band ☒

Channelization: Auto

Radio 6 GHz: 1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24
125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000

Channel: Auto

TX Power: Auto

Call Admission Control: Off

OK Cancel

Parent topic: [Configuring Global AP Settings](#)

Configuring the 6 GHz Radio

You can configure the 6 GHz radio setting on an AP or AP Group from the **Radio 6 GHz** tab or **Radio (6G)** tab, respectively. You can configure settings for all APs connected to the RUCKUS Unleashed network in the "System Default" AP group, unless overridden by settings for another AP group or individual AP settings.

You can select or clear channels from which to choose during the automatic channel selection process, or select a specific channel on which to operate, or enable **Call Admission Control** for this radio.

You can disable the WLAN service for this radio entirely by selecting the **Override Group Config** checkbox in the **Enable 6 GHz** band field, and toggling the switch OFF.

Complete the following steps to configure a 6 GHz radio setting on an AP or AP Group.

1. From the dashboard, select **Access Points**.
The **Access Points** page is displayed.
2. Depending on your requirements, configure the 6 GHz radio at the AP level or at the AP Group level.
 - To configure a 6 GHz radio on an AP, click the AP you want to configure, then click **Edit**.
 - To configure a 6 GHz radio on an AP Group, select the **Access Point Groups** view, select the **System Default** access point group, then click the **Edit** button.
3. In the **Edit AP** page, select the **Radio 6 GHz** tab; in the **Edit AP Group** page, select the **Radio (6G)** tab.
4. The **Enable 6 GHz band** toggle switch is set by default to **ON**. Click the toggle switch to disable, or subsequently re-enable, the 6 GHz band.

5. For **Channelization**, choose the desired channel bandwidth from the drop-down list. If you are editing at the AP level, then also select the **Override Group Config** checkbox.

These options represent the range of channel bandwidths that each radio frequency can support.

- 2.4 GHz radio: Auto, 20, or 40 MHz.
- 5 GHz radio: Auto, 20, 40, 80, or 160 MHz.
- 6 GHz radio: Auto, 20, 40, 80, 160, or 320 MHz.

If **320** channelization is selected, then the 320 MHz-1 and 320 MHz-2 radio channels are displayed in the **Radio 6 GHz** field, and the **Channel** field will display options for **320 MHz-1** and **320 MHz-2** if an applicable channel is selected. With Auto selection, the **320 MHz-1** and **320 MHz-2** options are not displayed. For more information, refer to [Support for 320 MHz channelization](#).

6. For **Radio 6 GHz**, select or deselect the center frequencies on which the radio will broadcast. If you are editing at the AP level, then also select the **Override Group Config** checkbox.
7. For **Channel**, select **Auto** or a channel number from the list.
 - Select 1 through 233 for **20** MHz channel.
 - Select 1 through 229 for **40** MHz channel.
 - Select 1 through 221 for **80**, **160**, or **320** MHz channels. For the **320** MHz channel, select 33 through 189 to choose between **320 MHz-1** and **320 MHz-2** channel options. If you select from 1 through 29, or from 193 through 221, the **320 MHz-1** and **320 MHz-2** options are automatically selected and locked, respectively. Select the radio channels by clicking on them. The 320 MHz channels consist of any two adjacent 160 MHz channels.
8. For **TX Power**, choose the desired transmit power from the list (default is **Auto**). If you are editing at the AP level, then also select the **Override Group Config** checkbox.
9. For **Call Admission Control**, enable Wi-Fi Multimedia Admission Control (WMM-AC) to support Polycom/ Spectralink Voice Interoperability for Enterprise Wireless (VIEW) certification (default is **Off**). If you are editing at the AP level, then also select the **Override Group Config** checkbox.

 **Note:** Call Admission Control is effective only when both the AP and the client support WMM-AC.

10. Click **OK**.

Parent topic: [Radio \(6G\)](#)

Support for 6 GHz Radio

The 6G networks enable high-speed, high bandwidth with low latency network communication at a faster rate than a 5G network.

Feature Overview

The 6 GHz frequency band operates at higher frequencies, enabling faster data transfer and seamless connectivity. The 6G networks enhances machine-to-machine communication in the Internet-of-Things (IoT) era. The technology opens up possibilities for new applications, including networked vehicles, smart factories, and collaborative virtual reality. It also promises improvements in public safety, health monitoring systems, and facial recognition technology. Lastly, 6G aims to provide faster, lower-cost, and more energy-efficient connectivity.

The 6 GHz radio is supported on the tri-band APs. Following are the 6 GHz radio features supported in Unleashed:

- 6G auto channel selection
- 6G RF scan and report
- Load balance and band balance
- Mesh support
- Statistic (per AP, VAP, and Station)
- Packet capture

Requirements

RUCKUS Unleashed 200.16 introduces 6 GHz radio support for RUCKUS Wi-Fi 7 tri-band APs.

Considerations

- Country code must support 6 GHz radio.
- Encryption methods other than WPA3 and OWE are not supported on the 6 GHz radio. Only WPA3 is used with WPA2/WPA3-Mixed mode.
- If you turn off **WiFi 6/7** mode, the 6 GHz radio will stop working.

Best Practices

This feature has no special recommendations for feature enablement or usage.

Prerequisites

To manage and utilize the 6 GHz radio, an AP in the RUCKUS Unleashed network must upgrade to version 200.16 or a later version.

Parent topic: [Configuring the 6 GHz Radio](#)

Support for 320 MHz channelization

Support for 320 MHz channelization is a feature of Wi-Fi 7 that provides ultra-wide bandwidth for increased throughput and transmission rates.

Feature Overview

The 320 MHz channelization is supported on the 6 GHz radio in RUCKUS tri-band APs that support Wi-Fi 7 standards (IEEE 802.11be). The 320 MHz channels operate on the less-congested 6 GHz band. IEEE standard 802.11be defines the 320 MHz channelization methodology as six channels, spaced 160 MHz apart, and grouped as follows:

- 320 MHz-1: Channels with center frequencies numbered 31, 95, and 159.
- 320 MHz-2: Channels with center frequencies numbered 63, 127, and 191.

Following are the benefits:

- Increased throughput, transmission rates, and data transfer: The ultra-wide 320 MHz bandwidth can quadruple the data transfer rate compared to 80 MHz and double it compared to 160 MHz, significantly enhancing the transmission capacity of Wi-Fi 7.
- Minimized latency: The expanded bandwidth reduces transmission delays, potentially reaching a maximum theoretical rate of 46 Gbps.
- Reduced signal disruption: The 320 MHz channels operate on the less-crowded 6 GHz band, which avoids common wireless transmission protocol bands, leading to less signal interference.

Requirements

The 320 MHz channelization option is supported only on the RUCKUS tri-band APs supporting Wi-Fi 7 (IEEE standard 802.11be).

Considerations

- Country code must support 6 GHz radio.
- You can configure 320 MHz channelization for the 6 GHz radio globally for all APs in an AP group and also for individual APs.

Best Practices

This feature has no special recommendations for feature enablement or usage.

Prerequisites

To use the 320 MHz channelization, an AP in the RUCKUS Unleashed network must upgrade to version 200.16 or a later version.

Parent topic: [Configuring the 6 GHz Radio](#)

Other

The **Access Points > Summary > Edit > Other** page provides the following options:

- **Preferred Master:** Select a specific AP to be the Master AP and, if the preferred Master AP reboots, it will resume the role of Master AP again once it rejoins the Unleashed network. By default, there is no preference as to which AP should become the Master AP; the first AP that is deployed automatically becomes the Master AP. Using the Preferred Master setting, users can configure one AP to have priority. Any (non-mesh) AP can become the Master if the preferred Master is offline, but when the Preferred Master comes back online, it will assume the Master role again.
- **Model Specific Control:** Select which AP model to configure from the drop-down list. The options below can be configured independently for each Unleashed AP model. See [Modifying Model-Specific Controls](#).

Figure 1. Configuring other AP settings

The screenshot shows the 'Edit AP Group' configuration page. At the top, there is a 'Name' field with the value 'System Default'. Below this, there are three tabs: 'Radio B/G/N(2.4G)', 'Radio A/N/AC(5G)', and 'Other'. The 'Other' tab is selected. Under the 'Other' tab, there is a 'Model Specific Control' section with a dropdown menu set to 'C110'. Below this, there are two settings: 'Max Clients' with a value of '100' and 'Status LEDs' with a checkbox labeled 'Disable Status LEDs'.

Parent topic: [Configuring Global AP Settings](#)

Modifying Model-Specific Controls

The following settings can be applied to all APs of a particular model that are members of the AP group.

Some options are available for specific AP models only.

To configure model-specific settings for the AP group, select the AP model from the **Model Specific Control** list.

Figure 1. Model-Specific Controls

The screenshot shows the 'Edit AP Group' configuration window. At the top, there is a 'Name' field set to 'System Default'. Below this are tabs for 'WLAN Assign', 'Radio (2.4G)', 'Radio (5G)', 'Radio (6G)', and 'Other'. The 'Radio (6G)' tab is selected. Inside this tab, the 'Model Specific Control' dropdown is set to 'R670'. Below this, there are four settings: 'Max Clients' (Allow Max: 100), 'Status LEDs' (Disable Status LEDs checkbox), 'PoE Operating Mode' (Auto dropdown), and 'Band Operation Mode' (Tri-band dropdown). A note below the Band Operation Mode states: 'Modifying the Dual/Tri Band Mode will reboot the AP, the mesh connection will also be disconnected when rebooting.' At the bottom right, there are 'OK' and 'Cancel' buttons.

Configure any of the following settings for each model independently, and click **OK** to save your changes:

- **Max Clients:** Set the maximum number of clients that can associate per AP. Note that different AP models have different maximum client limitations.
- **PoE Out Ports:** (For specific AP models only.) Enable PoE out ports.
- **Status LEDs:** Disable the external LEDs on certain AP models. This option can be useful if your APs are installed in a public location and you do not want to draw attention to them.
- **External Antenna:** (For APs with external antennas only.) Enable the external antenna. When enabled, enter a gain value in the range from 0 through 90 dBi. The default value is 3 dBi.
- **Port Settings:** Refer to [Configuring AP Ethernet Ports](#) for more information on configuring AP-specific Ethernet port settings.
- **PoE Operating Mode:** Select the PoE operating mode, **Auto**, **802.3af PoE**, or **802.3at PoE** (specific AP models only). Default is **Auto**. If **802.3af PoE** is selected, the AP will operate in 802.3af mode (not 802.3at mode), and will consume less power than in 802.3at mode. However, when this option is selected, some AP features are disabled to reduce power consumption, such as the USB port and one of the Ethernet ports.

- **Note:** On some APs, an additional mode, **802.3at+ PoE**, is available. This mode enables all features on the AP but requires an Ethernet switch that supports the 802.3at+ standard due to the higher power draw from the port to which the AP is connected. For a list of PoE operating modes by AP model, refer to [Unleashed Access Point Power Supply Considerations](#).

- **Band Operation Mode:** The two supported modes are:

- **Dual-band:** Supports two radios: 2x2:2 in 2.4GHz and 4x4 in 5GHz
- **Tri-band:** Supports three radios: 2x2:2 in 2.4 GHz, 2x2:2 in 5GHz and 6GHz

- **Note:** The default setting is dependent on the country code associated with the AP; for example, an AP in a country that does not support 6GHz defaults to **Dual-band** mode.

- **Note:** Modifying the Band Operation Mode will cause the AP to reboot, which will also temporarily disconnect the Mesh connection.

- **Note:** Band Operation Mode is supported only on AP model R670.

Parent topic: [Other](#)

Parent topic: [Working with AP Groups](#)


Disabling Access Point LEDs

In some situations, customers may wish to disable the LED lights on the access points to avoid drawing attention to them, when installed in a public location, for example.

To disable status LEDs on all APs of a specific model:

1. Go to **Access Points > Summary > Edit > Other**.
2. Select the AP model from the list and enable the option **Disable Status LEDs**. The setting must be configured for each AP model individually.
3. Click **Finish** to save your changes.

Figure 1. Select model and enable the option "Disable Status LEDs"

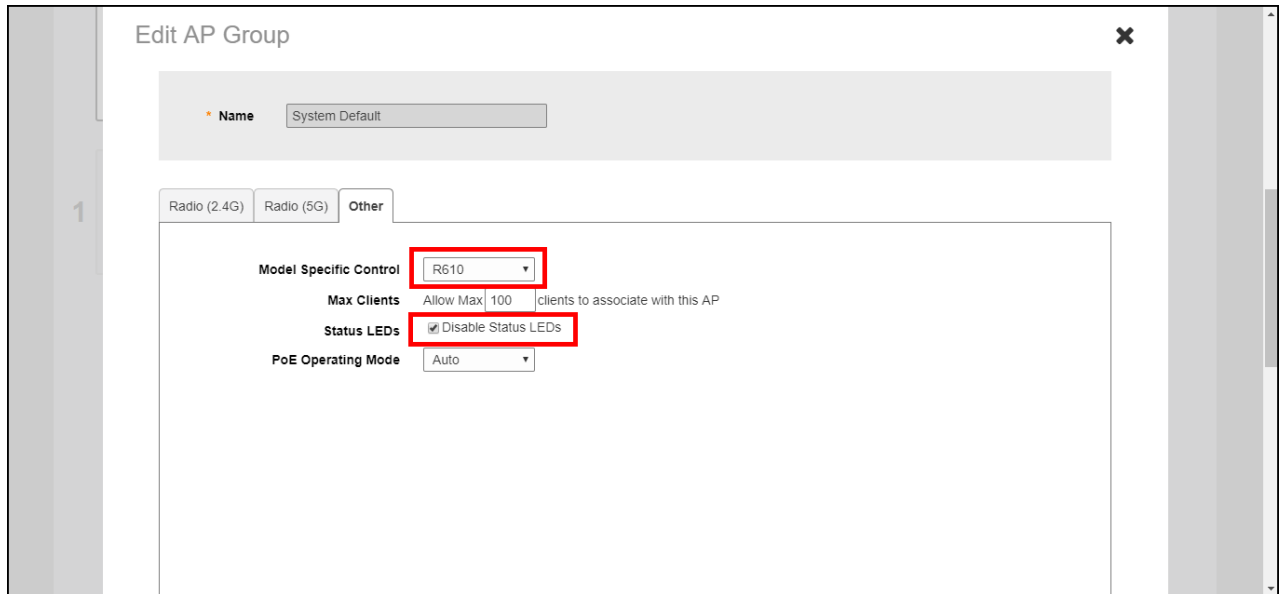


Parent topic: [Other](#)

Monitoring an Individual AP

Click one of the AP boxes in the Access Points component to monitor and configure that specific AP individually.

You can edit, restart, or remove an AP from the network from the individual AP monitoring page. The individual AP monitoring page also includes graphs displaying signal quality and traffic statistics, and links to more detailed information on the AP and its connected clients.

Figure 1. Viewing Individual APs

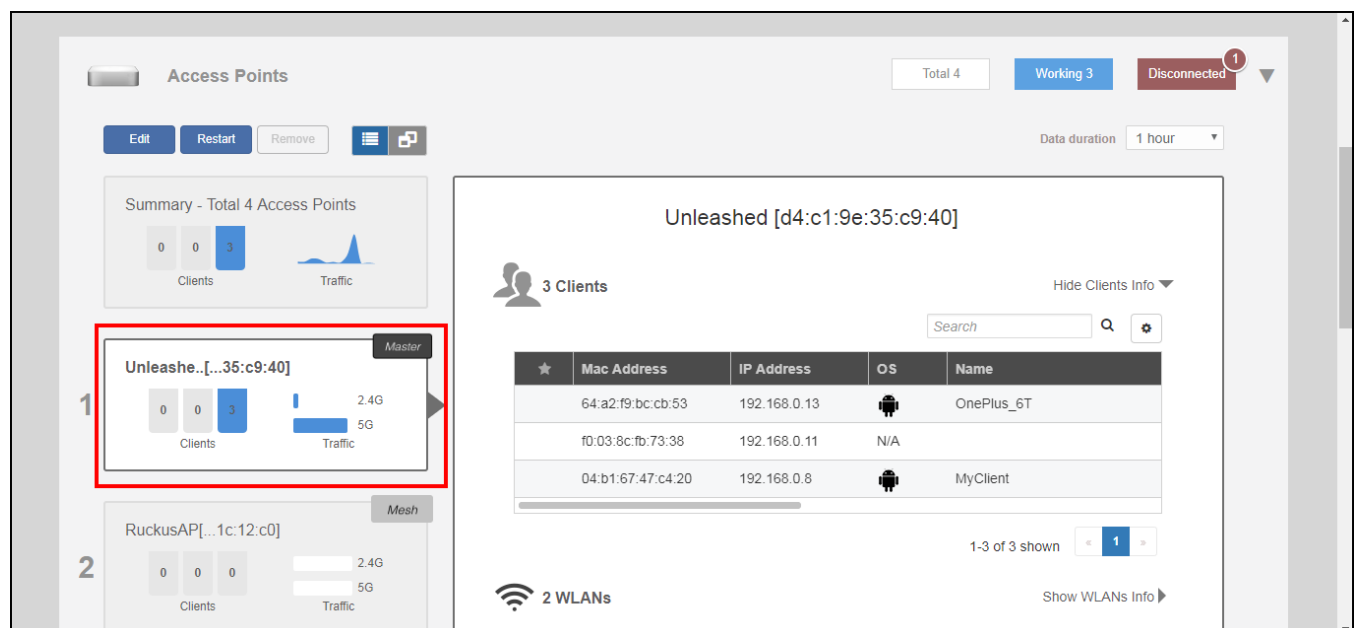

The individual AP monitoring screen contains the following elements:


- **Edit:** Click this button to configure an AP individually.
- **Restart:** Click this button to restart the AP.
- **Approve:** If auto-approval is disabled, click this button to approve the AP and allow it to join the network.
- **Remove:** Click this button to remove this AP from the network.
- **Show Clients Info:** Click this link to display a list of clients currently connected to the AP. Details for each client include MAC address, IP address, OS, Host Name, MAC address of the AP to which the client is currently connected, WLAN name, Signal Strength indicator, Auth status, and duration online.
- **Show AP Info:** Click this link to display AP-specific information including MAC address, IP address, external IP and port number, model name, serial number, and firmware version.
- **Client Status:** Displays a breakdown of client numbers by signal quality (Excellent, Moderate, or Poor) over time, in one-minute intervals.
- **Traffic:** Displays the total traffic (Tx + Rx) on the AP radio in one-minute intervals.

Parent topic: [Access Point Configuration](#)

Show Client Info

Click the **Show Client Info** link to display a list of clients connected to this AP.

Figure 1. Show Client Info from AP page

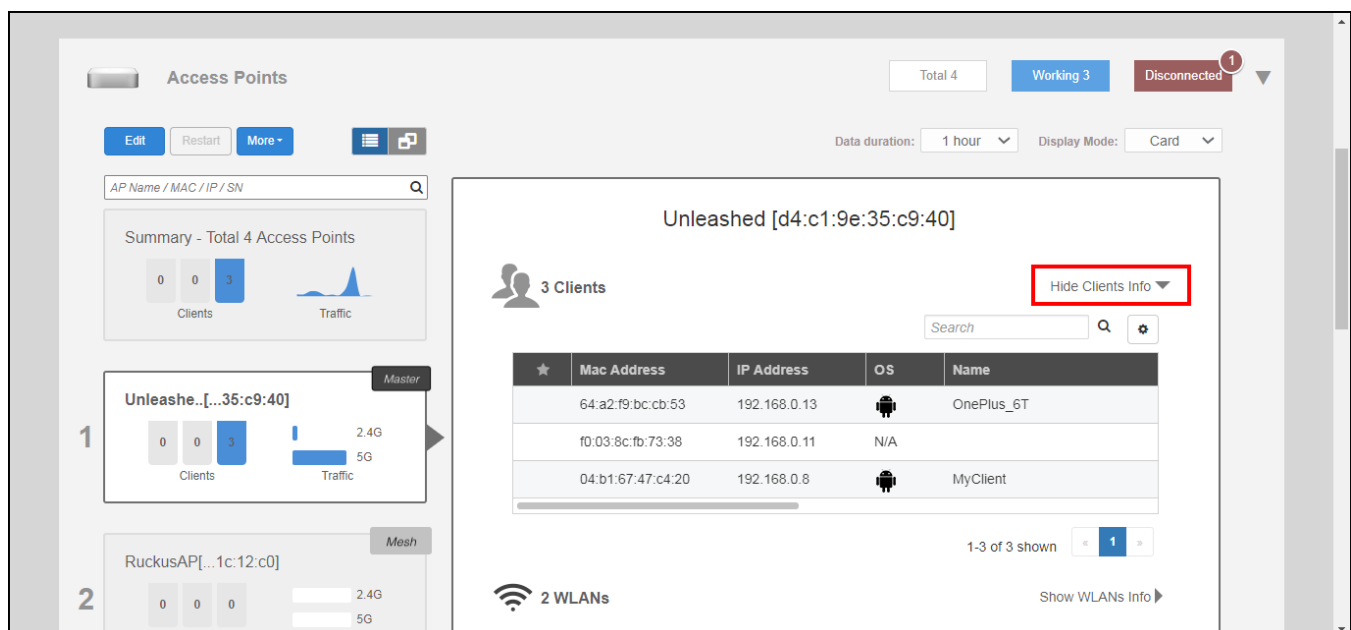


Parent topic: [Monitoring an Individual AP](#)

Show WLANs Info

Click **Show WLANs Info** to display the list of WLANs that are currently deployed on this AP. The list displays the WLAN name (ESSID), BSSID (MAC address), radio, and state (up or down).

Figure 1. Showing WLAN Information for an Individual AP

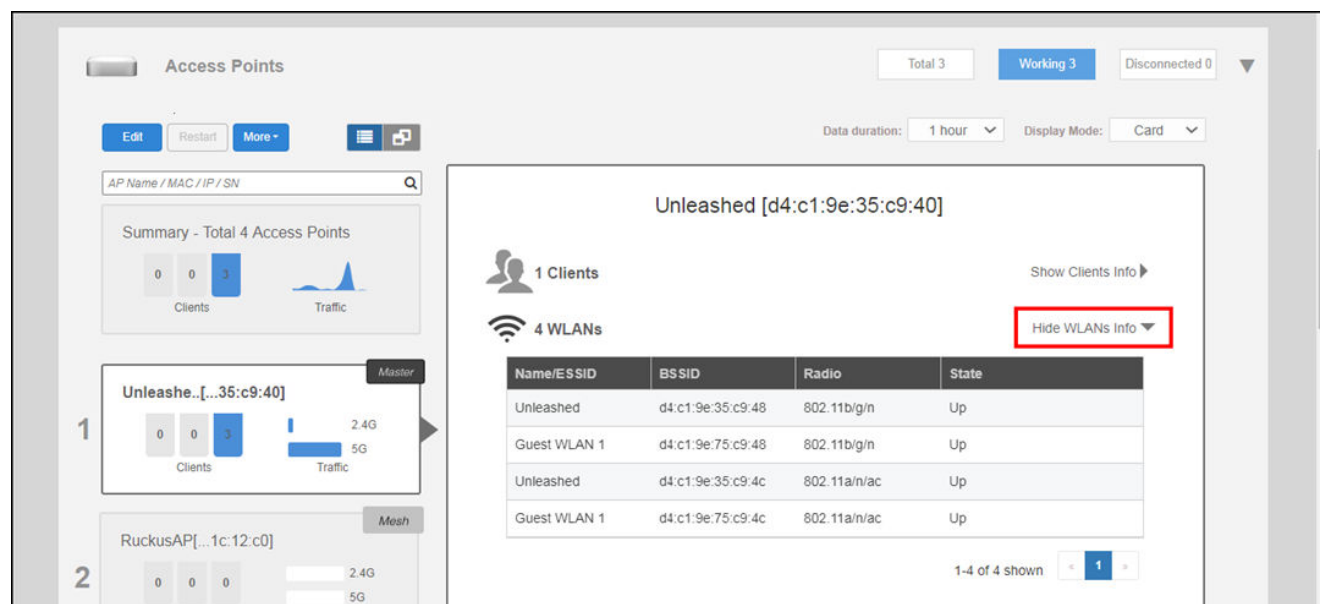

Parent topic: [Monitoring an Individual AP](#)

Show AP Info


Click **Show AP Info** to display detailed information on this AP. The AP info page displays general information about the AP, including the radio channels in use, Mesh type, maximum number of clients, and firmware version. The **Save Logs** and **Speed Test** buttons are also available.

Click **Save Logs** to generate a log file (.txt) that can be useful for troubleshooting. Click **Speed Test** to measure the connection performance of the AP.

Note: Speed Test option is displayed for member APs only.

Note: The maximum number of clients (**Max Clients**) displayed for the Master AP may be lower than the configured maximum because the Master must perform additional tasks other than serving clients. The Master AP maximum client load varies by AP model. These limits apply only to the current Master AP. All other member APs honor the maximum number of clients set from the global AP model-specific controls page (**Access Points > Summary > Edit > Others > Max Clients**).

Figure 1. Showing AP Information for an Individual AP

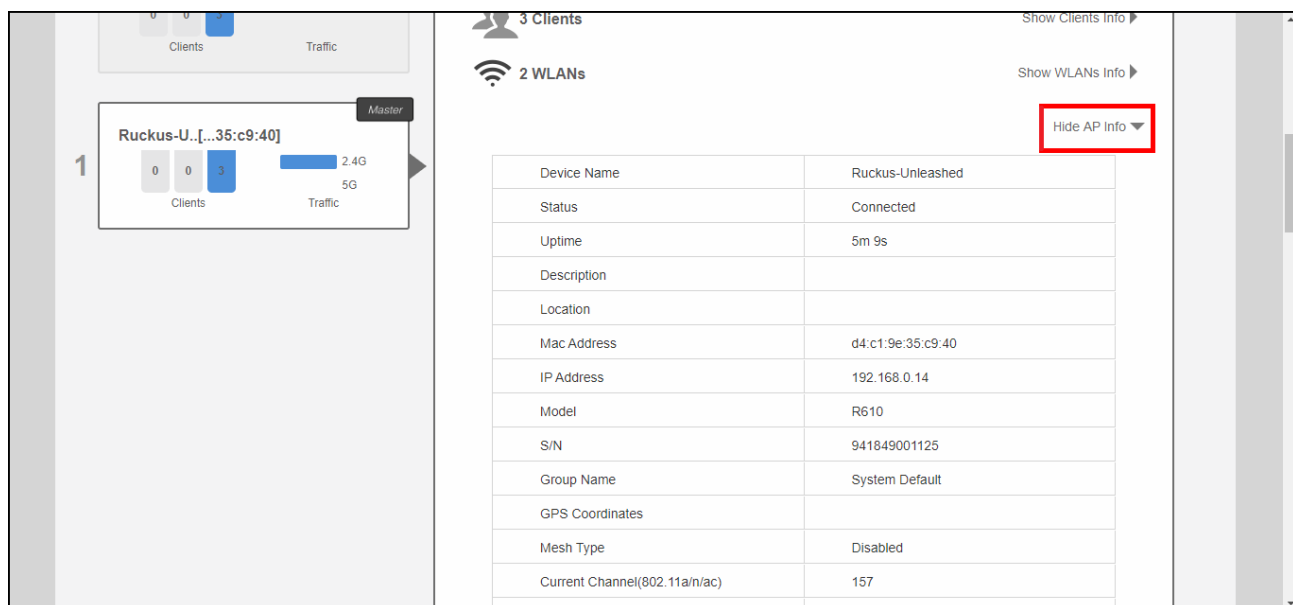

For **Download Logs**, you can click **Support Logs** to save AP support log as a .txt file, and click **AP Dump Logs** to save the AP dump log as a .tar file on your computer.

Note: AP Dump Logs and Download buttons are displayed only when an AP reboots unexpectedly.

Figure 2. Download Logs

GPS Coordinates	
Mesh Type	Disabled
Current Channel(802.11a/n/ac/ax)	161
Current Channel(802.11b/g/n/ax)	11
LACP/LAG	Disabled
Power Consumption Mode	802.3af Switch/Injector
Max Clients	100
Version	200.10.10.5.88
Fixed Member Role	no
Download Logs	Support Logs AP dump Logs

Ethernet Port Status ⓘ				
Port	Interface	Logic Link	Physical Link	Label
Port1	eth0	Down	Down	10/100/1000 Port1
Port2	eth1	Up	Up 1000Mbps full	100/1000/2500 PoE Port2

The table under **Ethernet Port Status** displays the current link status of the Ethernet ports on the AP. Hover over the "i" icon to display an illustration of the physical port locations on the AP.

Figure 3. Ethernet Port Status

Ethernet Port Status ⓘ

Port	Interface	Logic Link	Physical Link	Label
Port1	eth0	Down	Down	10/100/1000 Port1
Port2	eth1	Up	Up 1000Mbps full	100/1000/2500 PoE Port2

Packet Capture

Use this feature to capture wireless packets during normal operation and save them in local files or stream them to Wireshark.

Radio ☐ 2.4GHz ☒ 5GHz

☒ Local Mode (Capture a limited snapshot on each AP, then Stop and Save to file)

Filter (Packets to/from one IP or MAC address)

☐ Streaming Mode (Use Wireshark's Remote Capture Option to connect to wifi0 or wifi1)

Neighbor APs

Access Point	Channel	SNR
No data available.		

The Packet Capture section displays radio channels and capture modes. For more information, refer to [Capturing Remote Packets](#).

Figure 4. Packet Capture

Ethernet Port Status ⓘ

Port	Interface	Logic Link	Physical Link	Label
Port1	eth0	Down	Down	10/100/1000 Port1
Port2	eth1	Up	Up 1000Mbps full	100/1000/2500 PoE Port2

Packet Capture

Use this feature to capture wireless packets during normal operation and save them in local files or stream them to Wireshark.

Radio ☐ 2.4GHz ☒ 5GHz

☒ Local Mode (Capture a limited snapshot on each AP, then Stop and Save to file)

Filter (Packets to/from one IP or MAC address)

☐ Streaming Mode (Use Wireshark's Remote Capture Option to connect to wifi0 or wifi1)

Neighbor APs

Access Point	Channel	SNR
No data available.		

The Neighbor APs section displays channel, path score, and SNR of nearby APs.

Figure 5. Neighbor APs

Neighbor APs			
Access Point	Channel	SNR	Path Score (status)
4c:b1:cd:18:e8:60	149	51 dB	666
d8:38:fc:33:ae:f0	44	65 dB	669

The Radio information section provides channel and transmission details on the AP's 2.4 GHz and 5 GHz radios.

Figure 6. Radio information

Radio	802.11b/g/n	802.11a/n/ac
Current Channel	6	157
Config Channel	Auto	Auto
Channelization	20	80
WLAN Service	Enabled	Enabled
Background Scanning	Enabled	Enabled
TX Power	Full	Full
# of Authorized Client Devices	3	0
% Retries/% Drops	0.0140/0.00	0.00/0.00
% Non-unicast	0.383	0.00
Packets/Bytes RX	5.9K/491K	0/0
Packets/Bytes TX	14K/17M	1.4K/323K
Wlans Data Packets/Bytes RX	1.7K/351K	0/0
Wlans Data Packets/Bytes TX	2.7K/2.5M	0/0
Noise Floor	-97	-104
PHY Errors	2	0
% AirTime (total/busy/RX/TX)	5.0/0.0/4.5/0.5	4.0/0.5/3.5/0.0
Available Channel	1,2,3,4,5,6,7,8,9,10,11	36,40,44,48,149,153,157,161
Block Channel		165

Parent topic: [Monitoring an Individual AP](#)

Show Events and Alarms

Click **Show Events and Alarms** to view lists of event and alarm messages for this AP.

Figure 1. Show AP-specific Events & Alarms

5G

Clients

Traffic

Events & Alarms

Hide Events & Alarms

Events

Alarms

Search

Q

↺

⚙

Date/Time	Severity	Activities
2020/03/17 10:56:05	High	A new Same-Network Rogue[f0:b0:52:1b:f0:48] wi
2020/03/17 10:56:04	High	A new Same-Network Rogue[f0:b0:52:1b:f0:4c] wi
2020/03/17 10:50:37	High	A new Same-Network Rogue[44:1e:98:1b:f0:dc] w
2020/03/17 10:50:36	High	A new Same-Network Rogue[44:1e:98:1b:f0:d8] w
2020/03/17 10:49:34	High	A new Same-Network Rogue[f0:b0:52:1c:12:c8] wi
2020/03/17 10:49:33	High	A new Same-Network Rogue[f0:b0:52:1c:12:cc] wi
2020/03/17 10:38:49	High	A new Same-Network Rogue[b4:79:c8:14:26:48] w
2020/03/17 10:38:48	High	A new Same-Network Rogue[b4:79:c8:14:26:4c] w
2020/03/17 10:35:48	High	A new Same-Network Rogue[d4:c1:9e:35:c9:58] w
2020/03/17 10:35:47	High	A new Same-Network Rogue[d4:c1:9e:35:c9:5c] w

1-10 of 14 shown

1

2


»

Parent topic: [Monitoring an Individual AP](#)

Client Status and Traffic Graphs

The Client Status and Traffic graphs provide a graphical display of the number and signal quality of connected clients and transmit/receive traffic over the last hour.

Figure 1. Client status and traffic graphs

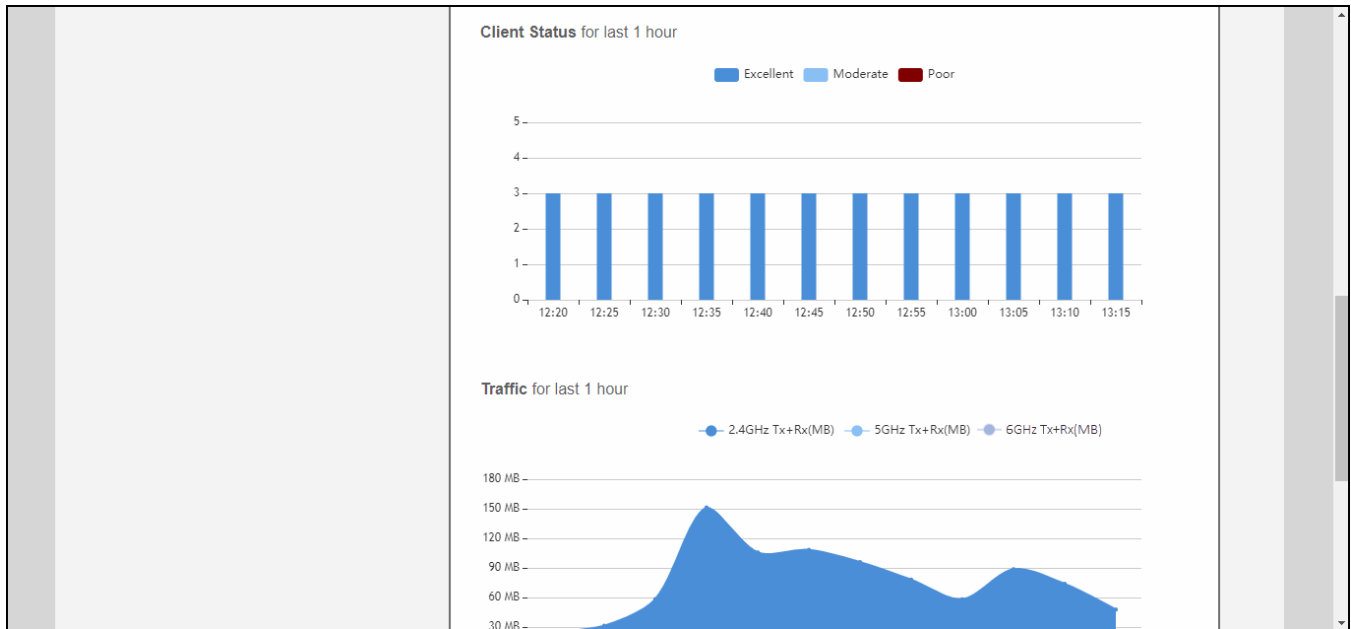

Parent topic: [Monitoring an Individual AP](#)

Configuring an Individual AP

To configure a specific AP, from the dashboard, click **Access Points**. Select the AP you want to configure and click **Edit**.

Figure 1. Configuring an AP

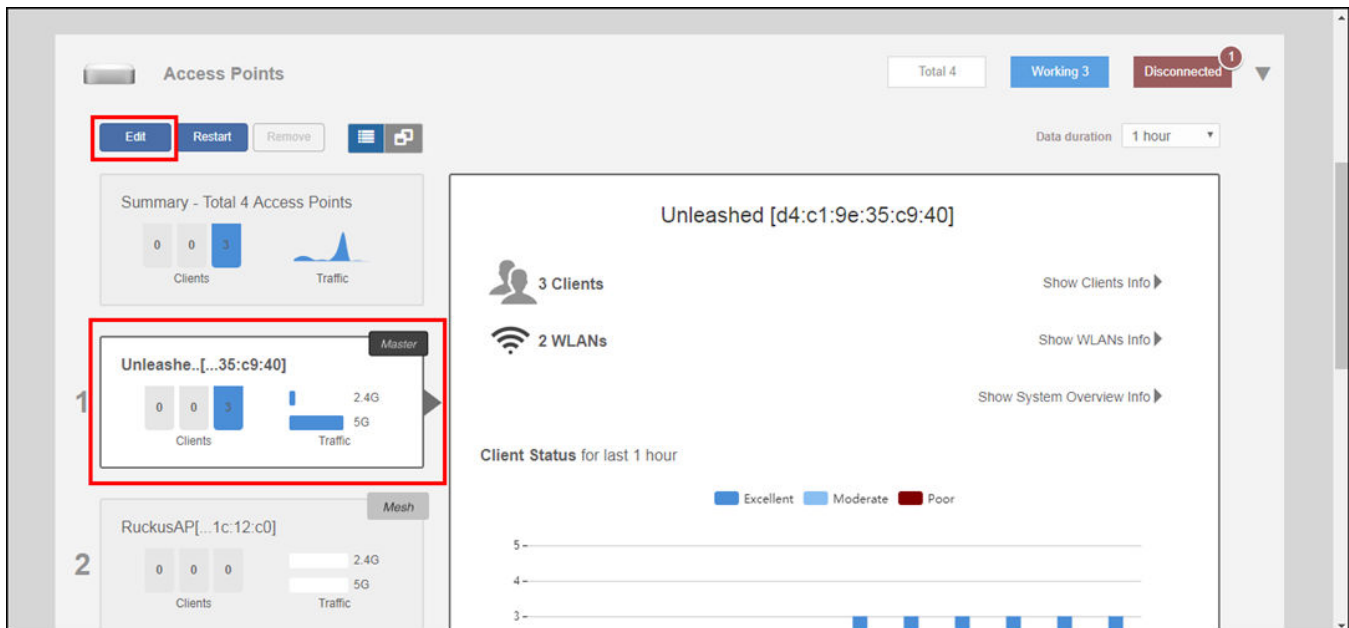


Figure 2. Editing Configuration Settings of an AP

The screenshot shows the 'Edit AP(34:20:e3:19:06:40)' configuration page. The 'General' tab is selected, showing fields for 'MAC Address' (34:20:e3:19:06:40), 'Device Name' (R550), 'Description', 'Location', and 'GPS Coordinates' (Latitude and Longitude). The 'Radio 2.4 GHz' and 'Radio 5.0 GHz' tabs are also visible. The 'OK' and 'Cancel' buttons are at the bottom right.

In general, the settings available on the **Edit AP** page for an individual AP are the same as those for global AP settings (refer to [Configuring Global AP Settings](#)). Configuring these settings for an individual AP overrides the global AP settings.

However, some settings are only configurable on a per-AP basis, as follows:

- **General:** Configure the device name of the AP, the description, location, and GPS coordinates.
- **Radio 2.4 GHz:** Enable or disable WLAN service for this radio.
- **Radio 5 GHz:** Enable or disable WLAN service for this radio.

- **Note:** For the country code "US", 11ax and 11ac APs support channel 144. For the country codes "UK" and "JP", only 11ax APs support channel 144.

- **Radio 6 GHz:** Enable or disable WLAN service for this radio.
- **Network:** Configure a manual (static) IP address, or allow the AP to obtain an IP address using DHCP.

Figure 3. Configuring an AP with a Static IP Address

The screenshot shows the 'Edit AP(38:ff:36:35:2f:f0)' configuration window with the 'Network' tab selected. Under 'Device IP Settings', the 'IPv4' section has the 'Manual' radio button selected. The configuration fields are as follows:


Field	Value
IP Address	192.168.10.136
Netmask	255.255.255.0
Gateway	192.168.10.1
Primary DNS Server	137.117.0.1
Secondary DNS Server	8.8.8.8

At the bottom right, there are 'OK' and 'Cancel' buttons.

- **Note:** You cannot configure the IP address settings for the current Master AP from the **Network** tab. You must go to the **Admin & Services > System > IP Settings** screen to change the IP settings of the Master AP.
- **Mesh:** Configure the following Mesh settings when the system Mesh is enabled.
 - Set the **Mesh Mode** of an AP to manually configure the AP's Mesh role in the Mesh network (**Auto** (default), **Root AP**, **Mesh AP**, or **Disable**). Refer to [Smart Mesh Networking Terms](#) for more information about AP Mesh roles. In most cases, RUCKUS recommends setting the Mesh mode to **Auto** to reduce the risk of isolating a Mesh AP. Select **Disable** if you do not want this AP to be part of your Mesh network.
 - **Note:** Beginning with Unleashed 200.15, when the system Mesh is enabled, you can configure the RUCKUS Unleashed Master AP's Mesh mode to **Auto** (default), **Root AP**, or **Disable**.
- For **Uplink Selection**, choose one of the following options:
 - **Note:** This option is available only when the **Mesh Mode** is set to **Auto** or **Mesh AP**.
 - **Smart (Mesh APs will automatically select the best uplink)** (default): Select this option so that the Mesh APs automatically connect to a Mesh node. Refer to [Overview of Smart Mesh Networking](#) for more information.

- **Manual (Only selected APs can be used for uplink):** Select this option to manually configure the uplink APs.
 - **Max Hops:** Select the maximum number of Mesh hops for the AP from the list (**1**, **2**, **3**, and **Unlimited** (default)). Mesh hops is the number of wireless Mesh links a data packet takes from one Mesh AP to the Root AP. **Max Hops** can be configured when the Mesh mode is set to **Auto** or **Mesh AP**, and the uplink selection is set to **Smart**.
- 🔧 **Note:** In a Mesh network, every hop reduces throughput by approximately 50%, affecting latency. When designing a Mesh network, RUCKUS recommends allowing no more than three hops to ensure good overall performance within the Mesh.

Figure 4. Configuring AP Mesh Settings

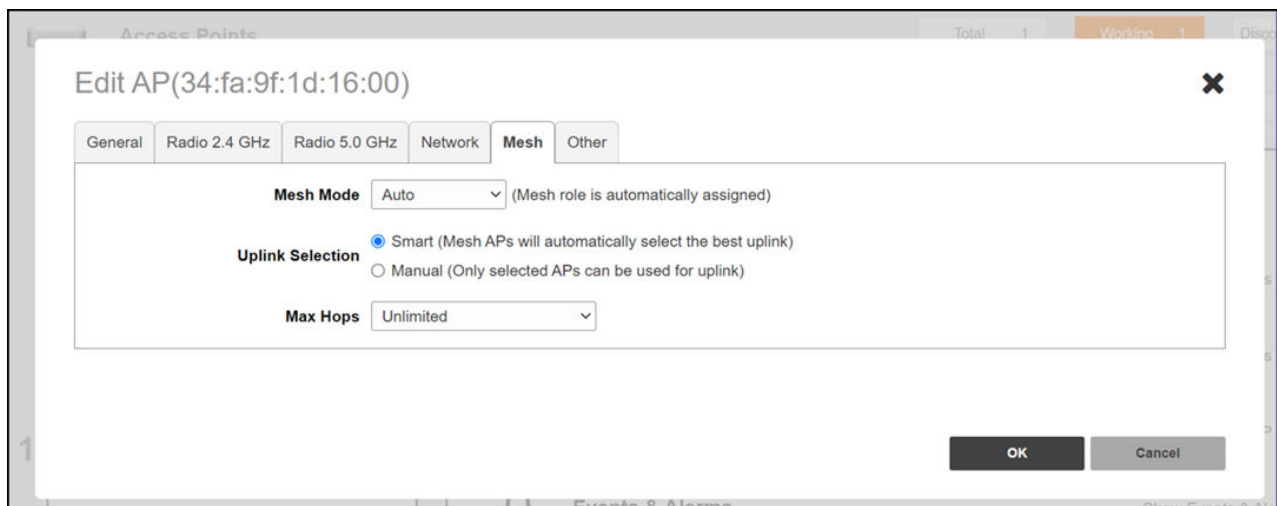

- **Other:** Configure the following settings.
 - **Bonjour Gateway:** Select the **Choose Bonjour Gateway** check box and designate this AP to serve as a Bonjour Gateway AP (refer to [Bonjour Gateway](#)).
 - **Status LEDs:** Select **Override Group Config** to disable the status LEDs of the AP.
 - **Port Setting:** Select **Override Group Config** to override the port settings of the AP group, and configure a specific port for this AP. When **Port Setting** is enabled, the administrator can configure the rate limiting value of an Ethernet port in uplink and downlink directions and control the bandwidth of an AP's Ethernet port (user port). The value of rate limiting ranges from 1 Mbps through 1000 Mbps (integer values), including **Disabled**. You can also configure the rate limiting values from the CLI interface (AP configuration mode).
- 🔧 **Note:** **Port Setting** is supported only on the H350 AP and H550 AP since they have multiple Ethernet ports.

🔧 **Note:** **Port Setting** is not supported in the Gateway mode.

🔧 **Note:** Rate limiting cannot be configured for the WAN port since it is not the user port. Hence, port 3 on the H350 AP and port 5 on the H550 AP cannot be configured.

From the AP groups settings, you can configure Ethernet ports on all the APs of a certain model. Refer to [Configuring AP Ethernet Ports](#) for more information.

- **Band Operation Mode:** The two supported modes are:

- **Dual-band:** Supports two radios: 2x2:2 in 2.4GHz and 4x4 in 5GHz

- **Tri-band:** Supports three radios: 2x2:2 in 2.4 GHz, 2x2:2 in 5GHz and 6GHz

🔧 **Note:** The default setting is dependent on the country code associated with the AP; for example, an AP in a country that does not support 6GHz defaults to **Dual-band** mode.

🔧 **Note:** Modifying the Band Operation Mode will cause the AP to reboot, which will also temporarily disconnect the Mesh connection.

🔧 **Note:** Band Operation Mode is supported only in R670 AP.

Figure 5. Configuring Other AP Settings

The screenshot shows the 'Edit AP (80:f0:cf:3e:b5:90)' configuration page. The 'Device Name' is 'R670'. The 'Other' tab is selected, showing the following settings:

- Bonjour Gateway:** ☐ Choose Bonjour Gateway (dropdown menu)
- Status LEDs:** ☐ Override Group Config, ☒ Disable Status LEDs
- PoE Operating Mode:** ☐ Override Group Config, (dropdown menu)
- Band Operation Mode:** ☐ Override Group Config, (dropdown menu). Below this, it says 'Operating bands: 2.4 GHz, 5 GHz and 6 GHz' and a warning: 'Modifying the Dual/Tri Band Mode will reboot the AP, the mesh connection will also be disconnected when rebooting.'

Parent topic: [Access Point Configuration](#)

Renaming an AP

Renaming an AP allows the AP to be more easily identifiable in Unleashed dashboard components, tables, charts and graphs and other user interface elements.

To rename an AP, replace the **Device Name** field on the Edit AP form with a recognizable name for the AP.

Figure 1. Renaming an AP

Parent topic: [Configuring an Individual AP](#)

Working with AP Groups


Access Point Groups can be used to define configuration options and apply them to groups of APs at once, without having to modify each AP's settings individually.

For each group, administrators can create a configuration profile that defines the channels, radio settings, Ethernet ports and other configurable fields for all members of the group, or for all APs of a specific model in the group. By default, all AP's are members of the "System Default" AP group.

AP group configuration settings can be overridden by individual AP settings. For example, if you want to set the transmit power to a lower setting for only a few specific APs, leave the Tx Power Adjustment at Auto in the System Default AP Group, then go to the individual AP configuration page, and set the Tx Power setting to a lower setting.

AP group settings can be viewed and configured when the view mode on the Access Points screen is set to "AP Group."

Figure 1. Set View Mode to AP Group

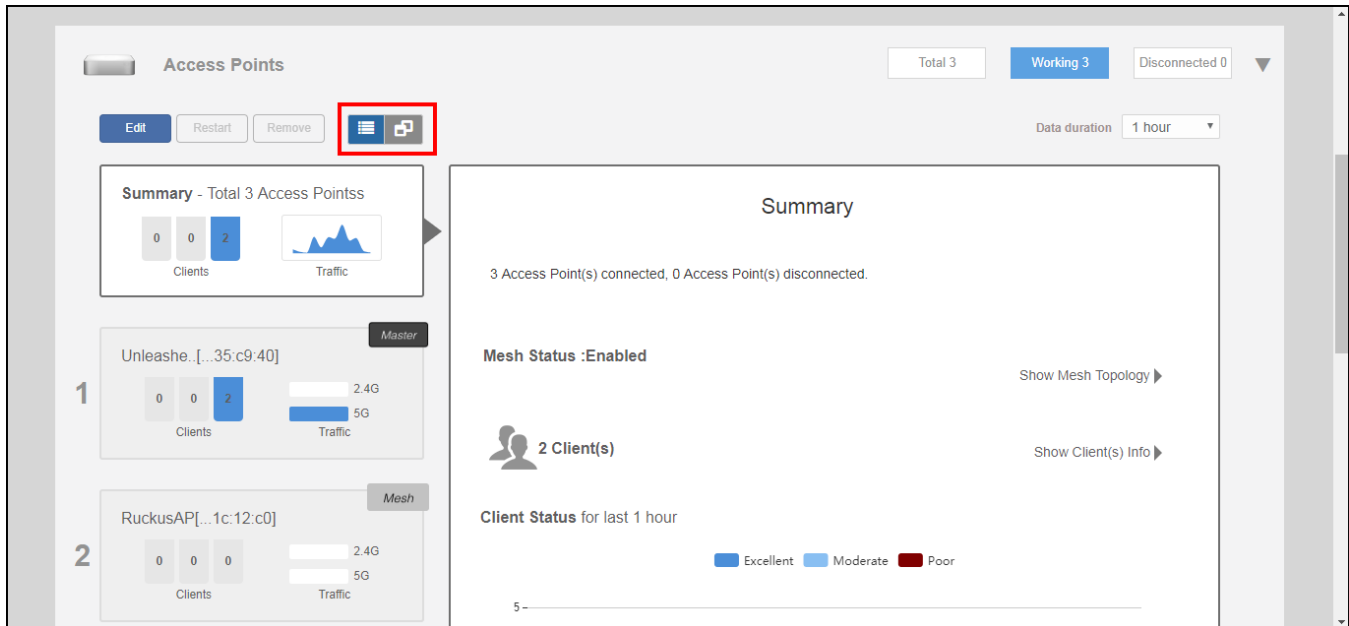

Parent topic: [Access Point Configuration](#)

Viewing AP Group Members


Select an AP group to view details on all APs that are members of the AP group.

To view AP group membership:

1. Go to **Access Points** and click the **Group View** button.
You can view details of each member of the AP group, including its MAC address, IP address, Device Name, Model number, Status, Mesh Mode, Channel, and Serial Number.
2. In the AP table, click on the MAC address of the AP to view the AP detail page of each AP.

 **Note:** By default, only AP group view is displayed if there are more than 25 APs in the network.

Figure 1. Viewing Members of an AP Group

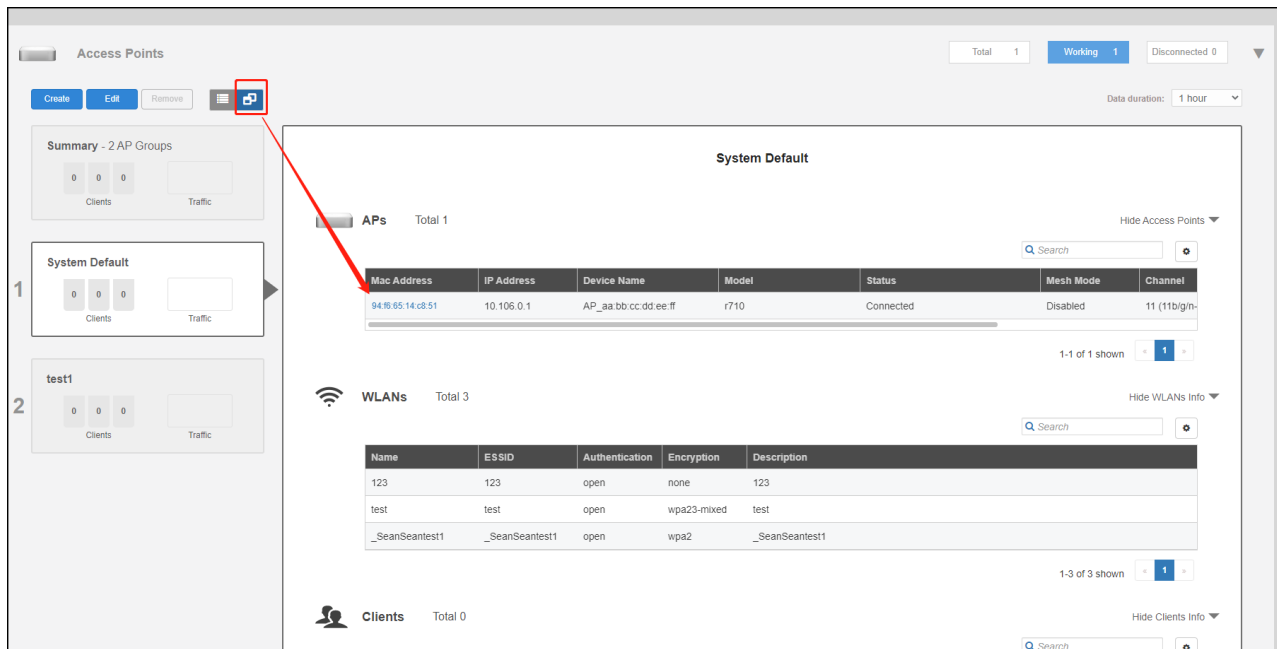

Parent topic: [Working with AP Groups](#)


Modifying the System Default AP Group

If you want to configure global settings for default behavior for all access points, modify the System Default AP group and apply settings to all APs at once.

To modify the System Default Access Point group and apply global configuration:

1. Go to **Access Points**.
2. Select the **Access Point Groups** view, select the **System Default** access point group, and click the **Edit** button.

Figure 1. Modifying the System Default AP Group

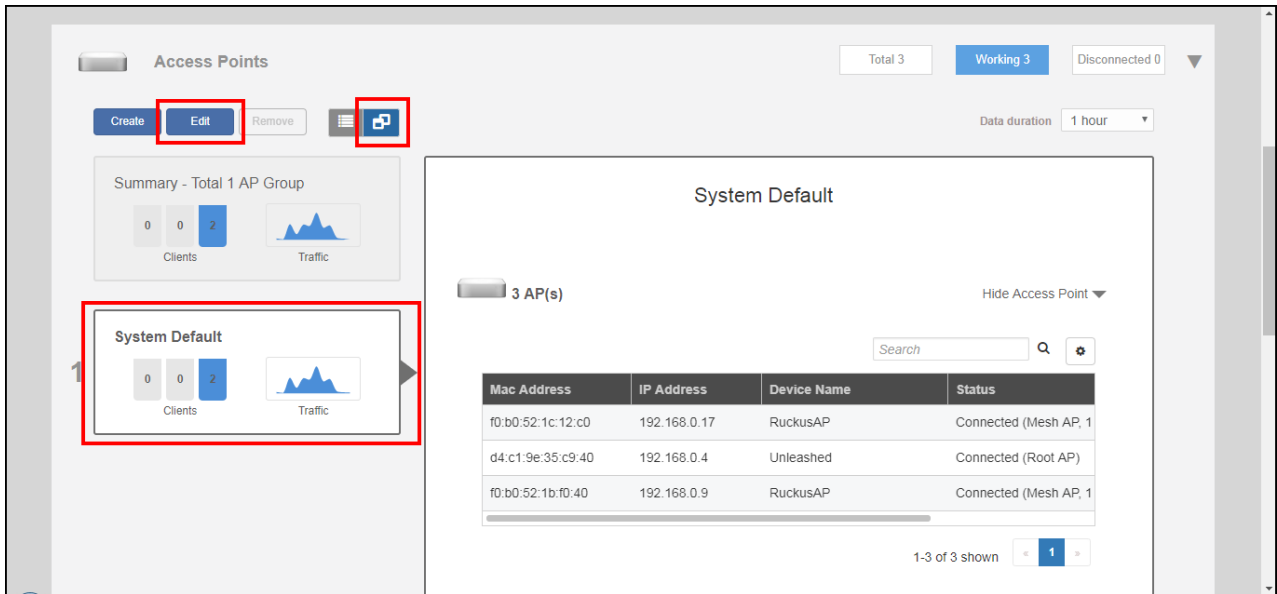

The **Edit AP Group** page appears.

3. Assign APs to or from this AP group using the left and right arrows on the **AP Assign** tab.
4. Assign WLANs to or from this AP group using the left and right arrows on the **WLAN Assign** tab.
5. On the **Radio (2.4G)**, **Radio (5G)**, and **Radio (6G)** tabs, modify any of the following settings that you want to apply to the System Default AP group.
 - **Channel Range:** To limit the available channels for 2.4 GHz, 5 GHz indoor (lower and upper) and 5 GHz outdoor (lower and upper), and 6 GHz channel selection, cancel the channel selection by clicking on any channels that you do not want the APs to use.
 - **Note:** For country codes "US", "UK", and "JP", channel 144 is supported if DFS channel is enabled.
 - **Channelization:** Select Auto, 20MHz or 40MHz channel width for the 2.4 GHz radio. Select Auto, 20, 40, or 80 MHz channel width for the 5 GHz radio. Select Auto, 20, 40, 80, 160, or 320 MHz channel width for the 6 GHz radio.
 - **Channel:** Select Auto or manually assign a channel for the 2.4 GHz, 5 GHz, or 6 GHz radio.
 - **TX Power:** Allows you to manually set the transmit power on all 2.4 GHz, 5 GHz, or 6 GHz radios (default is Auto), where
 - Full** is the maximum allowable Tx power according to country regulations.
 - Min** is the 0dBm per chain for 11n APs, 2dBm per chain for 11ac APs.
 - **Call Admission Control:** (Disabled by default). Enable Wi-Fi Multimedia Admission Control (WMM-AC) to support Polycom/Spectralink VIEW certification.

- **WLAN Service:** This option allows users to disable WLAN service on the 2.4, 5, or 6 GHz radios on all APs in the AP group.
 - **Protection Mode:** If you activate Protection Mode, you control how 802.11 devices know when they should communicate with another device. The use of RTS/CTS (Request to Send/Clear to Send) reduces collisions and increases the performance of the network if hidden stations are present. However, RTS/CTS (and CTS-only) introduce overhead and may in fact reduce overall performance in some situations. Through the proper use of RTS/CTS and CTS-only, you can fine-tune the operation of your wireless LAN depending on the physical operating environment.
 - **CTS-only:** Choose this option to force all destination devices to acknowledge their ability to receive data when a transmission is initiated. Use this option for compliance with the Wi-Fi Alliance certification.
 - **RTS/CTS:** Choose this option to force both sending and receiving devices to confirm a data exchange on both ends before proceeding.
 - **None:** Choose this option to disable both RTS and CTS acknowledgment.
6. On the **Other** tab, modify settings for all APs of a specific model in the System Default AP group. For more information on model-specific controls, see [Modifying Model-Specific Controls](#).
- **Model Specific Control:** Select the AP model to which the settings will apply.
 - **Max Clients:** Set the maximum number of clients that can associate per AP. Note that different AP models have different maximum client limitations.
 - **Status LEDs:** When managed by ZoneDirector, you can disable the external LEDs on certain AP models. This can be useful if your APs are installed in a public location and you don't want to draw attention to them.
 - **PoE Operating Mode:** Options vary depending on AP model selected from the **Model Specific Control** list. For a list of PoE operating modes by AP model, refer to [Unleashed Access Point Power Supply Considerations](#).
 - **Port Setting:** Refer to [Configuring AP Ethernet Ports](#) for more information on configuring AP-specific Ethernet port settings.

7. Click **OK** to save your changes.

Figure 2. Configuring AP Group Settings

Edit AP Group

* **Name**

Radio (2.4G) **Radio (5G)** **Other**

Radio 2.4 GHz ☒ 1 ☒ 2 ☒ 3 ☒ 4 ☒ 5 ☒ 6 ☒ 7 ☒ 8 ☒ 9 ☒ 10 ☒ 11

Channelization

Channel

TX Power

Call Admission Control

WLAN Service

Protection Mode

Parent topic: [Working with AP Groups](#)


Creating a New AP Group

Create new AP groups to apply custom settings to a group of APs distinct from the system default group's settings.

To create a new AP group:

1. Go to **Access Points > AP Groups**, and click **Create**.

Figure 1. Creating a New AP Group

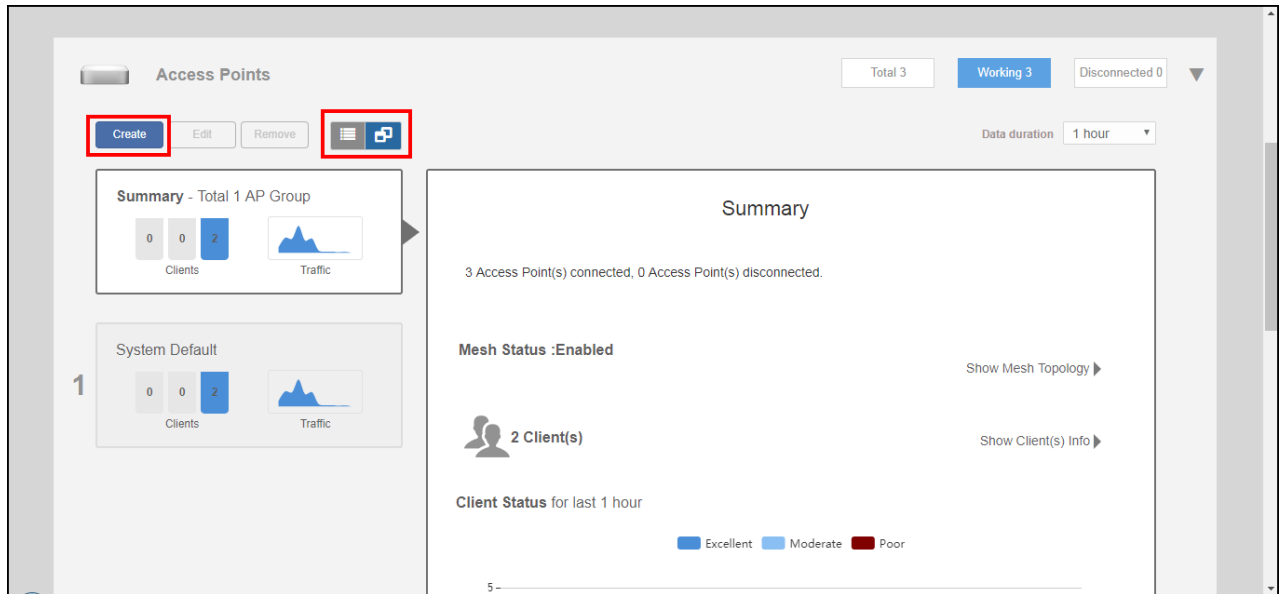

The Create AP Group form appears.

2. Assign APs to or from this AP group using the left and right arrows on the Step 1 - Assign APs screen.
3. Assign WLANs to or from this AP group using the left and right arrows on the Step 2 - Assign WLANs screen.

 **Note:** A maximum of 13 WLANs can be selected to create an AP group.

4. On the Radio (2.4G), Radio (5G), and Radio (6G) tabs, modify any of the following settings that you want to apply to the group:
 - **Channel Range:** To limit the available channels for 2.4 GHz, 5 GHz Indoor, 5 GHz Outdoor, and 6 GHz channel selection, deselect any channels that you do not want the APs to use.
 - **Channelization:** Select Auto, 20 MHz or 40MHz channel width for the 2.4 GHz radio, or Auto, 20, 40, or 80 MHz channel width for the 5 GHz radio, or Auto, 20, 40, 80, 160, or 320 MHz channel width for the 6 GHz radio.
 - **Channel:** Select Auto or manually assign a channel for the 2.4 GHz, 5 GHz, or 6 GHz radios.
 - **TX Power:** Allows you to manually set the transmit power on all 2.4 GHz, 5 GHz, or 6 GHz radios (default is Auto).


Max = max allowable Tx power according to country regulations

Min = 0dBm per chain for 11n APs, 2dBm per chain for 11ac APs

- **Call Admission Control:** (Disabled by default). Enable Wi-Fi Multimedia Admission Control (WMM-AC) to support Polycom/Spectralink VIEW certification.

- **WLAN Service:** This option allows users to disable WLAN service on the 2.4, 5, or 6 GHz radios on all APs in the AP group.
 - **Protection Mode:** Protection Mode allows control over how 802.11 devices know when they should communicate with another device. The use of RTS/CTS (Request to Send/Clear to Send) reduces collisions and increases the performance of the network if hidden stations are present. However, RTS/CTS (and CTS-only) introduce overhead and may in fact reduce overall performance in some situations. Through the proper use of RTS/CTS and CTS-only, you can fine-tune the operation of your wireless LAN depending on the physical operating environment.
 - **CTS-only:** Choose this option to force all destination devices to acknowledge their ability to receive data when a transmission is initiated. Use this option for compliance with the Wi-Fi Alliance certification.
 - **RTS/CTS:** Choose this option to force both sending and receiving devices to confirm a data exchange on both ends before proceeding.
 - **None:** Choose this option to disable both RTS and CTS acknowledgment.
5. On the Other tab, modify any of the following settings that you want to apply to the System Default AP group:
- **Model Specific Control:** Select the AP model to which the settings will apply. For more information, see [Modifying Model Specific Controls](#).
 - **Max Clients:** Set the maximum number of clients that can associate per AP. Note that different AP models have different maximum client limitations.
 - **Status LEDs:** When managed by ZoneDirector, you can disable the external LEDs on certain AP models. This can be useful if your APs are installed in a public location and you don't want to draw attention to them.
 - **PoE Operating Mode:** Options vary depending on AP model selected in Model Specific Control. For a list of PoE operating modes by AP model, refer to [Unleashed Access Point Power Supply Considerations](#).
 - **Port Setting:** Refer to [Configuring AP Ethernet Ports](#) for more information on configuring AP-specific Ethernet port settings.

Figure 2. Creating a New AP Group

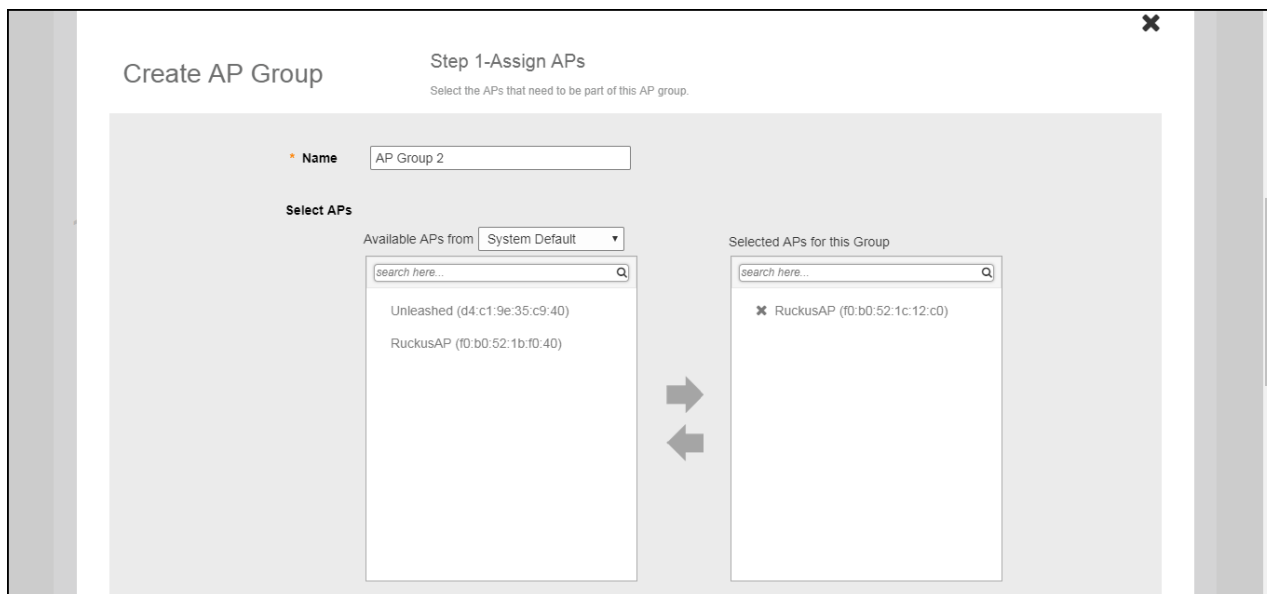

Parent topic: [Working with AP Groups](#)


Modifying Model-Specific Controls

The following settings can be applied to all APs of a particular model that are members of the AP group.

Some options are available for specific AP models only.

To configure model-specific settings for the AP group, select the AP model from the **Model Specific Control** list.

Figure 1. Model-Specific Controls

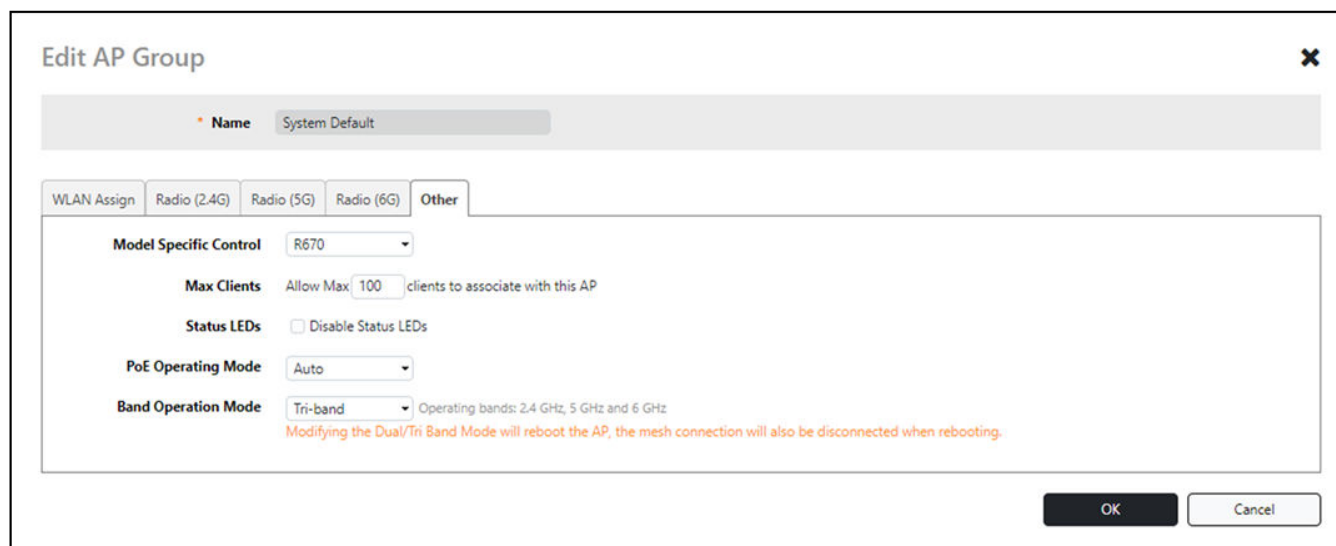

Configure any of the following settings for each model independently, and click **OK** to save your changes:

- **Max Clients:** Set the maximum number of clients that can associate per AP. Note that different AP models have different maximum client limitations.
- **PoE Out Ports:** (For specific AP models only.) Enable PoE out ports.
- **Status LEDs:** Disable the external LEDs on certain AP models. This option can be useful if your APs are installed in a public location and you do not want to draw attention to them.
- **External Antenna:** (For APs with external antennas only.) Enable the external antenna. When enabled, enter a gain value in the range from 0 through 90 dBi. The default value is 3 dBi.
- **Port Settings:** Refer to [Configuring AP Ethernet Ports](#) for more information on configuring AP-specific Ethernet port settings.
- **PoE Operating Mode:** Select the PoE operating mode, **Auto**, **802.3af PoE**, or **802.3at PoE** (specific AP models only). Default is **Auto**. If **802.3af PoE** is selected, the AP will operate in 802.3af mode (not 802.3at mode), and will consume less power than in 802.3at mode. However, when this option is selected, some AP features are disabled to reduce power consumption, such as the USB port and one of the Ethernet ports.
 - **Note:** On some APs, an additional mode, **802.3at+ PoE**, is available. This mode enables all features on the AP but requires an Ethernet switch that supports the 802.3at+ standard due to the higher power draw from the port to which the AP is connected. For a list of PoE operating modes by AP model, refer to [Unleashed Access Point Power Supply Considerations](#).
- **Band Operation Mode:** The two supported modes are:
 - **Dual-band:** Supports two radios: 2x2:2 in 2.4GHz and 4x4 in 5GHz
 - **Tri-band:** Supports three radios: 2x2:2 in 2.4 GHz, 2x2:2 in 5GHz and 6GHz
 - **Note:** The default setting is dependent on the country code associated with the AP; for example, an AP in a country that does not support 6GHz defaults to **Dual-band** mode.
 - **Note:** Modifying the Band Operation Mode will cause the AP to reboot, which will also temporarily disconnect the Mesh connection.
 - **Note:** Band Operation Mode is supported only on AP model R670.

Parent topic: [Other](#)

Parent topic: [Working with AP Groups](#)

Configuring AP Ethernet Ports



You can use AP groups to configure Ethernet ports on all APs of a certain model.

 **Note:** Currently, only Unleashed wall-plate APs provide Ethernet port configuration options.

To configure Ethernet ports for all APs of the same model:

1. Go to **Access Points**.
2. In the **AP Groups** view, click **Edit** for the group you want to configure.
3. On the **Other** tab, locate the **Model Specific Control** section, and select the AP model that you want to configure from the list.
4. Click the **Port Setting** button. The page refreshes to display the Ethernet ports on the AP model currently selected.
5. Deselect the check box next to **Enable** to disable this LAN port entirely. All ports are enabled by default.
6. Select **DHCP_Opt82** if you want to enable this option for this port (see DHCP Option 82).
7. For any enabled ports, you can choose whether the port will be used as a **Trunk Port**, an **Access Port** or a **General Port**. The following restrictions apply:
 - All APs must be configured with at least one Trunk Port.
 - For Wall Plate APs, the LAN5/Uplink port on the rear of the AP is defined as a Trunk Port and is not configurable. The front-facing LAN ports are configurable.
 - For all other APs, you can configure each port individually as either a Trunk Port, Access Port or General Port. (See Designating Ethernet Port Type for more information.)
8. To segment this port's traffic into a separate VLAN from the native VLAN, use the VLAN **Untag ID** field.
9. In **Guest VLAN**, enter the VLAN ID for the guest VLAN, if configured.
10. In **Dynamic VLAN**, enable the check box to enable dynamic VLAN assignment based on RADIUS settings.

Figure 1. Configuring AP Ethernet Ports

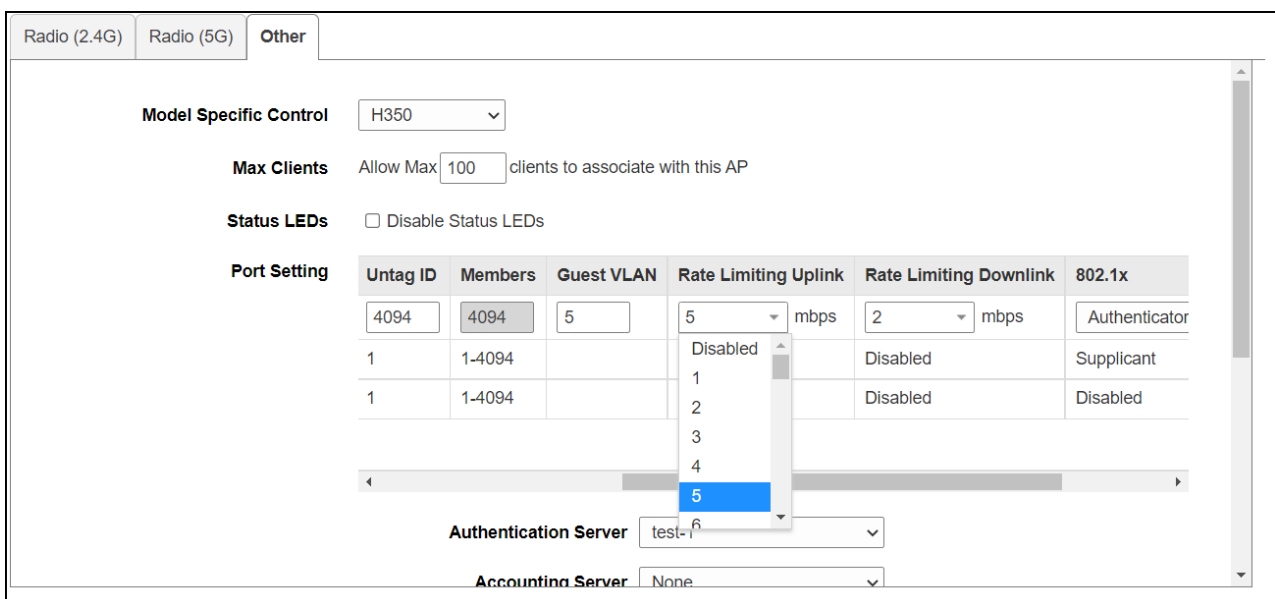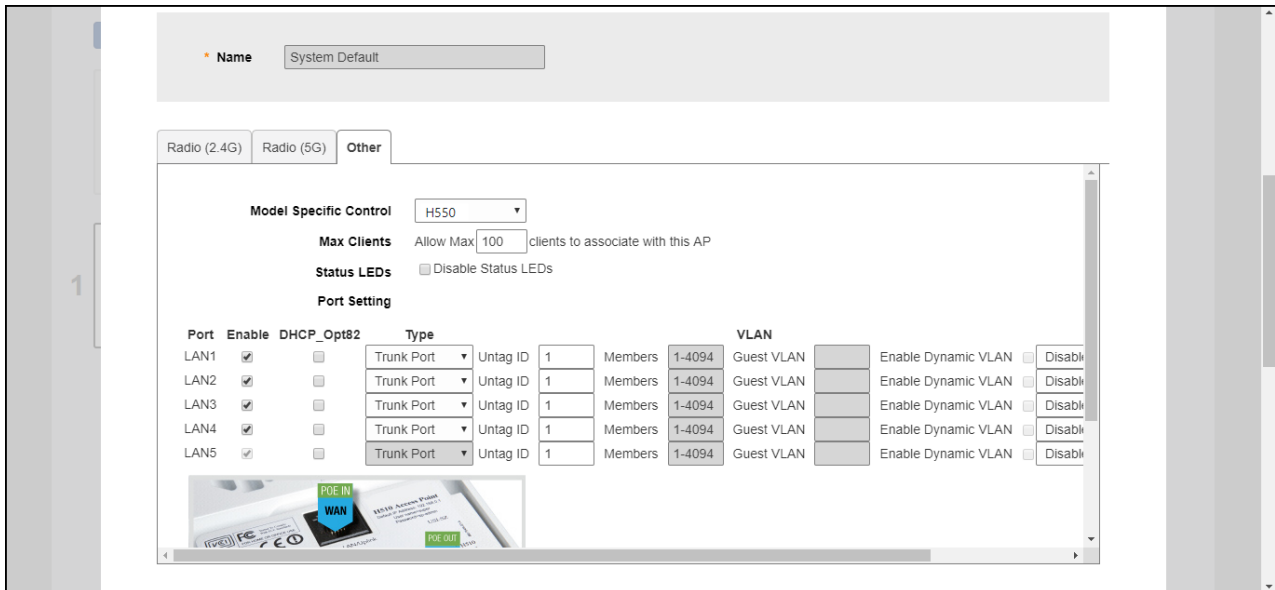

11. In **Rate Limiting Uplink** and **Rate Limiting Downlink**, select a value starting from 1 through 500 (Mbps).

Note: Memory type of 802.11ax and cypress is 500 Mbps, and other APs (mips) is 200 Mbps.

Note: Rate Limit supports maximum of 100 clients per WLAN. If the number of clients is more than 100, it will run out of memory of AP.

12. In **802.1X**, select whether the port will be used as an 802.1X Supplicant, Authenticator (port-based or MAC-based), or whether 802.1X is disabled on the port. AP Ethernet ports can be individually configured

to serve as either an 802.1X supplicant (authenticating the AP to an upstream authenticator switch port), or as an 802.1X authenticator (receiving 802.1X authentication requests from downstream supplicants). A single port cannot provide both supplicant and authenticator functionality at the same time.

- **Disabled:** 802.1X authentication is disabled for this port.
- **Supplicant:** This port authenticates itself to an upstream Authenticator port.
- **Authenticator (Port-Based):** This port accepts auth requests from downstream stations. In Port-based mode, only a single MAC host must be authenticated for all hosts to be granted access to the network.
- **Authenticator (MAC-Based):** This port accepts auth requests from downstream stations. In MAC-based mode, each MAC host is individually authenticated. Each newly-learned MAC address triggers an EAPOL request-identify frame.

For more information on port based 802.1X, see Using Port Based 802.1X.

13. In **Authenticator** (options appear if any port is configured as an Authenticator), select an **Authentication Server** and **Accounting Server** against which to authenticate clients from the drop-down list. Optionally, **Enable MAC authentication bypass (Use device MAC address as username and password)** to allow specific devices to bypass 802.1X authentication.
14. In **Supplicant** (options appear if any port is configured as a Supplicant), select the supplicant authentication method:
 - **MAC Address:** Use the station's MAC address as the user name and password.
 - **User Name and Password:** Enter the login info for authenticating this supplicant port to an upstream authenticator port.
15. Click **Finish** to save your changes.

Parent topic: [Working with AP Groups](#)

Designating Ethernet Port Type

Ethernet ports are defined as one of the following port types:

- Trunk Ports
- Access Ports
- General Ports

All three port types are used to define how to manage the following two aspects of VLAN processing:

- Which VLANs are processed vs. dropped

- What to do with untagged packets (in other words, Native VLAN)

For most RUCKUS APs, you can set which ports you want to be your Access, Trunk and General Ports from the Unleashed web interface, as long as at least one port on each AP is designated as a Trunk Port.

- **Note:** By default, all ports are enabled as Trunk Ports with Untag VLAN set as 1 (except for Wall Plate APs, whose four front-bottom ports are enabled as Access Ports by default, and whose rear port is a Trunk Port and is non-configurable).

If configured as an Access Port, all untagged ingress traffic is sent to the configured Untag VLAN, and all egress traffic is sent untagged. If configured as a Trunk Port, all untagged ingress traffic is the configured Untag VLAN (by default, 1), and all VLAN-tagged traffic on VLANs from 1 through 4094 will be seen when present on the network.

The default Untag VLAN for each port is VLAN 1. Change the Untag VLAN to:

- Segment all ingress traffic on this Access Port to a specific VLAN
- Redefine the Native VLAN on this Trunk Port to match your network configuration

Parent topic: [Configuring AP Ethernet Ports](#)

Trunk Ports

Trunk links are required to pass VLAN information between switches. Trunking is a function that must be enabled on both sides of a link. If two switches are connected together, for example, both switch ports must be configured as trunk ports. The Trunk port is a member of all the VLANs that exist on the AP/switch and carries traffic for all VLANs between switches.

For a Trunk port, the VLAN Untag ID field is used to define the native VLAN - the VLAN into which untagged ingress packets are placed upon arrival. If your network uses a different VLAN as the native VLAN, configure the AP Trunk port's VLAN Untag ID with the native VLAN used throughout your network.

Parent topic: [Designating Ethernet Port Type](#)

Access Ports

Access ports provide access to the network and can be configured as members of a specific VLAN, thereby separating the traffic on these ports from traffic on other VLANs.

All Access Ports are set to Untag (native) VLAN 1 by default. This means that all Access Ports belong to the native VLAN and are all part of a single broadcast domain. When untagged frames from a client arrive at an AP's Access Port, they are given an 802.1Q VLAN header with "1" as their VLAN ID before being passed onto the wired network.

When VLAN 1 traffic arrives destined for the client, the VLAN tag is removed and it is sent as plain (untagged) 802.11 traffic. When any tagged traffic other than VLAN 1 traffic arrives at the same Access Port, it is dropped rather than forwarded to the client.

To remove ports from the native VLAN and assign them to specific VLANs, select Access Port and enter any valid VLAN ID in the VLAN ID field (valid VLAN IDs are 2-4094).

The following table describes the behavior of incoming and outgoing traffic for Access Ports with VLANs configured.

Table 1. Access Ports with VLANs configured

VLAN Settings	Incoming Traffic (from the client)	Outgoing Traffic (to the client)
Access Port, Untag VLAN 1	All incoming traffic is native VLAN (VLAN 1).	All outgoing traffic on the port is sent untagged.
Access Port, Untag VLAN [2-4094]	All incoming traffic is sent to the VLANs specified.	Only traffic belonging to the specified VLAN is forwarded. All other VLAN traffic is dropped.

Parent topic: [Designating Ethernet Port Type](#)

General Ports

General ports are user-defined ports that can have any combination of up to 20 VLAN IDs assigned. General ports function similarly to Trunk ports, except that where Trunk ports pass all VLAN traffic, General ports pass only the VLAN traffic that is defined by the user.

To configure an AP Ethernet port as a General port, select General Port and enter multiple valid VLAN IDs separated by commas or a range separated by a hyphen.

- Note:** You must also include the Untag (native) VLAN ID in the Members field when defining the VLANs that a General port will pass. For example, if you enter 1 as the Untag VLAN ID and want the port to pass traffic on VLANs 200 and 300, you would enter: **1,200,300**.

Parent topic: [Designating Ethernet Port Type](#)

Using Port Based 802.1X

802.1X authentication provides the ability to secure the network and optionally bind service policies for an authenticated user.


- Note:** 802.1X port settings are unavailable when mesh mode is enabled.

802.1X provides logical port control and leverages the EAP authentication and RADIUS protocols to allow the network policy to be effectively applied in real time, no matter where the user connects to the network.

AP Ethernet ports can be individually configured to serve as either an 802.1X supplicant (authenticating the AP to an upstream authenticator switch port), or as an 802.1X authenticator (receiving 802.1X authentication requests from downstream supplicants). A single port cannot provide both supplicant and authenticator functionality at the same time.

If port based 802.1X is enabled on any ports, you can monitor connected wired clients by expanding the **Clients** Dashboard component and clicking **Wired Clients** to display a list of authenticated 802.1X wired clients.

Figure 1. Monitor currently connected 802.1X wired clients

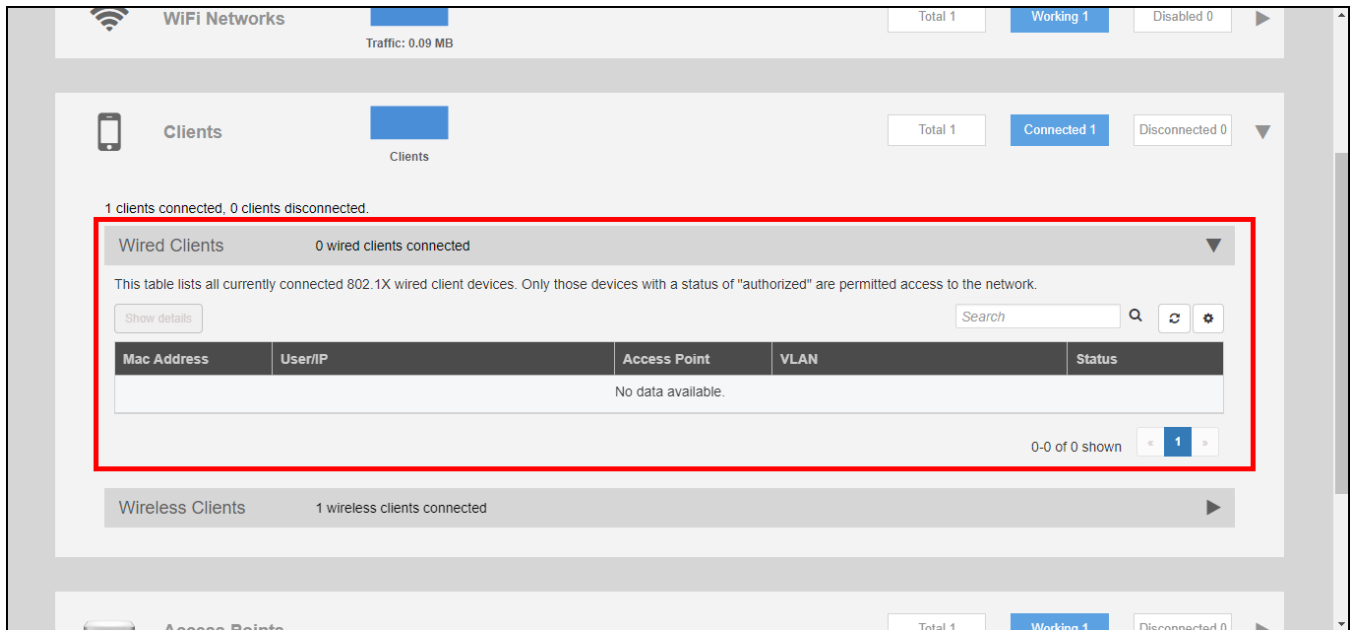


Parent topic: [Configuring AP Ethernet Ports](#)

Restarting an AP

To restart an AP, expand the Access Points section, click the AP's box on the left side, then click **Restart**.

Figure 1. Click Restart to reboot a single AP

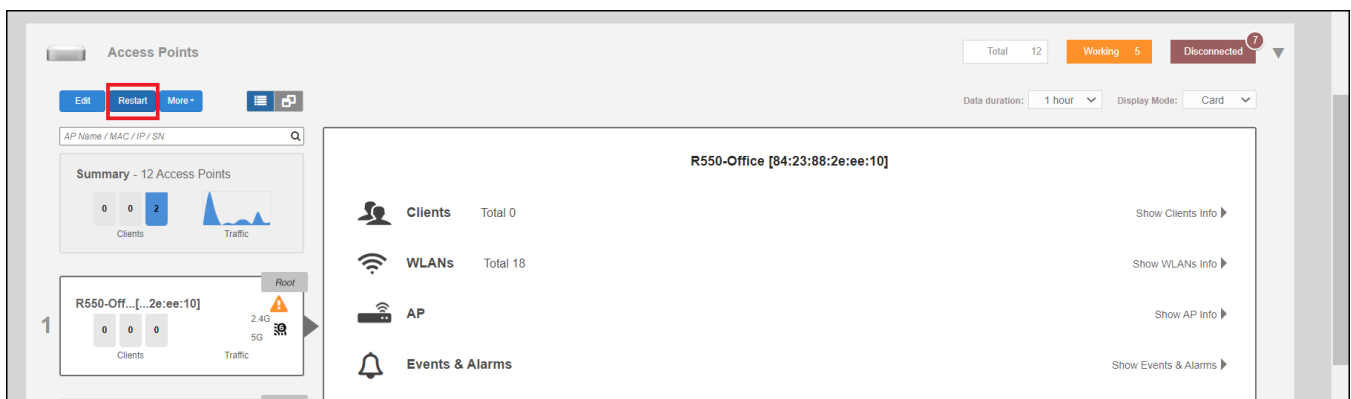

Note: Restarting the Unleashed Master AP will prompt you to click **OK** to confirm, as the network will experience a brief service interruption during the restart process. Additionally, restarting the Master AP will force another AP to assume the role of Master (when more than one Unleashed AP exists on the network).


Parent topic: [Access Point Configuration](#)

Removing an AP

To remove a member AP from the Unleashed network, expand the Access Points section, click the AP's box on the left side, then click **Remove**.

Once removed, the **Approve** button becomes available. Click **Approve** to allow the AP to rejoin the Unleashed network.

Figure 1. Removing an AP

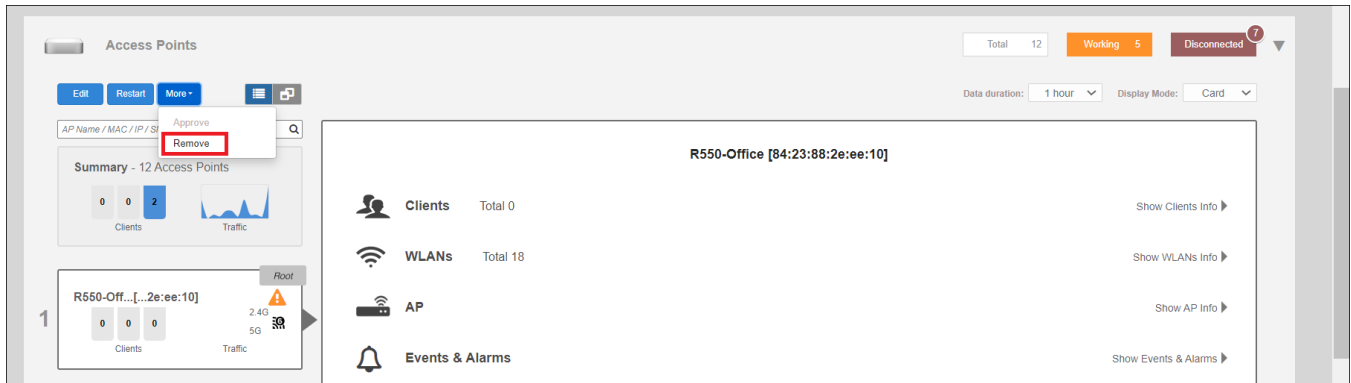

Parent topic: [Access Point Configuration](#)

ICX Switch Management

[ICX Switch Management Overview](#)

[RUCKUS ICX Release Compatibility Matrix](#)

[Preparing an ICX Switch for Unleashed Management](#)

[Approving a New Switch to Join Unleashed](#)

[Monitoring Connected ICX Switches](#)

[Managing Switch Ports](#)

[Audio-Visual Profile Support for an ICX Switch](#)

[Fanless Mode Support for an ICX Switch](#)

[Backing up and Restoring a Switch Configuration](#)

[Backing up and Restoring a Switch List](#)

[Upgrading ICX Switch Firmware](#)

ICX Switch Management Overview

Beginning with Unleashed 200.8, the administrator can monitor and manage RUCKUS ICX switches and routers in the ICX 7000 series and above. Unleashed can manage up to 8 switches at a time. Beginning with Unleashed 200.15, Unleashed supports 16 ICX switches in the Dedicated mode.

ICX switch management allows you to monitor status, view usage statistics, and perform basic management operations including configuration backup and firmware management.

The following capabilities are supported:

- ICX switch registration and authentication
- Switch inventory (including model, firmware version, and last backup)
- Health and performance monitoring (status, traffic stats, errors, clients) with alarms
- Switch configuration file backup and restore
- Firmware upgrades

Requirements

- **Note:** For more information on ICX device capabilities and configuration, refer to the RUCKUS FastIron documentation set available at the following URL:

<https://support.ruckuswireless.com>. On the site, select **Products > RUCKUS ICX Switches > Technical Documents**, and choose the platform and document of interest.

The following items are required to manage ICX devices:

- The ICX switch must be running FastIron software version **08.0.90** or higher.
- The Unleashed Master AP's IP address must be reachable by the ICX device through the Management interface or through router interfaces.
- ICX devices will be automatically discovered by the Unleashed Master. If automatic switch approval is enabled, all ICX switches discovered on the network will be listed in the Switches dashboard component. To disable automatic approval, go to **Admin & Services > System > System Info > Switch Approval** and disable the **Approval** option.

ICX devices running either router or switch images can be managed by Unleashed.

Figure 1. Switch auto approval

The screenshot shows the 'Admin & Services' configuration page. On the left is a sidebar with a 'System' menu containing 'System Info', 'IP Settings', 'System Time', 'Country Code', 'Roles', 'Users', and 'Mesh'. Below this are 'Services' and 'Administration' sections. The main content area is titled 'System Info' and contains three sections: 'System Info', 'Preferred Master', and 'Switch Approval'. The 'System Info' section has fields for 'Name*' (Ruckus-Unleashed), 'System Version' (200.8.10.3.94), and 'Unleashed ID' (un9418490011251563205223) with a 'Generate' button. The 'Preferred Master' section has a 'Preferred Master' dropdown set to 'No Preference' and a warning message. The 'Switch Approval' section has an 'Approval' checkbox checked, which is highlighted with a red box, and a description: 'Automatically approve all join requests from switches.' There are 'Apply' buttons at the end of each section. At the bottom, there is an 'Email Server' section with an 'Enable Email Server' checkbox.

Parent topic: [ICX Switch Management](#)

RUCKUS ICX Release Compatibility Matrix

Following is the software compatibility matrix for RUCKUS ICX FastIron and Unleashed releases.

Table 1. RUCKUS ICX FastIron and Unleashed Software Release Compatibility Matrix

	Unleashed 200.8	Unleashed 200.9	Unleashed 200.10	Unleashed 200.11	Unleashed 200.12	Unleashed 200.13	Unleashed 200.14	Unleashed 200.15	Unleashed 200.16	Unleashed 200.17
FastIron 08.0.90 a	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
FastIron 08.0.91	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
FastIron 08.0.92	No	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes	Yes
FastIron 08.0.95 and subsequ ent patches	No	No	No	Yes	Yes	Yes	Yes	Yes	Yes	Yes
FastIron 09.0.10 a and subsequ ent patches	No	No	No	No	Yes	Yes	Yes	Yes	Yes	Yes
FastIron 10.0.00 and subsequ ent patches	No	No	No	No	No	No	Yes	Yes	Yes	Yes
FastIron 10.0.10 and subsequ ent patches	No	No	No	No	No	No	No	Yes	Yes	Yes
FastIron 10.0.20 and subsequ ent patches	No	No	No	No	No	No	No	No	Yes	Yes

Parent topic: [ICX Switch Management](#)

Preparing an ICX Switch for Unleashed Management

Unleashed uses LLDP (Link Layer Discovery Protocol) for communication with the ICX switch. Preparing the switch for Unleashed management requires that the device is running compatible firmware that supports LLDP and that its management IP address and login name and password are discoverable by the Unleashed Master AP.

The easiest way to do this is to reset the switch to factory default settings and allow Unleashed to auto-discover and auto-configure the switch for Unleashed management.

Beginning with ICX version 8.0.90, ICX switches in factory default state use the default user name and password **super/sp-admin**. When the Unleashed Master AP connects to an ICX switch via LLDP, it will attempt to log in using this default username and password. If successful, Unleashed will automatically change the ICX login to match the Unleashed admin login name and password.

To prepare an ICX switch for Unleashed management:

1. Confirm that the switch is running FastIron firmware version 08.0.90 or later using the following command:

```
SSH@ICX7150-C12-Switch#show version
Copyright (c) Ruckus Networks, Inc. All rights reserved.
UNIT 1: compiled on Jun  6 2019 at 20:57:00 labeled as SPS08091
(28774816 bytes) from Primary SPS08091.bin (UFI)
SW: Version 08.0.91T211
Compressed Primary Boot Code size = 786944, Version:10.1.16T225 (mnz10116)
Compiled on Sat May 25 10:09:26 2019
...
...
```

2. If your device is running an earlier version, you must upgrade to version 08.0.90 or later. Refer to the Release Notes, Upgrade Guide and Installation Guide for the relevant FastIron release for upgrade instructions.

 **Note:** Upgrading to a more recent release may require several steps (depending on the version of the original firmware) as each release has different upgrade requirements. Be sure to carefully read the FastIron documents to ensure a successful upgrade.

3. An ICX switch running 08.0.90 or later firmware in factory default state will attempt to register with an Unleashed Master AP via LLDP. An easy way to prepare a switch for Unleashed management is to reset the switch to factory default state. Use the following command to restore the switch to factory default settings:

```
SSH@ICX7150-C12-Switch#erase system factory-default
System will go for reload after factory reset. Please enter 'y' to confirm, 'n' to
exit :
(enter 'y' or 'n'): y
*****
*                               *
*           Factory Reset Alert *
*                               *
*****
* Please pay attention to the details listed below *
* 1. uboot params will be erased, you might want to *
* backup the uboot params *
* stop at uboot and do 'printenv' to read uboot params *
* 2. All configuration will be erased, you might want to *
* backup the config *
* 3. Core Files, Logs will be erased *
```

```

* 4. SAU license will be restored to original SKU
* use show license sau for more details
* 5. XML license will be erased
*****

*****
I have read the alert and factory reset can be performed now.
Please enter 'y' to confirm, 'n' to exit :
*****
(enter 'y' or 'n'):
```

4. When the factory reset is complete, the switch will reboot and perform LLDP neighbor discovery.
5. If **Auto Approval** is enabled (Admin & Services > System > System Info > Switch Approval), Unleashed will automatically approve the switch join request. If disabled, you must manually approve each switch join request.
6. The switch should now be visible on the Unleashed dashboard as connected, or "Pending" if auto-approval is disabled.
7. If the switch does not appear on the Unleashed dashboard after performing a factory reset, there are a number of possible explanations:
 - LLDP info does not exist: This typically indicates the switch is not running compatible firmware. Upgrade to 08.0.90 or later.
 - LLDP info exists, but Management IP info does not exist: This typically indicates the switch is in router mode. In this case, the admin must obtain the IP address from the router or DHCP server and then click the **Add** button to configure the IP address, admin name and password for the switch.
8. Use the following command to verify whether or not LLDP neighbor information exists:

```

SSH@ICX7150-C12-Switch#show lldp neighbors
Lcl Port Chassis ID      Port ID      Port Description      System Name
1/1/1    348f.2712.c950  348f.2712.c950  eth0                  RuckusAP
1/1/3    d4c1.9e35.c940  d4c1.9e35.c940  eth0                  Ruckus-
Unleas~
SSH@ICX7150-C12-Switch#
```

9. Additionally, you can verify whether the AP can receive LLDP information from its neighbors using the AP CLI. To check the AP's LLDP info, use the following command:

```

ruckus(ap-mode)# get lldp neighbors
-----
LLDP neighbors:
-----
Interface:    eth0, via: LLDP, RID: 1, Time: 3 days, 02:55:58
Chassis:
  ChassisID:   mac 78:a6:e1:2e:03:ce
  SysName:     ICX7150-C12-Switch
  SysDescr:    Not received
  MgmtIP:      192.168.0.24
  Capability:   Bridge, on
Port:
  PortID:      mac 78:a6:e1:2e:03:d0
  PortDescr:   GigabitEthernet1/1/3
  MFS:         1522
  PMD autoneg: supported: yes, enabled: yes
  Adv:         10Base-T, HD: yes, FD: yes
```

```

Adv:          100Base-TX, HD: yes, FD: yes
Adv:          1000Base-T, HD: yes, FD: yes
MAU oper type: 1000BaseTFD - Four-pair Category 5 UTP, full duplex mode
MDI Power:    supported: yes, enabled: yes, pair control: no
Device type:  PSE
Power pairs:  signal
Class:        class 4
Power type:   2
Power Source: unknown
Power Priority: low
PD requested power Value: 26200
PSE allocated power Value: 26200
UPOE:         0
-----
OK
ruckus(ap-mode)#

```

10. After approval, if the switch is in factory default state, Unleashed will log in to the switch and change the default username/password to the Unleashed admin login name and password, and begin managing the switch.
11. If the switch is not in factory default state, select the switch in "Pending" state and click **Approve**, then enter the Admin Name and Password to authenticate to the switch and then manage it automatically.
12. If the Unleashed login name and password are changed via the web interface, the new login will be synched to any connected switches that registered with Unleashed in factory default state. Connected switches that registered as non-factory default switches will remain unchanged and will require the user to manually approve them and enter the new user name and password.

Parent topic: [ICX Switch Management](#)


Approving a New Switch to Join Unleashed

Once an ICX switch has been discovered, it is listed in the web interface as "pending" until the administrator approves the join request by entering the switch admin user name and password (if auto-approval is disabled).

To approve a new switch to join Unleashed management:

1. Expand the **Switches** component, and select a switch that is marked as "Pending" in the list on the left side of the page.


Figure 1. Select a switch that is pending approval

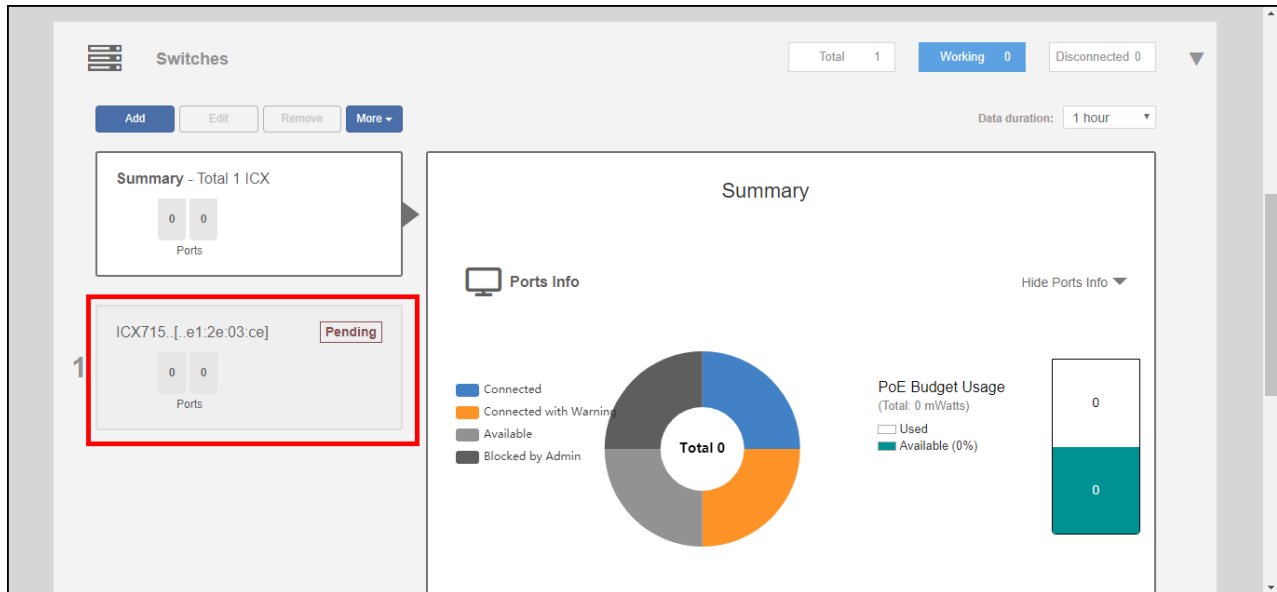

Note: RUCKUS Unleashed does not recognize older versions of ICX switches and displays the following warning message: "Unleashed system only supports ICX firmware version 08.0.90 or later."


- Click **Approve**. If the switch is in factory default state, it will automatically connect and be listed among the connected switch devices once the connection is established and the page is refreshed.

Figure 2. Click Approve

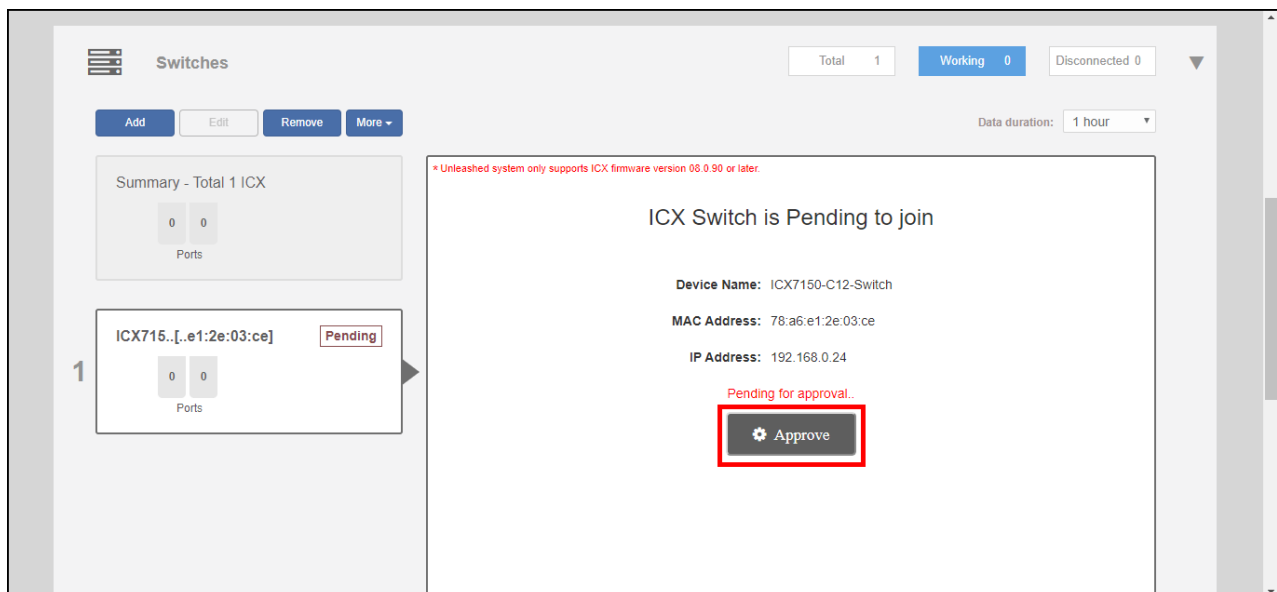


- If the switch is not in factory default state, the Unleashed Master is unable to login using the default user name and password, and the following message appears. Click **Continue** to manually enter the login credentials.

Figure 3. Click Continue

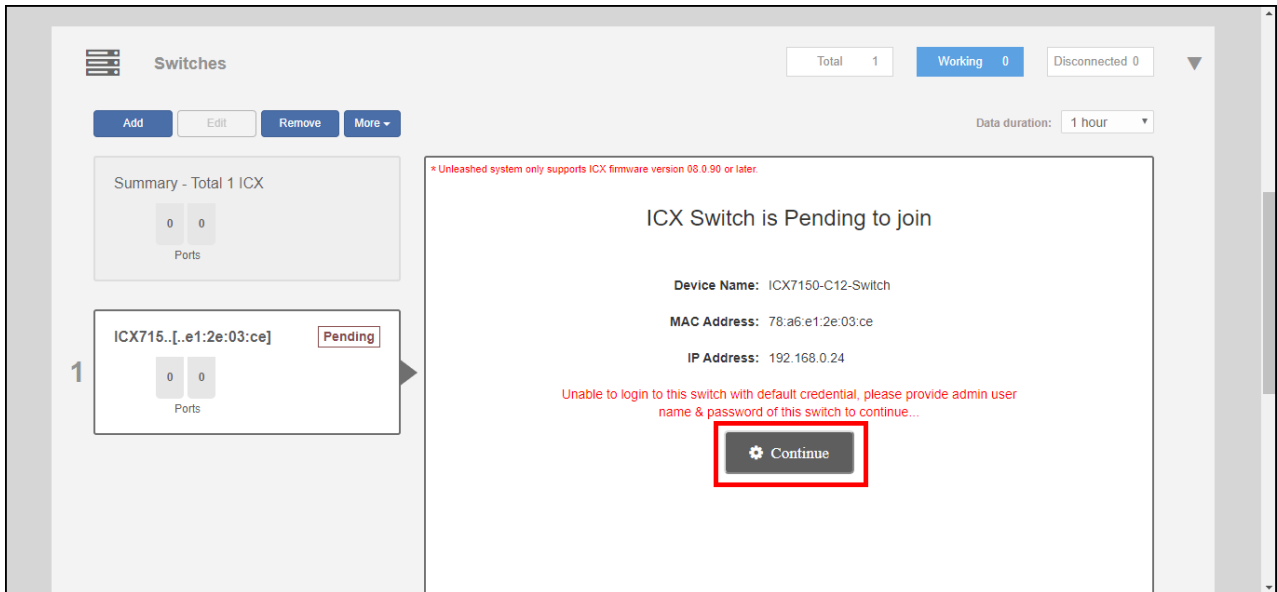


4. In the Approve Switch to Join Unleashed dialog that appears, enter the **Admin Name** and **Password** to authenticate to the switch.

Figure 4. Enter admin user name and password for switch authentication

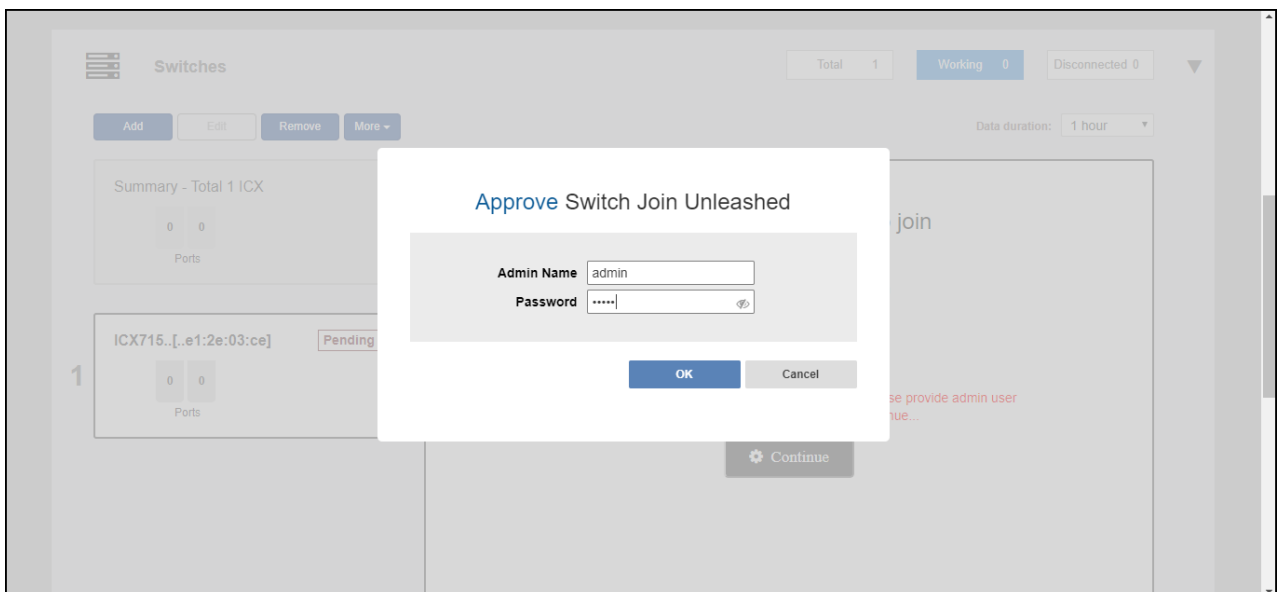

5. Click **OK**. Unleashed immediately attempts to verify and approve the switch. If successful, the switch status will change to **Connecting** before joining Unleashed.

Figure 5. ICX switch connecting

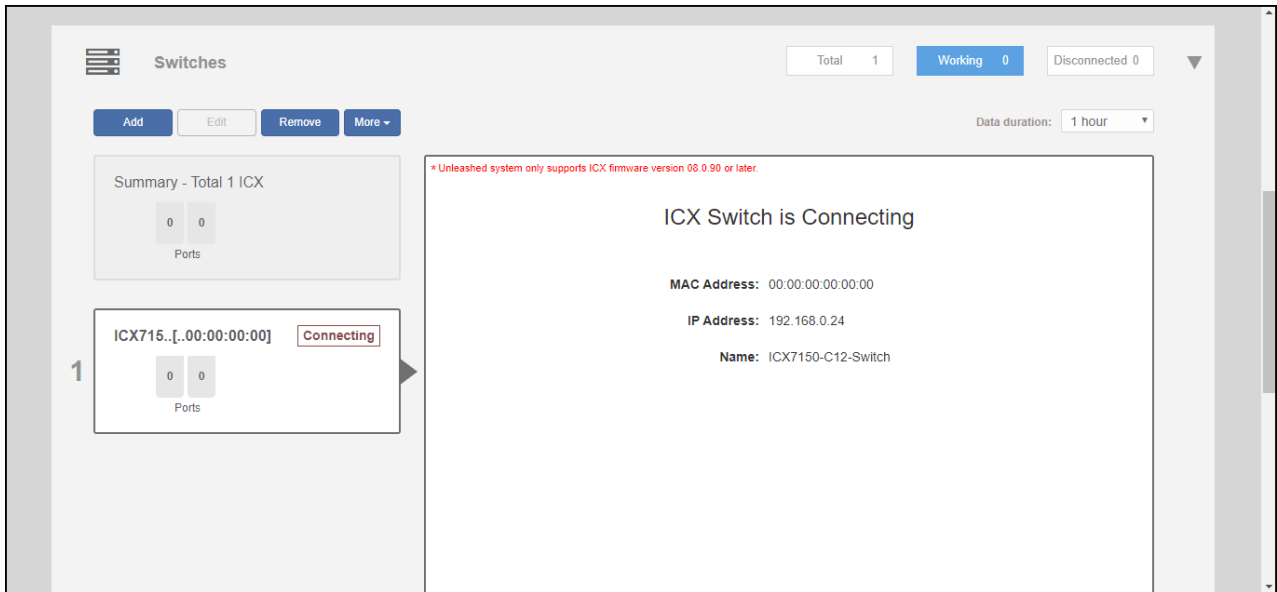

Parent topic: [ICX Switch Management](#)


Monitoring Connected ICX Switches

Expand the **Switches** dashboard component and select a connected switch to view general information, port status, health details, and events and alarms on the selected switch.

The following details are displayed when the links are expanded:


- **General Info:** Displays general device information such as device name, IP address, MAC address, software version, and uptime.
- **Ports Info:** Displays the number of ports used and available, PoE power budget usage, and details on specific ports when selected from the port diagram or port list.
- **Health:** Displays hardware status information such as CPU and memory utilization.
- **Events & Alarms:** Displays a list of alarm and event system messages.

Figure 1. Selecting a Switch to Monitor Details

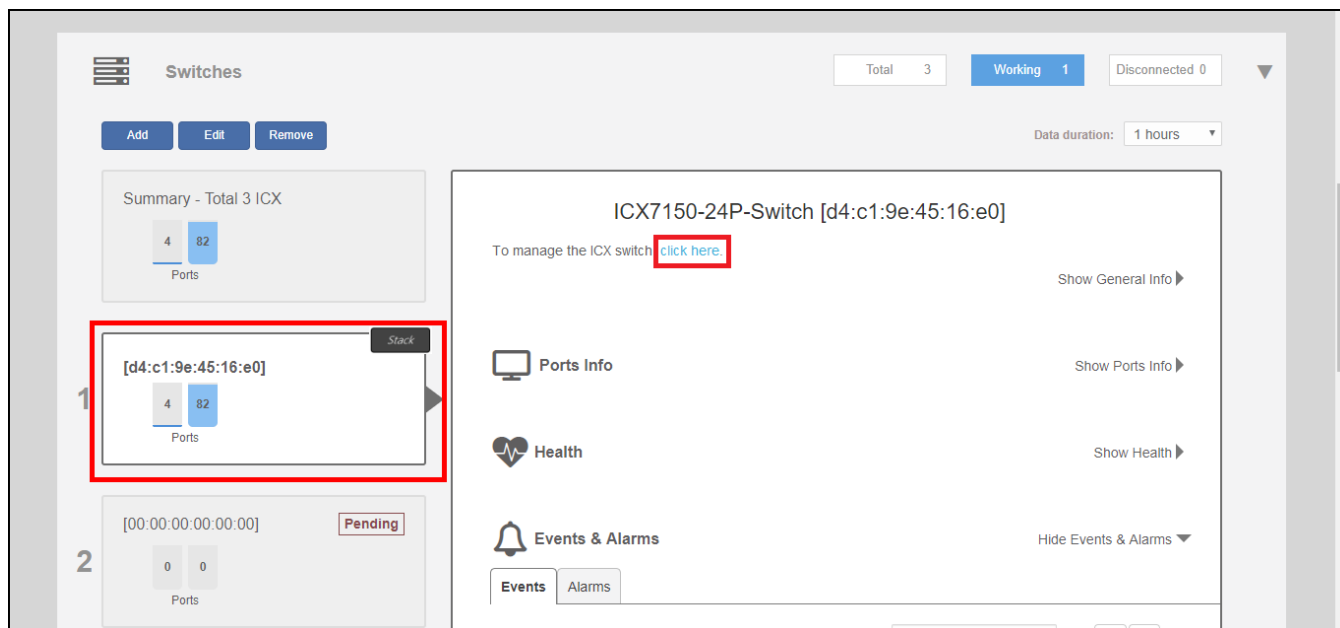


Click **Show Health** to view the switch's health status information, including CPU and memory utilization, power supply usage, and temperature details. Hover over a segment of the charts to view time-specific details.

Figure 2. Monitoring Switch Health Details

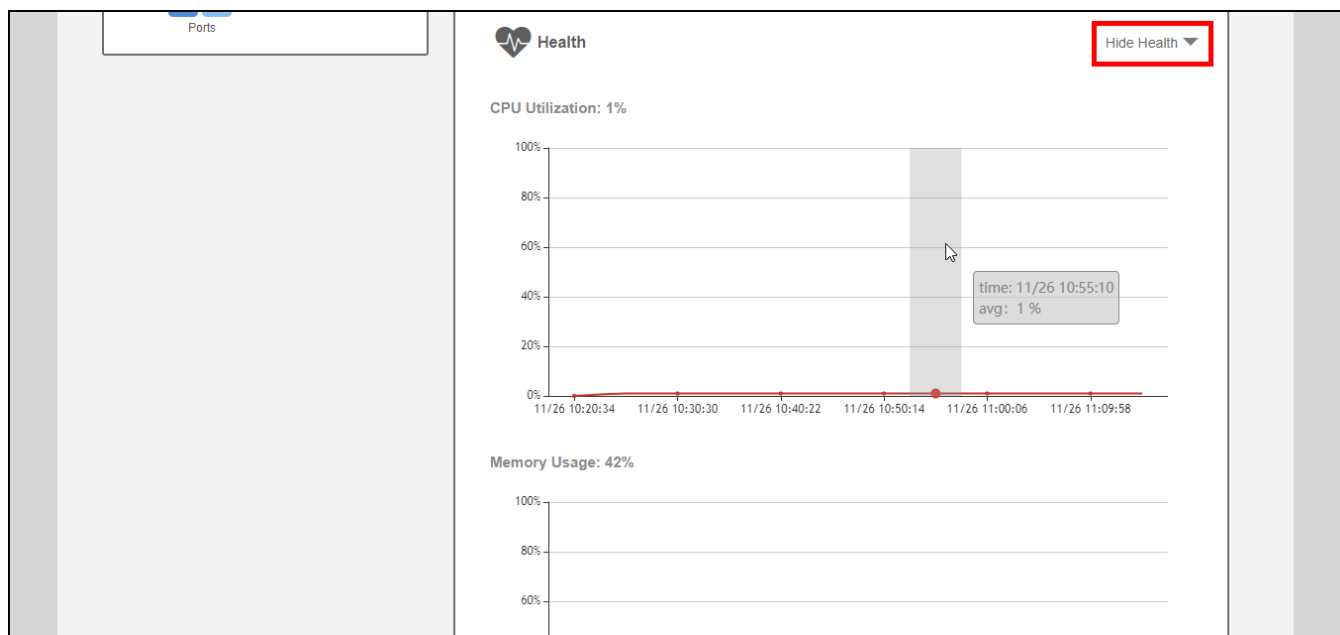

Click **Show Events & Alarms** to expand the section and view switch event and alarm lists.

Figure 3. Viewing Switch Event and Alarm Lists

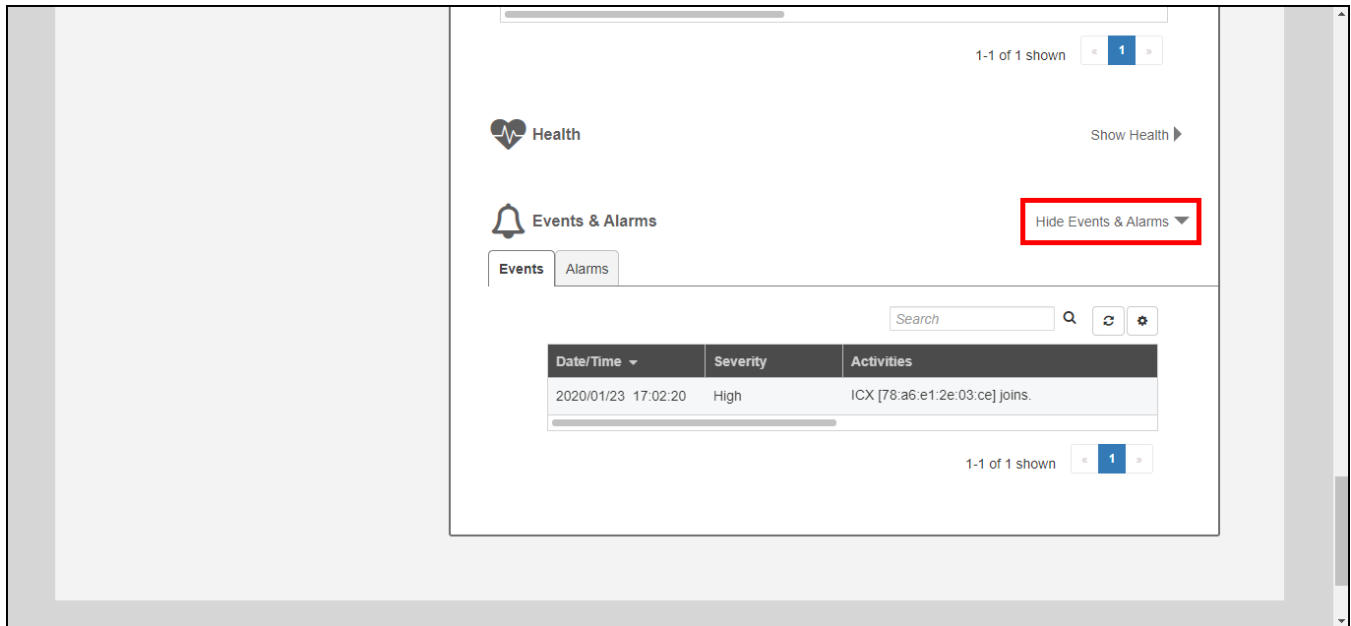


Parent topic: [ICX Switch Management](#)

Accessing the RUCKUS Switch Home Page

To access the RUCKUS switch home page from within Unleashed without manual login, click the **To manage the ICX switch, click here** link. Enter the user name and password, and click **Login** to log in to the RUCKUS switch home page.

Figure 1. Logging In to the RUCKUS Switch Home Page

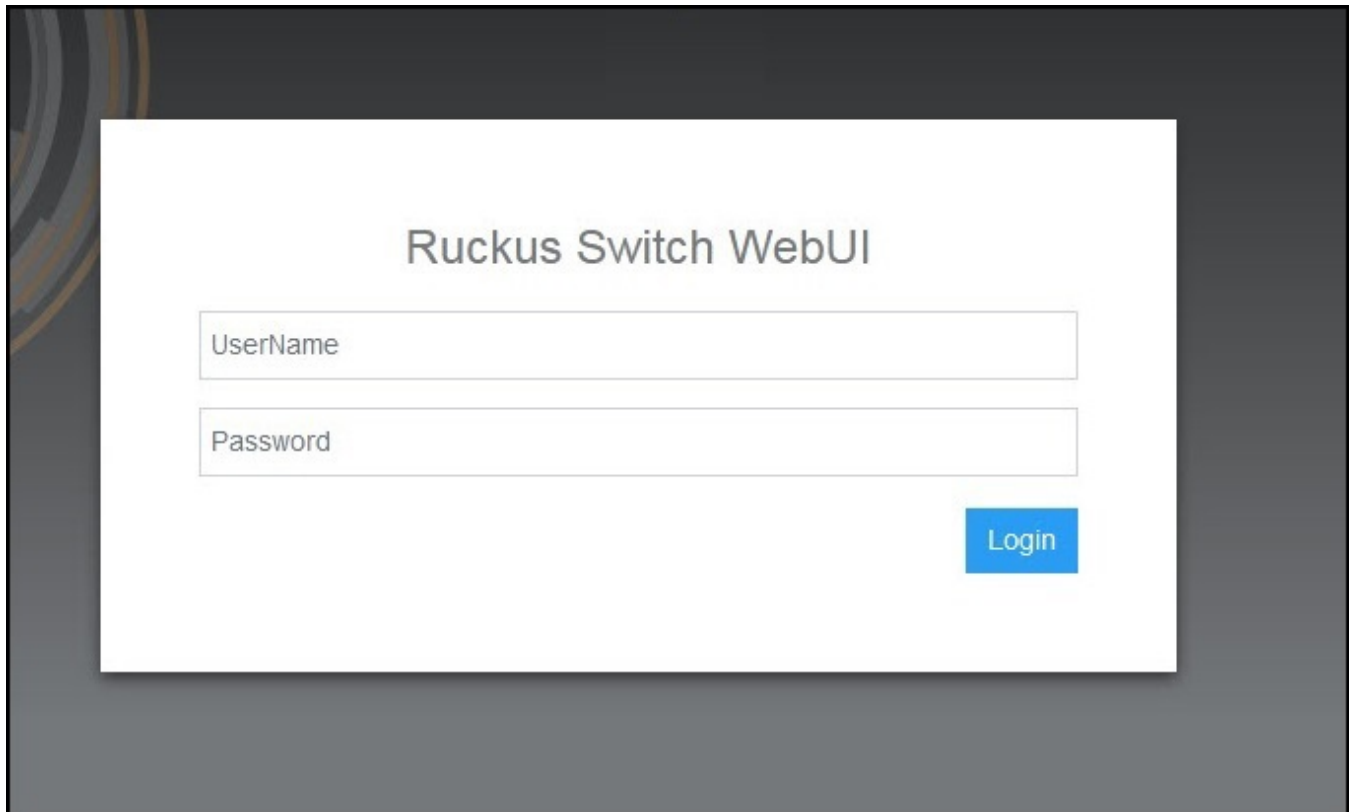

 Note:

- Access to the RUCKUS switch home page is supported only for ICX firmware version 9.0.0 or later.
- Access to the RUCKUS switch home page redirection is available only when an ICX switch is connected.
- You can extend the available redirection window time. The standard available redirection window time is 10 minutes.

Parent topic: [Monitoring Connected ICX Switches](#)


Managing Switch Ports

The "Ports Info" link expands to display information on overall switch status such as the number of ports used and available and PoE power budget usage. Individual switch ports can be managed by selecting the specific port from the switch port diagram or from the port list table below.

To manage ICX switch ports:


1. Expand the **Switches** dashboard component, and select a connected switch from the list on the left.
2. Click **Show Ports Info** to expand the port details view.

Figure 1. The "Ports Info" view displays summary info and per-port details

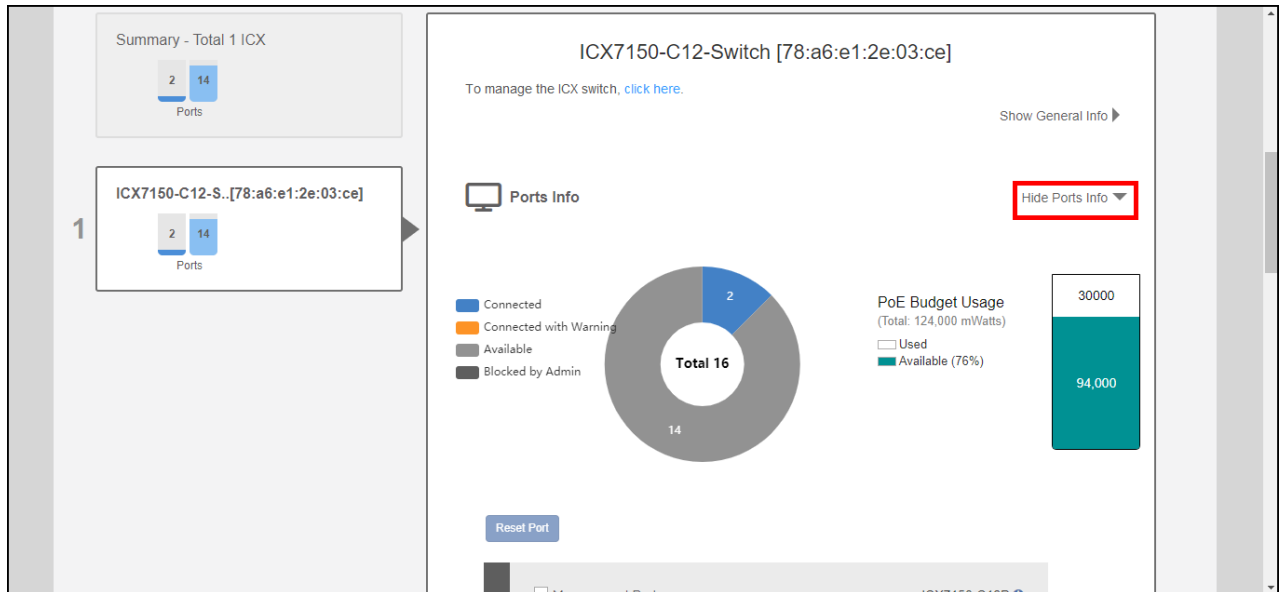


3. Select an individual port from the port diagram or port list table.

Figure 2. Select a switch port to display details on that port

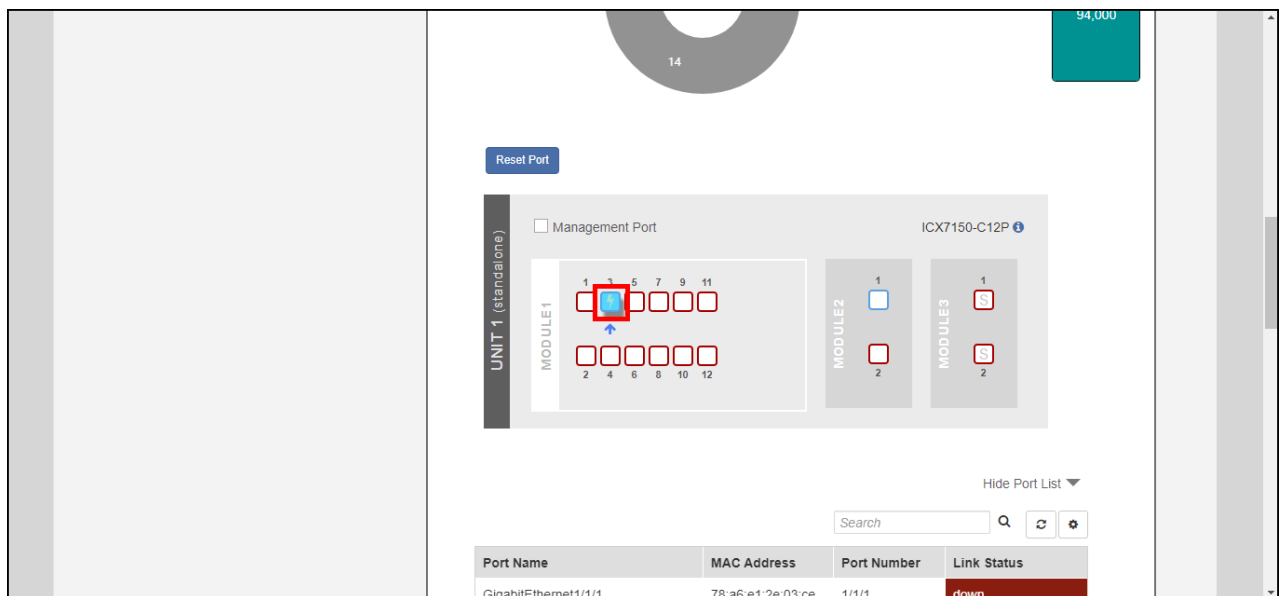


4. Review the details in the switch port list for the port selected.
5. To reboot a device connected to a PoE switch port, click the **Reset Port** button. The port reset button can be used to power cycle a connected device by powering down and back up a PoE port.

Figure 3. Resetting a switch port

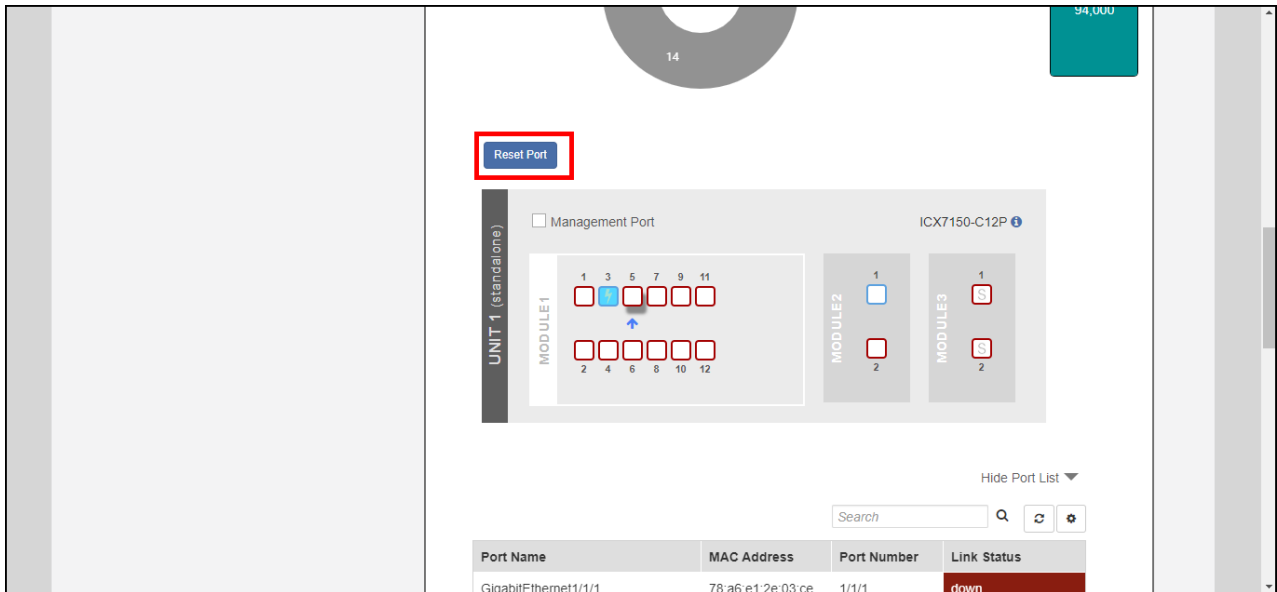

6. Scroll down to view the traffic trend chart and LLDP neighbor list for a port.

Figure 4. Viewing a port's traffic statistics and LLDP neighbors

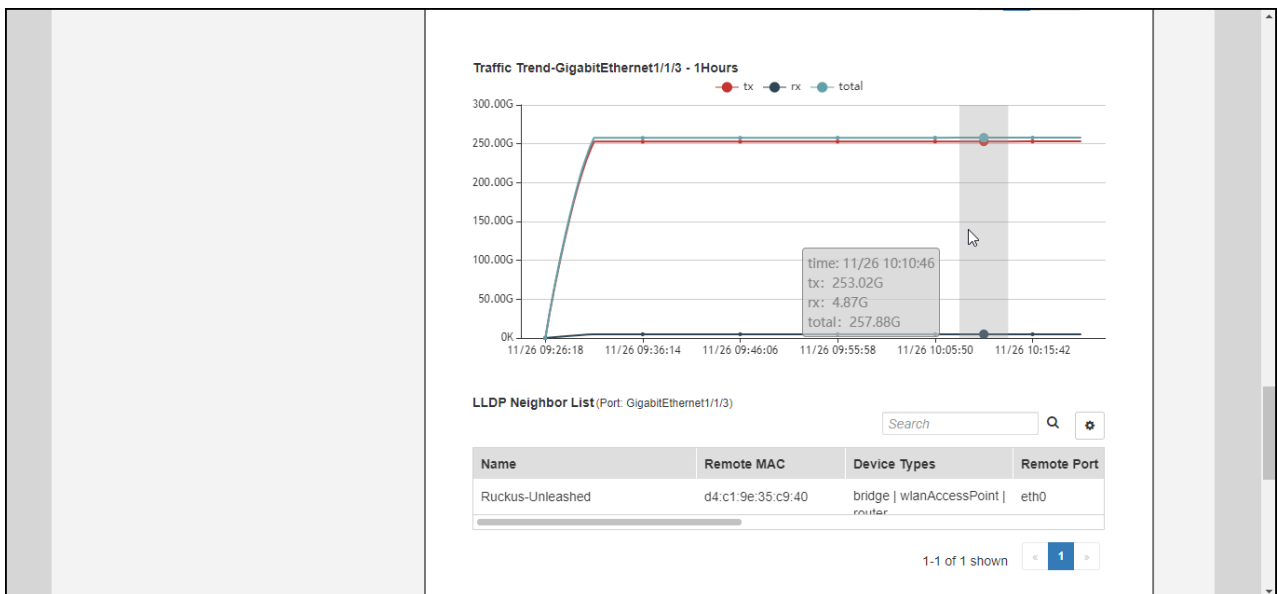

Parent topic: [ICX Switch Management](#)

Audio-Visual Profile Support for an ICX Switch

An Audio-Visual (AV) profile manages and optimizes audio and video signals over an IP network, such as a local area network (LAN) or the internet, to provide scalable, flexible, and reliable audio-visual delivery systems.

Overview

The AV profile is designed to deliver audio-visual applications using IP network infrastructure. With an AV profile created from the RUCKUS Unleashed web interface, a RUCKUS AP can transmit configuration settings to an ICX AV switch, enabling the switch to effectively handle Audio-Visual traffic. An ICX AV switch can also be configured from the ICX CLI interface. Based on the AV template, the configuration is pushed to an ICX AV switch.

Requirements

- Supported only on the following ICX AV switches:
 - Software: FastIron release 10.0.20a and later, 10.0.10d and later
 - Hardware: ICX 8200-24PV, ICX 8200-48P, ICX 8200-48PF, ICX 8200-48PF2, ICX 8200-C08PFV
- Maximum ICXs and AV profiles supported in RUCKUS Unleashed:
 - Maximum of eight ICX switches for Unleashed bridge mode
 - Maximum of 16 ICX switches for Unleashed Dedicated mode
 - Maximum of eight AV profiles supported for one ICX switch
- 10G uplink port and Ethernet cable (CAT 5, CAT 6, or CAT 7) with a cable length of less than 125 meters
- VLAN tagging:
 - Each AV profile belongs to a unique VLAN, two different profiles cannot share the same VLAN
- Set PTP Transparent Clock (TC) per interface
- Disable EEE
- Disable MTU, the value is set to 1500 by default
- Disable jumbo frame and storm control

Considerations

Here are the considerations when implementing a configuration:

- Reconfiguring a switch: The switch needs to be reconfigured whenever it is reconnected.
- Replacing a switch: If a new switch replaces an old one, you must reconfigure and delete the old entry from the RUCKUS Unleashed web interface to keep your network configurations up-to-date.

- Updating stack unit ID: If a stack reboots, the stack unit ID in the XML ports-list nodes may vary and need to be updated.
- Stack unit limit: A stack can contain at most 12 units.
- Overriding conflicting QoS settings: Conflicting QoS settings will be overridden when pushing the configuration and the old configuration setting will not work. A warning message is displayed in the RUCKUS Unleashed web interface.
- VLAN range: The valid VLAN range is between 1 through 4086.
- Template limit: Six default templates are provided and an additional eight custom templates can be created.
- AV profile limit: A maximum of eight AV profiles per ICX switch can be created, and a port can only be bound to one AV profile.
- Strict priority forwarding policy: Applied on AV output queues (0-7), all other DSCP will be mapped to a forwarding queue having a priority of 5 or lower.
- Symmetrical flow control: The ICX switch applies to 0 through 4 queues by default.

Limitations and Exceptions

Following are the limitations and exceptions:

- An AV profile for an ICX switch can be configured from the RUCKUS Unleashed web interface and the ICX CLI interface, but the configuration of other switch settings must be carried out directly on the switch. Therefore, potential configuration conflicts may arise, such as the possibility of AV profile settings being overridden later within the switch itself.
- By default, the Maximum Transmission Unit (MTU) size is set to 1500 bytes for Ethernet II encapsulation.
- When enabled, Strict mode is applied to all queues and cannot be set on specific queues.
- Use the **broadcast limit**, **multicast limit**, and **unknown-unicast limit** FastIron commands to manage traffic limits on broadcast, multicast, and unknown-unicast traffic, respectively.
- The Quality of Service (QoS) setting is global, and a profile created by the user that includes QoS settings may potentially conflict with those in the template.
- The ICX 8200 family of switches support one-step PTP transparent clock mode, so FOLLOWUP messages will be discarded.
- A stack port cannot be bound to an AV profile.
- Cannot configure Class of Service (CoS)-related QoS settings from an AV profile.

Best Practices

This feature has no special recommendations for feature enablement or usage.

Prerequisites

Beginning with RUCKUS Unleashed 200.16, AV profile support is available on a RUCKUS Unleashed-managed ICX switch. Ensure that the ICX switch is managed by an Unleashed AP.

Parent topic: [ICX Switch Management](#)

AV Profile Overview

Navigating to the **AV Profiles** tab allows you to view the following information about all the AV profiles configured on the ICX switches associated with the RUCKUS Unleashed network. The information is displayed in table format, reflecting a default subset of columns. You can control which information is included and excluded

by clicking the  icon and selecting or deselecting column names check boxes.

Name	Name of the AV profile.
Profile Template	Name of the AV profile template.
Color	Color of the AV profile as seen from the ports diagram in the AV Profiles tab.
Untagged VLAN	Access VLAN associated with the specific ICX AV switch.
IGMP	Internet Group Management Protocol (IGMP) settings (Enabled or Disabled). - Querier Version (V2 or V3): Version of IGMP - Querier Election (IP address): Configurable IP address used in the Querier Election process. IGMP and Querier Version settings are pre-configured for the built-in templates. Only for custom templates, you can configure these settings. For the Data AV profile template, the IGMP setting is disabled.
DHCP Relay	Dynamic Host Configuration Protocol (DHCP) Relay settings (Enabled or Disabled). VLAN IP Address: IP address of the VLAN

	• Netmask IP address: IP address of the netmask • DHCP Server IP address: IP address of the DHCP server that the relay agent forwards the DHCP requests from the clients on its network.
Actions	Available actions for the AV profile (edit and delete).

You can search the results using the **Search** field. Enter the AV profile name, profile template, IGMP, or DHCP relay setting in the **Search** field. All matching AV profiles are displayed.

You can refresh the table by clicking the  icon.

You can edit or delete the AV profiles using the **Edit** or **Delete** options.

You can sort the **AV Profiles** table using the following criteria:

- **Rows:** Search the **AV Profiles** table using key words.
- **Columns:** Select the columns to be displayed. Click any column header to sort the table by that column.

Figure 1. AV Profiles Tab

Ports Detail **AV Profiles**

UNIT 1 (standalone) ICX8200-C08ZP

MODULE1: 1, 3, 5, 7, 2, 4, 6, 8

MODULE2: 1, 2

AV Profiles

+ Create Edit Delete

Q Search

Name	Profile Template	Color	Untagged VLAN	IGMP	DHCP Relay	Actions
No data available.						

AV Profile Template (Shared)

+ Create Edit Clone Delete

Q Search

Name	Description	PTPv2	Actions
AES67 Audio-Video	AES67 Audio&Video	Enabled	
Dante Audio-Video	Dante Audio&Video	Enabled	
NDIS-Video	NDIS Video	Enabled	
Q_SYS-Video	Q-SYS Video	Enabled	
Video	Video	Disabled	
Data	Data	Disabled	
Custom-Template-1		Enabled	
Custom-Template-2		Enabled	

The **AV Profile Template (Shared)** table allows you to view the following information about all the AV profile templates.

Name	Name of the AV profile template. Built-in AV templates are defined as follows: • AES67 Audio-Video: Use this template to connect the ICX switch to the AES67 audio devices and their controller. AES67 is a standard that transmits high-quality audio over IP networks. • Dante Audio-Video: Use this template to connect the ICX switch to the Dante audio devices and their controller. Dante is a technology that transmits video and multiple channels of audio over Ethernet cables.
-------------	--

	• NDI5-Video: Use this template to connect the ICX switch to the video systems. Network Device Interface (NDI5) is a standard that allows video systems to communicate with one another over IP. • Q_SYS-Video: Use this template to connect the ICX switch to the IP audio Q-SYS devices and their controller. Q_SYS is a cloud platform that integrates audio, video, and control processing in one system. • Video: Use this template to connect the ICX switch to the IP video devices and their controller. • Data: Use this template to connect the ICX switch to other network devices as well as to computers. • Custom: Use this template to build your customized AV profile template.
Description	Description of the AV profile template.
PTPv2	Precision Time Protocol (PTP) v2 setting (Enabled or Disabled).
Actions	Available actions for the AV profile template (edit, clone, and delete).

You can search the results using the **Search** field. Enter the AV profile template name in the **Search** field. All matching AV profile templates are displayed.

You can refresh the table by clicking the  icon.

You can edit, clone, or delete the AV profile templates using the **Edit**, **Clone**, or **Delete** options.

You can sort the **AV Profiles** table using the following criteria:

- **Rows:** Search the **AV Profiles** table using key words.
- **Columns:** Select the columns to be displayed. Click any column header to sort the table by that column.

Parent topic: [Audio-Visual Profile Support for an ICX Switch](#)

Creating an AV Profile on an ICX Switch

Using an AV profile that is created from the RUCKUS Unleashed web interface allows the ICX AV switch to effectively handle Audio-Visual traffic.

If a RUCKUS Unleashed AP is directly connected to an ICX switch port, and the ICX username and password has not changed, then the Unleashed network will manage the ICX switch automatically, else click the **To manage the ICX switch, click here** link and enter the username and password. If an Unleashed AP is not connected to the ICX switch, then add the ICX switch manually by adding the IP address, admin name, and password.

1. From the **Switches** component, select a specific ICX switch, and click **Show Ports Info**.
By default, the **Ports Detail** tab is displayed.
2. Select the **AV Profiles** tab and from the **AV Profiles** table, click **Create**.
3. In the **Create New** dialog box, select the ports to which you want to bind an AV profile and enter the AV profile name.

Figure 1. Creating an AV Profile on an ICX Switch

Create New

UNIT 1 (standalone)

ICX8200-C08ZP

MODULE1

1

3

5

7

2

4

6

8

MODULE2

1

2

Profile Name

Profile Template

AES67 Audio-Video

+

✎

Color

#D9E3F0

Untagged VLAN

IGMP

Enabled

Querier Version

v2

Querier Election

☐ Enable

DHCP Relay

☐

OK

Cancel

4. Select the **AV Profile Template** from the list or click the  icon to create a new AV profile template. You can also create an AV profile template by clicking **Create** in the **AV Profile Template (Shared)** table.
 - a. In the **Create New** dialog box, enter an AV profile template name and description.
A maximum of eight AV profiles per ICX switch can be created, and a port can only be bound to one AV profile.
 - b. Enable **PTPv2**.

- c. For **Quality of Service**, create a QoS prioritization rule by clicking **Create New**. Select **QoS Type** (DSCP), **Value**, **Queue** (0 through 6), and click **Save** and then click **OK**.
5. For **Color**, select the color for the AV profile and click **OK**.
6. For **Untagged VLAN**, enter the untagged VLAN ID.

The ports bound to an AV profile are set to untagged for that VLAN, while unbound ports are tagged for the same VLAN.

7. To configure the IGMP settings, select the **IGMP** check box and complete the following steps:
 - a. For **Querier Version**, select **V2** or **V3**.
 - b. Enable **Querier Election** and enter the Querier IP address.

 **Note:** IGMP and Querier Version settings are pre-configured for the built-in templates. Only for custom templates, you can configure these settings. For the Data AV profile template, IGMP setting is disabled.

8. To configure the DHCP setting, enable the **DHCP Relay** check box and enter the VLAN IP address, Netmask IP address, and DHCP Server IP address, and then click **OK**.

Parent topic: [Audio-Visual Profile Support for an ICX Switch](#)

Fanless Mode Support for an ICX Switch

Fanless mode, when enabled, allows the device to run silently with zero RPM fan speed, while limiting the Power over Ethernet (PoE) budget to 150 Watts.

Overview

Beginning with Unleashed 200.16, fanless mode on an ICX switch can be enabled or disabled from the RUCKUS Unleashed web interface. If fanless mode is disabled, the fan speed is reset to auto and the PoE budget is reinstated to the default value.

Requirements

- ICX 7150-24P, ICX 7150-48P, ICX 8200-24, ICX 8200-24P, ICX 8200-48, ICX 8200-48P, and ICX 8200-48PF devices support fanless mode.
- Fanless mode can be enabled only if the PoE power allocation is less than or equal to 150 Watts.

Considerations

- Even if fanless mode is configured on a switch, fans will be turned on temporarily during bootup or reboot and will be turned off after the bootup.
- In fanless mode operation, if the temperature of the switch goes beyond a maximum limit, the switch reboots. When fanless mode is enabled on an ICX 8200 device with both 1G and 10G SFPs installed, the maximum temperature for the 10G SFP ports is used.
- When fanless mode is enabled, inserting a 25G SFP will disable the port. If a 25G SFP is already inserted in a port, the optic must be removed before fanless mode can be enabled.
- If the PoE power allocation is more than 150W, PoE load must be reduced by disabling PoE on interfaces manually or by unplugging PoE devices.

Best Practices

Check for PoE allocation on the switch before enabling fanless mode.

Prerequisites

- If the PoE power allocation is more than 150W, PoE load must be reduced by disabling PoE on interfaces manually or by unplugging PoE devices.
- When fanless mode is enabled, inserting a high-speed optic such as a 25G SFP will disable the port to prevent overheating. If a 25G SFP is already inserted in a port, the optic must be removed before fanless mode can be enabled.

Parent topic: [ICX Switch Management](#)

Enabling Fanless Mode on an ICX Switch

Fanless mode enables the device to operate with the fans disabled while limiting the PoE budget to 150 Watts. That is, when fanless mode is enabled, the fan speed is set to zero RPM, thus allowing the device to operate silently. You can enable fanless mode on an ICX switch from the RUCKUS Unleashed web interface.

Before enabling the fanless mode on an ICX switch, ensure that the PoE power allocation is less than or equal to 150 Watts.


 **Note:** ICX 7150-24P, ICX 7150-48P, ICX 8200-24, ICX 8200-24P, ICX 8200-48, ICX 8200-48P, and ICX 8200-48PF devices support fanless mode.

1. From the dashboard, expand the **Switches** component, select a specific ICX switch, and click **Edit**.
2. In the **Edit Switch** dialog box, for **Enable Fans**, select a specific switch unit for which you wish to disable fanless mode or click **Unselect All** to disable all the fans on the switch and click **OK**.

Figure 1. Edit Switch: Enabling Fanless ModeThe image shows a dialog box titled "Edit Switch" with a close button (X) in the top right corner. Inside the dialog, there is a "Device Name" field containing the text "ICX8200-24P Router". Below this, there is a section labeled "Enable Fans" with a yellow warning triangle icon. To the right of "Enable Fans" are two links: "Select All" and "Unselect All". Below these links are two checkboxes, both of which are checked. The first checkbox is labeled "UNIT 1" and the second is labeled "UNIT 2". At the bottom of the dialog, there are two buttons: "OK" and "Cancel".

You can also enable the fanless mode from the **Ports Detail** tab. From the **Switches** component, click **Show Ports Info** to expand the port details view. In the **Ports Detail** tab, for a specific switch unit, click the  icon to enable the fanless mode. A confirmation message is displayed. Click **Yes**.

Figure 2. Ports Detail Tab: Enabling Fanless Mode

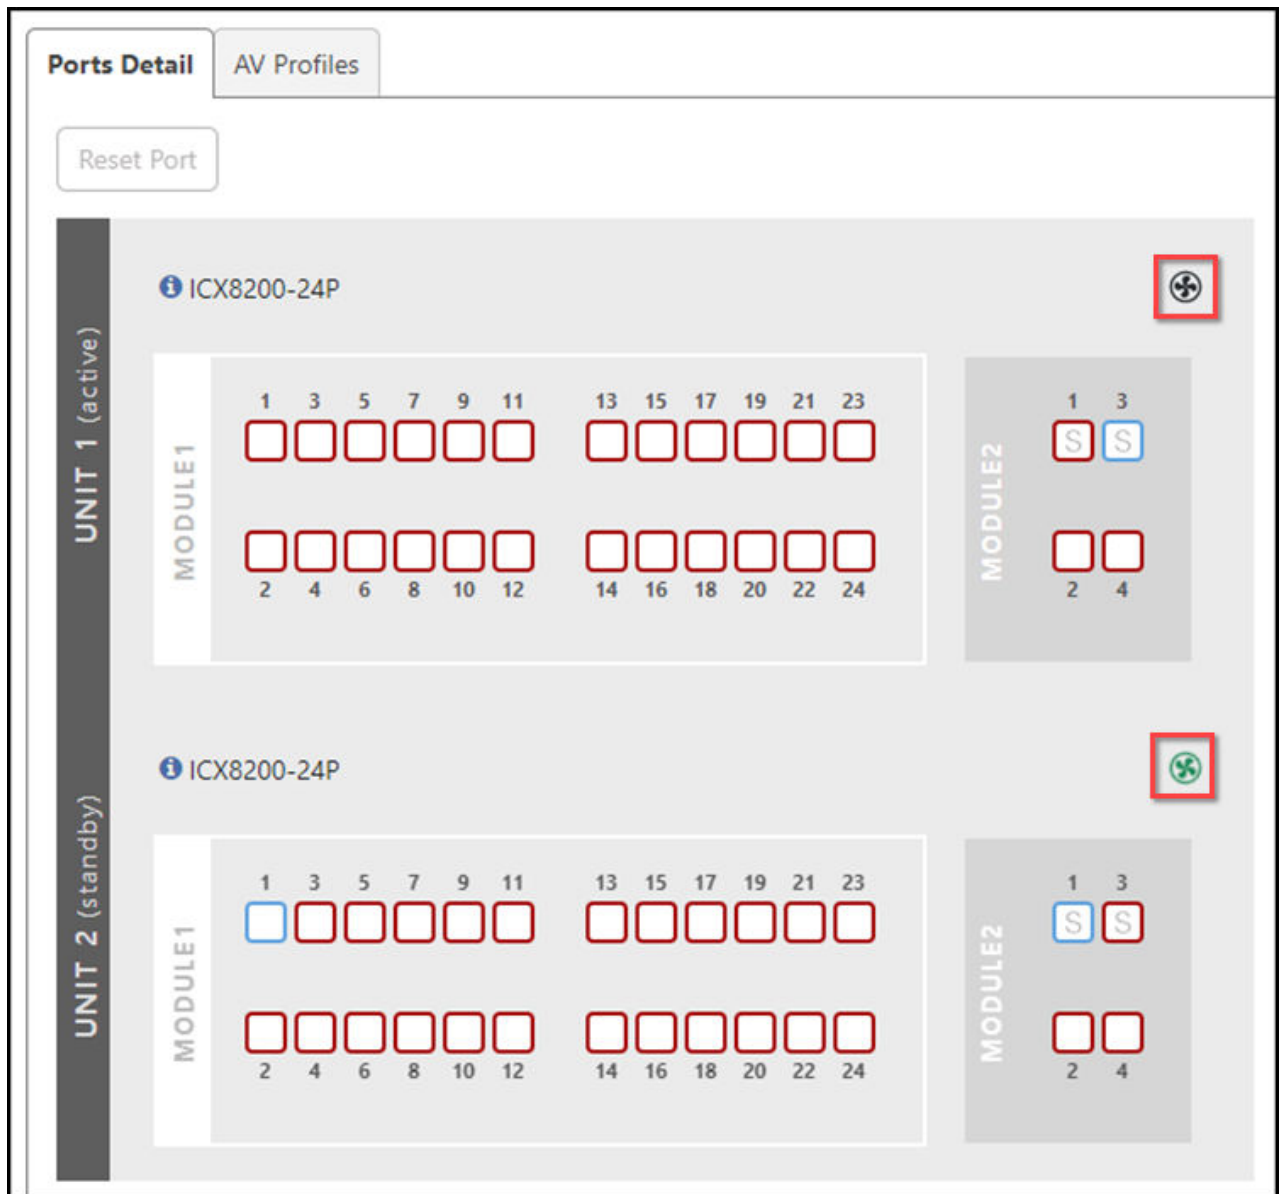

If a fan is enabled on a switch unit, then the  icon will appear rotating in green, else it will appear stationary in black.

Parent topic: [Fanless Mode Support for an ICX Switch](#)

Backing up and Restoring a Switch Configuration

RUCKUS Unleashed ICX switch management provides tools for performing a backup of the current ICX switch configuration and restore to a previously saved configuration backup file.


Use the following procedure to perform a backup and restore of the current switch configuration:

1. Expand the **Switches** dashboard component and select a connected switch from the device list on the left.

- Click **More** > **Back Up Configuration**.

 **Note:** Only connected switches can backup and restore the configuration.


Figure 1. Backing up a Switch Configuration

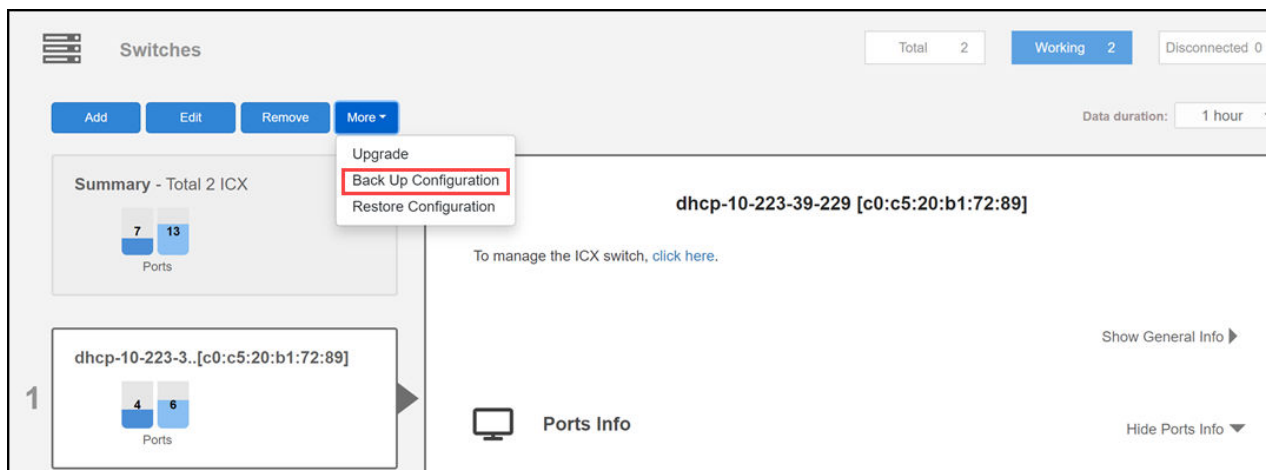

The switch status displays "Downloading" as the configuration file is generated and prepared for download. When finished, the backup file is created as a .txt file that can be saved to your local computer.


- Save the backup file to a convenient location.
- To restore configuration settings from a previously saved backup file, select the switch and click **More** > **Restore Configuration**.

Figure 2. Restoring a Switch Configuration

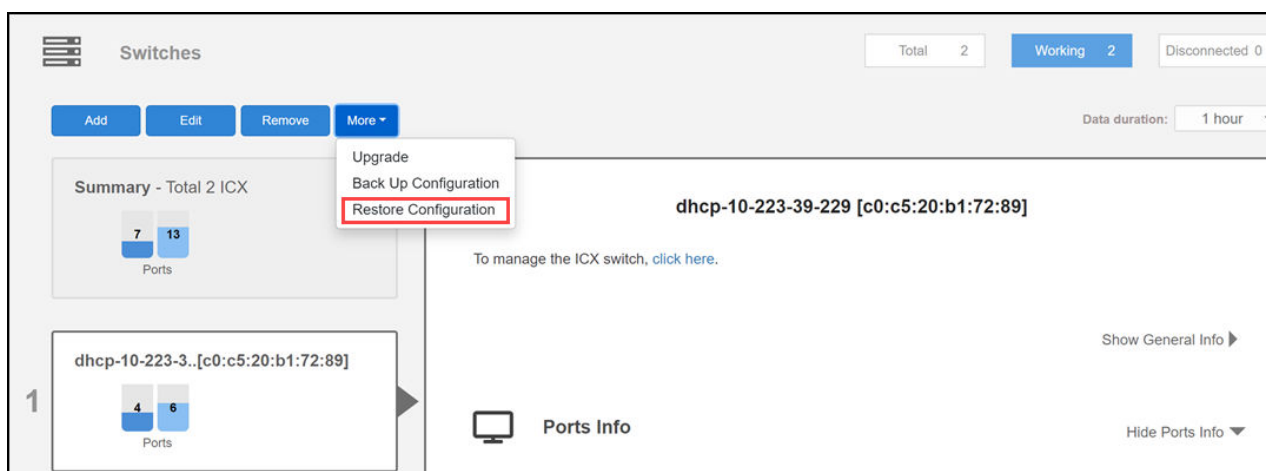

- In the **Restore** dialog box, click **Browse** and select a valid backup file.
- Click **Restore**.


Figure 3. Restoring Switch Configuration from a Backup File

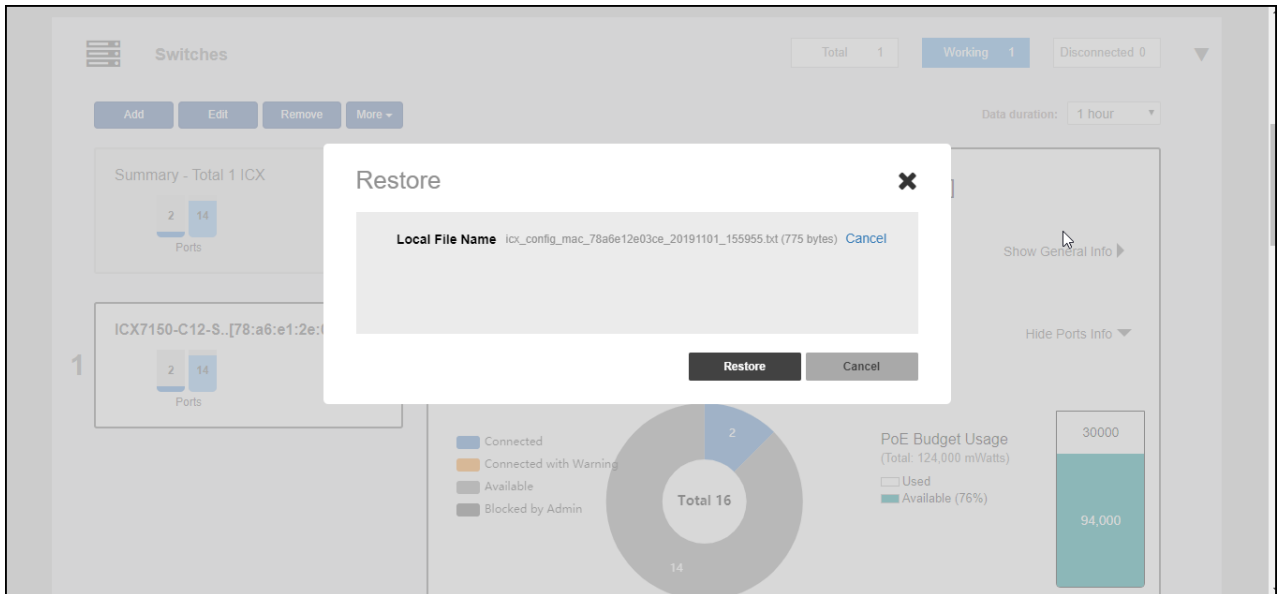

7. Click **Yes** to confirm.

The **ICX Switch is Restoring** screen appears, notifying you that the restore process may take 10 minutes or more.

Figure 4. Switch Restore in Process

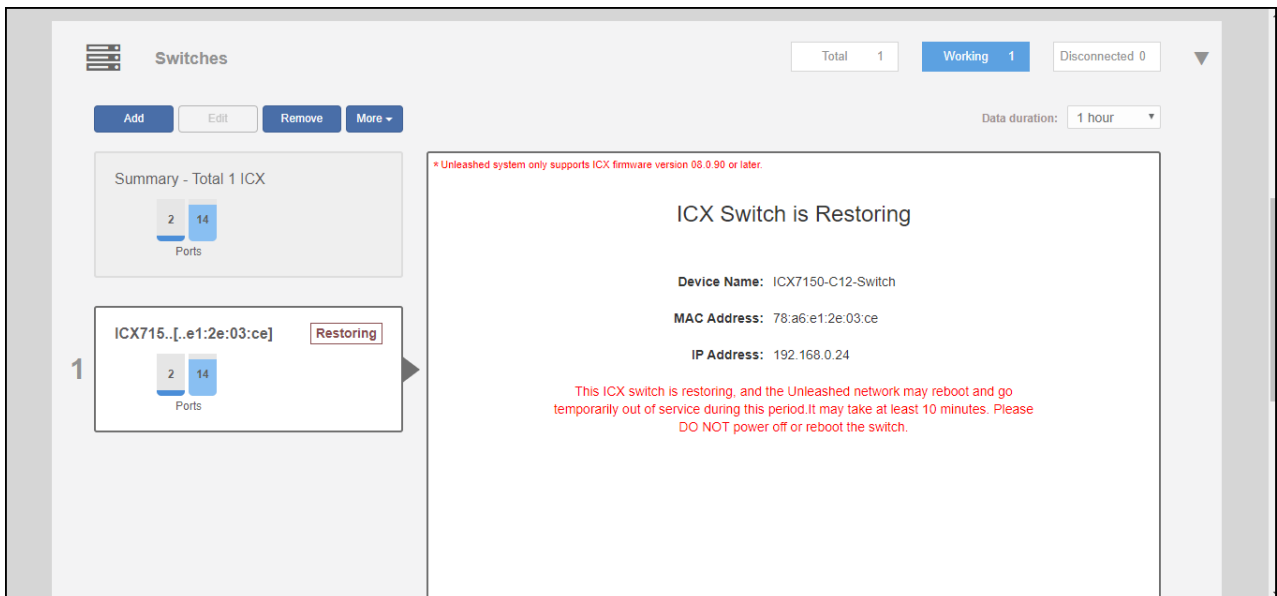

When the process is finished, the restored switch appears in the connected device list.

Parent topic: [ICX Switch Management](#)

Backing up and Restoring a Switch List


RUCKUS Unleashed ICX switch management provides tools for performing a backup of the current ICX switch list and restore to a previously saved configuration backup file. Use the **Backup ICX List** and **Restore ICX List** options when you want to reset a switch to factory default settings to join a new RUCKUS Unleashed system.

- Note:** You can restore only the ICX switch list that is in the same mode (Dedicated, Bridge, or Gateway) as the backup ICX list. For example, if the new RUCKUS Unleashed system is in Dedicated mode, it cannot restore the ICX switch list that is in Bridge mode.

Use the following procedure to perform a backup and restore of the current switch configuration list:

- Expand the **Switches** dashboard component. Select **Summary** and click **Backup ICX List**.


Figure 1. Backing up a Switch Configuration List

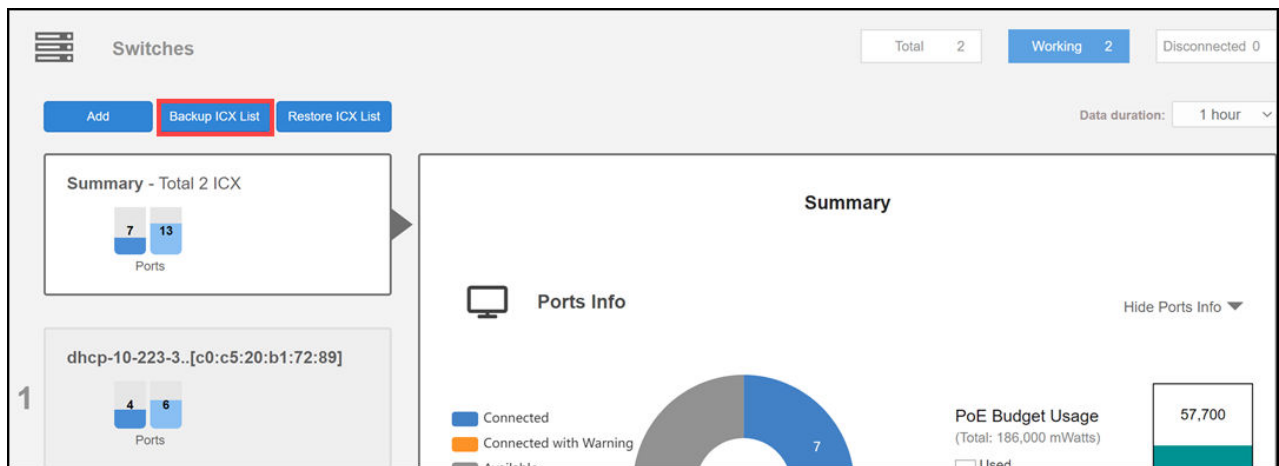

When finished, all the ICX switches including the disconnected ICX switches are backed up and restored. The backup file is created as a .bak file that can be saved to your local computer.

- Save the backup file to a convenient location.
- To restore configuration settings from a previously saved backup file, select **Summary** and click **Restore ICX List**. Alternately, you can restore the switch list from the **Admin & Services > Administration > Backup & Restore** screen by selecting the **Restore ICX Switches List** option from the **Restore Configuration** section. Refer to [Backup and Restore](#) for more information.


Figure 2. Restoring a Switch Configuration List

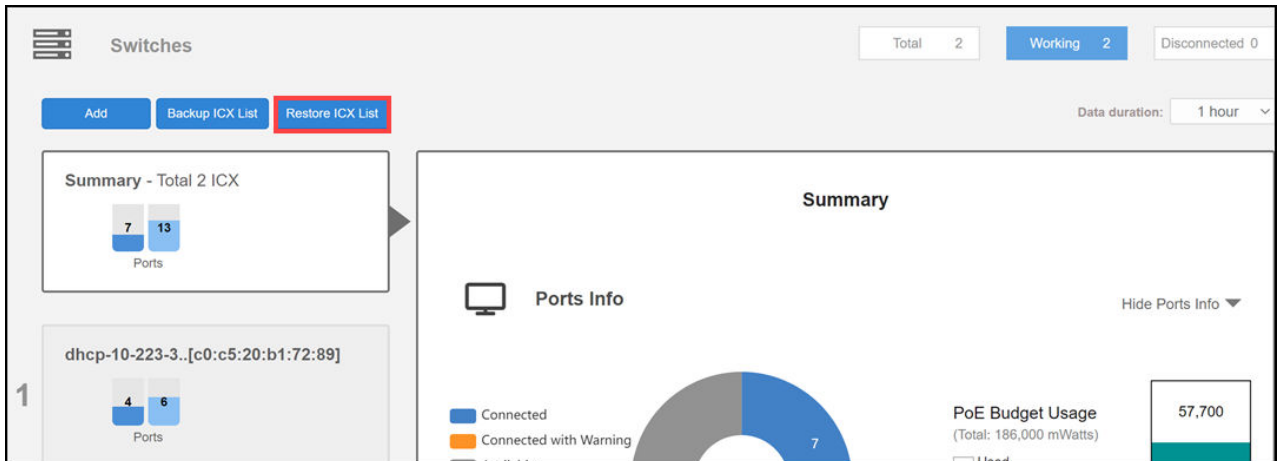

4. In the **Restore** dialog box, click **Browse** and select a valid backup file.


5. Click **Restore**.

Figure 3. Restoring a Switch List from a Backup File

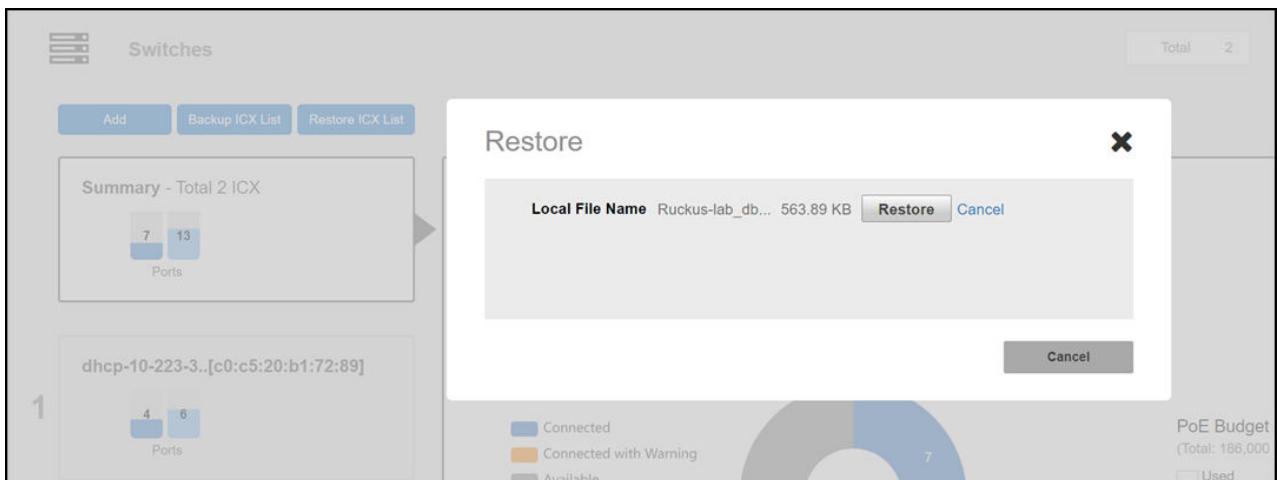

A confirmation message appears notifying you to confirm the restore process.

Figure 4. Switch Restore Confirmation Message

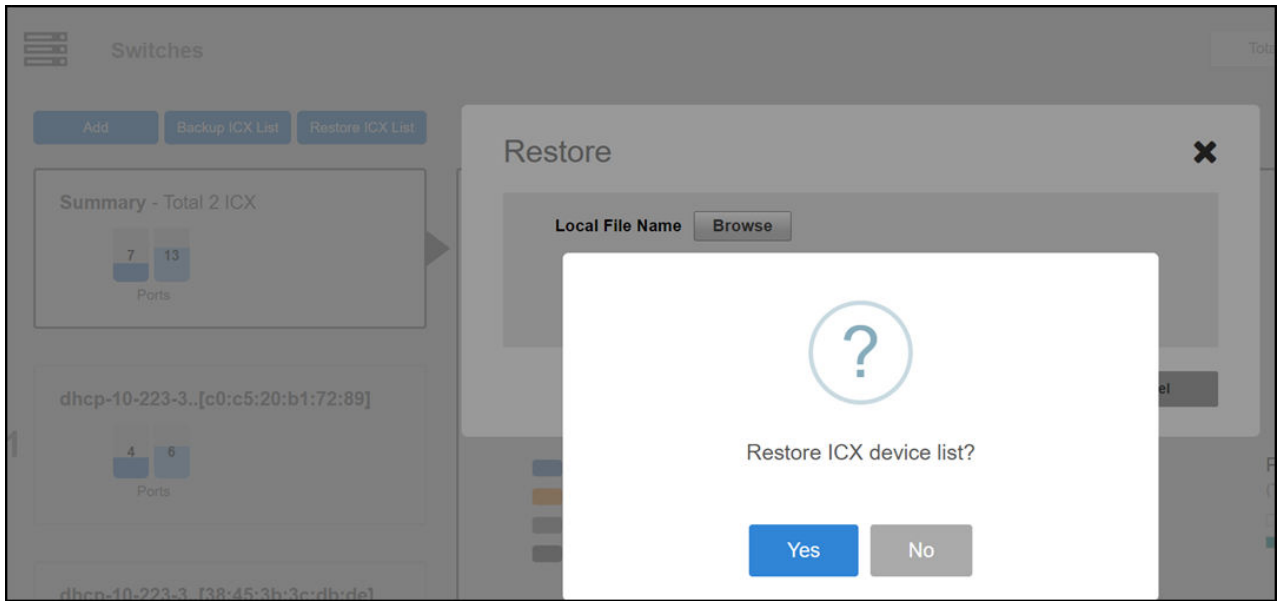


6. Click **Yes** to confirm.

The **Restoring** screen appears, notifying you that the restore process has begun. A progress bar shows the relative status of the restore process.

- **Note:** The restore process may take 10 minutes or more, during which time the Unleashed network may reboot and go temporarily out of service. Do not manually power off or reboot the switch.

Figure 5. Switch Restore in Process

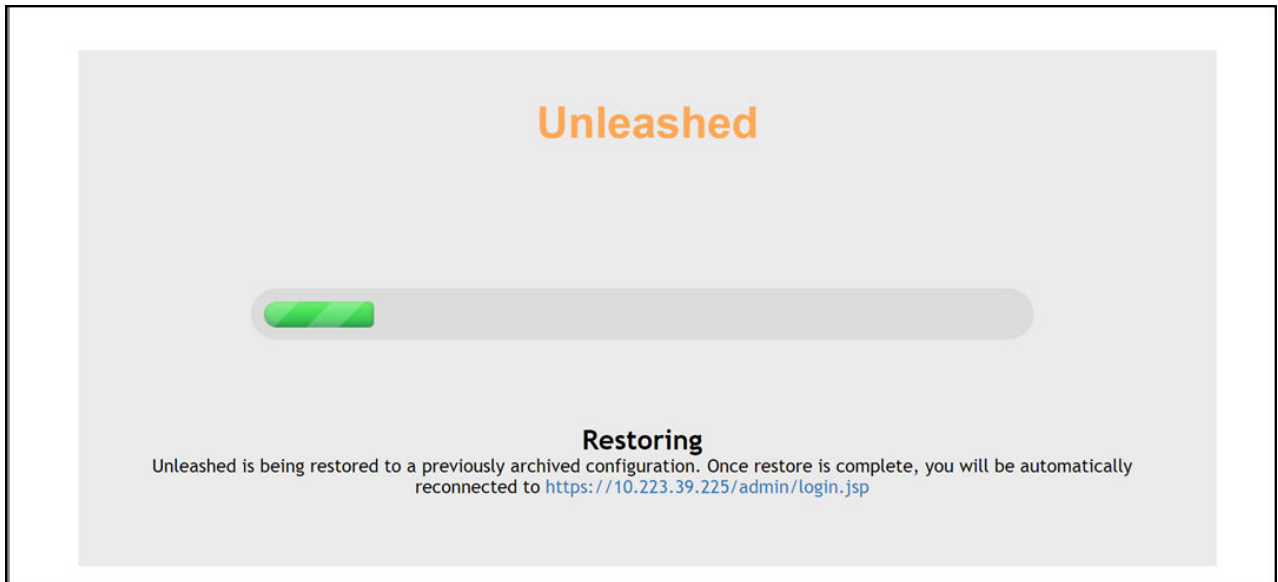

When the process is finished, the restored switch list appears when you click the **Summary** box.

Parent topic: [ICX Switch Management](#)


Upgrading ICX Switch Firmware

Unleashed management requires FastIron firmware version 08.0.90 or later.

To upgrade the firmware of an ICX switch, use the following procedure:


1. Expand the Switches dashboard component and select a connected switch from the connected device list on the left.
2. Click **More > Upgrade**.

Figure 1. Upgrading an ICX switch

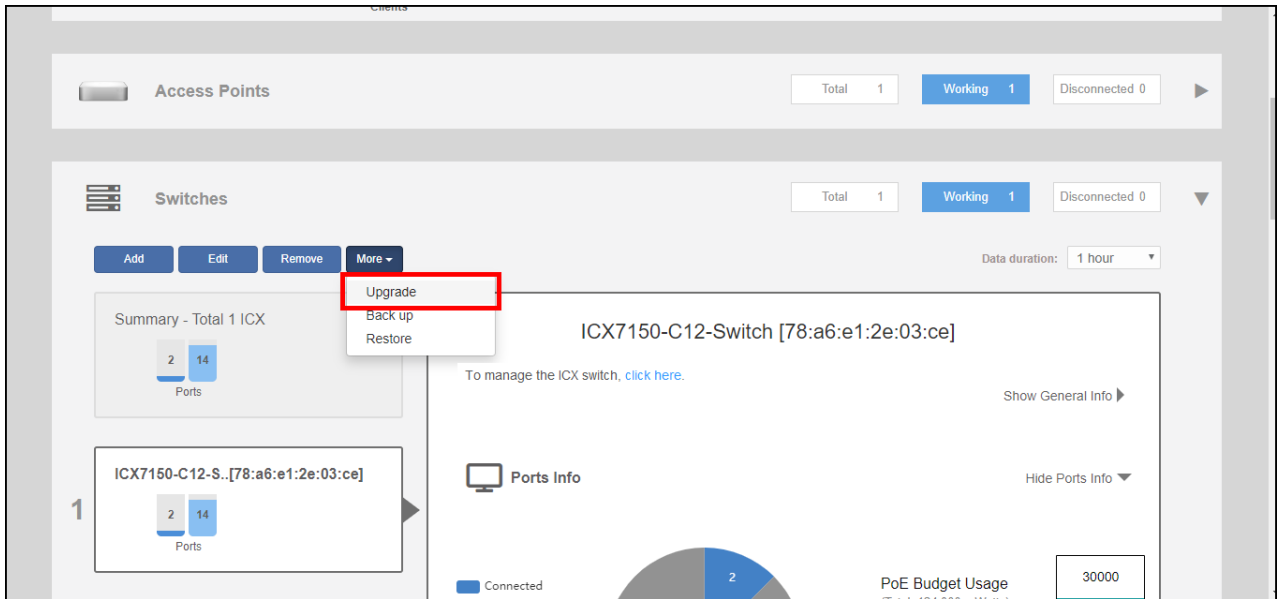


3. In the Upgrade dialog, click **Choose File** and select a valid FastIron image file.

Figure 2. Choose upgrade image file

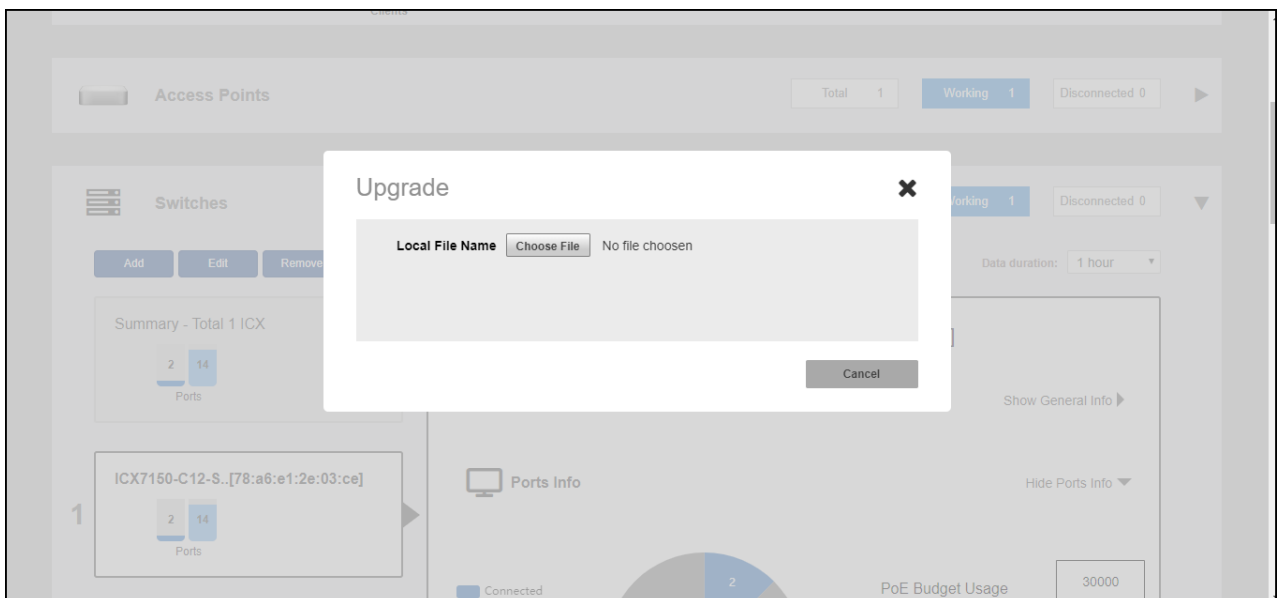


4. Click **Upgrade**. A warning message appears notifying you that the upgrade will cause a power outage to your Unleashed APs. Click **Yes** to continue.

Figure 3. Upgrade warning message

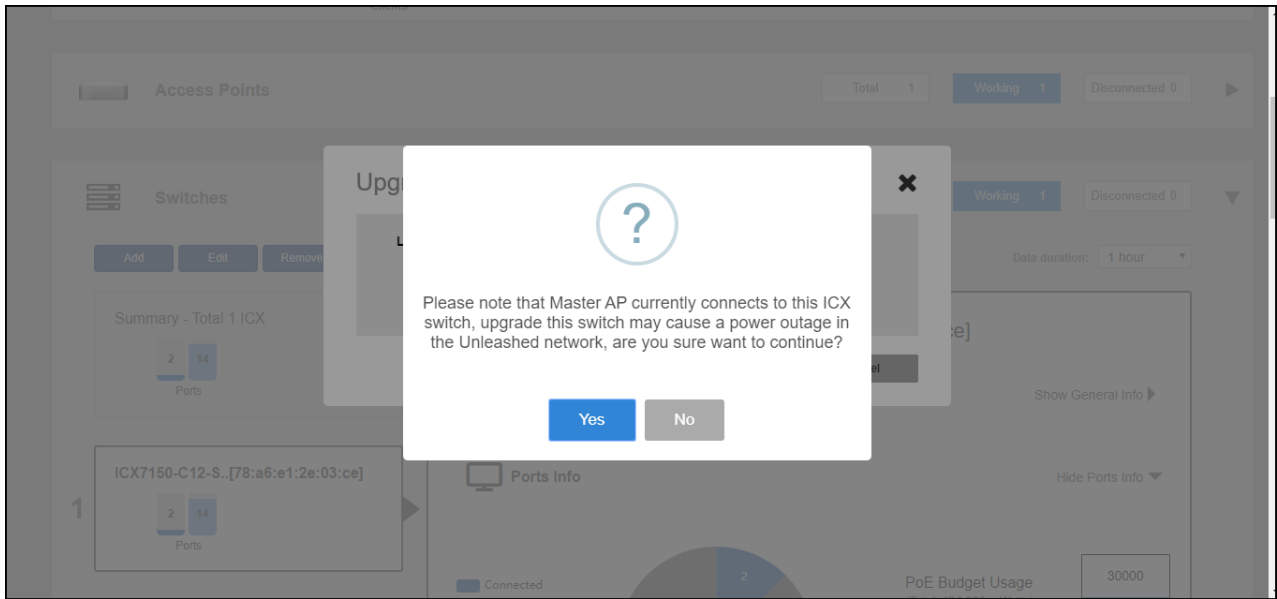

5. When the upgrade is complete, Unleashed reboots and displays the switch in the connected device list.
6. Verify the new firmware version from the **Show General Info** display.

Figure 4. Verify switch version

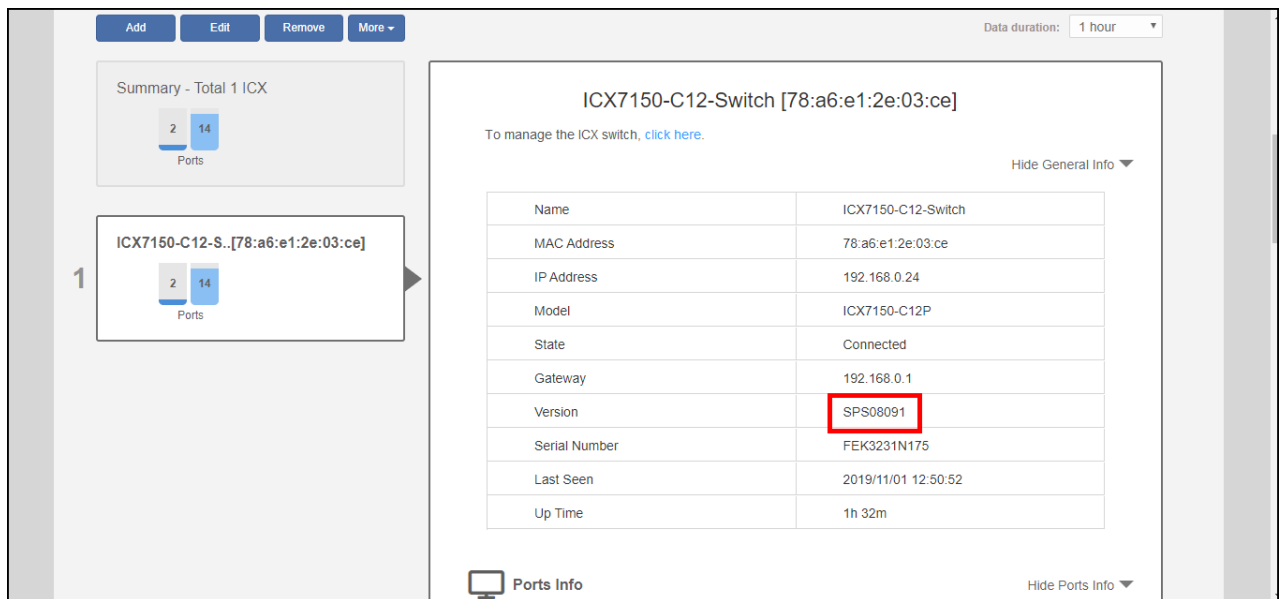

Parent topic: [ICX Switch Management](#)

Working with Clients

Client Management Overview

Viewing the Clients List

Renaming a Client

Deleting a Client

Permanently Blocking a Client Device

Marking a Client as a Favorite

Running a Speed Performance Test on a Wireless Client

Client Connection Troubleshooting

Marking a Client as a Legacy Device

Adding User Accounts to the Internal User Database

Authenticating Clients Using an External Database

Client Management Overview


The Unleashed Admin Interface provides tools for monitoring and managing wireless clients, including blocking and deleting client devices, viewing an overview of client traffic, and drilling down into details about a specific client's connection status and traffic statistics.

Parent topic: [Working with Clients](#)

Viewing the Clients List

To view a list of currently connected wireless clients, click on the **Clients** component on the dashboard.

Figure 1. Clients Component

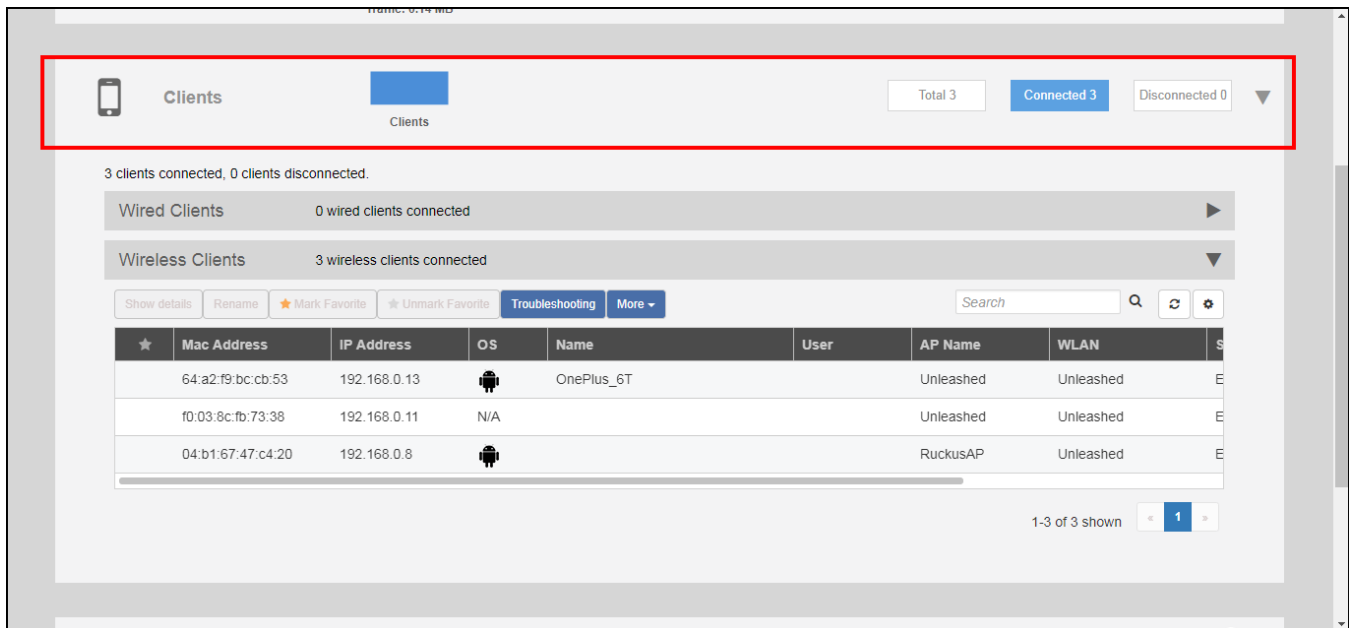


The clients list displays the number of connected and disconnected clients, along with a table that includes detailed information about the client. You can customize which fields must appear in the **Wireless Clients** table by clicking the  icon and selecting or deselecting the desired column names in **Columns**. You can customize the search criteria using all or any of the key words in **Rows**.

You can sort the clients list table by clicking the associated column header.

To view additional details about a specific client, select the row and click **Show Details**.

Figure 2. Viewing the List of Currently Connected Clients

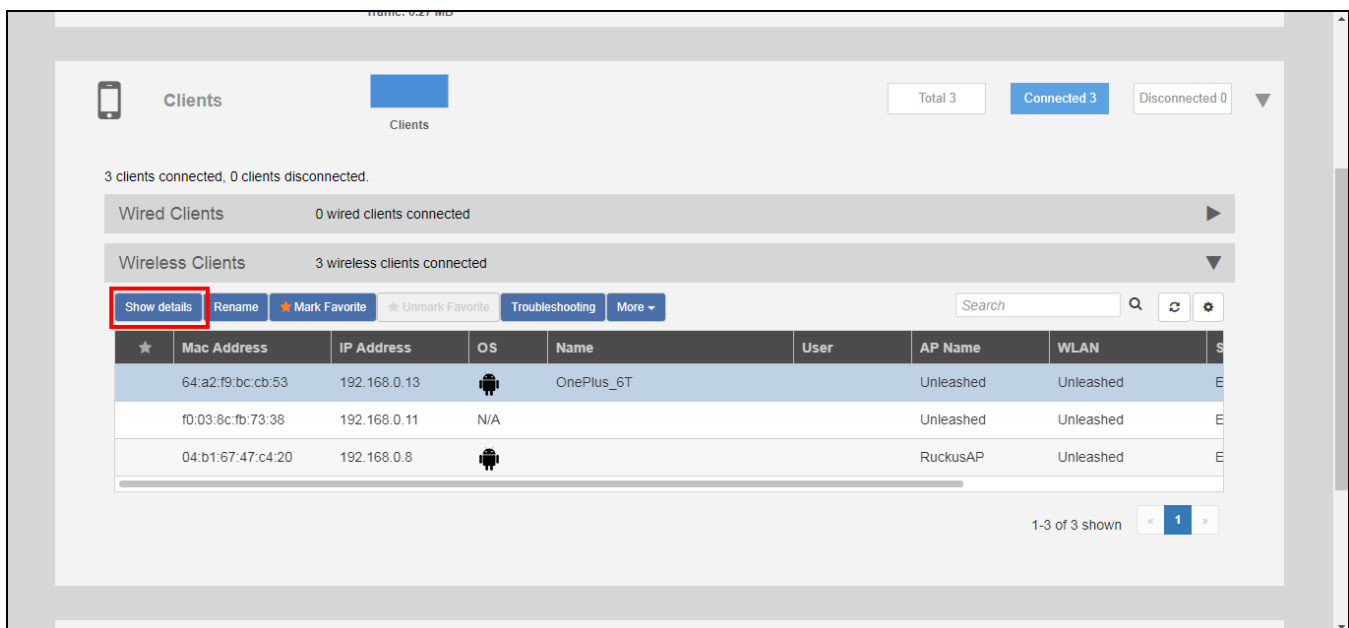

The following client information is displayed:


- **Name:** Displays the name or the unique identifier for the device, typically the MAC address of the client device.
- **Device Name:** Displays the name assigned to the device, often the same as the MAC address.
- **OS Vendor Type:** Displays the operating system vendor, such as macOS, iOS, or Android.
- **Device Model:** Displays the specific model of the device.
- **IP Address:** Displays the IP address assigned to the device.
- **MAC:** Displays the MAC address of the device.
- **WLAN:** Displays the WLAN name the device is connected to.
- **AP Name:** Displays the name of the AP the device is connected to.
- **AP MAC:** Displays the MAC address of the AP.
- **Received from client:** Displays the amount of data received by the AP from the client device (in packet/bytes).
- **Transmitted to client:** Displays the amount of data sent from the AP to the client device (in packet/bytes).
- **RSSI:** Displays the signal strength received by the device (in dBm).
- **SNR:** Displays the quality of signal received by the device (in dB).
- **Health:** Displays the overall health status of the connection (Excellent, Good, Poor).
- **BSSID:** Displays the MAC address of the AP radio.
- **VLAN:** Displays the VLAN ID the device is on.
- **Username:** Displays the username associated with the device, if applicable.
- **Role:** Displays the role assigned to the device or user in the network.
- **Radio:** Displays the radio frequency the device is using.
- **Radio Type:** Displays an icon indicating the type of Wi-Fi network connection protocol the device is using.

Table 1. Radio Type Indicators

Radio Type Icon	Supported IEEE 802.11 Standards
	IEEE 802.11b, IEEE 802.11g, IEEE 802.11bg
	IEEE 802.11a
	IEEE 802.11n
	IEEE 802.11ac
	IEEE 802.11ax
	IEEE 802.11be

- **Radio Band:** Displays the frequency band (2.4 GHz, 5 GHz, or 6 GHz) the device is operating on.
- **Auth Method:** Displays the authentication method used by the device.
- **Encryption:** Displays the encryption type used for the connection.
- **Auth Status:** Displays the current authentication status of the device.
- **Channel:** Displays the specific channel the device is using.
- **Channelization:** Displays the channel width used for the connection.
- **TX drops due to retry failure:** Displays the number of transmission drops due to retry failures.
- **Connected Since:** Displays the time since the device has been connected.
- **Duration:** Displays the total duration of the connection.
- **AP Rx Signal (dB):** Displays the received signal strength at the AP.
- **AP Tx Data Rate:** Displays the data rate at which the AP is transmitting to the device.

Figure 3. Viewing Details of a Specific Client

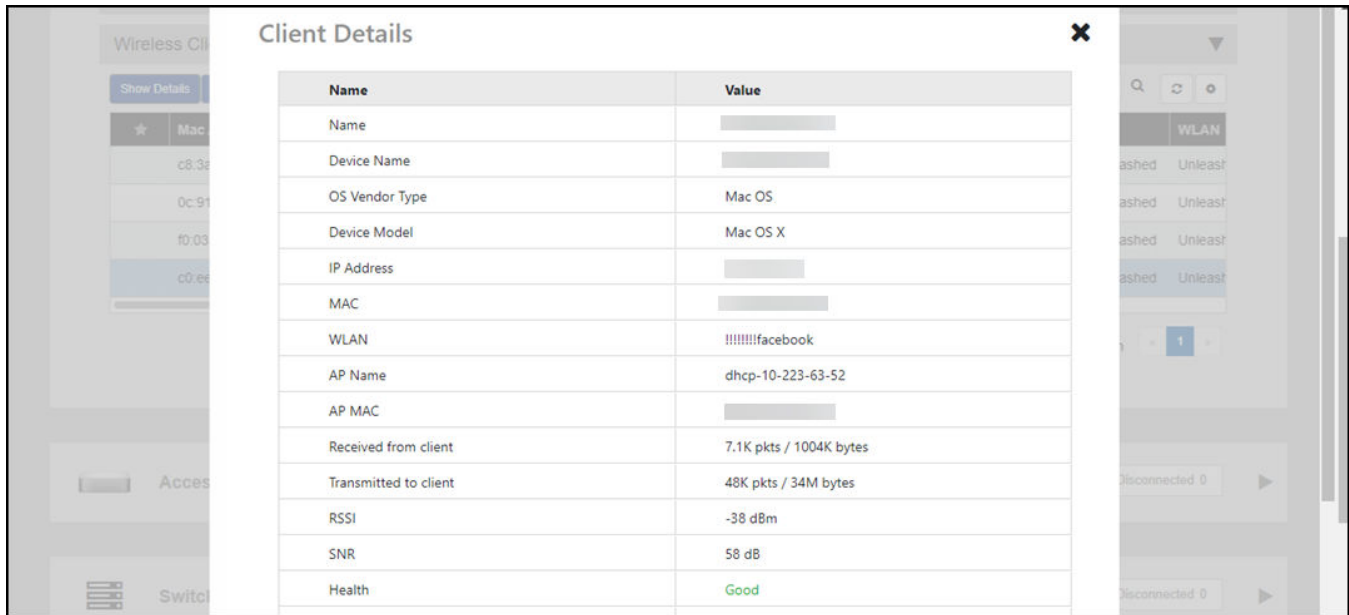

Name	Value
Name	
Device Name	
OS Vendor Type	Mac OS
Device Model	Mac OS X
IP Address	
MAC	
WLAN	!!!!!!facebook
AP Name	dhcp-10-223-63-52
AP MAC	
Received from client	7.1K pkts / 1004K bytes
Transmitted to client	48K pkts / 34M bytes
RSSI	-38 dBm
SNR	58 dB
Health	Good

Parent topic: [Working with Clients](#)

Renaming a Client

Unleashed collects client host names from the client's operating system and displays them in client lists, tables and charts on the web interface. However, the host names provided by the OS are often not very useful in identifying clients on the network.


Entering a custom host name manually via the web interface is one way to address this issue.

Any renamed clients will be displayed using the new name whenever they are online. The maximum number of marked clients is 520. When this max is reached, Unleashed will delete the oldest renamed offline stations, 10 stations at a time, and trigger an alarm event to indicate the renamed stations have been deleted.

To rename a connected wireless client:

1. Open the **Clients** component, and select the client you want to rename from the list.
2. Click **Rename**.


Figure 1. Rename a client

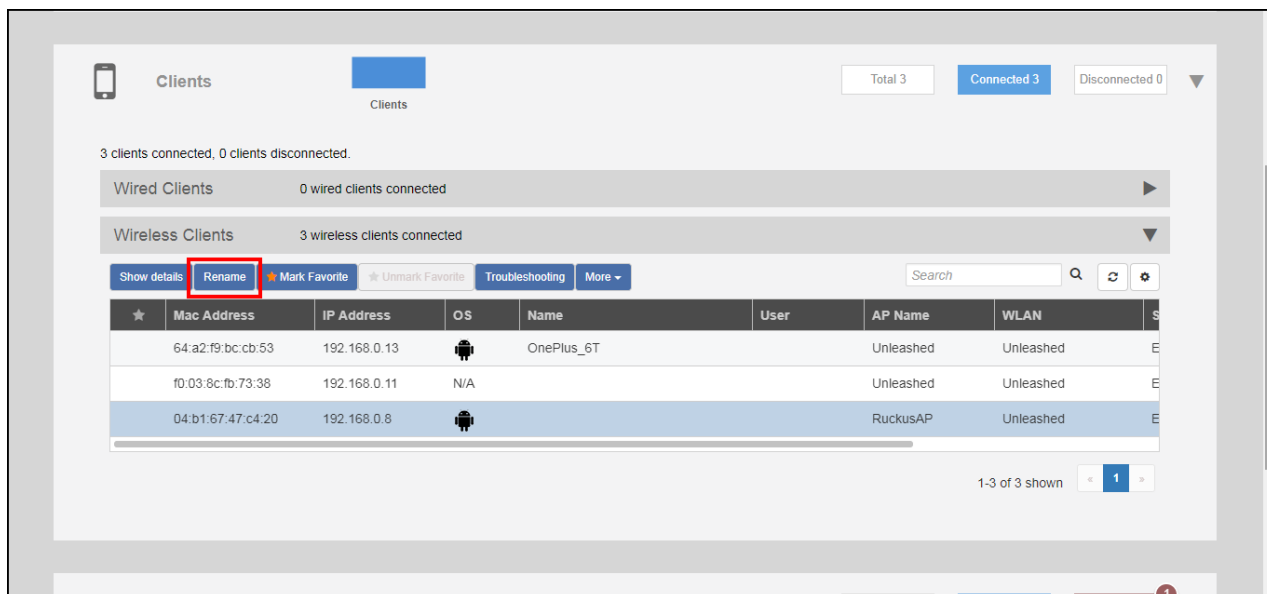

The Rename Client dialog appears.


3. Enter the **New Name**, and click **OK**.

Figure 2. Enter new client name

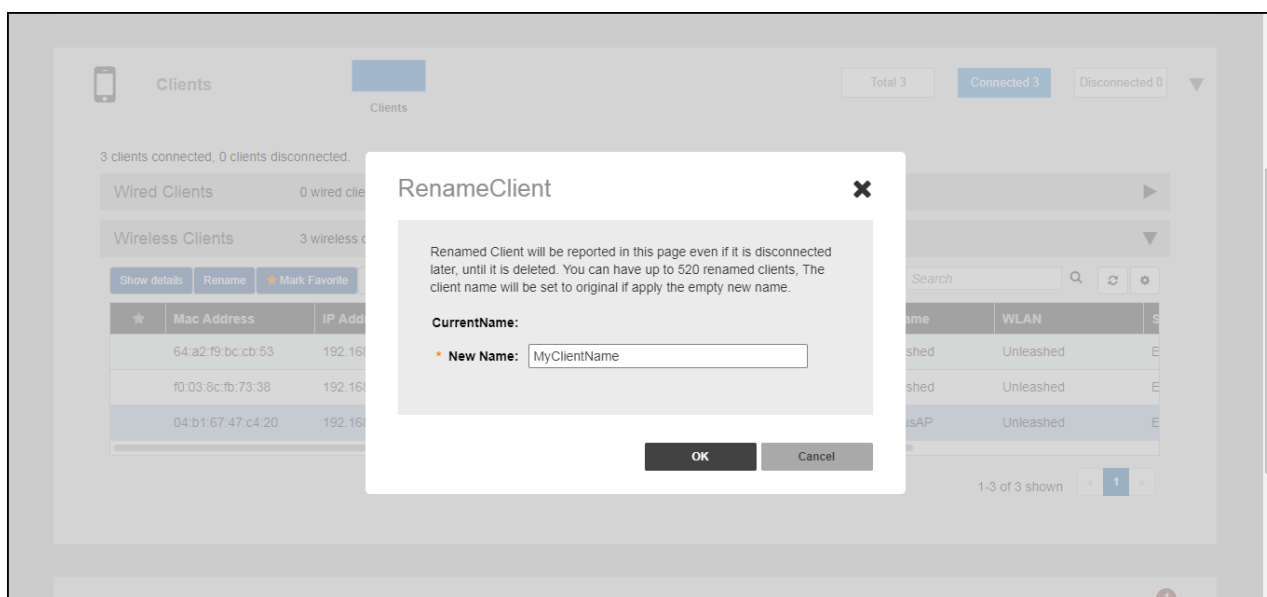

4. The new client name now appears in clients lists in the Host Name column.

Figure 3. New name appears in Host Name

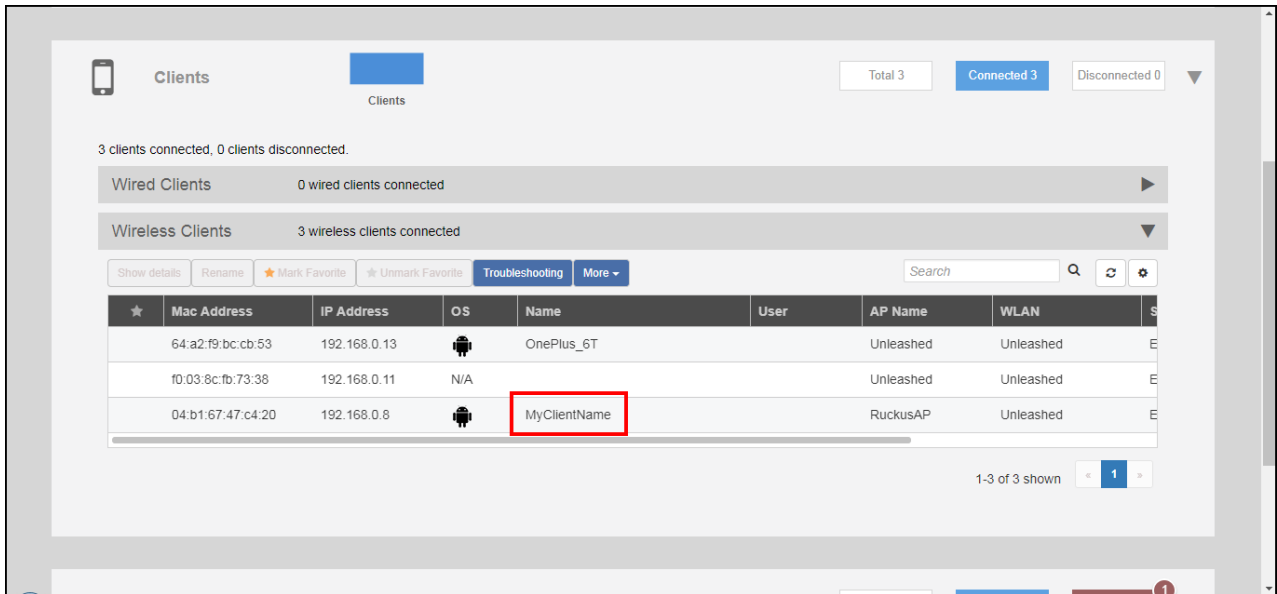


Parent topic: [Working with Clients](#)

Deleting a Client

Follow these steps to temporarily disconnect a client device from your WLAN. (The user can simply reconnect manually, if they prefer.) This is helpful as a troubleshooting tip for problematic network connections.

1. Expand the **Clients** component on the Dashboard.
2. Select a client from the list, and click **Delete**.

Figure 1. Click the Delete button to temporarily delete a client. The client will be able to reconnect.

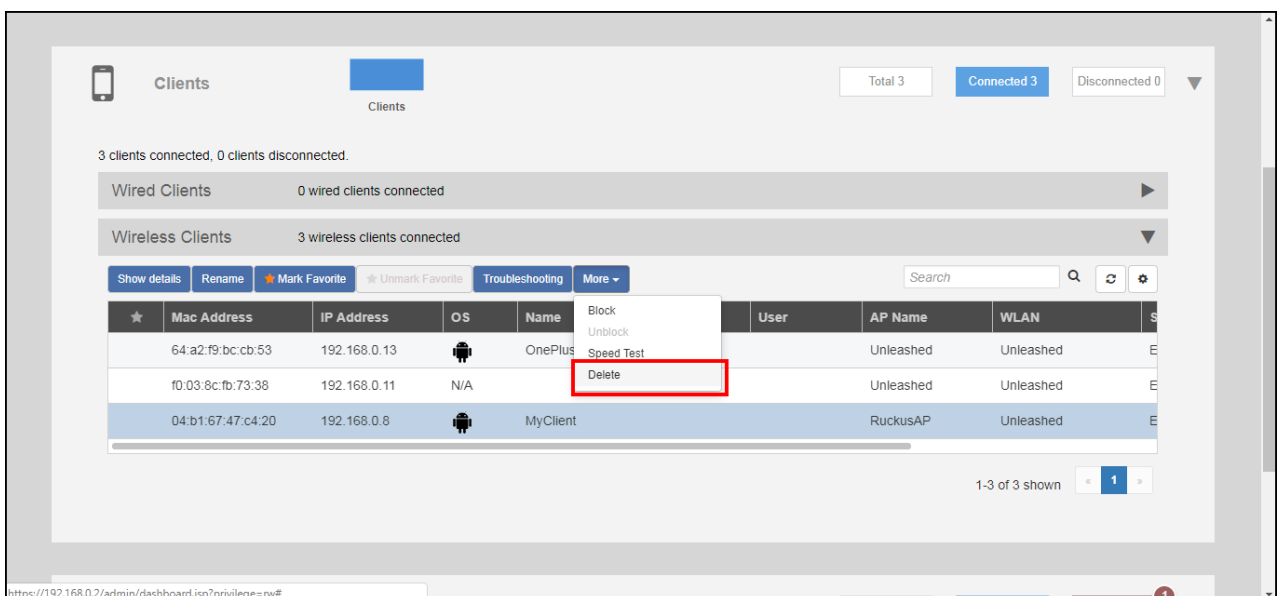

The entry is deleted from the Active Clients list, and the listed device is disconnected from your WLAN.

The user can reconnect at any time, which, if this proves to be a problem, may prompt you to consider [Permanently Blocking a Client Device](#).


Parent topic: [Working with Clients](#)

Permanently Blocking a Client Device

Complete the following steps to permanently block a client device from WLAN connections.

1. Expand the **Clients** component on the dashboard.
2. In the **Status** column of the clients list, identify any unauthorized users.
3. Select an AP from the list, and click the **Block** button from the **More** pull-down menu to move this client to the blocked clients list.

Figure 1. Blocking a Client Permanently

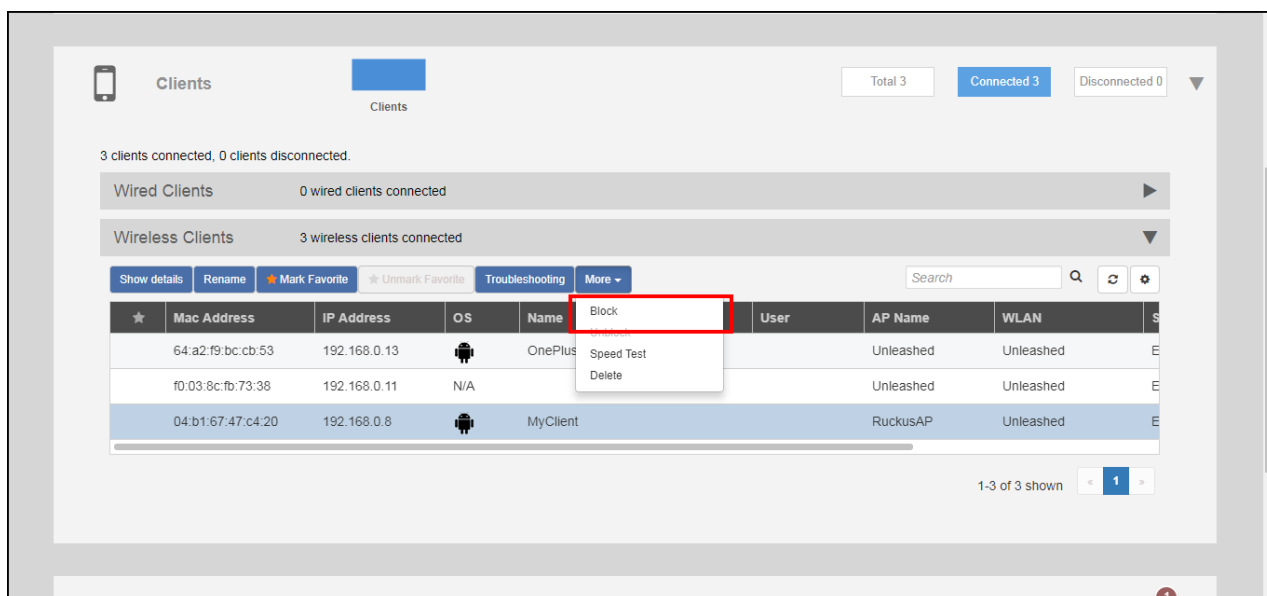

The status of the client is changed to **Blocked**, preventing the listed device from using your RUCKUS WLANs.

Parent topic: [Working with Clients](#)

Marking a Client as a Favorite


Designating a client as a "favorite" client provides a way to monitor the client's behavior, triggering a report when the client goes online or offline.

Note: Unleashed supports a maximum of 20 favorite clients.

To mark a client as a favorite, use the following procedure:

1. Expand the **Clients** component on the Unleashed Dashboard.
2. Select a client from the list, and click **Mark Favorite**.

Figure 1. Mark Favorite

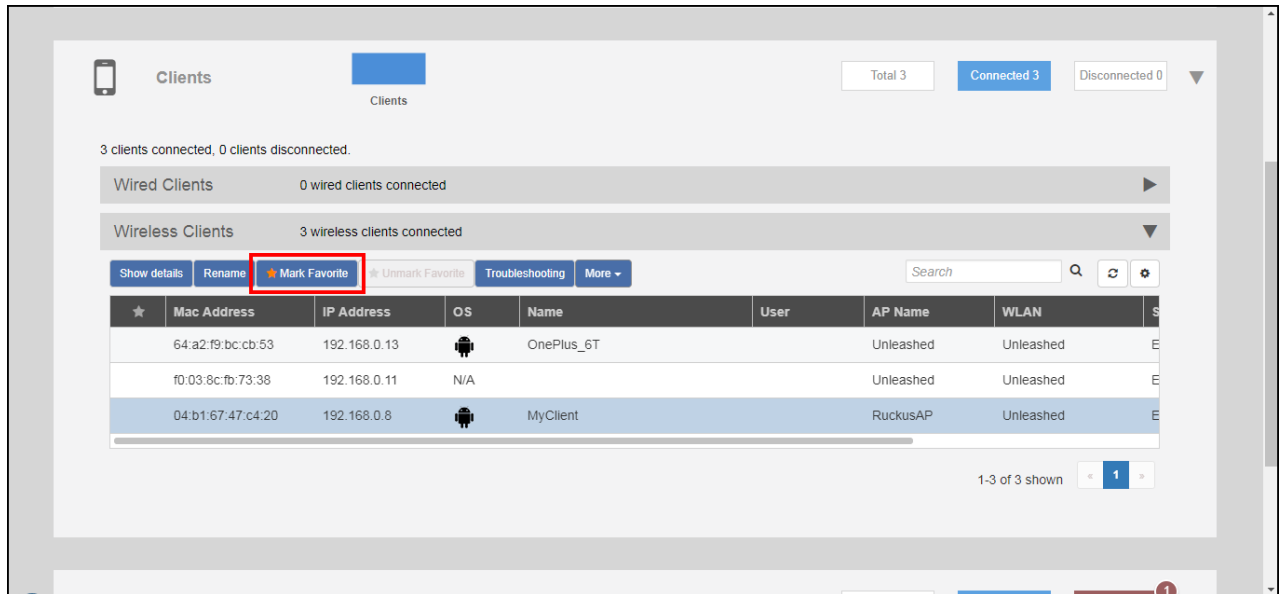

An alarm event will be generated each time this client goes online or offline.

Parent topic: [Working with Clients](#)


Running a Speed Performance Test on a Wireless Client

You can test the wireless throughput to a client using the Speed Test tool.

Before performing this procedure, ensure that your RUCKUS Unleashed client is running version 200.16 or later, and that the station (device) you want to test has the iPerf3 tool installed directly or available through the RUCKUS Unleashed mobile app.

1. Install (<https://iperf.fr/iperf-download.php>) and enable the iPerf3 service as server mode. For more information about iPerf3, refer to [iPerf3 Integration in Unleashed](#).
2. Expand the **Clients** component on the dashboard.
3. Select a client from the clients list, click the **More** option, and select **Speed Test**.


Figure 1. Selecting a Client for Speed Test

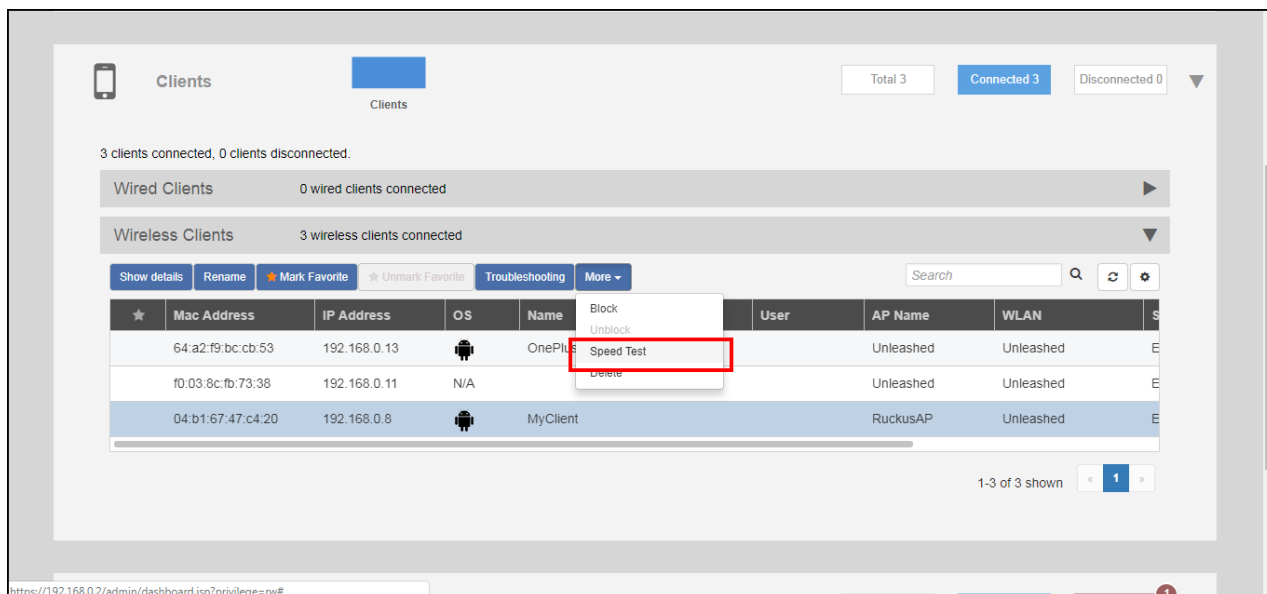

The **Speed Test** dialog box is displayed.

- Click **Start** to begin the speed test.


Figure 2. Running the Speed Test

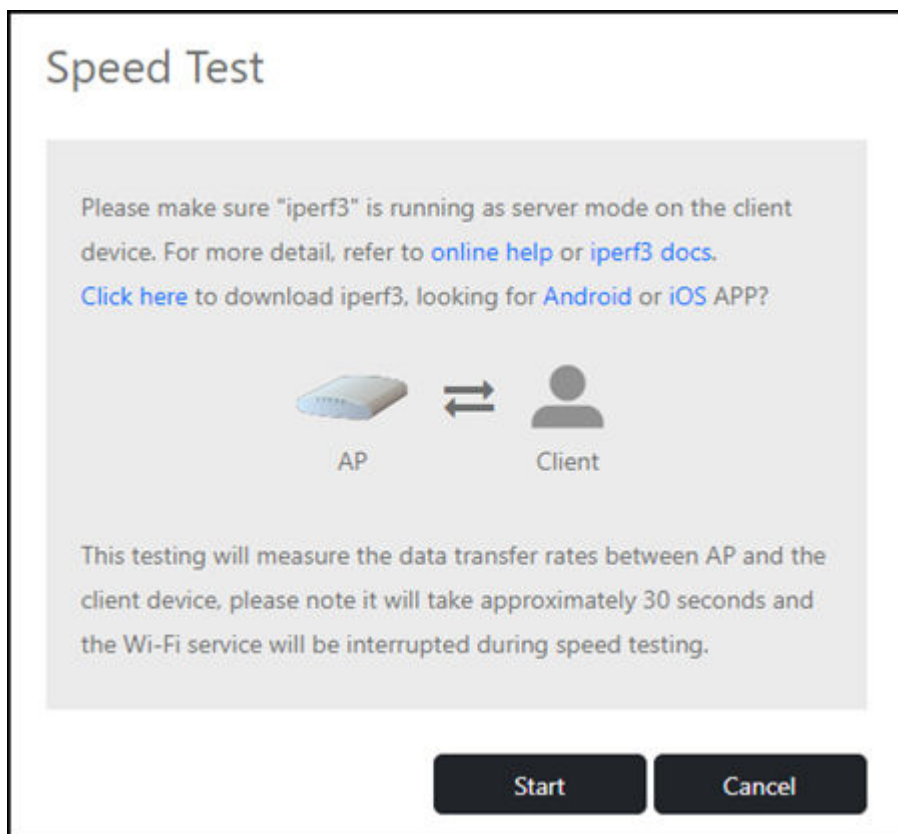

When the test is complete, the average downlink and uplink speed results are displayed along with packet loss percentages.

Figure 3. Speed Test Results

Speed Test

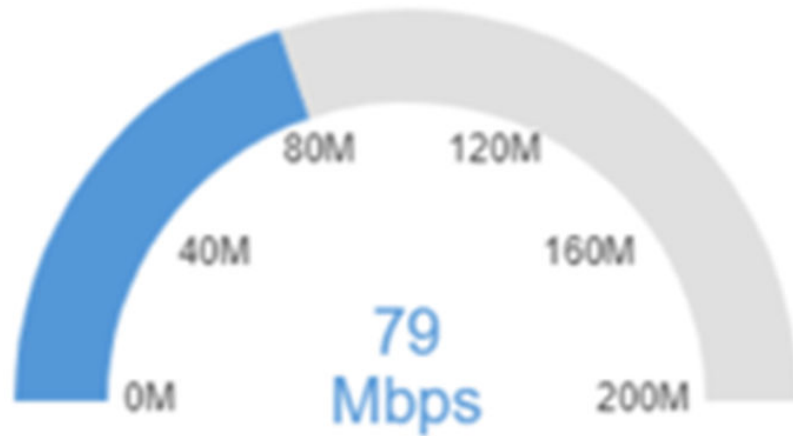

Master



Finished !



Client

Downlink :

95Mbps

pkt-loss: 0%

Uplink :

79Mbps

pkt-loss: 0%

Test Again

Exit

5. (Optional) Click **Test Again** to rerun the test.

Parent topic: [Working with Clients](#)

iPerf3 Integration in Unleashed

iPerf3 is a third-party open-source speed measurement tool, widely used to measure network performance and maximum achievable throughput by sending traffic between one host and another.

Overview

iPerf3 effectively tests on higher performance Wi-Fi chips and inspects bandwidth issues between two endpoints.

iPerf3 implementation in RUCKUS Unleashed:

- A station connects with an AP through Wi-Fi
- A dedicated Master AP or Master AP connects with a member AP by Mesh or Ethernet

Requirements

- As a station, Windows and MAC OS devices must install the iPerf3 tool.
- As a station, Android and iOS devices must install the RUCKUS Unleashed Mobile App (UMA) integrated with the iPerf3 tool.
- Ensure you have access to both the systems that you want to test for network performance testing.
- Ensure that any firewalls in your network allow traffic on the port that iPerf3 uses (the default is 5201).

Considerations

iPerf3 in RUCKUS Unleashed handles only TCP streams.

Best Practices

This feature has no special recommendations for feature enablement or usage.

Prerequisites

- Supported in RUCKUS Unleashed 200.16 and later versions.
- Install the iPerf3 tool in the devices on which you want to perform network performance test.

Parent topic: [Running a Speed Performance Test on a Wireless Client](#)

Client Connection Troubleshooting

The client connectivity trace feature is designed to help customers diagnose wireless client connection issues to determine why a client fails to connect to the wireless network.

To perform a client connectivity trace:

1. Open the **Clients** section, and select the problematic client from the list.


Note: Alternatively, go to **Admin & Services > Administration > Diagnostics > Client Troubleshooting**, and locate the **Client Connection Logs** section.

Note: As of release 200.8, client connection traces can be performed on clients connected to the following WLAN types:

- WPA2
- Web Auth
- Hotspot
- Guest Access

2. Click **Troubleshooting**.

Figure 1. Click Troubleshooting to perform client connectivity trace

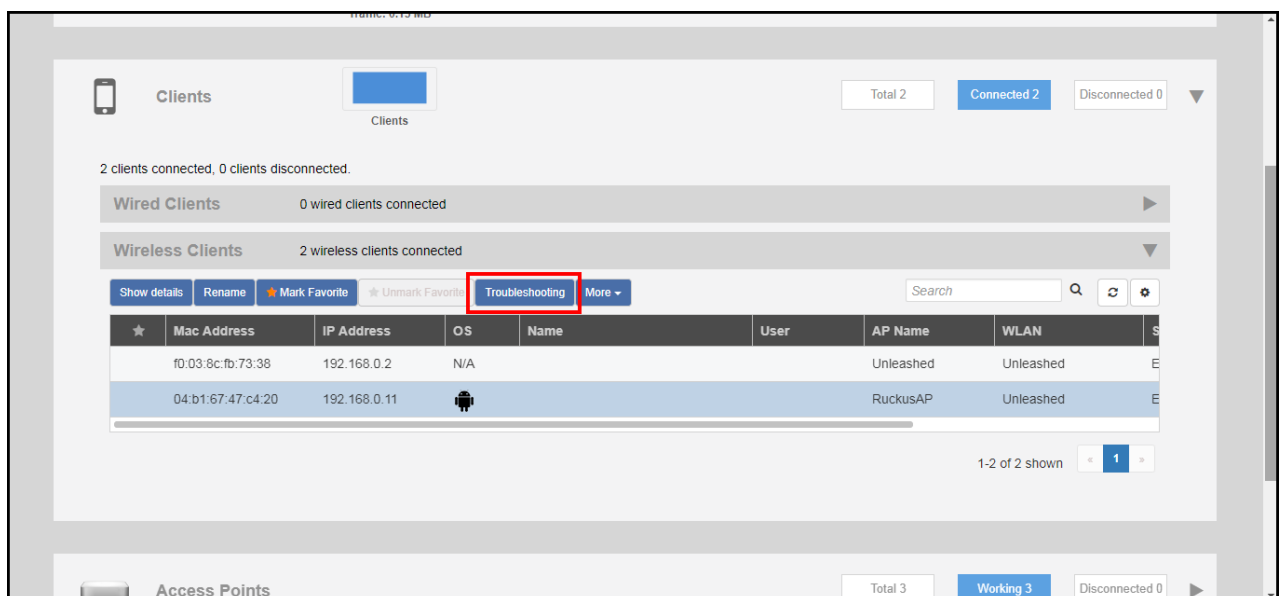

The Troubleshooting screen appears.

- In Connectivity Trace, click the **Start** button to begin. The association trace begins. The page refreshes to display detailed results.

Figure 2. Click Start to begin connectivity trace


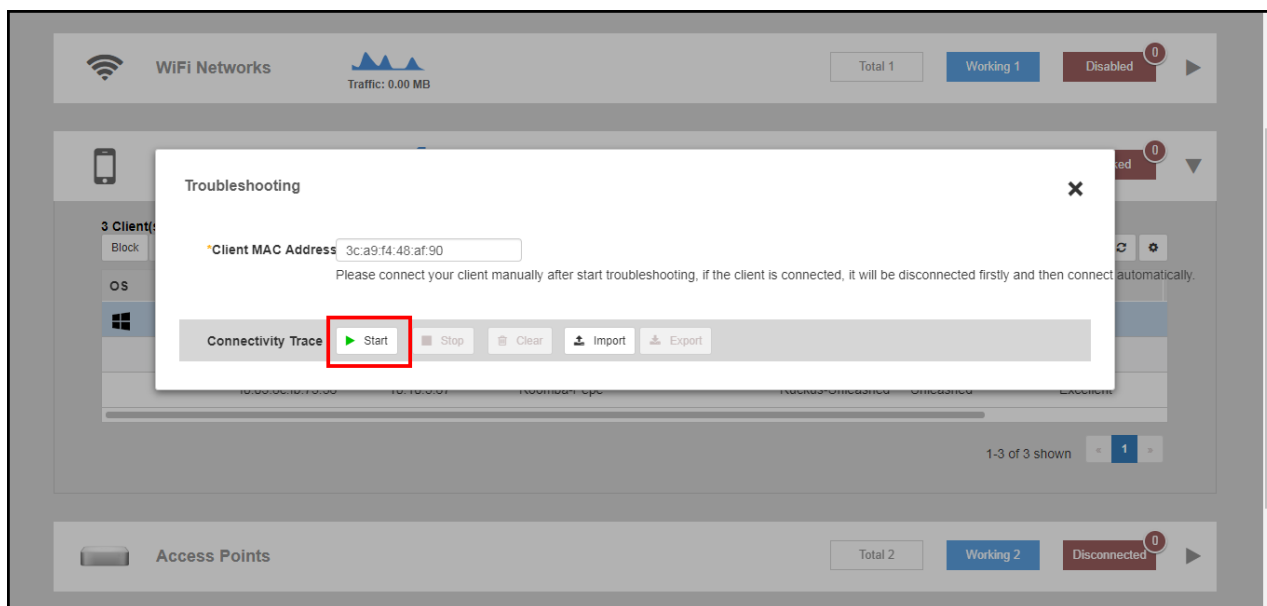


Figure 3. Connectivity trace in progress

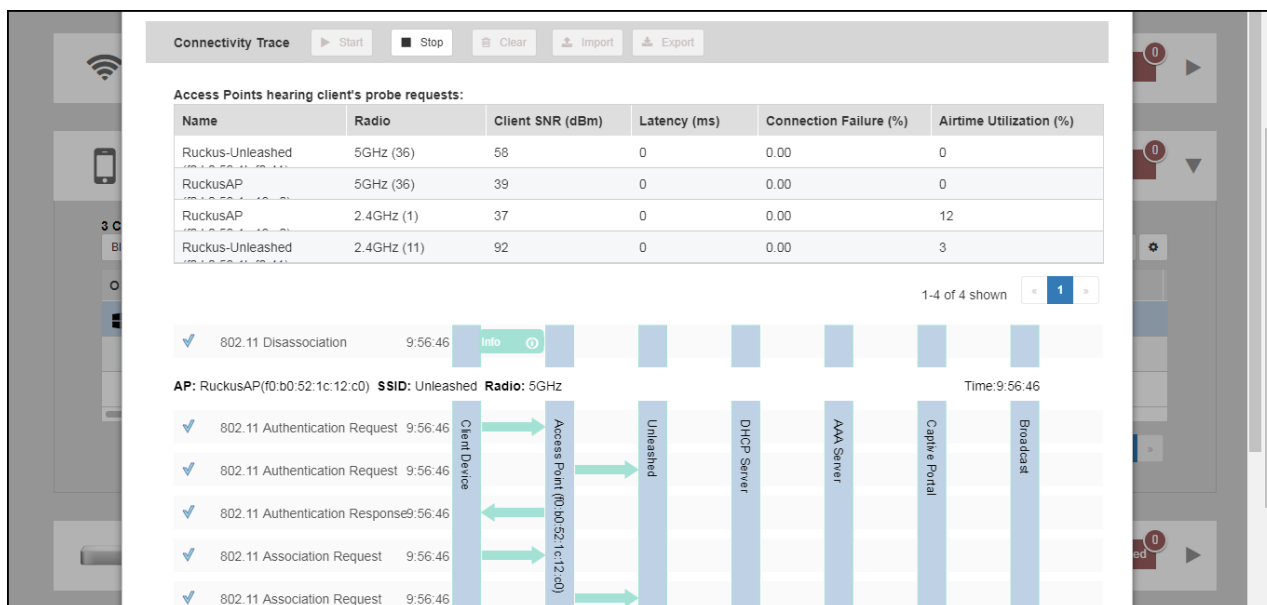

- Examine the results to isolate the problematic step in the process.
- If needed, you can download the client connectivity data to a file, which can later be imported for analysis. Click **Export** to download the data file and save it to your local computer. Click **Import** to import a previously exported file back into Unleashed.

Parent topic: [Working with Clients](#)

Parent topic: [Diagnostics](#)


Marking a Client as a Legacy Device

Designating a wireless client as a legacy device provides a way to change a password, but allows original connected wireless devices to continue using the previous password. On a large-scale deployment, marking a wireless client as a legacy device is effective because the customer is not required to change the passwords on all the connected wireless devices.

Complete the following steps to mark a wireless client as a legacy device.

1. From the Unleashed dashboard, expand the **Clients** component.
2. Under **Wireless Clients**, select a client from the list and click **Mark Legacy**.

Figure 1. Marking a Client as a Legacy Device

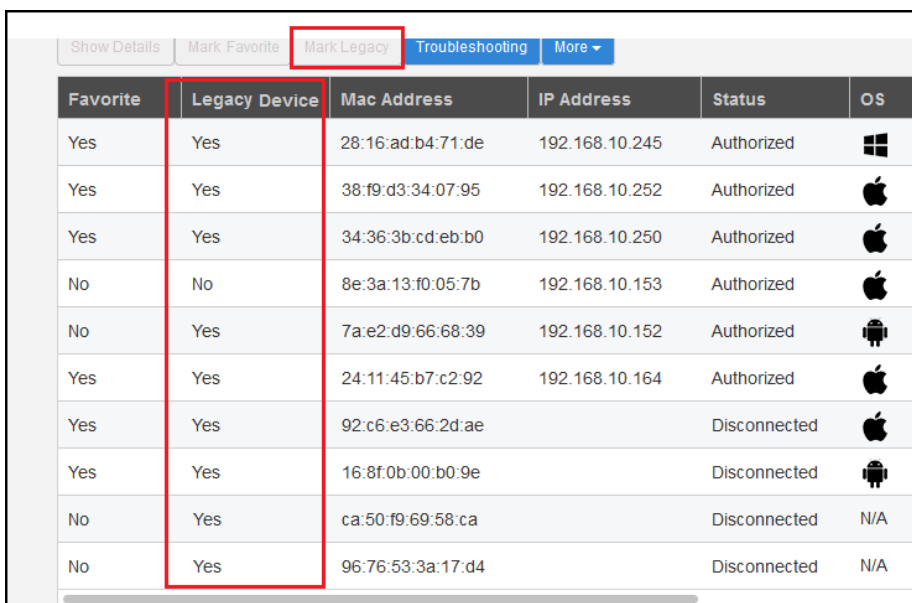

Favorite	Legacy Device	Mac Address	IP Address	Status	OS
Yes	Yes	28:16:ad:b4:71:de	192.168.10.245	Authorized	Windows
Yes	Yes	38:f9:d3:34:07:95	192.168.10.252	Authorized	iOS
Yes	Yes	34:36:3b:cd:eb:b0	192.168.10.250	Authorized	iOS
No	No	8e:3a:13:f0:05:7b	192.168.10.153	Authorized	iOS
No	Yes	7a:e2:d9:66:68:39	192.168.10.152	Authorized	Android
Yes	Yes	24:11:45:b7:c2:92	192.168.10.164	Authorized	iOS
Yes	Yes	92:c6:e3:66:2d:ae		Disconnected	iOS
Yes	Yes	16:8f:0b:00:b0:9e		Disconnected	Android
No	Yes	ca:50:f9:69:58:ca		Disconnected	N/A
No	Yes	96:76:53:3a:17:d4		Disconnected	N/A

The devices marked as legacy devices are allowed to connect to the WLAN with the previous password. For more information, refer to "Creating a New WLAN".


3. (Optional) Select a client and click **More > Unmark Legacy** to unmark the wireless client.

Parent topic: [Working with Clients](#)

Adding User Accounts to the Internal User Database

1. Go to **Admin & Services > System > Users** and click **Create New**.
2. Enter a **User Name**, optional **Full Name**, **Password**, **Confirm Password**, and select a **Role** for this user.
3. Click **OK** to create the new user.

Figure 1. Creating a new User on the Internal User Database

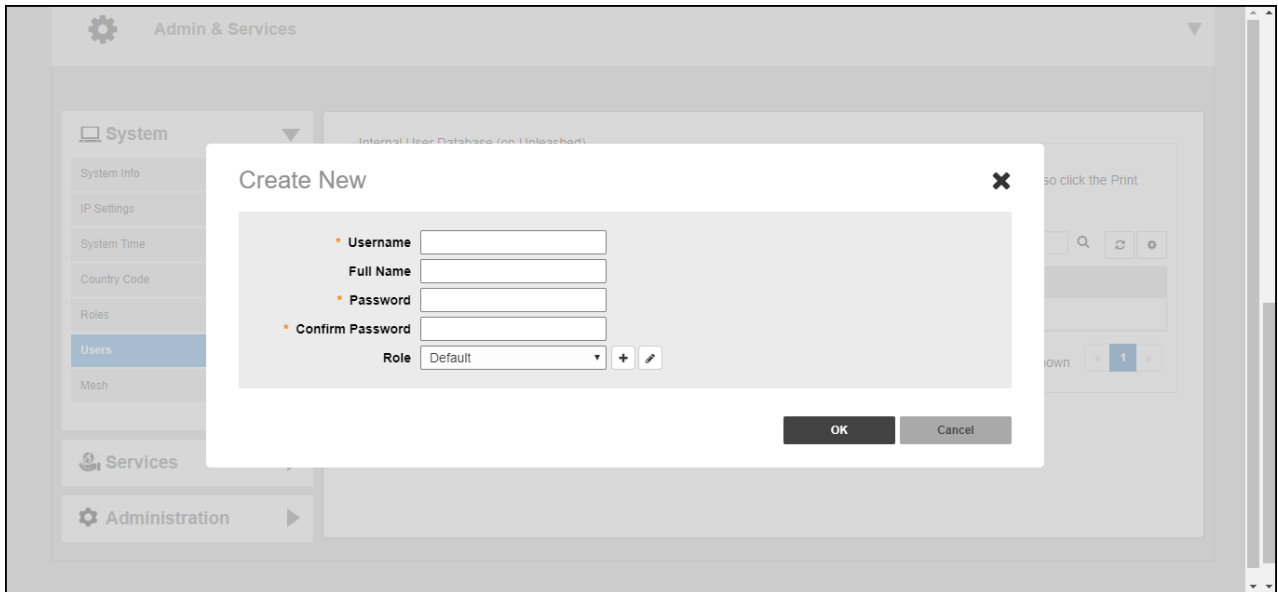

Parent topic: [Working with Clients](#)

Authenticating Clients Using an External Database

In addition to the Internal User Database, Unleashed also supports authenticating clients using an external authentication server.

To enable this feature, you must first create an "AAA Server" entry, and then apply the AAA server to one or more WLANs with external authentication enabled. Unleashed supports the following types of external authentication servers:

- Microsoft Active Directory
- RADIUS

For more information on configuring AAA servers, see [AAA Servers](#).

Parent topic: [Working with Clients](#)

Configuring Admin & Services Settings

[Admin & Services Overview](#)

[System Settings](#)

[Services](#)

[Administration Settings](#)

Admin & Services Overview

The **Admin & Services** settings provide tools for use in managing many of the "under the hood" features of your Unleashed deployment.

These options allow you to configure system settings such as system name and IP address, configure services such as Application Recognition and Control, Guest Access and Hotspot services, and perform administration functions such as changing the admin user name and password, performing an upgrade and performing diagnostics.

The Admin & Services component is divided into the following sub-components:

- [System Settings](#)
- [Services](#)
- [Administration Settings](#)

Parent topic: [Configuring Admin & Services Settings](#)

System Settings

System settings include options for changing the system name, preferred Master AP, IP address, time zone, country code, users, user roles and mesh settings.

To configure system settings, click **Admin & Services > System**. The menu expands to display additional options under the **System** tab.

Figure 1. Click Admin & Services, and expand the System tab to configure system settings

The screenshot shows the 'Admin & Services' configuration page. On the left, a sidebar contains a 'System' menu with 'System Info' highlighted. The main area is divided into sections: 'System Info' with fields for Name, System Version, and Unleashed ID; 'Preferred Master' with a warning, dropdowns for Primary and Secondary Preferred Master, and a checkbox for 'Disable WLAN service on Master AP'; and 'Switch Approval' with an 'Approval' checkbox. Each section has an 'Apply' button.

Parent topic: [Configuring Admin & Services Settings](#)

System Info Settings

System Info settings include options for configuring system name, preferred Master, automatic switch approval, email and SMS server settings.

Parent topic: [System Settings](#)


Changing the System Name

The **System Info** page displays the current system firmware version and provides an option to reconfigure the system name.

To change the system name:

1. Go to **Admin & Services > System > System Info**.
2. In **System Name**, delete the text, and then type a new name. The name should be between 1 and 32 characters in length, using letters, numbers, underscores (_) and hyphens (-). Do not use spaces or other special characters. Do not start with a hyphen (-) or underscore (_). System names are case sensitive.
3. Click **Apply** to save your settings. The change goes into effect immediately.

Figure 1. The System Info page displays the firmware version and system name

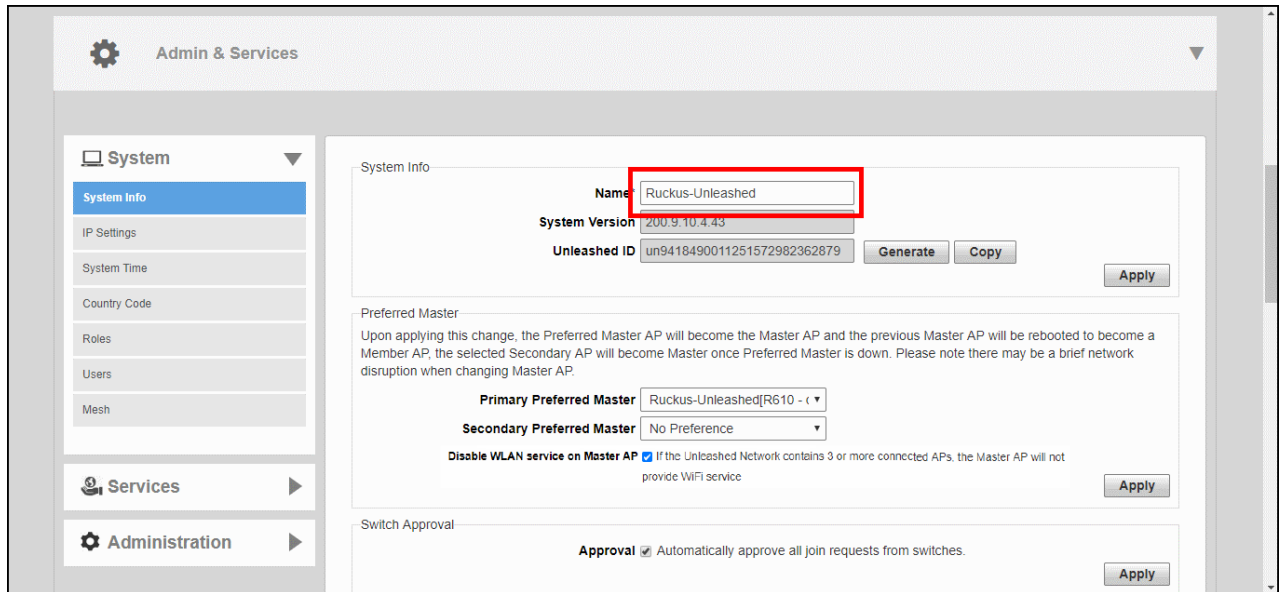


Parent topic: [System Info Settings](#)

Generating an Unleashed ID

The Unleashed ID uniquely identifies each Unleashed network for use in remote management via either the Unleashed Mobile App or the Unleashed Multi-Site Manager.

1. Go to Admin & Services > System > System Info.
2. Click the Generate button next to Unleashed ID.
3. A new ID number appears in the Unleashed ID field. You can now use this number for remote management of this Unleashed network using the Unleashed Mobile App or Unleashed Multi-Site Manager.

Figure 1. Generating a new Unleashed ID for use in remote management

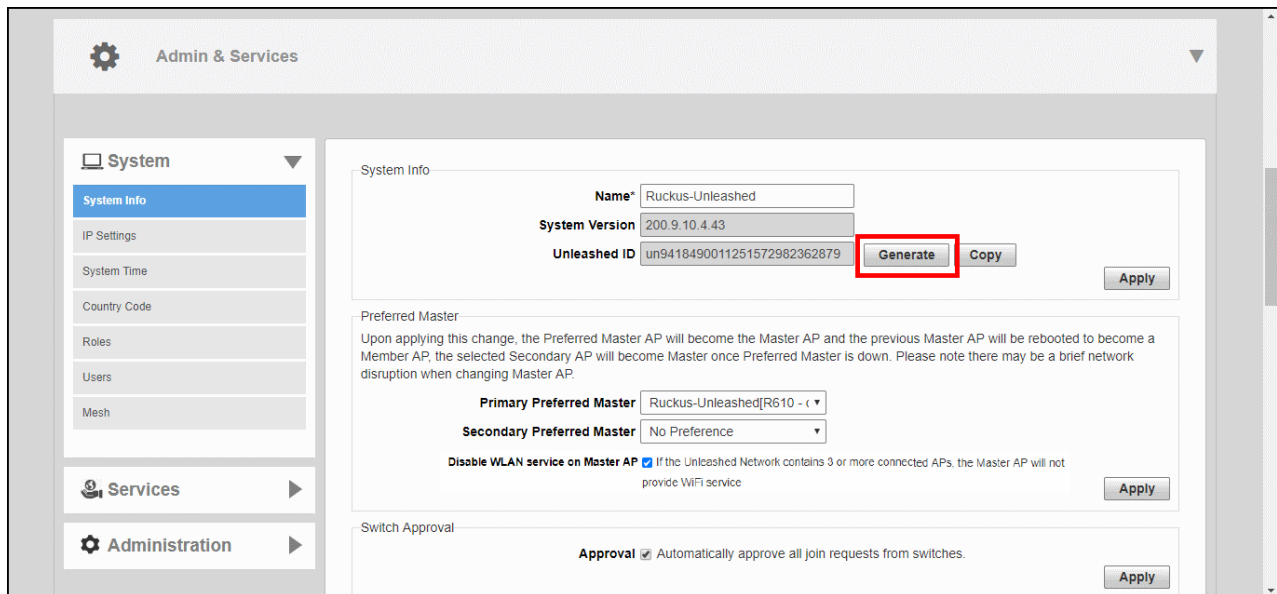

Parent topic: [System Info Settings](#)

Designating a Preferred Master AP

The **Preferred Master** settings allow an administrator to manually designate the primary and secondary preferred Master APs.

By default, there is no preference as to which AP should become the Master AP. The first AP that is deployed automatically becomes the Master AP. If the Master AP goes offline for any reason, any other Ethernet-connected member AP can take over the role of the Master AP.

By using the **Preferred Master** option, the administrator can designate the APs that will have a priority as the Master AP.


Complete the following steps to configure the primary and the secondary preferred Master APs.

1. Go to **Admin & Services > System > System Info**.
2. Under **Preferred Master**, from the **Primary Preferred Master** list, select a primary preferred Master AP.

The **Primary Preferred Master** list displays the best Master AP at the top of the list. The recommended

best Master AP is displayed in green and is indicated by a 🍏 ("thumbs up" symbol), as shown in the following figure and you can choose this AP as the primary preferred Master.

Figure 1. Designating APs as the Preferred Masters

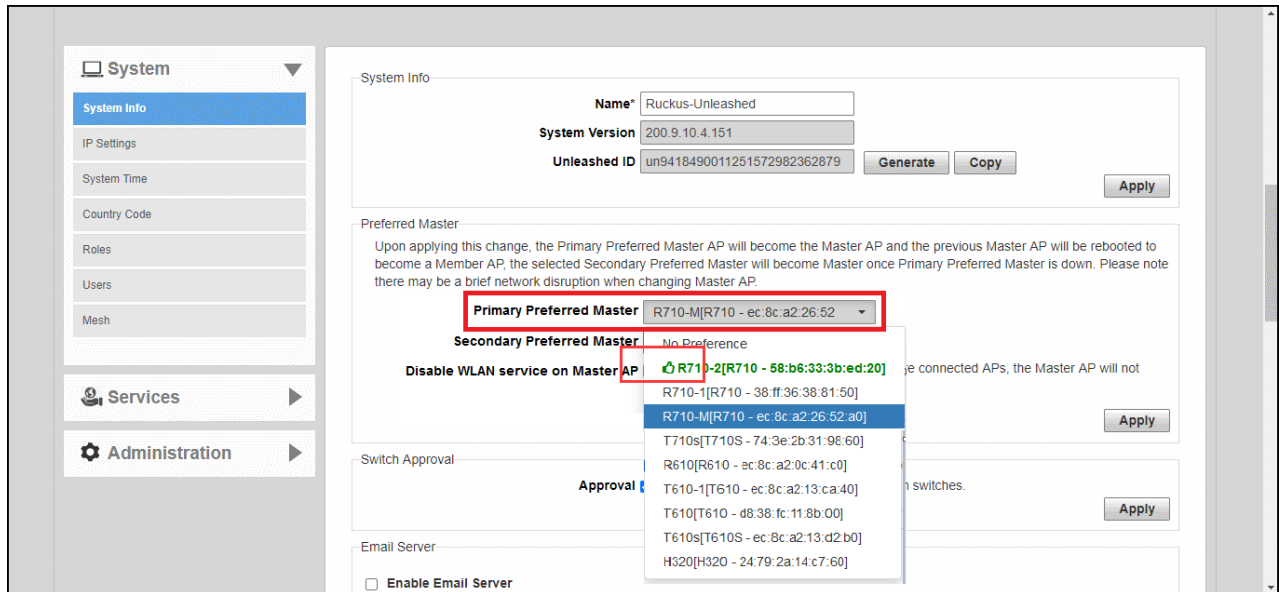

3. From the **Secondary Preferred Master** list, select a secondary preferred Master AP.

When the primary preferred Master AP is offline, the secondary preferred Master AP assumes the role of the Master AP. When the primary preferred Master AP returns online, it rejoins the Unleashed network and resumes the role of the Master AP again.

Parent topic: [System Info Settings](#)

Disabling WLAN Service on the Master AP

Because the Master AP has to perform a number of tasks at once, it may be useful in some scenarios to reduce the compute load on the Master AP by disabling its WLAN service and allow the Master to focus on controller functions.

To disable WLAN service on the Master AP to allow it to focus on controller functions:

1. Go to Admin & Services > System > System Info.
2. In the Preferred Master section, deselect the **Enable WLAN service on Master AP** option.
3. Click **Apply** to save your changes.

Note: This feature will only take effect when the Unleashed network contains at least three other connected APs to provide WLAN service.

Figure 1. Disabling Master AP WLAN service

Parent topic: [System Info Settings](#)

Configuring Global Access Point Policies

The **Access Point Policies** settings allow you to define how new APs are detected and approved for use in WLAN coverage, as well as policies on Dedicated Master discovery and communicating with the Dedicated Master.

Complete the following steps to review and revise the general AP policies.

1. Go to **Admin & Services > System > System Info**.
2. Review the current settings under **Access Point Policies**. You can change the following settings:
 - **Approval:** This option is enabled by default, which means that all join requests from any RUCKUS AP will be approved automatically. If you want to manually review and approve the joining of new APs to the WLAN, clear the **Approval** check box.
 - 🔗 **Note:** For RUCKUS Unleashed Wi-Fi 7 APs, the **Approval** check box is cleared by default. You must manually approve the APs by selecting the **Approval** option.
 - **Dedicated Master Discovery Policy:** If you have multiple Dedicated Masters on the network and want specific APs to join a specific Dedicated Master, you can limit Dedicated Master discovery. Ensure that Dedicated Master setup is completed.

Select one of the following options:

- **Use DHCP OPTION 43 or auto discovery on same subnet (AP settings will be ignored):** Add the Option 43 setting under DHCP server in the Linux DHCP server.

```
#Ruckus Option 43 configuration as below:
option space ruckus_info;
option ruckus_info.zdiplist code 3 = text;
vendor-option-space ruckus_info;
option ruckus_info.zdiplist "10.223.26.121";
```

- **Configure Primary and Secondary Unleashed Settings to AP:** Enter the IP addresses (or FQDNs) of the primary and secondary Dedicated Master units to which you want APs to join. APs will first attempt to join the primary Dedicated Master. If they cannot find or are unable to join the primary Dedicated Master, they will attempt to join the secondary Dedicated Master. If still unsuccessful, APs will stop attempting for a brief period of time, and then they will restart the joining process. They will repeat this process until they successfully join either the primary or secondary Dedicated Master.
- 🔗 **Note:** If you have two Dedicated Masters, RUCKUS recommends using Smart Redundancy. For information on Smart Redundancy configuration, refer to [Smart Redundancy Configuration](#).
- **Management VLAN:** You can enable the Dedicated Master management VLAN if you want to separate management traffic from regular network traffic. The following options are available:
 - **Keep AP's setting:** Select this option if you want to preserve the Management VLAN settings as configured on the AP. Note that the Management VLAN on the AP is disabled by default.
 - **VLAN ID:** Select this option and enter a valid VLAN ID to segment management traffic into the specified VLAN. Valid VLAN IDs are from 1 through 4094.
- **Tunnel MTU:** Use this field to set the Maximum Transmission Unit for tunnel packets between a Dedicated Master and the APs. The MTU is the size of the largest protocol data unit (in bytes) that can be passed. Supported MTU values range from 850 through 1500 (the default is 1500).
- **Auto Recovery:** Set an AP auto-recovery time in minutes, after which APs will reboot in attempt to reconnect to Dedicated Master. Default is 30 minutes.

3. Click **Apply** to save and apply your settings.

Figure 1. Configuring Global AP Policies

The screenshot displays the Ruckus Unleashed web interface. On the left is a navigation menu with 'System' selected, showing sub-items like 'System Info', 'IP Settings', 'System Time', 'Country Code', 'Roles', 'Users', 'Mesh', 'Services', and 'Administration'. The main content area is divided into two sections. The top section, 'System Info', contains fields for 'Name' (Dedicated-Unleashed), 'System Version' (200.13.6.1.224), and 'Unleashed ID' (un2320720064691656261275542), with 'Generate' and 'Copy' buttons. The bottom section, 'Access Point Policies', includes an 'Approval' checkbox, a 'Dedicated Master Discovery Policy' section with radio buttons for 'Configure Primary and Secondary Unleashed Settings to AP' and 'Keep AP's Primary and Secondary Unleashed Settings', a 'Management VLAN' section with radio buttons for 'Keep AP's setting' and 'VLAN ID', a 'Tunnel MTU' field set to 1500, and an 'Auto Recovery' checkbox with a time field set to 30 minutes. 'Apply' buttons are present at the bottom of both sections.

Parent topic: [System Info Settings](#)

Enabling Automatic Switch Approval

To enable automatic approval of RUCKUS ICX switches, use the following procedure:

1. Go to Admin & Services > System > System Info, and locate the Switch Approval section.
2. Enable the **Approval** option.
3. Click **Apply** to save your changes.

Figure 1. Enable automatic approval of ICX switches

The screenshot shows the 'System Info' page in the RUCKUS Unleashed 200.17 web interface. The left sidebar contains navigation links for System time, Country Code, Roles, Users, Mesh, Services, and Administration. The main content area is divided into several sections. The 'Preferred Master' section includes a dropdown for 'Primary Preferred Master' (set to 'Ruckus-Unleashed[R610 - c') and a dropdown for 'Secondary Preferred Master' (set to 'No Preference'). Below this is a checkbox for 'Disable WLAN service on Master AP' with a note: 'If the Unleashed Network contains 3 or more connected APs, the Master AP will not provide WiFi service'. The 'Switch Approval' section is highlighted with a red box and contains the text 'Approval ☒ Automatically approve all join requests from switches.' with an 'Apply' button. The 'Email Server' section at the bottom has an 'Enable Email Server' checkbox and fields for 'From Email Address', 'SMTP Server Name', 'SMTP Server Port', 'SMTP Authentication Username', 'SMTP Authentication Password', and 'Confirm SMTP Authentication Password'.

Parent topic: [System Info Settings](#)

Configuring Email Server Settings

In order for Unleashed to send guest pass codes to guest users via email, it needs to have an email server configured.

To configure email server SMTP settings:

1. Go to **Admin & Services > System > System Info**.
2. In the **Email Server** section, enable the **Enable Email Server** check box, and then enter the following:
 - **From email address:** Type the email address from which Unleashed will send email messages.
 - **SMTP Server name:** Type the full name of the server provided by your ISP or mail administrator. Often, the SMTP server name is in the format smtp.company.com.

- **SMTP Server port:** Type the SMTP port number provided by your ISP or mail administrator. Often, the SMTP port number is 465 or 587. The default SMTP port value is 587.
 - **SMTP Authentication username:** Type the user name provided by your ISP or mail administrator. This might be just the part of your email address before the @ symbol, or it might be your complete email address. If you are using a free email service (such as Hotmail or Gmail), you typically have to type your complete email address.
 - **SMTP Authentication password:** Type the password that is associated with the user name above.
 - **Confirm SMTP Authentication password:** Retype the password you typed above to confirm.
 - **SMTP Encryption Options:** If your mail server uses TLS encryption, click the SMTP Encryption Options link, and then select the TLS check box. Additionally, select the STARTTLS check box that appears after you select the TLS check box. Check with your ISP or mail administrator for the correct encryption settings that you need to set.
3. To verify that Unleashed can send email messages using the SMTP settings you configured, click the **Test** button.
 - If Unleashed is able to send the test message, the message **Success !** appears at the bottom of the Email Notification page.
 - If Unleashed is unable to send the test message, the message **Failed !** appears at the bottom of the Email Notification page. Go back to the previous step, and then verify that the SMTP settings are correct.
 4. Click **Apply**. The email server settings you configured become active immediately.

Figure 1. Email Server settings

The screenshot displays the 'Administration' page in the RUCKUS Unleashed 200.17 web interface. The left sidebar shows 'Services' and 'Administration' with a gear icon. The main content area is titled 'Email Server' and includes the following sections:

- Switch Approval:** A section with an 'Approval' checkbox checked and the text 'Automatically approve all join requests from switches.' An 'Apply' button is located to the right.
- Email Server:** A section with a checked 'Enable Email Server' checkbox. Below it are input fields for:
 - From Email Address:** test@example.com
 - SMTP Server Name:** smtp.example.com
 - SMTP Server Port:** 587
 - SMTP Authentication Username:** username
 - SMTP Authentication Password:** (masked with asterisks)
 - Confirm SMTP Authentication Password:** (masked with asterisks)
 A link for 'SMTP Encryption Options' is visible below the password fields. 'Test' and 'Apply' buttons are at the bottom right of this section.
- SMS Settings:** A section with an unchecked 'Enable SMS Server' checkbox. Below it are:
 - A checked 'Country Code' checkbox.
 - Three radio button options for Twilio account information:
 - No default and ask user to input** (selected)
 - Use default +12 and allow user to change**
 - Use default +12 and disallow user to change**
 - A partially visible 'Twilio account information' section at the bottom.

Parent topic: [Guest WLANs](#)

Parent topic: [System Info Settings](#)

Configuring SMS Server Settings

In order for Unleashed to send guest pass codes to guest users via SMS, it needs to have an SMS server configured.

To configure SMS server settings:

1. Go to **Admin & Services > System > System Info**.
2. In the **SMS Settings** section, enable the **Enable SMS Server** check box.
3. In **Country Code**, select one of the following options:
 - **CountryCode**: This option is only available with "Customized Server" SMS server type (for Twilio and Clickatell, the country code is mandatory and cannot be unchecked). When unchecked, the guest registration page does not support country code input.
 - **No default and ask user to input**: The guest registration page does not provide a default country code and the guest user is asked to input one.
 - **Use default and allow user to change**: The guest registration page provides a default country code and allows the guest user to change it.
 - **Use default and disallow user to change**: The guest registration page provides a default country code and the guest user is not allowed to change it.
4. Select **Twilio**, **Clickatell**, or **Customized Server**, depending on your SMS service provider.
5. Enter your **Account SID**, **Auth Token** and **From Phone Number** (Twilio) or your **User Name**, **Password** and **API ID** (Clickatell), or **Method** (Get or Post) and the URL for a custom SMS service provider.
6. Click the **Test** button to test your settings.
7. Once confirmed, click **Apply** to save your changes.

Figure 1. Configuring SMS settings

Parent topic: [Guest WLANs](#)

Parent topic: [System Info Settings](#)

IP Settings

The IP Settings page provides options for configuring the Unleashed Master AP's IP address, IP address mode, management IP interface and DHCP options.

Parent topic: [System Settings](#)

Configuring Device IP Address Settings

If you want to update the IP address and DNS server settings of your Master AP, complete the following steps.

- 🔧 **Note:** As soon as the IP address has been changed (applied), you will be disconnected from your web interface connection to the Master AP. You can log in to the web interface again by using the new IP address in your web browser.

Complete the following steps to change the IP address settings:

1. Go to **Admin & Services > System > IP Settings**.
2. Review the **IP Settings** options.

- 🔧 **Note:** Upon enabling Gateway mode, all devices will reboot immediately. Refer to [Gateway Mode](#).


3. Under **WAN IP Address**, select one of the following options:

- **Manual:** If you select **Manual**, enter the correct information in the active fields (**IP Address**, **Netmask**, **Gateway**, **Primary DNS Server**, **Access VLAN** are required).
- **DHCP:** If you select **DHCP**, for **Access VLAN**, enter the VLAN ID.

 **Note:** The default value of the VLAN ID is 1. VLAN is configurable only in the Dedicated mode.

4. Click **Apply** to save your settings. You will lose connection to the Master AP.
5. To log in again to the web interface, use the newly assigned IP address in your web browser or use the Universal Plug and Play (UPnP) application to rediscover the Master AP.

Figure 1. Configuring Device IP Address Settings

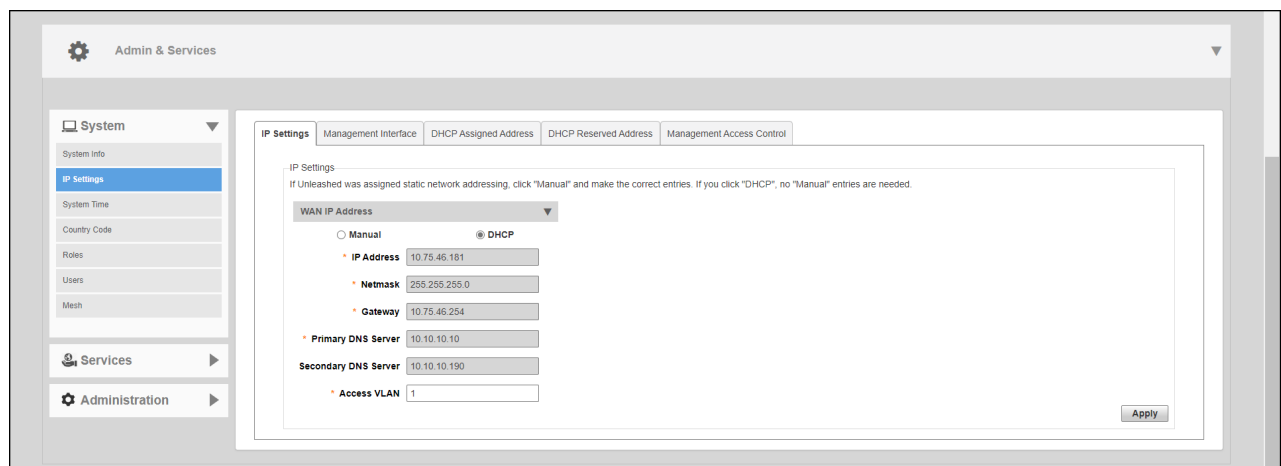

Parent topic: [IP Settings](#)


Gateway Mode

Gateway mode provides a solution for small and midsize business (SMB) customers who want to provide private IP addresses for clients and do not have an existing gateway router, or who connect to their Internet service provider (ISP) over PPPoE. Enabling Gateway mode provides Network Address Translation (NAT) and DHCP functionality to assign private IP addresses to member APs and clients.

Only the H350 AP and the H550 AP support dual WAN ports, where one Ethernet port is configured as the active WAN port and the other Ethernet port is configured as the standby WAN port for the RUCKUS Unleashed gateway. At any given point, only one Ethernet port acts as the active WAN port. The traffic moves through the active WAN port. If the active WAN port fails, the traffic is automatically switched to the standby WAN port until the active WAN port recovers.

 **Note:** If Gateway mode is enabled, the maximum number of APs in a RUCKUS Unleashed network is 25, even if the Master AP can otherwise support more APs.

Figure 1. Gateway Mode Topology

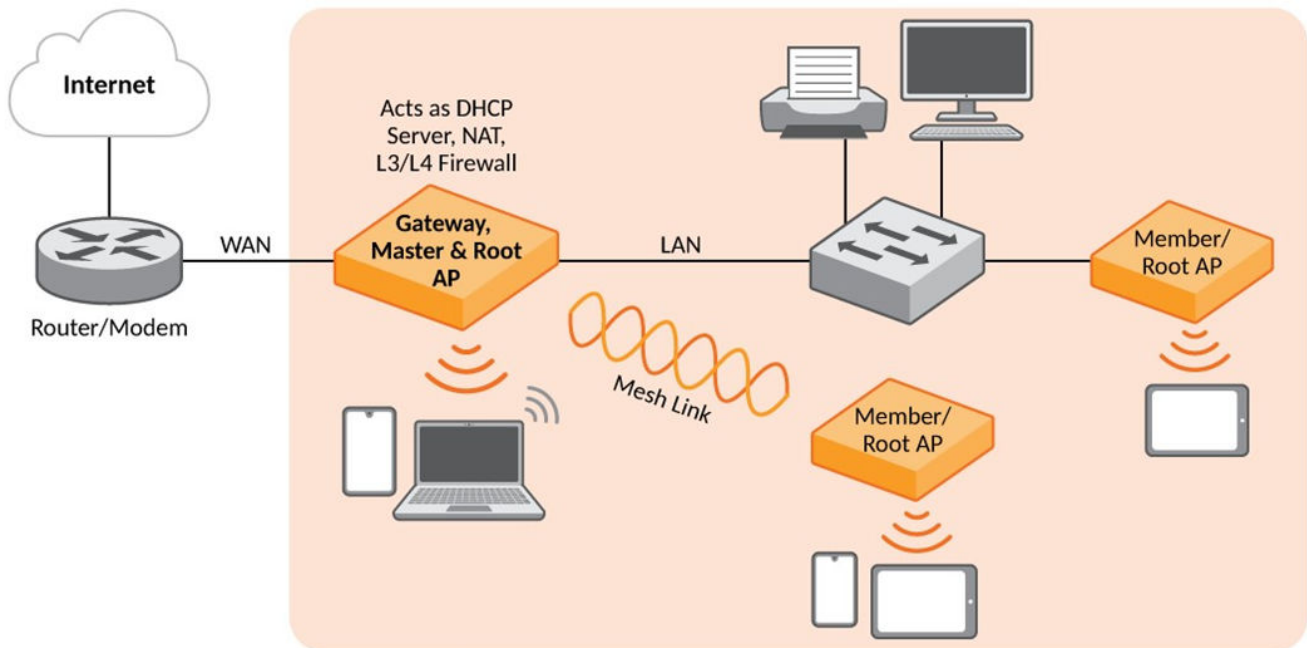

Gateway functionality can be restored with minimum user intervention when a Gateway Master AP is out of service. If the Gateway Master AP goes down, simply replace it with one of the member APs and connect the uplink Ethernet cable to the WAN port, and the member AP will become the new gateway.

If the gateway recovery mechanism does not work, you can still access the web interface of the new Master AP to configure it manually.

Parent topic: [Configuring Device IP Address Settings](#)

Configuring Gateway Mode

The Master AP can be configured to serve as a gateway router.

Complete the following steps to configure the Master AP as a gateway:

1. Go to **Admin & Services > System > IP Settings**.
2. Under **IP Settings**, enable the **Gateway Mode** option and configure the WAN and LAN IP address settings.

Note: Alternatively, in the factory default state, you can connect to the Master AP and perform the initial setup as described in step 2b - Setup Using a Web Browser. On the second wizard screen (**Management IP**) select **Enabled** in **Gateway Mode**. Refer to [Advanced Install](#) for more information.

Figure 1. Enabling Gateway Mode



- Designate which port will be the WAN (uplink) port. The Gateway AP must have at least two Ethernet ports. Under **WAN Selection**, use the AP diagram to identify which port is LAN1 and LAN2 on the AP, and select the relevant port from the **WAN Port** list.

Figure 2. Configuring WAN, Standby WAN, and LAN & WLAN IP Addresses

WAN Port	LAN & WLAN Client IP Addresses
WAN Port PORT 1	Starting IP 10.106.0.2
☐ Manual ☒ DHCP ☐ PPPoE	Ending IP 10.106.7.209
IP Address 10.223.38.237	Number of IPs 2000
Netmask 255.255.255.0	Lease Time Twelve hours
Gateway 10.223.38.254	Primary DNS Server 10.10.10.190
Primary DNS Server 10.10.10.190	Secondary DNS Server 10.10.10.10
Secondary DNS Server 10.10.10.10	
Standby WAN Port ⓘ	LAN & WLAN IP Address
WAN Port Disabled	Router IP 10.106.0.1
☒ Manual ☐ DHCP	Netmask 255.255.0.0
IP Address 	
Netmask 	
Gateway 	
Primary DNS Server 	
Secondary DNS Server 	

4. Configure how the WAN (uplink) port obtains its IP address:

- **DHCP (Dynamic):** When **DHCP (Dynamic)** is selected, the WAN port is assigned an IP address automatically.
- **Manual (Static):** When **Manual (Static)** is selected, enter an IP address, netmask, gateway address, and primary DNS server addresses in the required fields, and (optionally) enter the secondary DNS server address.
- **PPPoE:** When PPPoE is selected, enter the PPPoE username and PPPoE password in the fields provided.

5. Configure local subnet settings for the LAN port:

- **LAN & WLAN Client IP Addresses**
 - **Starting IP** and **Ending IP:** Enter the first and last IP addresses that will be issued in this scope.
 - **Number of IPs:** Enter the total number of addresses in this scope.
 - **Lease Time:** Select a duration for IP address lease time from the list.
 - **Primary DNS Server** and **Secondary DNS Server:** Enter the primary and secondary DNS server addresses.
- **LAN & WLAN IP Address**
 - **Router IP:** Enter the IP address for the LAN port.
 - **Netmask:** Enter the netmask.

6. Designate which port will be the standby WAN (uplink) port and configure how the standby WAN port obtains its IP address:

- **DHCP (Dynamic):** When **DHCP (Dynamic)** is selected, the WAN port is assigned an IP address automatically.
- **Manual (Static):** When **Manual (Static)** is selected, enter an IP address, netmask, gateway address, and primary DNS server address in the required fields, and (optionally) enter the secondary DNS server address.

 **Note:** A standby WAN port is applicable only for the H350 AP and H550 AP.

7. Click **Apply**. Once setup is complete, the Gateway AP will begin providing DHCP and NAT service for clients, and clients will be assigned IP addresses from the DHCP scope that you configured.

Parent topic: [Gateway Mode](#)

Gateway Mode Limitations and Considerations

There are several important limitations and factors to consider when enabling gateway mode.

- All RUCKUS Unleashed AP models with multiple Ethernet ports support Gateway mode. If your network's WAN bandwidth is higher than 100 Mbps, RUCKUS recommends using 802.11ax or later APs to enjoy the fastest Internet access experience.
- The Master AP acts as the gateway for both wired and wireless clients.
- The gateway AP provides IP addresses and performs NAT (routing) functions in addition to serving as the RUCKUS Unleashed Master AP, and servicing wireless clients. For this reason, it is preferable to use an AP with higher CPU/memory resources, especially 802.11ax or later APs as the Gateway AP, if possible.
- If gateway mode is enabled, the maximum number of APs in an RUCKUS Unleashed network is 25, even if the Master AP could otherwise support more.
- No VLAN support in gateway mode.
- Bonjour Gateway is not supported in gateway mode (no VLANs).
- When Mesh is enabled in gateway mode, and when the WAN IP address is obtained by means of PPPoE, the Master AP cannot be part of a Mesh tree. However, Mesh can still be enabled and any member AP can be a Root AP or Mesh AP.
- The WAN and LAN IP addresses must be in different IP subnets, and the address ranges may not overlap.
- If gateway mode is enabled, redundancy is disabled. This means that if the Master (gateway) AP goes offline for any reason, a member AP will not be able to take over and become the new Master.

Parent topic: [Gateway Mode](#)

DHCP Server

RUCKUS Unleashed provides a built-in DHCP server that you can enable to assign IP addresses to devices that are connected to the RUCKUS Unleashed network. The internal DHCP server will only assign addresses to devices that are on its own subnet and part of the same VLAN.

- **Note:** Before you can enable the built-in DHCP server, the Master AP must be assigned a manual (static) IP address. If you configured RUCKUS Unleashed to obtain its IP address from another DHCP server on the network, the options for the built-in DHCP server will not be visible on the IP Settings page.

Complete the following steps to configure the built-in DHCP server:

1. Go to **Admin & Services > System > IP Settings**.

2. Under **WAN IP Address**, select **Manual** and enter the static IP settings (IP address, netmask, gateway and DNS settings).
3. In LAN and WLAN Client IP Addresses, enable the **DHCP Server** check box.
4. **Starting IP**: Enter the first IP address that the built-in DHCP server will allocate to DHCP clients. The starting IP address must be on the same subnet as the IP address assigned to the Master AP. If the value that you entered is invalid, an error message appears and prompts you to let RUCKUS Unleashed automatically correct the value. Click **OK** to automatically correct the entry.
5. **Ending IP**: Enter the last IP address in the range that you want to allocate to requesting clients. The built-in DHCP server can allocate up to 512 IP addresses including the one assigned to the Master AP. The default value is 200.
6. **Lease Time**: Select a time period for which IP addresses will be allocated to DHCP clients. Options range from six hours to two weeks (the default is one week).
7. Enter the primary and secondary DNS server addresses.

 **Note:** In the gateway mode, the user can customize the DNS server setting for wireless clients. If the DNS server setting is ignored, the WAN interface DNS server setting is used.

8. Click **Apply**.

 **Note:** If you entered an invalid value in any of the text boxes, an error message appears and prompts you to let RUCKUS Unleashed automatically correct the value. Click **OK** to automatically correct the value.

 **Note:** RUCKUS recommends that you only enable the built-in DHCP server if there are no other DHCP servers on the network. If you enable the built-in DHCP server, RUCKUS also recommends enabling rogue DHCP server detection. For more information, refer to [Rogue DHCP Server Detection](#).

 **Note:** Make sure the DHCP address pool is routable to the internet and non-overlapping with other devices. Because RUCKUS Unleashed in non-gateway mode does not support Network Address Translation (NAT), this is important to avoid IP address conflicts. For example, if your router uses the 192.168.0.x subnet, you must use any subnet other than 192.168.0.x for your RUCKUS Unleashed DHCP subnet.

Figure 1. DHCP Server Configuration

Admin & Services

System

- System Info
- IP Settings**
- System Time
- Country Code
- Roles
- Users
- Mesh

Services

Administration

IP Settings | Management Interface | DHCP Assigned Address | DHCP Reserved Address | Management Access Control

IP Settings
If Unleashed was assigned static network addressing, click "Manual" and make the correct entries. If you click "DHCP", no "Manual" entries are needed.

WAN IP Address ☒ Manual ☐ DHCP

* IP Address: 10.75.46.181
 * Netmask: 255.255.255.0
 * Gateway: 10.75.46.254
 * Primary DNS Server: 10.10.10.10
 Secondary DNS Server: 10.10.10.190
 * Access VLAN: 1

LAN & WLAN Client IP Addresses ☒ DHCP Server

* Starting IP: 10.75.46.182
 * Ending IP: 10.75.46.200
 Number of IPs: 19
 Lease Time: Six hours
 Primary DNS Server: 10.10.10.10
 Secondary DNS Server: 10.10.10.190

Apply

Parent topic: [Configuring Device IP Address Settings](#)

DHCP Client List

The **Admin & Services > System > IP Settings > DHCP Client List** page displays a list of IP addresses assigned to clients by the Unleashed Master AP.

Figure 1. DHCP Client List

Admin & Services

System

- System Info
- IP settings**
- System Time
- Country Code
- Roles
- Users
- Mesh

Services

Administer

IP Settings | Management Interface | **DHCP Client List** | Preserve DHCP Client IPs

MAC Address	IP Address
58:48:22:35:af:4b	192.168.2.243
3ca9:14:48:af:90	192.168.3.98

Previous **1** Next

Parent topic: [DHCP Server](#)

Reserve DHCP Client IPs

Use this page to create a list of reserved IP addresses bound to specific MAC addresses.

To create an entry, click **Create New**, and enter the client's **MAC Address**, the **IP Address** you want to reserve, and optionally a **Description** of the device.

A maximum of 128 reserved IP address entries can be created.

Figure 1. Create New Reserved IP Address


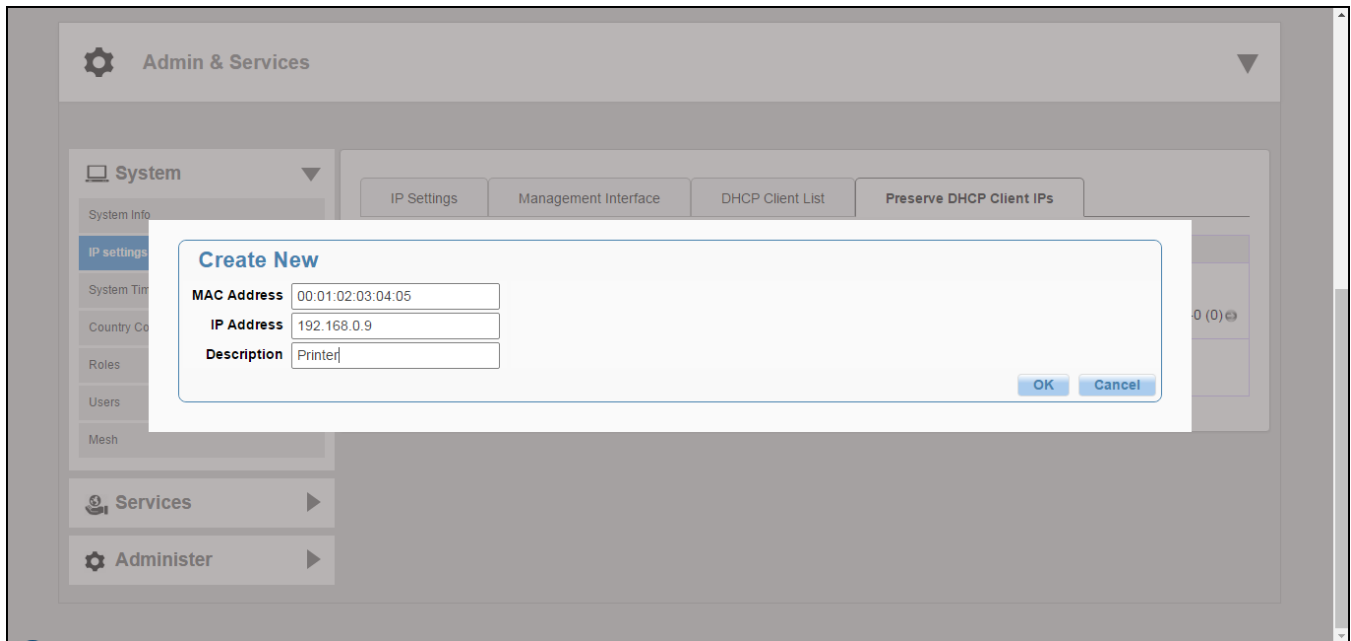


Figure 2. Reserved IP Addresses

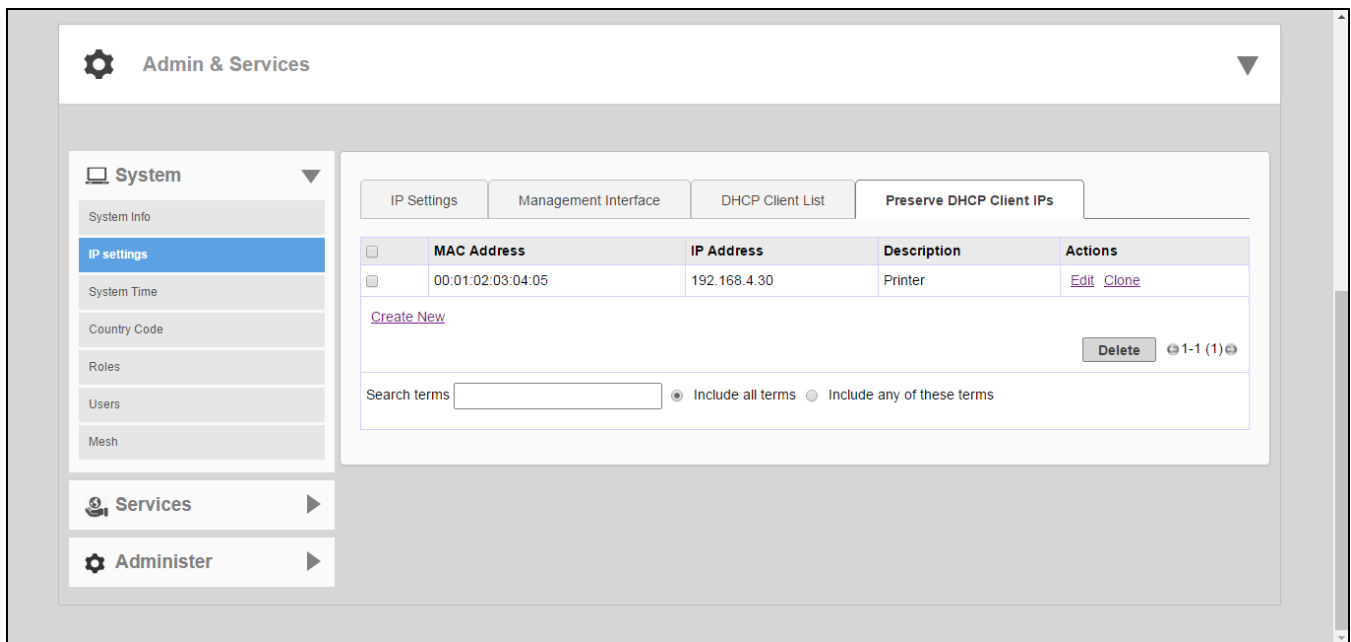

Parent topic: [DHCP Server](#)

Configuring a Management Interface

The Management IP address can be configured to allow an administrator to manage the Unleashed network from a single IP address, regardless of which Unleashed AP is currently the Unleashed Master AP.

The Management IP can be reached from anywhere on the network as long as it is routable by way of the default Gateway configured in **Device IP Settings**. Then, you only have to remember one IP address.

Complete the following steps to configure a Management Interface:

1. Go to **Admin & Services > System > Device IP Settings**, and click the **Management Interface** tab.
2. Select the check box next to **Enable IPv4 Management Interface**.
3. Enter an **IP Address** and **Netmask**.
4. (Optional) Select **Enable VLAN for Management Interface** and enter **Access VLAN**.
5. (Optional) Enable the check box next to **Use for RADIUS services** to use this IP address for communication with a RADIUS authentication/accounting server. If enabled, the Master AP will send RADIUS packets through this management interface, and the RADIUS server only needs to record one IP address for the Unleashed network. Otherwise, it will record the addresses of all APs.
6. The **Use for SNMP services** check box is automatically enabled when a Management Interface is enabled, and this address will be used for SNMP communications, if enabled.

Figure 1. Management Interface

The screenshot shows the 'Management Interface' configuration page in the RUCKUS Unleashed web interface. The page is titled 'Admin & Services' and has a sidebar with 'System' selected. The 'Management Interface' tab is active, showing options to enable IPv4 Management Interface, set IP Address (192.168.30.30) and Netmask (255.255.255.0), enable VLAN for Management Interface (Access VLAN 193), and use for RADIUS and SNMP services. The 'Enable VLAN for Management Interface' option is highlighted with a red box.

Parent topic: [Configuring Device IP Address Settings](#)


Configuring a Management Access Control

Management Access Control can be used to control access to the management interface of RUCKUS Unleashed.

When you create a management access control rule, all IP addresses and subnets other than those listed specifically listed are blocked from accessing the RUCKUS Unleashed web interface. Access can be restricted by subnet, single IP address, and IP address range.


1. Go to **Admin & Services > IP Settings > Management Access Control**.

Figure 1. Management Access Control Tab

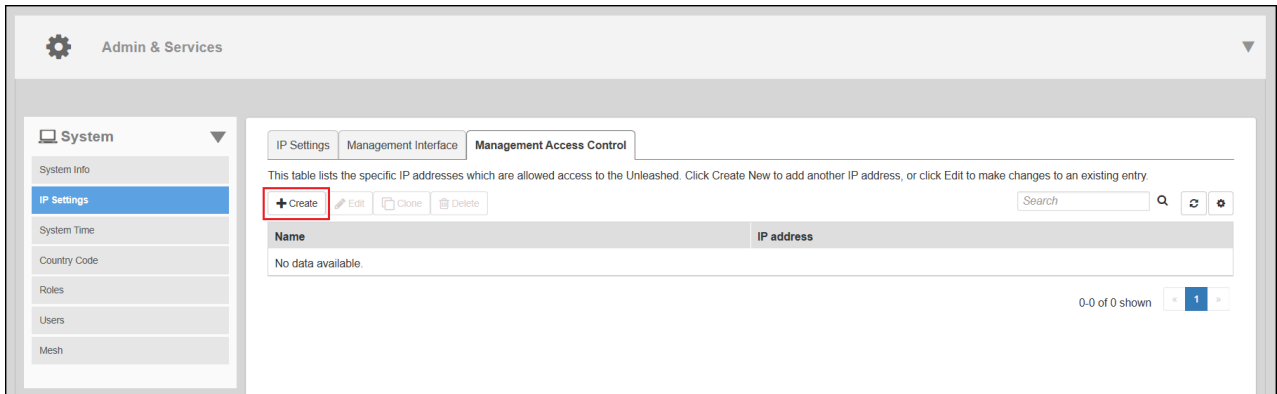

2. Click **Create**.
3. In the **Create New** dialog box, enter the following information:
 - a. In the **Name** field, enter the user name that you want to allow access to the RUCKUS Unleashed web interface.
 - b. For **Restriction**, select one of the options:
 - **Single**
 - **Range**
 - **Subnet**
 - c. In the **IP Address** field, enter a single IP address, a range of IP addresses, or a subnet based on your **Restriction** option.

Figure 2. Creating a New Management Access Control

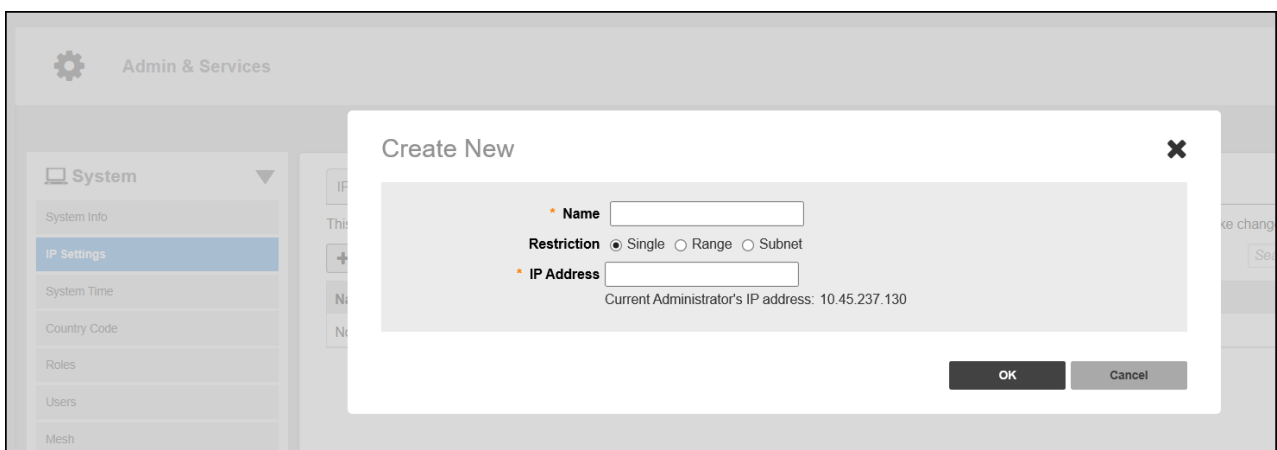

4. Click **OK**.

Parent topic: [IP Settings](#)

Configuring the System Time

Many RUCKUS Unleashed features require that the Master AP maintains the proper system time.


Maintaining the proper time relies on periodically retrieving the time from a Network Time Protocol (NTP) server on the internet. By default, the RUCKUS Unleashed network automatically updates its system time using the Network Time Protocol (NTP), which periodically polls an NTP server and synchronizes its time with the NTP server.

You can also sync time with your PC to manually synchronize the internal clock with the clock of your administration PC.

Complete the following steps to configure the system time:

1. From the dashboard, go to **Admin & Services > System > System Time**.
2. Click **Refresh** to update the display (a static snapshot) from the internal clock.
3. Enable the **Use NTP to synchronize the Unleashed clock automatically** option.

Figure 1. Configuring the System Time

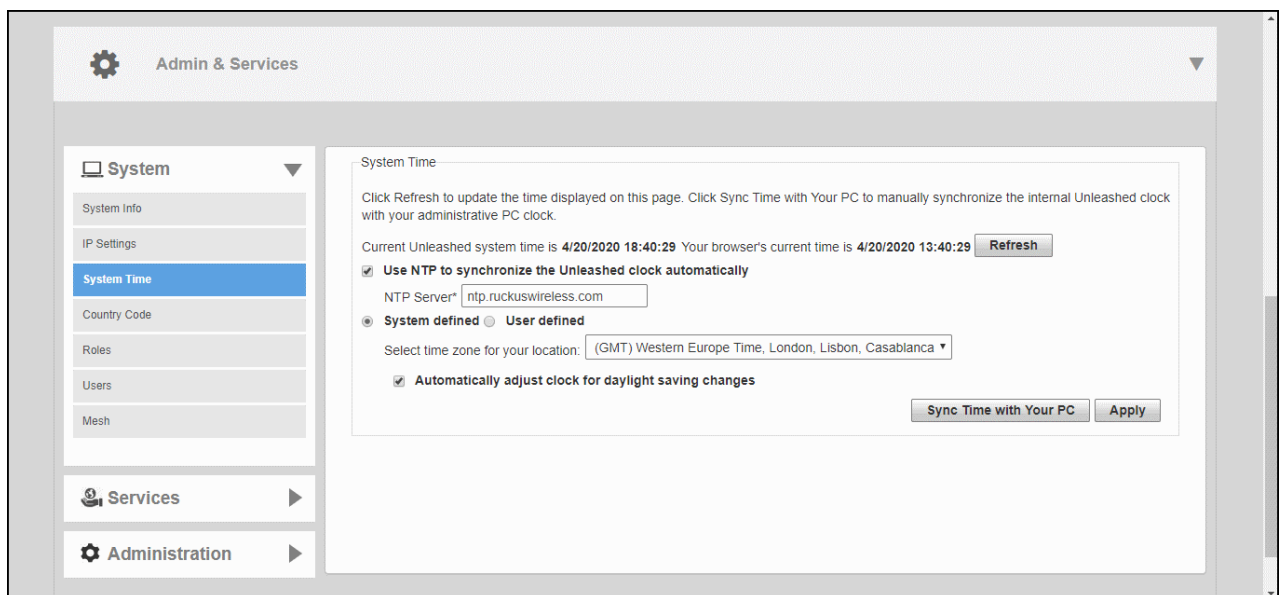

4. Configure the **NTP Server**: The default NTP server is maintained by RUCKUS, and is located at ntp.ruckuswireless.com. If you would like to use a different NTP server, enter the DNS name or IP address from which Unleashed will sync its clock.
5. Select **System defined** or **User defined** for the time zone. By default, the system-defined time zones are listed in the **Select time zone for your location** list. For information on the user-defined time zone option, refer to [Configuring a User-Defined Time Zone](#).

- From the **Select time zone for your location** list, select your time zone. Setting the proper time zone ensures that time stamps on log files are in the proper time zone.
- Click **Sync Time with Your PC** to update the internal clock with the current time settings from your administration PC if needed.
- Click **Apply** to save the results of any re-synchronization or NTP server settings changes.

Parent topic: [System Settings](#)


Configuring a User-Defined Time Zone

The user-defined time zone option allows the admin to customize the time zone and daylight savings time start and end times.

To configure a user-defined time zone:

- Go to Admin & Services > System > System Time.
- Enable **Use NTP to synchronize the Unleashed clock automatically**, and select **User Defined**.
- Select **GMT Offset** (hours and minutes) away from GMT.
- Optionally, enable **Daylight Saving Time (DST)**, and enter the DST Start and DST End dates.
- Click **Apply** to save your changes.

Figure 1. Configuring a user-defined time zone

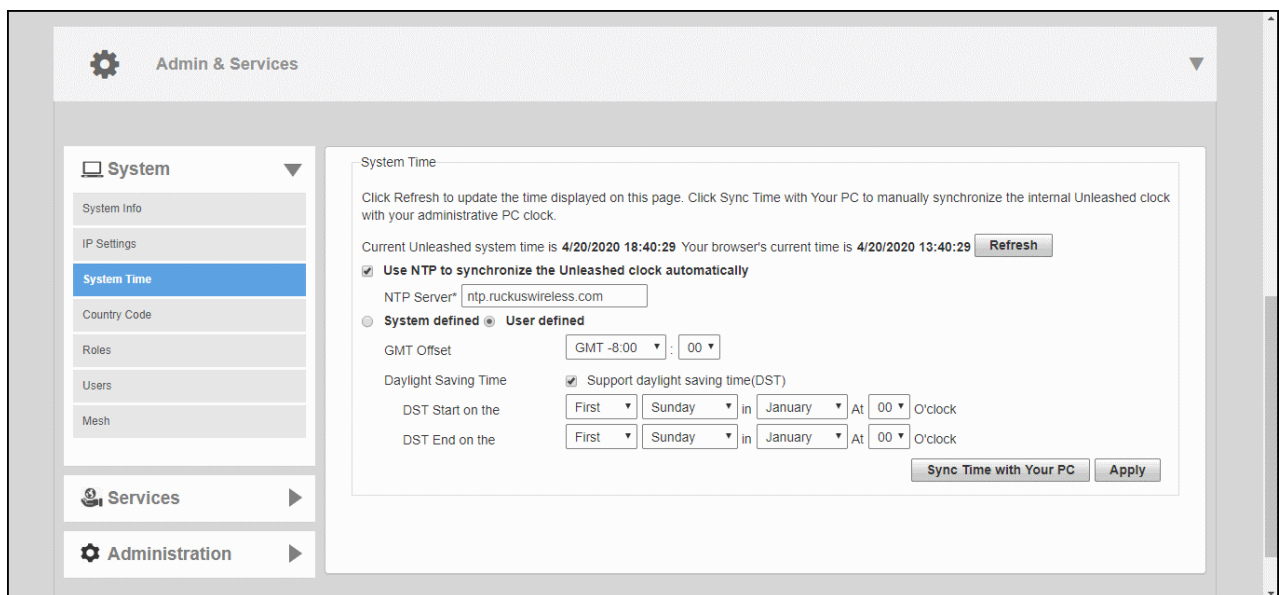

Parent topic: [Configuring the System Time](#)

Setting the Country Code

Different countries and regions maintain different rules that govern which channels can be used for wireless communications. Setting the country code to the proper regulatory region ensures that your RUCKUS Unleashed network does not violate local and national regulatory restrictions.

Setting the country code for the Master AP will also set the country code for all member APs under its control.

 **Note:** Changes to the country code are applied to all Access Points in the RUCKUS Unleashed network.

 **Note:** RUCKUS Unleashed APs sold in the United States are fixed to US country code, and cannot be changed.


Complete the following steps to set the country code to the proper location:

1. From the dashboard, go to **Admin & Services > System > Country Code**.
2. Choose your location from the **Country Code** drop-down menu.
3. In **Channel Optimization**, select one of the following options:
 - **Optimize for Compatibility:** Allows the following channels: 36, 40, 44, 48, 149, 153, 157, 161, 165 (non-DFS channels).
 - **Optimize for Interoperability:** Allows all non-DFS channels plus channels 52, 56, 58, 60.
 - **Optimize for Performance:** Allows all DFS/non-DFS channels, including 100, 104, 108, 112, 116, 120, 124, 128, 132, 136, 140.

 **Note:** Note that these settings only affect RUCKUS APs that support the extended DFS channel list.

4. Click **Apply** to save your settings.

Figure 1. Setting the Country Code

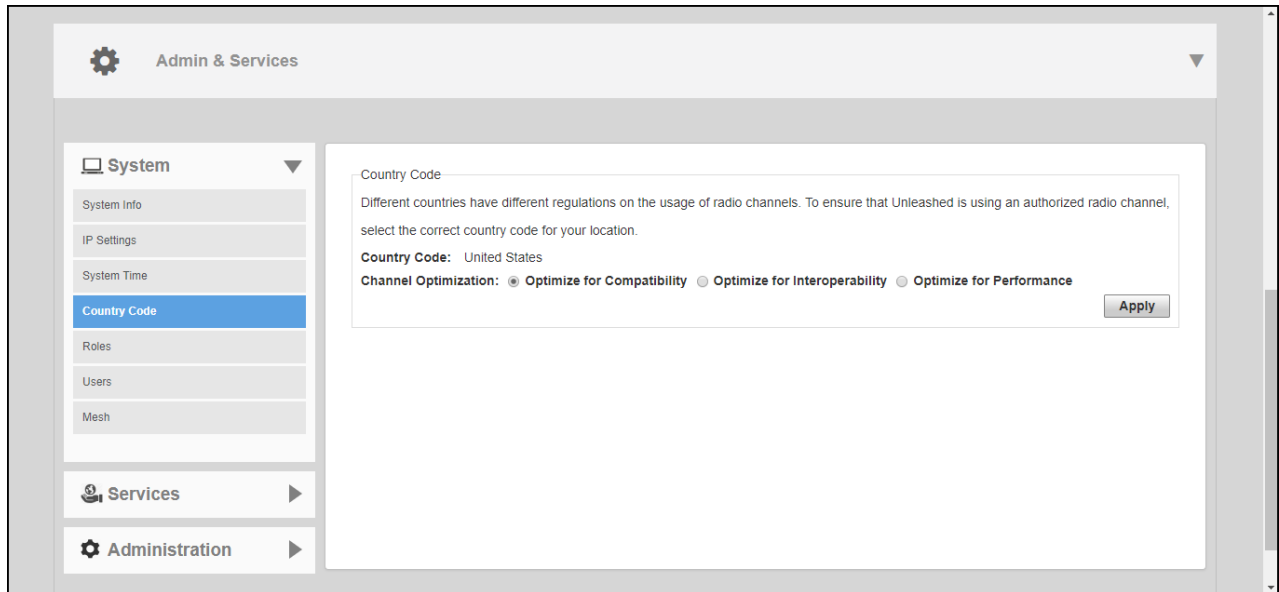

Parent topic: [System Settings](#)

Channel Optimization

If your Country Code is set to "United States," an additional configuration option, **Channel Optimization**, is shown. Channel optimization allows you to choose whether additional DFS (Dynamic Frequency Selection) channels in the 5 GHz band should be available for use by your APs.

The following 5-GHz channels are available for the APs:

- **Optimize for Compatibility:** Non-DFS channels 36, 40, 44, 48, 149, 153, 157, 161, 165.
- **Optimize for Interoperability:** Non-DFS channels and channels 52, 56, 58, 60.
- **Optimize for Performance:** All DFS + non-DFS channels: 36, 40, 44, 48, 52, 56, 60, 64, 100, 104, 108, 112, 116, 120, 124, 128, 132, 136, 149, 153, 157, 161.

 **Note:** These settings only affect RUCKUS APs that support the extended DFS channel list.

Channel optimization settings are described in the following table.

Table 1. Channel Optimization Settings for US Country Code

Setting	Description	Use this setting when
Optimize for Compatibility	DFS-capable RUCKUS Unleashed APs are limited to the same channels as all other APs (non-DFS channels only).	You have a mixture of APs that support DFS channels and other RUCKUS APs that do not support DFS channels in a Smart Mesh configuration.

Setting	Description	Use this setting when
Optimize for Interoperability	RUCKUS Unleashed APs are limited to non-DFS channels, plus four DFS channels supported by Centrino systems (may not be compatible with other wireless NICs).	You have only DFS-capable APs in your network, or Smart Mesh is not enabled, and you are confident that all wireless clients support DFS channels.
Optimize for Performance	RUCKUS Unleashed APs can use all available DFS and non-DFS channels, without regard for compatibility or interoperability	You have only DFS-capable APs in your network, you are not concerned with DFS compatibility of client devices, and you want to make the maximum use of all possible available channels.

Parent topic: [Setting the Country Code](#)

Channel Mode

The Channel Mode option allows you to configure outdoor APs to use channels regulated as indoor-only.

Some countries restrict certain 5 GHz channels to indoor use only. For instance, Germany restricts channels in the 5.15 GHz to 5.25 GHz band to indoor use. When an Unleashed outdoor AP is set to a country code where these restrictions apply, the AP can no longer be set to an indoor-only channel and will no longer select from amongst a channel set that includes these indoor-only channels when SmartSelect or Auto Channel selection is used, unless the administrator configures the AP to allow use of these channels.

For instance, if the AP is installed in a challenging indoor environment such as a warehouse, the administrator may want to allow the AP to use an indoor-only channel. These channels can be enabled for use through the web interface by configuring the **Channel Mode** and checking **Allow indoor channels**. If you have an indoor AP functioning as a Root AP with outdoor APs functioning as Mesh APs, the mesh backhaul link must initially use a non-indoor-only channel. Your outdoor Mesh APs may fail to join if the mesh backhaul link is using a restricted indoor-only channel.

Parent topic: [Setting the Country Code](#)


Configuring User Roles

Unleashed provides a "Default" role that is automatically applied to all new user accounts.

This role links all users to the internal WLAN and permits access to all WLANs by default. As an alternative, you can create additional roles that you can assign to selected wireless network users, to limit their access to certain WLANs, to allow them to log in with non-standard client devices, or to grant permission to generate guest passes. (You can then edit the "default" role to disable the guest pass generation option.)

To create a new user Role:

1. Go to **Admin & Services > System > Roles**. The **Roles** page appears, displaying a Default role in the **Roles** table.

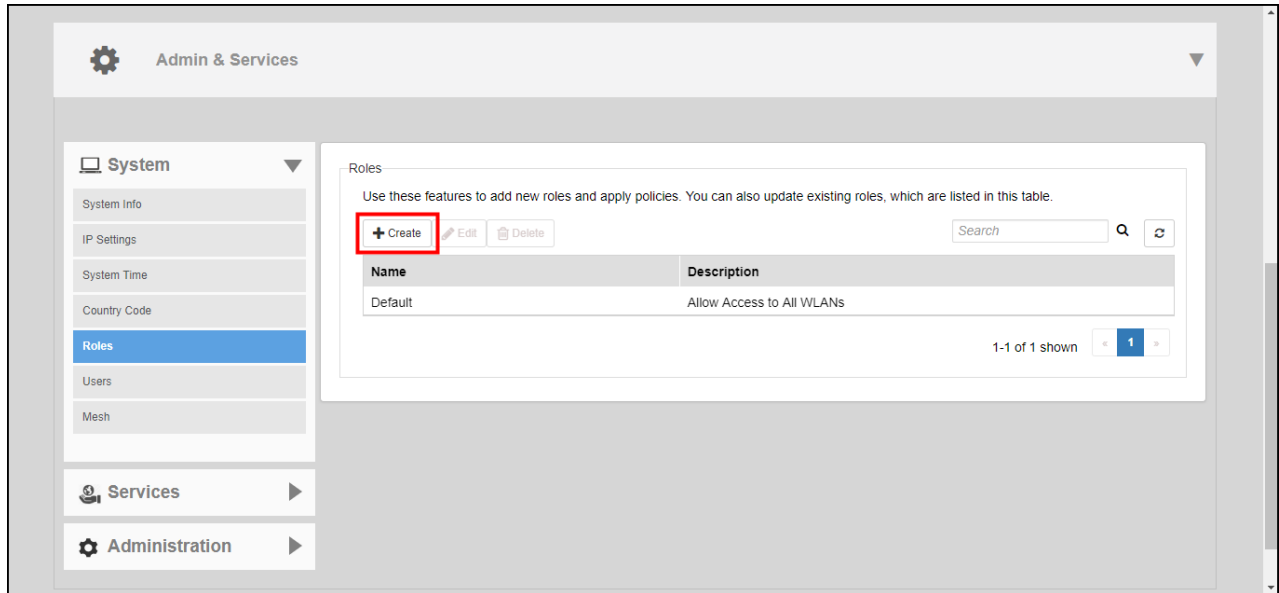2. Click **Create**.**Figure 1.** Roles3. Enter a **Name** and a short **Description** for this role.

4. Choose the options for this role from the following:

- **Group Attributes:** Fill in this field only if you are creating a user role based on Group attributes extracted from an Active Directory server. Enter the User Group name here. Active Directory/LDAP users with the same group attributes are automatically mapped to this user role.
- **Allow All WLANs:** You have two options: (1) Allow Access to all WLANs, or (2) Specify WLAN Access. If you select the second option, you must specify the WLANs by clicking the check box next to each one.
- **Guest Pass:** If you want users with this role to have the permission to generate guest passes, enable this option.
- **Note:** When creating a guest pass generator role, you must ensure that this role is given access to the guest WLAN/s. If you create a role and allow guest pass generation, but do not allow the role access the relevant WLANs, members of the "Guest Pass Generator" Role will be unable to generate guest passes for the guest WLAN.
- **Administration:** Enable this option to allow this user role admin privileges. Admin privileges are divided into two levels:
 - **Super Admin:** Allows users to perform all configuration and management tasks.
 - **Monitoring Admin:** Allows monitoring and viewing of operating status only.

- When you finish, click **OK** to save your settings. This role is ready for assignment to authorized users.
- If you want to create additional roles with different policies, repeat this procedure.

Figure 2. Creating a new user Role

Parent topic: [System Settings](#)

Adding New Users to the Local Database

Once the wireless network is set up, you can choose to authenticate wireless users using an external authentication server (Active Directory or RADIUS server), or to authenticate users by referring to accounts that are stored in the system's internal user database.

This section describes the procedures for managing users using the internal user database. For authentication using an external AAA server, see [AAA Servers](#).

To use the internal user database as the default authentication source and to create new user accounts in the internal database:

- Go to **Admin & Services > System > Users**.
- In the **Internal User Database** table, click **Create New**.
- When the **Create New** form appears, fill in the text fields with the appropriate entries:
 - User Name:** Enter a name for this user. User names must be 1-32 characters in length, using letters, numbers, underscores (_) and periods (.). User names are case-sensitive and may not begin with a number.

- **Full Name:** Enter the assigned user's first and last name. The user name can be up to 64 characters, including special characters and spaces.
 - **Password:** Enter a unique password for this user, 4-32 characters in length, using a combination of letters, numbers and special characters including characters from (!) (char 33) to (~) (char 126). Passwords are case-sensitive.
 - **Confirm Password:** Re-enter the same password for this user.
4. If you have created roles that enable non-standard client logins or that gather staff members into workgroups, select the appropriate role for this user from the **Roles** drop-down menu. For more information on roles and their application, see [Configuring User Roles](#).
 5. Click **OK** to save your settings. Be sure to communicate the user name and password to the appropriate end user.

Figure 1. The Users Page


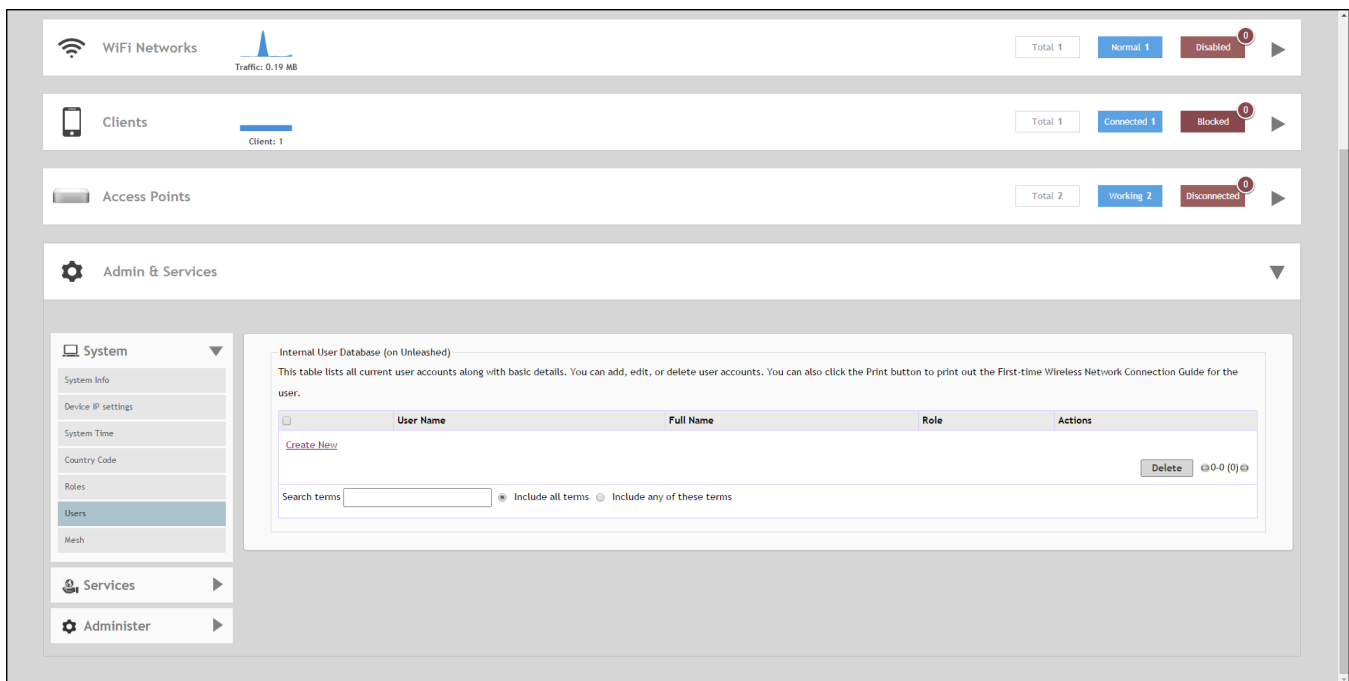


Figure 2. Creating a New User on the Internal Database

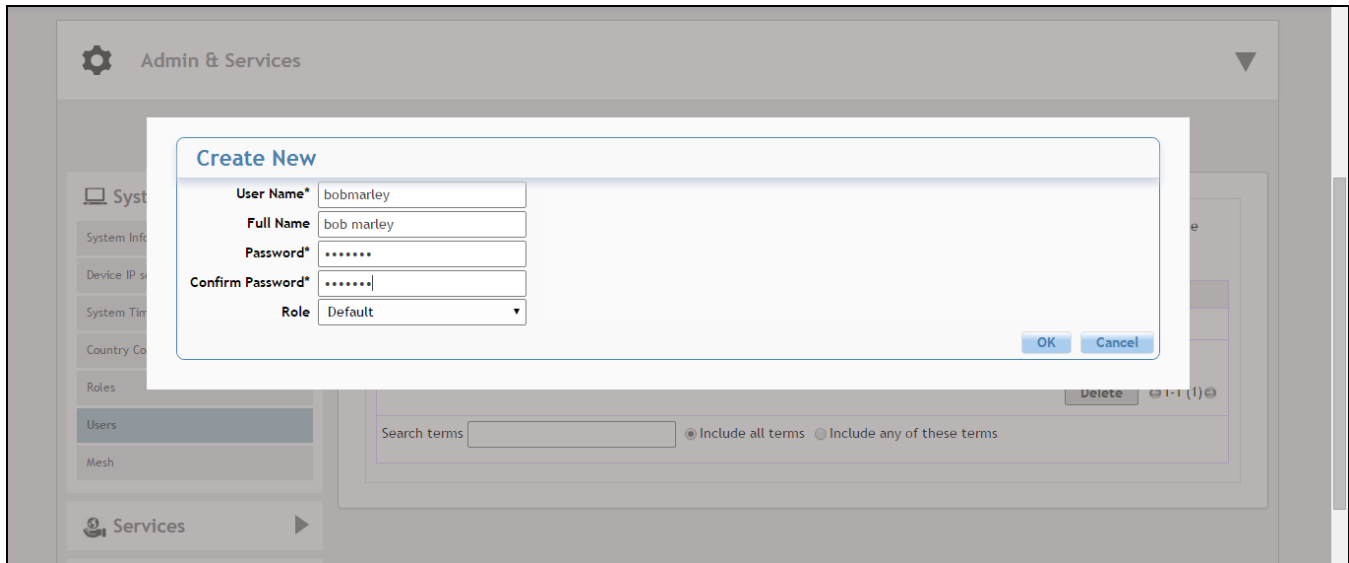

Parent topic: [System Settings](#)

Changing an Existing User Account

1. Go to **Admin & Services > System > Users**.
2. When the **Users** features appear, locate the specific user account in the **Internal User Database** table, and then click **Edit**.
3. When the **Editing [user name]** form appears, make the needed changes.
4. If a role must be replaced, select a new **Role** for this user. (For more information, see [Configuring User Roles](#).)
5. Click **OK** to save your changes. Be sure to communicate the relevant changes to the appropriate end user.

Parent topic: [System Settings](#)

Importing Users into the Local Database using CSV File

1. From the dashboard, select **Admin & Services > System > Users**.
2. Under **Internal User Database**, click **More > Import** to import user profiles.
You can download a sample user profile using the link in **To download a example of profile, click here**.

Figure 1. Importing Users into the Local Database

Internal User Database (on Unleashed)

This table lists all current user accounts along with basic details. You can add, edit, or delete user accounts. You can click the Print button to print out the First-time Wireless Network Connection Guide for the user. You also can click the Import button to import user profiles. To download an example of profile [click here.](#)

Users can access https://unleashed.ruckuswireless.com/user/user_changepass.jsp to change password.

Show QR Code

+ Create **Edit** **Delete** **More**

Search **Q** **↺** **⚙**

Username	Role
1239	Default

Clone
Print
Import

- In the **Import User List** window, either drag-and-drop a file within the dotted area or click to upload the file.

Figure 2. Importing User List

Import User List **×**

Drop file here or click to upload file

Cancel

Parent topic: [System Settings](#)

Limitations and Considerations for CSV Import

- A CSV file can contain a maximum of 2048 accounts at one time. A maximum of 2048 accounts are stored in the local database.
- A CSV file must use the following format: UserName,FullName,Password,RoleName.
 - Password can contain only between 4 through 32 characters, and cannot contain "< >" (angle brackets).
 - RoleName must be between 1 through 32 characters and cannot contain "< >" (angle brackets).


- UserName must be from 1 through 32 characters in length and can consist only of alphanumeric characters, underscore (_), and period (.), and Chinese characters.
- FullName is not necessary.

Parent topic: [Importing Users into the Local Database using CSV File](#)

Deleting a User Record

1. Go to **Admin & Services > System > Users**.
2. Review the **Internal User Database** table.
3. To delete one or more records, click the check boxes next to those account records, and click the **Delete** button.
4. When the confirmation dialog box appears, click **OK** to save your settings. The records are removed from the internal user database.

Figure 1. Deleting a user from the internal database

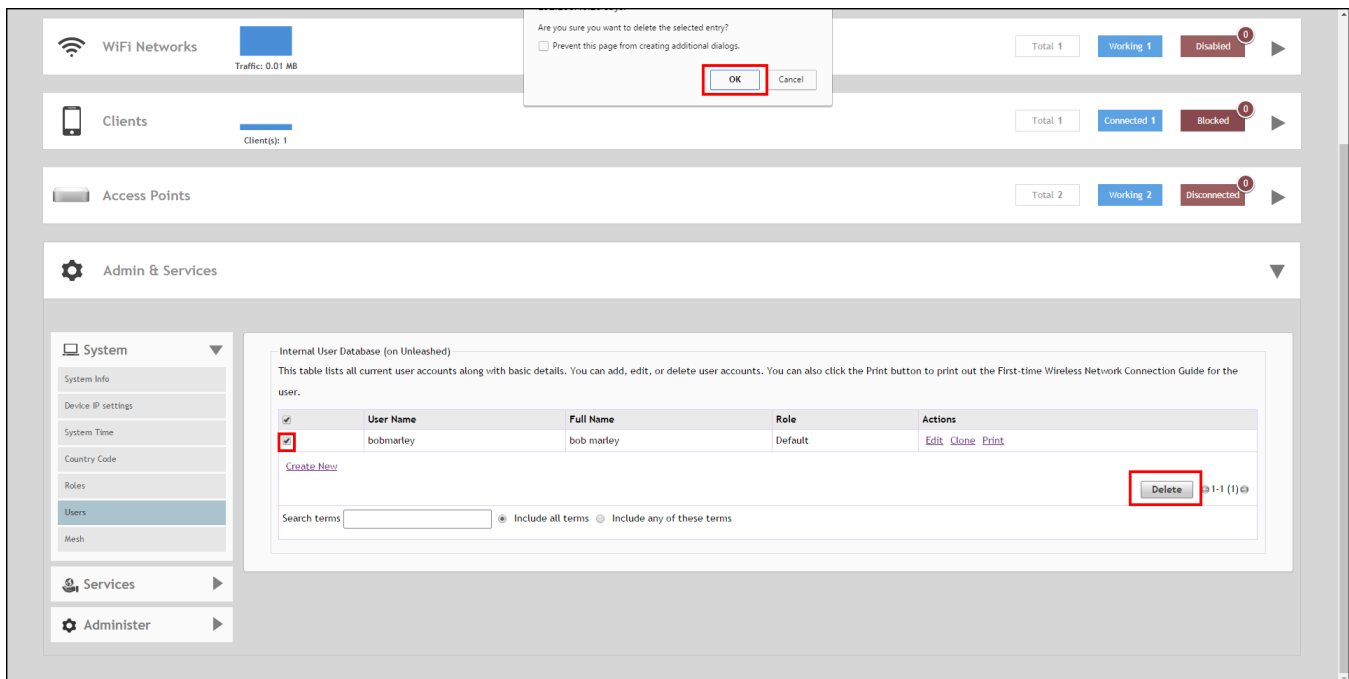

Parent topic: [System Settings](#)

Changing User Password

Users can change their account passwords without the aid of the administrator. Syslog maintains a record of the users who have changed their passwords, which reduces the workload of the administrator.

1. Go to [https://\[Master_IP\]/user/user_changepass.jsp](https://[Master_IP]/user/user_changepass.jsp) or scan the QR code to reset the password.

2. In the **Change your password** dialog box, enter the following information:

a. For **Username**, enter your username.

The username must be from 1 through 32 characters in length and can consist only of alphanumeric characters, underscore (_), period (.), and Chinese characters.


b. For **Password**, enter your current password.

The password must be from 4 through 32 characters in length. The usage of a pair of special characters "< >" (angle brackets) is limited, but you can use the characters separately.

c. For **New Password**, enter your new password.

d. For **Confirm New Password**, enter your new password again.

Figure 1. Changing the Password for a Local Database User

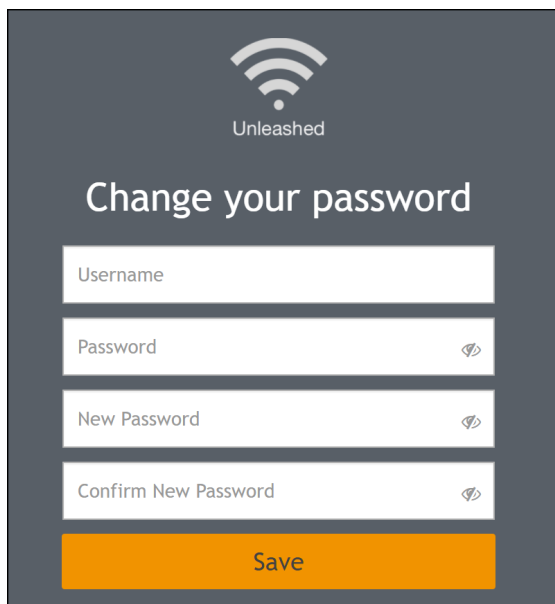

3. Click **Save** to save the changes.

 **Note:** If the authentication failed three times within five minutes, the login is disabled for three minutes.

Parent topic: [System Settings](#)

Mesh Networking

Overview of Smart Mesh Networking

Supported Mesh Topologies

Configuring Mesh Settings

ARP Broadcast Filter

Configuring Mesh Topology Detection

Parent topic: [System Settings](#)

Overview of Smart Mesh Networking

A Smart Mesh network is a peer-to-peer, multi-hop wireless network wherein participant nodes cooperate to route packets.

In a RUCKUS Smart Mesh network, the routing nodes (that is, the access points forming the network), or "mesh nodes," form the network's backbone. Clients connect to the mesh nodes and use the backbone to communicate with one another, and, if permitted, with nodes on the Internet. The mesh network enables clients to reach other systems by creating a path that "hops" between nodes.

Smart Mesh networking offers many advantages:

- Smart Mesh networks are self-healing: If any one of the nodes fails, the nodes note the blockage and re-route data.
- Smart Mesh networks are self-organizing: When a new node appears, it becomes assimilated into the mesh network.

In the RUCKUS Smart Mesh network, all traffic going through the mesh links is encrypted. A passphrase is shared between mesh nodes to securely pass traffic. When deployed as a mesh network, member APs communicate with the Master AP either through a wired Ethernet connection (Root APs) or through the wireless connection using the 2.4-GHz, 5-GHz, and 6-GHz radios (Mesh APs).

Smart Mesh Networking Terms

Before you begin deploying your Smart Mesh network, RUCKUS recommends becoming familiar with the terms in the following table.

Table 1. Mesh Networking Terms

Term	Definition
Mesh Node	A RUCKUS Unleashed AP with mesh capability enabled.

Term	Definition
Root AP (RAP)	A mesh node that communicates with the Master AP through its Ethernet (wired) interface. The Master AP itself must also be a Root AP.
Mesh AP (MAP)	A mesh node that communicates with the Master AP through its wireless interface by way of a Root AP.
Ethernet-Linked Mesh AP (eMAP)	A mesh node that is connected to its uplink AP through a wired Ethernet cable, rather than wirelessly. eMAP nodes are used to bridge wireless LAN segments together.
Mesh Tree	Each Mesh AP can have exactly one uplink to a Root AP or another Mesh AP, and each Root AP or Mesh AP can have multiple Mesh APs connected to it, resulting in a tree-like topology. A single Master AP can manage more than one mesh tree. There is no limit on the number of mesh trees per RUCKUS Unleashed Master AP. For example, a RUCKUS Unleashed network can consist of 1 mesh tree of 6 APs, 2 mesh trees of 3 APs each, or 3 mesh trees of 2 APs each.
Hop	The number of wireless mesh links a data packet takes from one Mesh AP to the Root AP. For example, if the Root AP is the uplink of Mesh AP 1, then Mesh AP 1 is one hop away from the Root AP. In the same scenario, if Mesh AP 1 is the uplink of Mesh AP 2, then Mesh AP 2 is two hops away from the Root AP. A maximum of 8 hops is supported.

Refer to [Supported Mesh Topologies](#) for more information.

Parent topic: [Mesh Networking](#)

Supported Mesh Topologies

Smart Mesh networks can be deployed in three types of topologies:


- Standard Topology
- Wireless Bridge Topology
- Hybrid Mesh Topology

Standard Topology

The standard Smart Mesh topology consists of the Unleashed Master AP and a number of Root APs and Mesh APs. In this topology, the Unleashed Master and the upstream router are connected to the same wired LAN

segment. You can extend the reach of your wireless network by forming and connecting multiple mesh trees to the wired LAN segment. In this topology, all APs connected to the wired LAN are considered "Root APs," and any AP not connected to the wired LAN is considered a "Mesh AP."


Figure 1. Mesh - standard topology

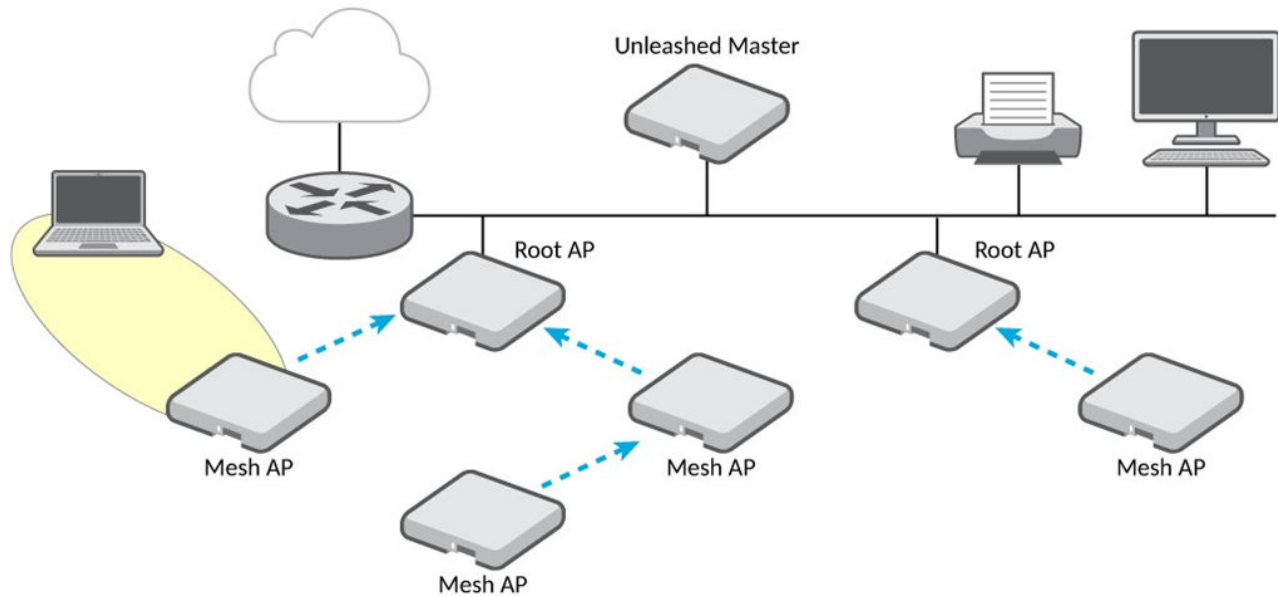

Wireless Bridge Topology

If you need to bridge isolated wired LAN segments, you can set up a mesh network using the wireless bridge topology. In this topology, the Unleashed Master and the upstream router are on the primary wired LAN segment, and another isolated wired segment exists that needs to be bridged to the primary LAN segment. You can bridge these two wired LAN segments by forming a wireless mesh link between the two wired segments, as shown in the figure below.

Figure 2. Mesh - wireless bridge topology

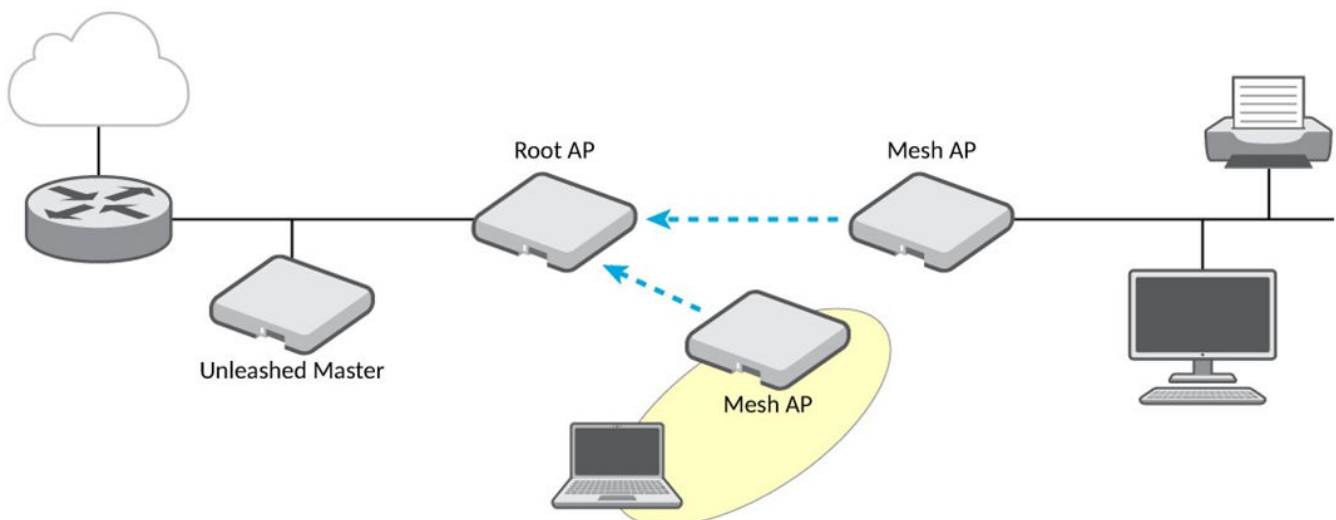

Hybrid Mesh Topology

A third type of network topology can be configured using the Hybrid Mesh concept.


Ethernet-linked Mesh APs (eMAP) enable the extension of wireless mesh functionality to a wired LAN segment. An eMAP is a special kind of Mesh AP that uses a wired Ethernet link as its uplink rather than wireless. An eMAP is not considered a Root AP, despite the fact that it discovers the Unleashed Master through its Ethernet port.

Multiple eMAPs can be connected to a single Mesh AP to, for example, bridge a wired LAN segment inside a building to a wireless mesh outdoors.

In designing a mesh network, connecting an eMAP to a Mesh AP extends the Smart Mesh network without expending a wireless hop, and the eMAP can be set on a different channel to take advantage of spectrum reuse.

Note: The Unleashed Master AP cannot be an eMAP.

Figure 3. eMAP - Hybrid Mesh topology

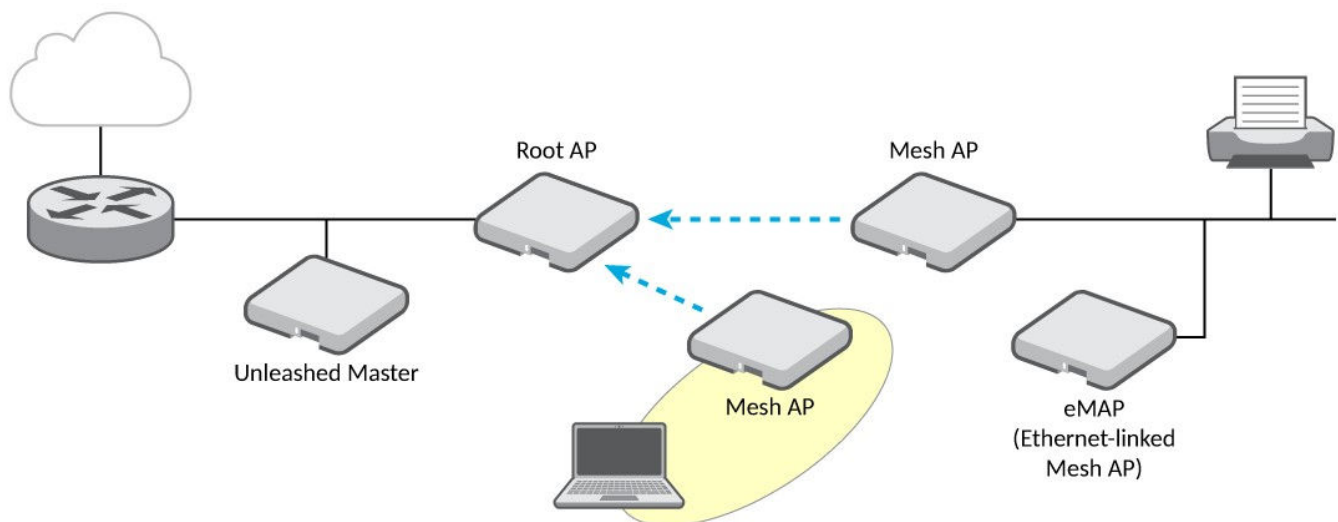

Parent topic: [Mesh Networking](#)

Configuring Mesh Settings

Complete the following steps to configure the Mesh settings.

1. From the dashboard, select **Admin & Services > System > Mesh**.
2. Select the **Enable Mesh** check box.
3. Under **Mesh Name (ESSID)**, enter a name for the Mesh network.
4. Under **Mesh Passphrase**, enter a passphrase, or click **Generate** to generate a random Mesh passphrase.

5. Under **Mesh Radio Option**, select **2.4GHz** or **5GHz/6GHz**.

- **Note:** Once you have enabled Mesh, you cannot disable it again without resetting the Master AP to factory defaults (refer to [Restore to Factory Settings](#)).
- **Note:** If you enabled Mesh during the Setup Wizard process, you do not need to configure it again here.
- **Note:** The Master AP cannot be a Mesh AP. The Master AP can only be a Root AP in a Mesh topology.
- **Note:** 2.4-GHz and 6-GHz Mesh radios do not support Zero Touch Mesh.

Figure 1. Configuring Mesh Settings

System ▼

- System Info
- IP Settings
- System Time
- Country Code
- Roles
- Users
- Mesh**

Services ►

Administration ►

Mesh Settings | ARP Broadcast Filter | Mesh Topology Detection

Mesh Settings

Mesh capability allows you to deploy your access points without using wires.

Enable Mesh

* **Mesh Name (ESSID)**

* **Mesh Passphrase** **Generate**

Mesh Radio Option ☐ 2.4GHz ☒ 5GHz/6GHz

☐ **Zero Touch Mesh**

Zero Touch Mesh provides zero-touch onboarding of mesh APs. The new AP with the serial number you add here, will be automatically approved to join Unleashed Network via Zero Touch Mesh discovery.

Pre-Approved Zero Touch Mesh APs

These APs will be approved when detected. No manual approval required

AP Serial # ▼	Status	Approved on
No data available.		

0-0 of 0 shown

Apply

Parent topic: [Mesh Networking](#)

Zero Touch Mesh


Zero Touch Mesh allows customers to skip the mesh configuration priming process, enabling Mesh APs already installed in their permanent locations to auto-discover, auto-provision and auto-form a mesh network without priming.

In most installations, Unleashed APs that are destined to become Mesh APs need to first be primed prior to deployment. They are first manually connected to the controller (Unleashed Master AP) via Ethernet to receive the provisioning parameters (Mesh SSID and PSK passphrase), and then unplugged from Ethernet and installed at their desired location.

Once installed, Mesh APs perform network discovery and associate to another Mesh AP (RAP, MAP or eMAP) that is beaconing the provisioned Mesh SSID.

This manual procedure can be skipped using the Zero Touch Mesh feature.

Figure 1. Enabling Zero Touch Mesh

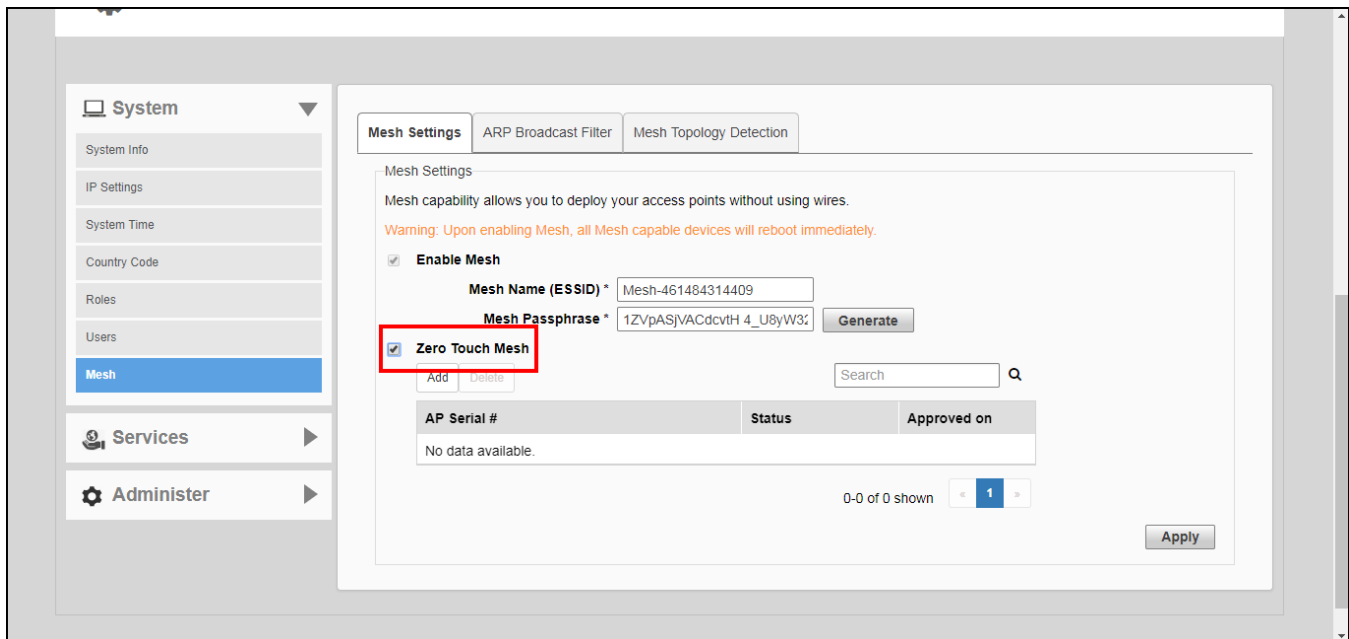

Parent topic: [Configuring Mesh Settings](#)

Onboarding Mesh APs with Zero Touch Mesh

To allow Unleashed Mesh APs to join the Mesh network without first connecting them via Ethernet, use the following procedure:

1. Go to **Admin & Services > System > Mesh**.
2. Select the check box to enable **Zero Touch Mesh**.
3. Click **Apply**.
The changes to the mesh settings will propagate through the mesh network.

4. Go to **Access Points > Summary > Show Zero Touch Mesh APs**.

Figure 1. Show Zero Touch Mesh APs

Access Points

Total 2 Working 2 Disconnected 0

Data duration: 10 mins

2 Access Point(s) connected, 0 Access Point(s) disconnected.
Please select one of the Access Points to see specific details.

Summary (2 Access Point(s) in total)

0 Clients 0 Traffic

RuckusAP [...37:b3:81] Master

1 0 Clients 2.4G 5G

RuckusAP [...1b:16:f0] Mesh

2 0 Clients 2.4G 5G

Mesh Status :Enabled Show Mesh Topology ▶

Zero Touch Mesh Status: Enabled Show Zero Touch Mesh APs ▼

0 Client(s) Show Client(s) Info ▶

Client Status for last 10 mins

5 Excellent Moderate Poor

4

5. When a supported AP attempts to join, it will appear in the Zero Touch Mesh AP table. Click the **Approve** button to approve the AP.

Figure 2. Waiting for connection

Access Points

Total 1 Working 1 Disconnected 0

Data duration: 10 mins

1 Access Point(s) connected, 0 Access Point(s) disconnected.
Please select one of the Access Points to see specific details.

Summary (1 Access Point(s) in total)

0 Clients 0 Traffic

RuckusAP [...37:b3:81] Master

1 0 Clients 2.4G 5G

Mesh Status :Enabled Show Mesh Topology ▶


Zero Touch Mesh Status: Enabled Show Zero Touch Mesh APs ▼

Access Points	Serial	Model	Status	Action
f0 3e 90 1b 16 f0	111604203423	R710	Waiting for connecting	


Previous 1 Next

0 Client(s) Show Client(s) Info ▶

Figure 3. Click Approve to allow the AP to join

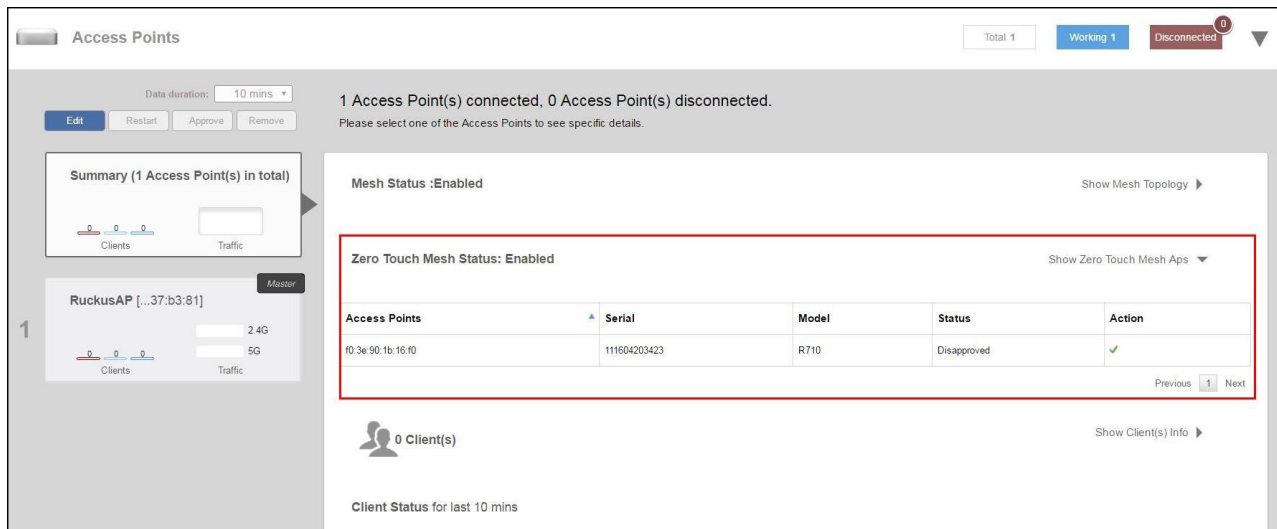

6. To pre-approve APs by serial number, go to **Admin & Services > System > Mesh > Zero Touch Mesh**, and locate the Pre-Approved Zero Touch Mesh section.
 7. In the same section, click the **Add** button to add a new AP to the list of pre-approved Zero Touch Mesh APs.
The Input AP Serial window appears.
 8. Enter the **AP Serial Number** of the AP to autoprovision, and click **OK**.
- Figure 4.** Add AP serial number

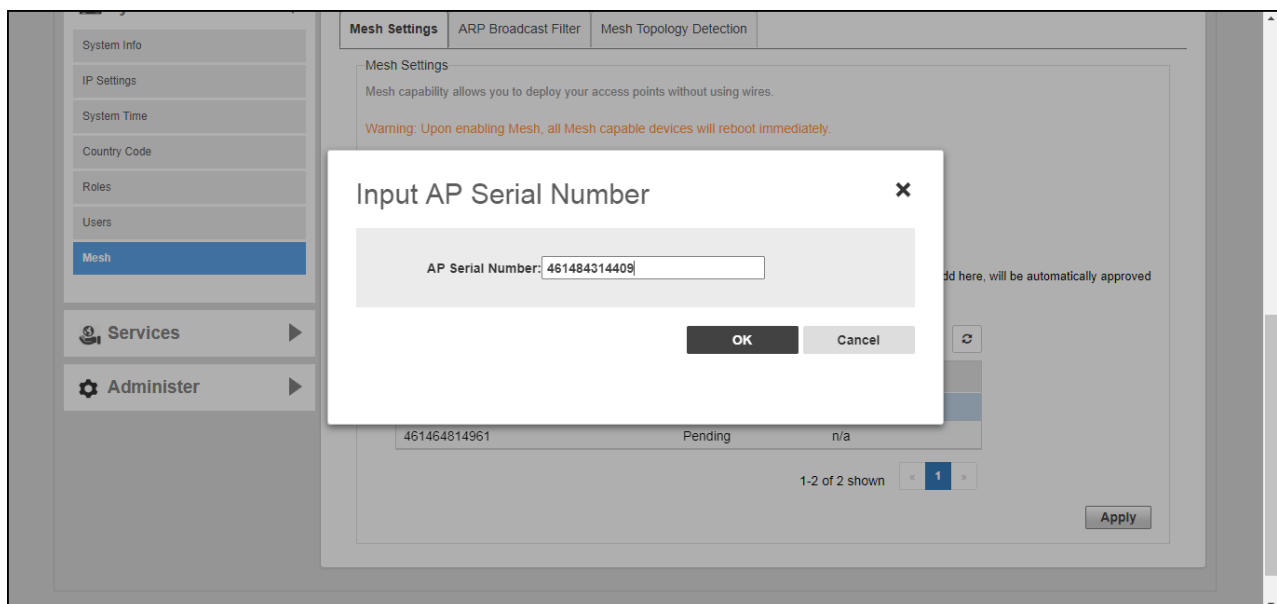

The AP's serial number is added to the list.

9. Repeat for additional mesh APs.
10. Click **Apply**.

A message box appears notifying you that the process may take several minutes for the changes to propagate through the mesh network.

11. When the listed APs in factory default state come online, they will begin performing network discovery, auto-provisioning and finally association to another upstream AP the Unleashed network.

Parent topic: [Configuring Mesh Settings](#)


ARP Broadcast Filter

The ARP Broadcast Filter is used to minimize or limit the amount of broadcast ARP (Address Resolution Protocol) packets on the network.

The ARP Broadcast filter is designed to reduce IPv4 ARP broadcasts over the air. Once enabled, access points will sniff ARP responses and maintain a table of IP addresses to MAC address entries. When the AP receives an ARP broadcast request from a known host, the AP converts the broadcast request packet into a unicast request by replacing the broadcast address with the MAC address.

To enable ARP Broadcast Filter, select the check box and click **Apply**.

Figure 1. ARP Broadcast Filter

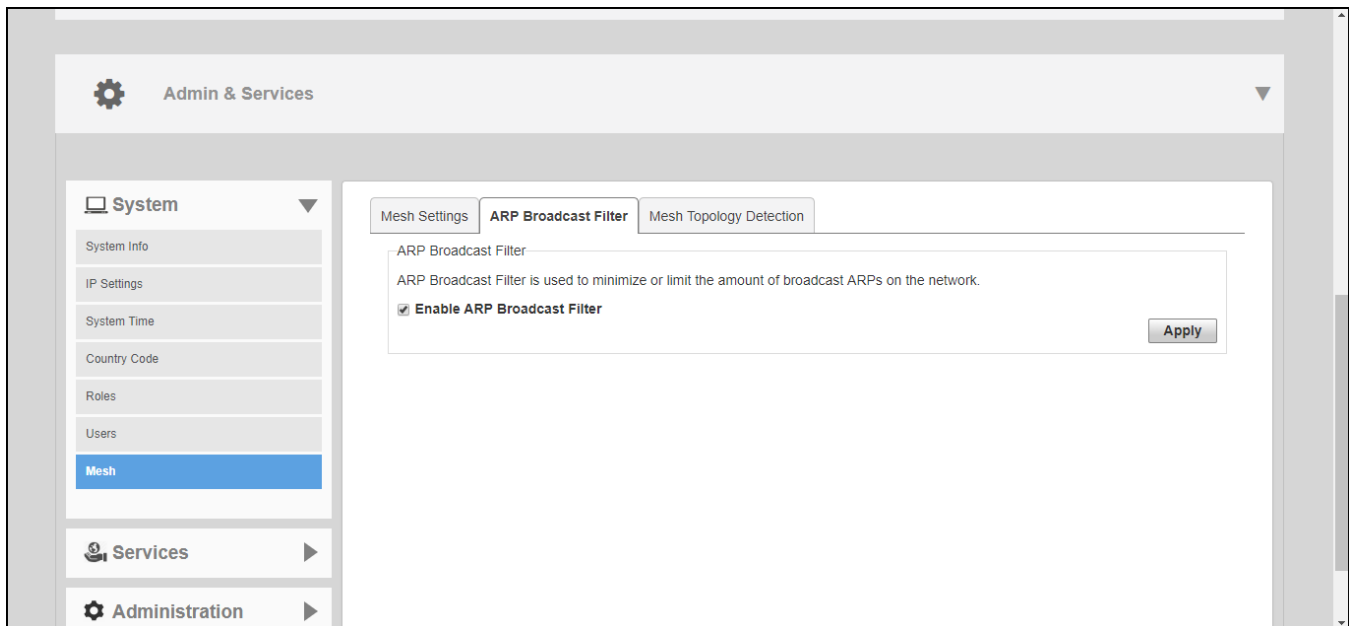

Parent topic: [Mesh Networking](#)

Configuring Mesh Topology Detection

The Mesh Topology Detection allows you to set the number of mesh hops and mesh downlinks after which RUCKUS Unleashed will trigger a warning message.


For example, if you enable both options with a threshold value of 3 for each (default), RUCKUS Unleashed will trigger a warning event message when either of the following events occurs:

- A Mesh AP with 4 or more hops from a Root AP is detected.
- A Root AP with 4 or more downlink Mesh APs connected to it is detected.

Complete the following steps to configure Mesh Topology Detection.

1. From the dashboard, select **Admin & Services > System > Mesh**.
2. Select the **Mesh Topology Detection** tab.
3. Select the **Enable mesh hops count detection** check box, and enter a number of hops.
4. Select the **Enable mesh downlinks detection** check box, and enter a number of downlinks.
5. Click **Apply**.

Figure 1. Mesh Topology Detection

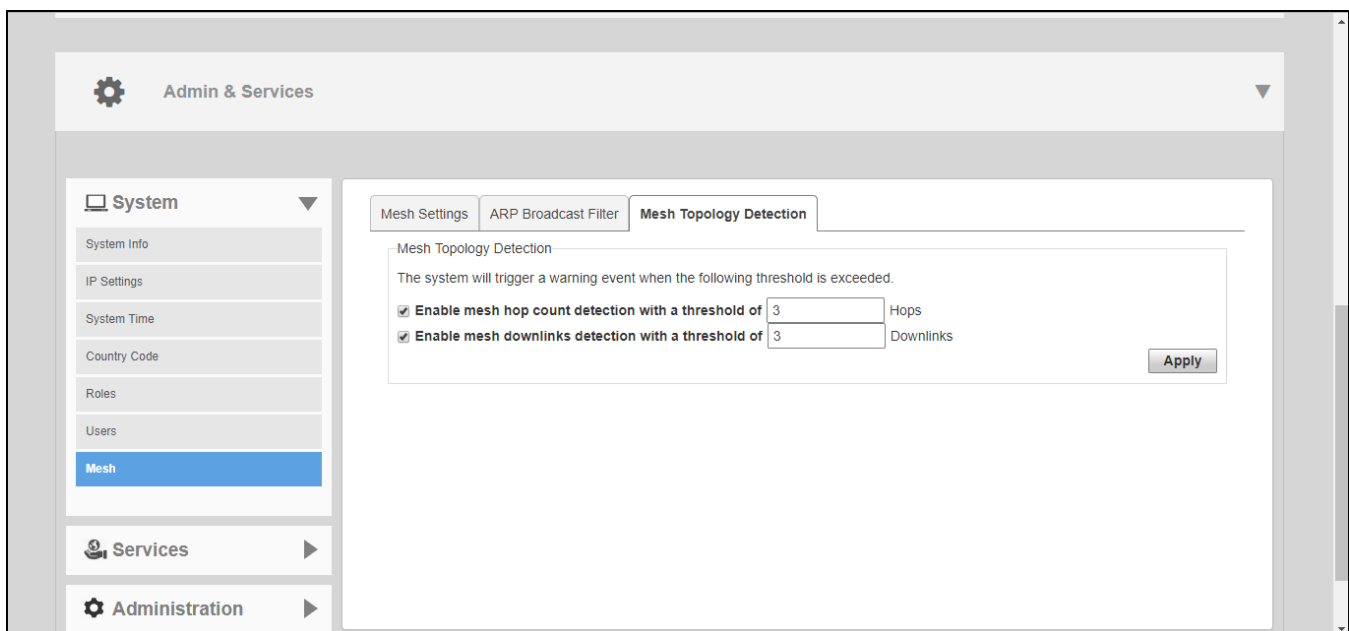

Parent topic: [Mesh Networking](#)

Enabling Log Delivery to Remote Syslog Server

Unleashed's internal log files can be configured for automatic delivery to a remote syslog server.

To enable log file delivery to a remote syslog server:

1. Go to **Admin & Services > System > System Info**, and scroll down to the Log Settings section at the bottom of the page.
2. Enable the **Remote Syslog** option and enter the IP address of the syslog server in the field provided.

3. Select one of the following options to control the content of the logs:
 - **All Syslog:** The controller sends all syslog messages configured in the Debug Logs section of the Admin & Services > Administration > Diagnostics > Debug Info page.
 - **Client Connection Logs Only:** The controller sends client connection logs only to the syslog server.
 - **Client Flow Data Only:** The controller sends client flow data only to the syslog server.
4. Optionally, enable the **Inherit remote syslog server for APs** option.

Enabling this feature allows the controller to supply client association information to a third party application that can then deploy ACL policies to a firewall based on client association information such as user name, IP, MAC address, etc. First, Unleashed retrieves client association information, then reorganizes the information and sends it to the syslog server, from which it can be collected by the third party software and sent to the firewall for access restrictions based on client association information.
5. Configure the **Facility Name** as follows:
 - **Keep Original:** Retain the original facility name.
 - **local0 - local7:** Specify facility name.
6. Set the **Priority Level** as follows:
 - **All:** Include all syslog messages.
 - 0(emerg), 1(alert), 2(crit), 3(err), 4(warning), 5(notice), 6(info), 7(debug): Lower numbers indicate higher priority. The syslog server will only receive logs whose priority levels are the same as or higher than the configured level.

Figure 1. Configuring syslog settings

Password
 API Id
 From PhoneNumber
☐ Customized Server
 Method
 URL

Log Settings

Remote Syslog: ☒ Enable reporting to remote syslog server at (IP Address) for

☒ Inherit remote syslog server for APs
Facility Name: **Priority Level:**

Parent topic: [System Settings](#)

Services

The Services pages include options for configuring system services such as Application Recognition and Control, Bonjour Gateway, DPSK, Hotspot service and Guest Access services.

To configure system services, go to **Admin & Services > Services**.

Figure 1. The Admin & Services > Services page

Admin & Services

System

Services

AAA Servers

Access Control

Application Recognition & Control

Bonjour Gateway

Dynamic PSK

Guest Access Service

Hotspot Services

Radio Control

WIPS

Authentication Servers Test Authentication Servers Settings

This table lists all authentication mechanisms that can be used whenever authentication is needed.

+ Create Edit Clone Delete Search

Name	Type	IP Address	Port
Ruckus AD	Active Directory	192.168.40.10	389

1-1 of 1 shown 1

Parent topic: [Configuring Admin & Services Settings](#)

AAA Servers

If you want to authenticate users against an external Authentication, Authorization and Accounting (AAA) server, you will need to first configure your AAA server, then point Unleashed to the AAA server so that requests will be passed through Unleashed before access is granted. This section describes the tasks that you need to perform on the Unleashed web interface to ensure your Unleashed APs can communicate with your AAA server.

For specific instructions on AAA server configuration, refer to the documentation that is supplied with your server.

Unleashed supports two types of AAA server:

- Microsoft Active Directory
- RADIUS

A maximum of 32 AAA server entries can be created, regardless of server type.

Parent topic: [Services](#)

Configuring AAA Servers

Complete the following steps to configure RUCKUS Unleashed to authenticate users against an external Active Directory or RADIUS authentication server:

1. Go to **Admin & Services > Services > AAA Servers**.
2. In **Authentication Servers**, click **Create New**.
3. Enter the name for the AAA server.
4. Under **Type**, select the server type:
 - **Active Directory:** If you use a Microsoft AD server, configure the following settings:
 - **Global Catalog:** Enable Global Catalog for multi-domain AD authentication. If this option is enabled, you must also enter an Admin DN and Password so that RUCKUS Unleashed can query the Global Catalog.
 - **Encryption:** select Enable TLS encryption if you want to encrypt all authentication traffic between the client and the Active Directory server. The AD server must support TLS1.0, TLS1.1, or TLS1.2.
 - **Server Address:** Enter the IP address or the domain name of the AD server.
 - **Port:** The default port number (389, or 636 if you have enabled TLS encryption) should not be changed unless you have configured your AD server to use a different port.

- **Windows Domain Name:** Enter a domain name for single domain authentication, or leave blank for multi-domain authentication.
- **RADIUS:** If your authentication server is a RADIUS server, configure the following settings:
 - **Encryption:** If you want to enable encryption of RADIUS packets using Transport Layer Security (TLS), select the Enable TLS encryption check box. This allows RADIUS authentication and accounting data to be passed safely across insecure networks such as the Internet.
 - **Auth Method:** Choose PAP or CHAP according to the authentication protocol used by your RADIUS server.
 - **Backup RADIUS:** If a backup RADIUS or RADIUS Accounting server is available, enable the check box next to Backup RADIUS and additional fields appear. Enter the relevant information for the backup server and click **OK**. When you have configured both a primary and backup RADIUS server, an additional option is available in the Test Authentication Settings section to choose to test against the primary or the backup RADIUS server.
 - **Server Address:** Enter the IP address or the domain name of the RADIUS server (and backup RADIUS server, if enabled).
 - **Port:** The default port (1812) should not be changed unless you have configured your RADIUS server to use a different port.
 - **Shared Secret:** Enter a password for communication between RUCKUS Unleashed and the RADIUS server.
 - **Confirm Secret:** Repeat the shared secret.
 - **Retry Policy:** Enter a request timeout value (in seconds) and maximum number of retries value in the relevant fields.
- 🔗 **Note:** If Backup RADIUS is disabled, enter a value for **Max Number of Consecutive Drop Packets** and **Reconnect Primary** (in minutes).

5. Click **OK** to save your AAA server entry.

Figure 1. The AAA Servers Page

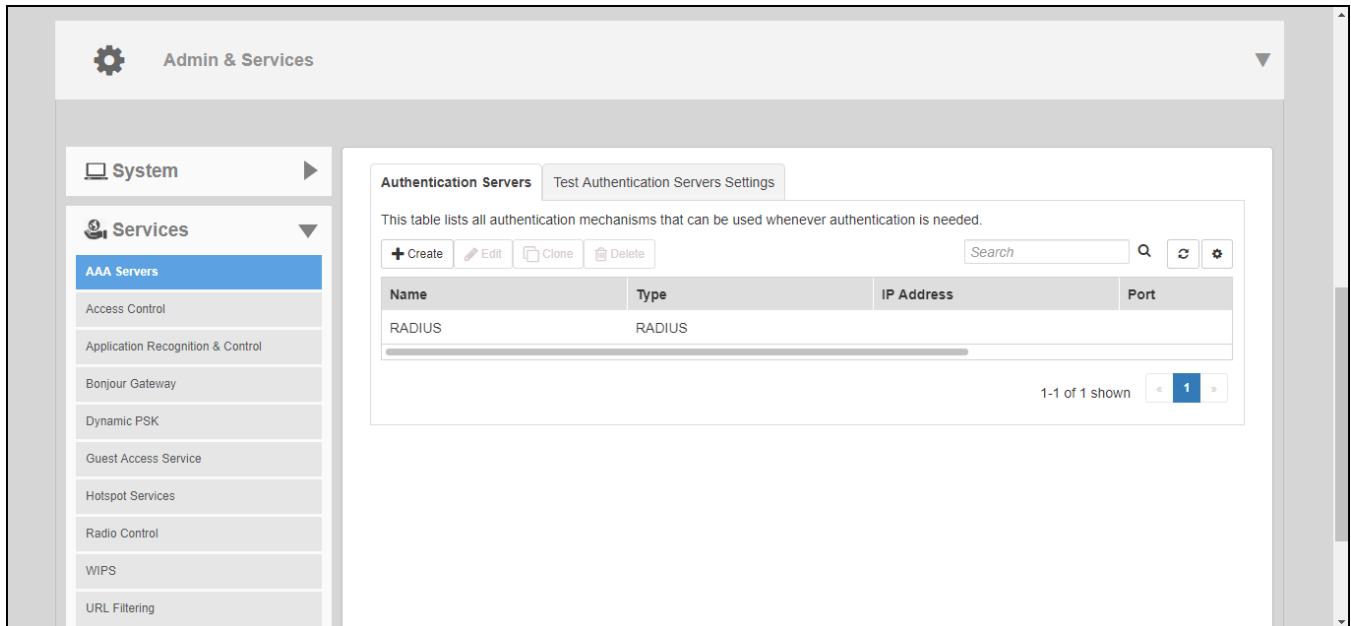


Figure 2. Microsoft Active Directory Server Configuration

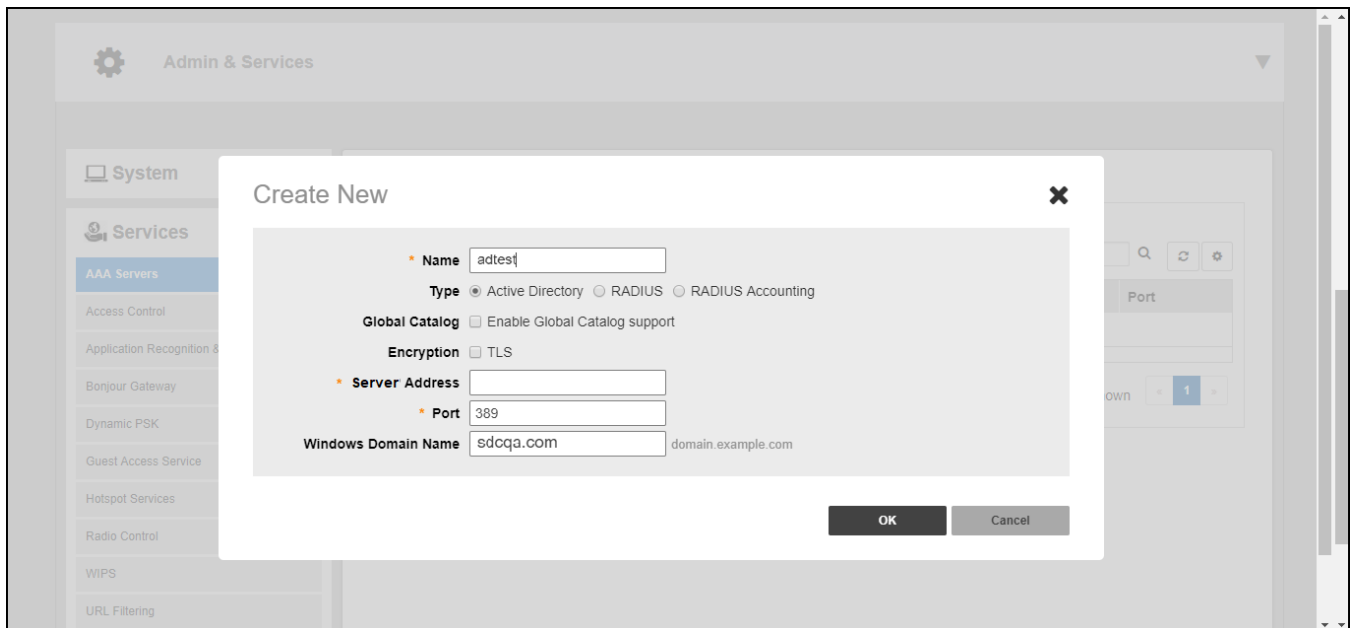


Figure 3. RADIUS or RADIUS Accounting Server Configuration

Create New ✕

* Name

Type ☐ Active Directory ☒ RADIUS ☐ RADIUS Accounting

Encryption ☐ TLS

Auth Method ☒ PAP ☐ CHAP

Backup RADIUS ☒ Enable Backup RADIUS support

First Server

* Server Address

* Port

* Shared Secret

* Confirm Secret

Second Server

* Server Address

* Port

* Shared Secret

* Confirm Secret

Retry Policy

* Request Timeout seconds

* Max Number of Retries times

* Max Number of Consecutive Drop Packets

* Reconnect Primary minutes

OK

Cancel

Parent topic: [AAA Servers](#)

Limitations on configuring AAA Servers

- If a domain name can be resolved to more than one IP address, the first two IP addresses are used as the primary and secondary servers when the **Backup RADIUS** is disabled.

366

- If a domain name can be resolved to only one IP address, it is used as the primary server.
- If a domain name can resolve multiple IP addresses, only the first IP address is used as the server IP address when **Backup RADIUS** is enabled. Even if the first IP addresses of two domain names are the same, the first IP address is used as the server IP address.
- If the first two IP addresses change, the backend resolves the domain name every 2 hours and updates the AAA configuration.
- If the domain name resolution fails, the domain name is requested every 2 minutes until there is a successful resolution.

Parent topic: [Configuring AAA Servers](#)

Testing Authentication Settings

The **Test Authentication Settings** feature allows you to query an AAA server for a known authorized user, and return Groups associated with the user that can be used for configuring Roles within Unleashed.

After you have configured one or more authentication servers in Unleashed, perform this task to ensure that Unleashed can connect to the authentication server and retrieve the groups/attributes that you have configured for each user account.

To test the connection to the authentication server:

1. Go to **Admin & Services > Services > AAA Servers > Test Authentication Servers Settings**.
2. Select the authentication server that you want to use from the **Test Against** drop-down menu.
3. In **User Name** and **Password**, enter an Active Directory or RADIUS user name and password.
4. Click **Test**.


If Unleashed was able to connect to the authentication server and retrieve the configured groups/attributes, the information appears at the bottom of the page. The following is an example of the message that will appear when Unleashed authenticates successfully with the server:

```
Success! Groups associated with this user are "{group_name}". This user will be
assigned a role of {role}.
```

If the test was unsuccessful, there are several possible results (other than success) that will be displayed to inform you if you have entered information incorrectly:

- Admin invalid
- User name or password invalid


These results can be used to troubleshoot the reasons for failure to authenticate users to an AAA server.

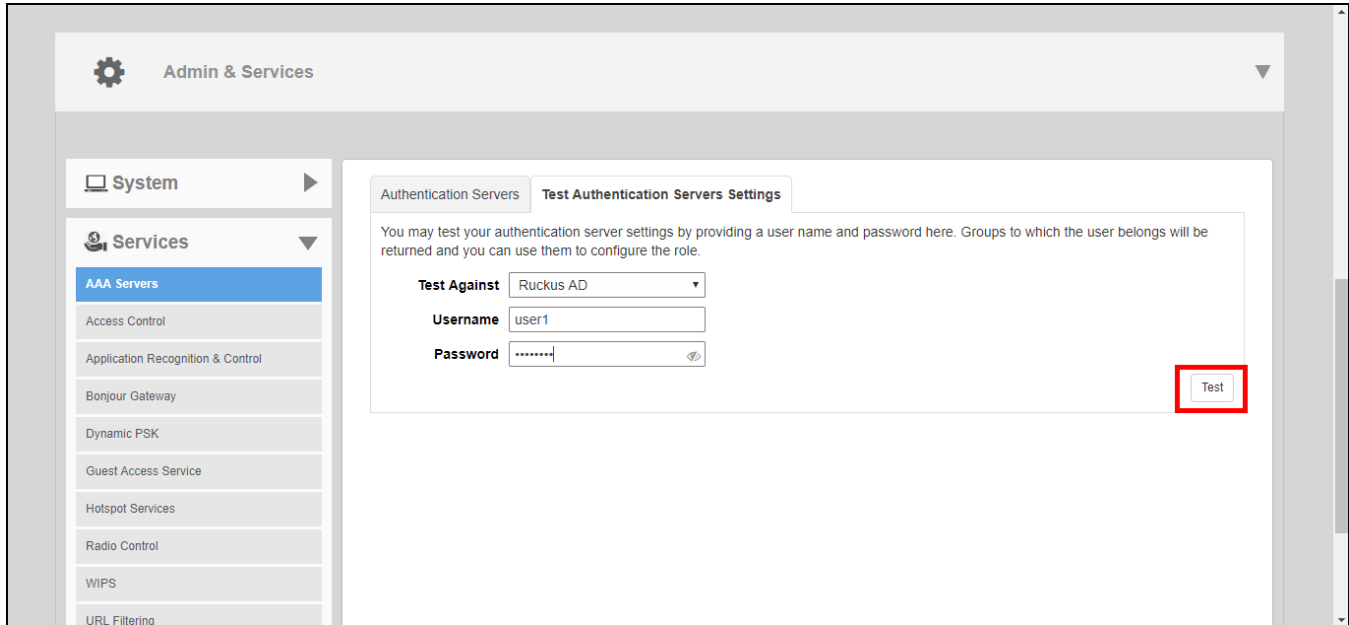Figure 1. Testing authentication server settings

Parent topic: [AAA Servers](#)

Access Control

RUCKUS Unleashed provides several options for controlling access to your networks, including Layer 2/MAC address level Access Control Lists (ACLs), Layer 3/Layer 4/IP Address ACLs, Device Access Policies to control clients by OS type, and Client Isolation Allowlists, which are necessary when Wireless Client Isolation is enabled on a WLAN.

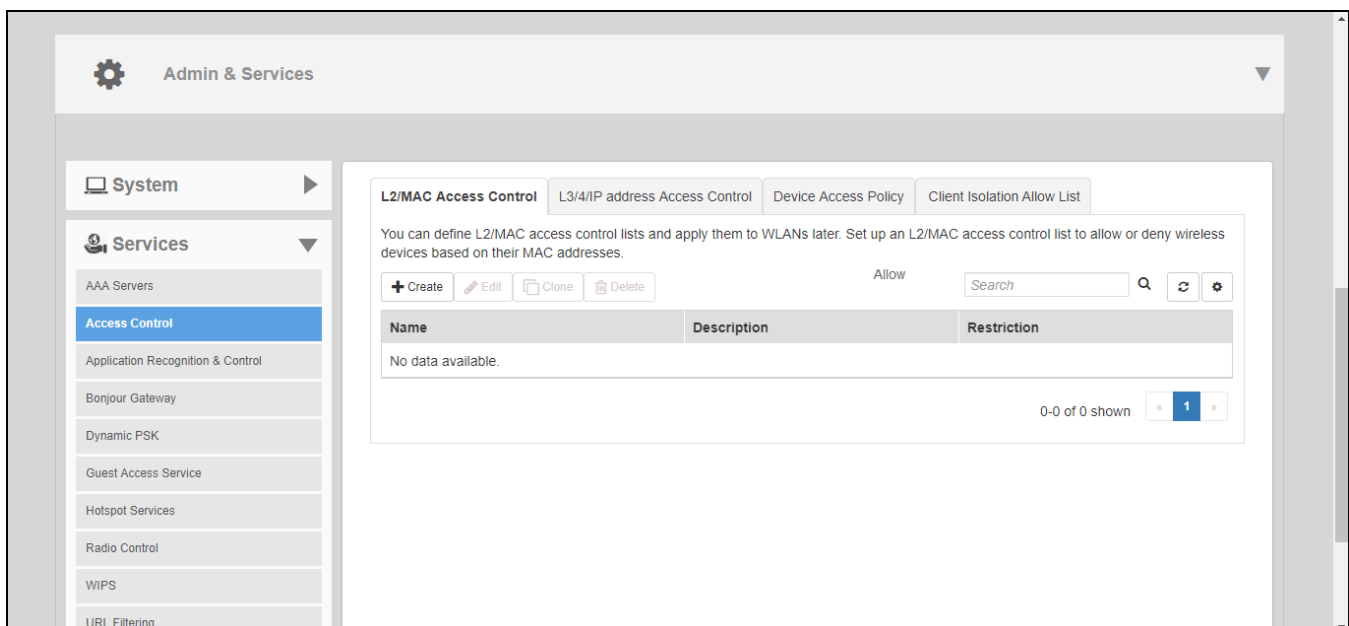Figure 1. Configuring Access Control

Parent topic: [Services](#)

Creating a Layer 2/MAC Address Access Control List


You can define Layer 2/MAC address ACLs, which can then be applied to one or more WLANs (upon the creation or editing of a WLAN). ACLs are either allow-only or deny-only; that is, an ACL can be set up to allow only specified clients or to deny only specified clients. MAC addresses that are in the deny list are blocked at the AP, not necessarily at the Master AP.

Complete the following steps to configure a Layer 2/MAC ACL.

1. From the dashboard, select **Admin & Services > Services > Access Control > L2/MAC Access Control**.
2. Click **Create**. The **Create New** dialog box is displayed.
3. Enter a name for the ACL, and (optionally) enter a description.
4. Under **Restriction**, select either **Only allow all stations listed below** or **Only deny all stations listed below**.
5. Under **MAC Address**, enter a MAC address and description (optional), and click **Add** to save the address. The new MAC address is displayed under **Stations**. You can enter up to 128 MAC addresses per ACL.
6. Click **OK** to save the Layer 2/MAC address-based ACL.

 **Note:** You can create up to 32 Layer 2/MAC address ACL rules and each rule can contain up to 128 MAC addresses. Each WLAN can be configured with one Layer 2 ACL.

Figure 1. Creating a New Layer 2/MAC Address ACL

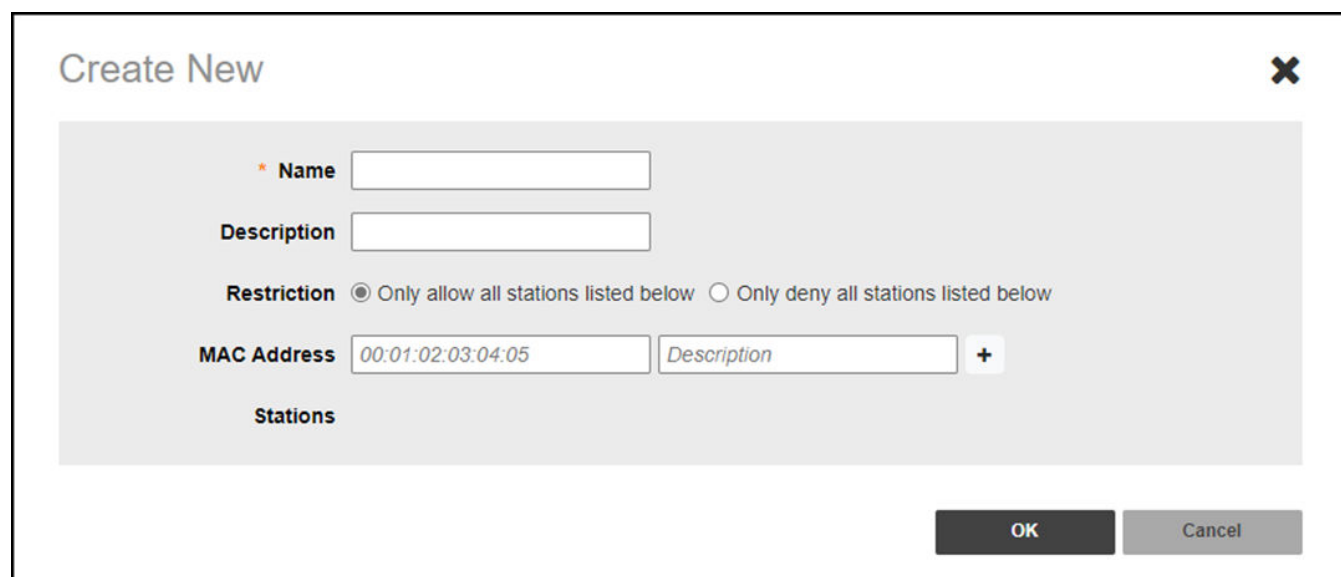

Create New ✕

Name

Description

Restriction ☒ Only allow all stations listed below ☐ Only deny all stations listed below

MAC Address	Description	
00:01:02:03:04:05		

Stations

OK **Cancel**

Parent topic: [Access Control](#)

Creating a Layer 3/Layer 4/IP Address Access Control List

In addition to L2/MAC based ACLs, Unleashed also provides access control options at Layer 3 and Layer 4.

This means that you can configure the access control options based on a set of criteria, including:

- Destination IP Address
- Application
- Protocol
- Destination Port

To create an L3/L4/IP address based ACL:

1. Go to **Admin & Services > Services > Access Control > L3/4/IP Address Access Control**.
2. Click **Create New**. The ACL **Create New** form appears.
3. Type a **Name** for the ACL, and optionally, a **Description** of the ACL.
4. In **Default Mode**, set the default access privilege (allow all or deny all) that you want to grant all users by default.
5. In **Rules**, click **Create New** or click **Edit** to edit an existing rule.
6. Define each access policy by configuring a combination of the following:
 - **Type**: The access privilege (allow or deny) that this policy grants.
 - **Destination Address**: Enter an IP subnet and netmask of the network target to which you want to allow or deny access. (IP address must be in the format A.B.C.D/M, where M is the subnet mask.) Otherwise, select Any. For example, if you enter 192.168.0.1/24, the rule would allow or deny the entire Class C subnet. To allow/deny a single host, use /32 as the netmask.
 - **Application**: If you select a specific application from the menu, the Protocol and Destination Port options are automatically filled with the relevant values and are not configurable.
 - **Protocol**: Enter a network protocol number (0-254), as defined by the IANA (<http://www.iana.org/assignments/protocol-numbers/protocolnumbers.xhtml>) to allow or deny. Otherwise, select Any.
 - **Destination Port**: Enter a valid port number (1-65534) or port range (e.g., 80-443).
7. Click **OK** to save the ACL.
8. Repeat these steps to create up to 32 L3/L4/IP address-based access control rules.

Figure 1. Configuring a Layer 3/4/IP address-based ACL

Create New

Name L3 ACL

Description Allow printer access L3 ACL

Default Mode Default Action if no rule is matched: ☒ Deny all by default ☐ Allow all by default

Order	Description	Type	Source Address
1		Allow	Any
2		Allow	Any
3	Printer	Allow	192.168.10.13

Create New Delete Advanced Options

OK Cancel

Parent topic: [Access Control](#)

Configuring Device Access Policies

In response to the ever-growing numbers of personally owned mobile devices such as smart phones and tablets being brought into the network, IT departments are requiring more sophisticated control over how devices connect, what types of devices can connect, and what they are allowed to do once connected.

Using the **Device Access Policy** settings, the Unleashed system can identify the type of client attempting to connect, and perform control actions such as permit/deny and rate limiting based on the device type.


Once a Device Access Policy has been created, you can apply the policy to any WLANs for which you want to control access by device type. You could, for example, allow only Apple iOS devices on one WLAN and only Linux devices on another.

To create a Device Access Policy:

1. Go to **Admin & Services > Services > Access Control > Device Access Policy**.
2. Click **Create New**.
3. Enter a **Name** and optionally a **Description** for the access policy.
4. In **Default Mode**, select **Deny all by default** or **Allow all by default**.
5. In **Rules**, you can create multiple OS-specific rules for each access policy.
 - **Description:** Description of the rule.

- **OS/Type:** Select from any of the supported client types.
 - **Type:** Select rule type (allow or deny).
 - **Uplink/Downlink:** Set rate limiting for this client type.
6. Click **Save** to save the rule you created. You can create up to nine rules per access policy (one for each OS/Type).
 7. To change the order in which rules are implemented, click the up or down arrows in the **Action** column. You can also **Edit** or **Clone** rules from the **Action** column.
 8. To delete a rule, select the box next to the rule and click **Delete**.
 9. Click **OK** to save the access policy. You can create up to 32 access policies (one access policy per WLAN).

Figure 1. Creating a Device Access Policy

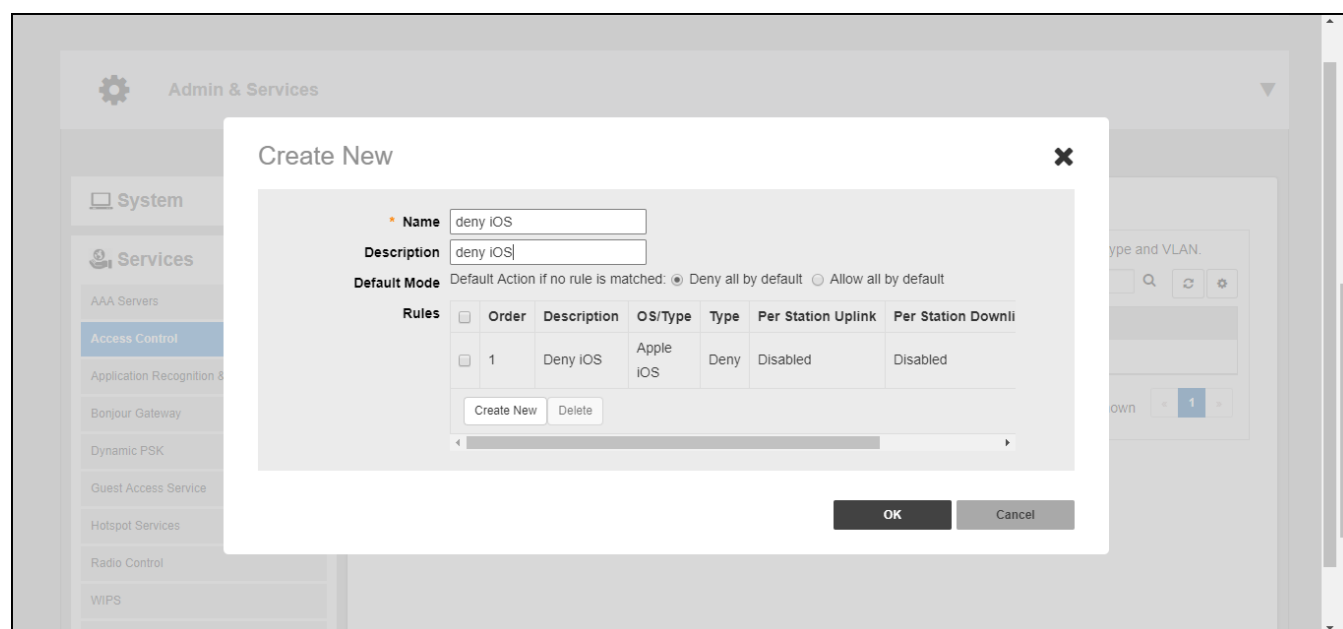

Parent topic: [Access Control](#)

Configuring Client Isolation Allow Lists

When Wireless Client Isolation is enabled on a WLAN, all communication between clients and other local devices is blocked at the Access Point.

To prevent clients from communicating with other nodes, the AP drops all ARP packets from stations on the WLAN where client isolation is enabled and which are destined to IP addresses that are not part of a per-WLAN allow list.

You can create exceptions to client isolation (such as allowing access to a local printer, for example) by creating Client Isolation Allow Lists.

To create a Client Isolation Allow List:

1. Go to **Admin & Services > Services > Access Control > Client Isolation Allow List**.
2. Click **Create New**.
3. Enter a **Name** and optionally a description for the allowlist policy.
4. **Auto Allowlist** is enabled by Default, which allows the APs to auto-discover gateway devices and add them to the isolation allowlist.
5. In **Rules**, you can create multiple device-specific rules for each device to be allow listed.
 - **Description:** Description of the device.
 - **MAC Address:** Enter the MAC address of the device.
 - **IPv4 Address:** Enter the IP address of the device.
6. Click **Save** to save the rule you created.
7. To change the order in which rules are implemented, select the order from the drop-down menu in the Order column. You can also **Edit** or **Clone** rules from the **Action** column. To delete a rule, select the box next to the rule and click **Delete**.
8. Click **OK** to save the allow list.

Figure 1. Creating a Client Isolation Allow List

Create New [X]

* **Name**

Description

Auto Allowlist ☒ APs will auto-discover gateway devices and add them to the isolation allowlist

Rules

	Order	Description	MAC Address	IPv4 Address	Action
					Create New Delete

[OK] [Cancel]

Parent topic: [Access Control](#)

Application Recognition and Control

The Application Recognition and Control (ARC) features enable administrators to monitor which applications are generating the most wireless traffic, to apply filtering policies to prevent users from accessing certain applications or to rate limit certain applications, and to enhance the built-in application recognition capabilities with custom applications and port mappings.

Parent topic: [Services](#)

Application Overview

The Application Overview page displays the top 10 applications and the top 10 clients by usage for the last 1 hour or 24 hour time period.

Use the drop-down menus at the top of the graphs to filter results by time period, AP group or SSID.

You can also choose to display applications by their application name or by port number. Hover over a section of the pie chart to display a breakdown of total, uplink and downlink values.

The Top 10 clients chart also shows the client's MAC address and percentage of total traffic for this client when you hover over the pie chart.

Figure 1. Application Overview page

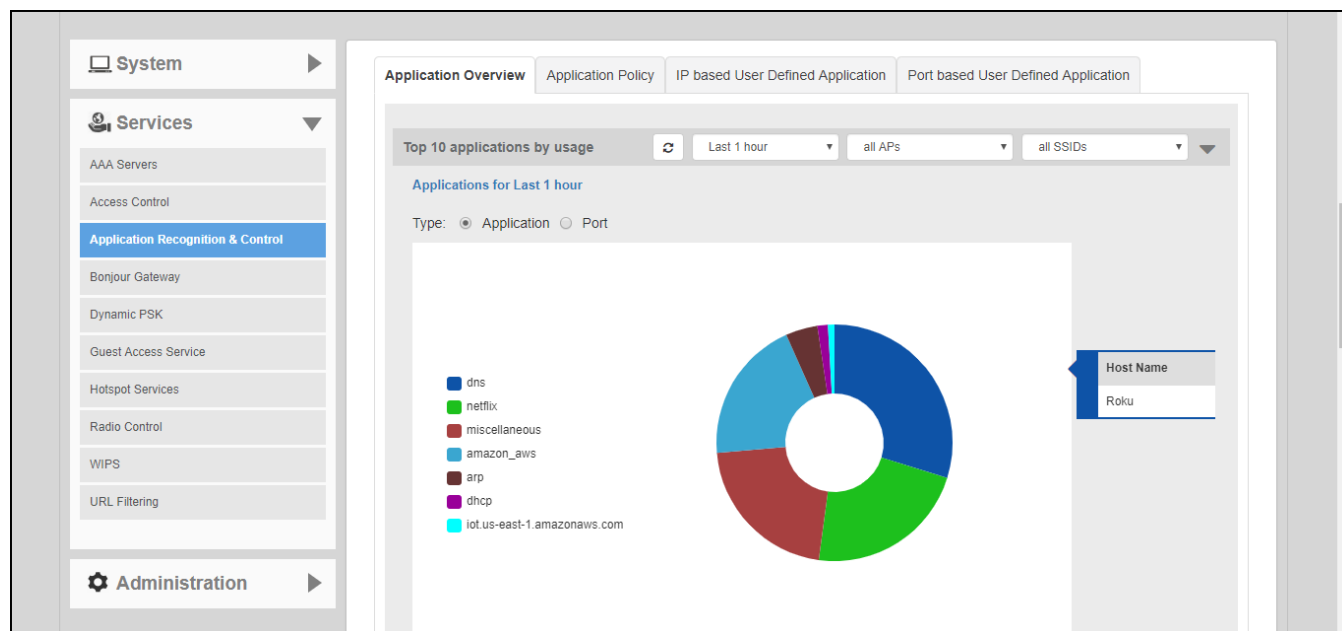


Figure 2. Application Performance


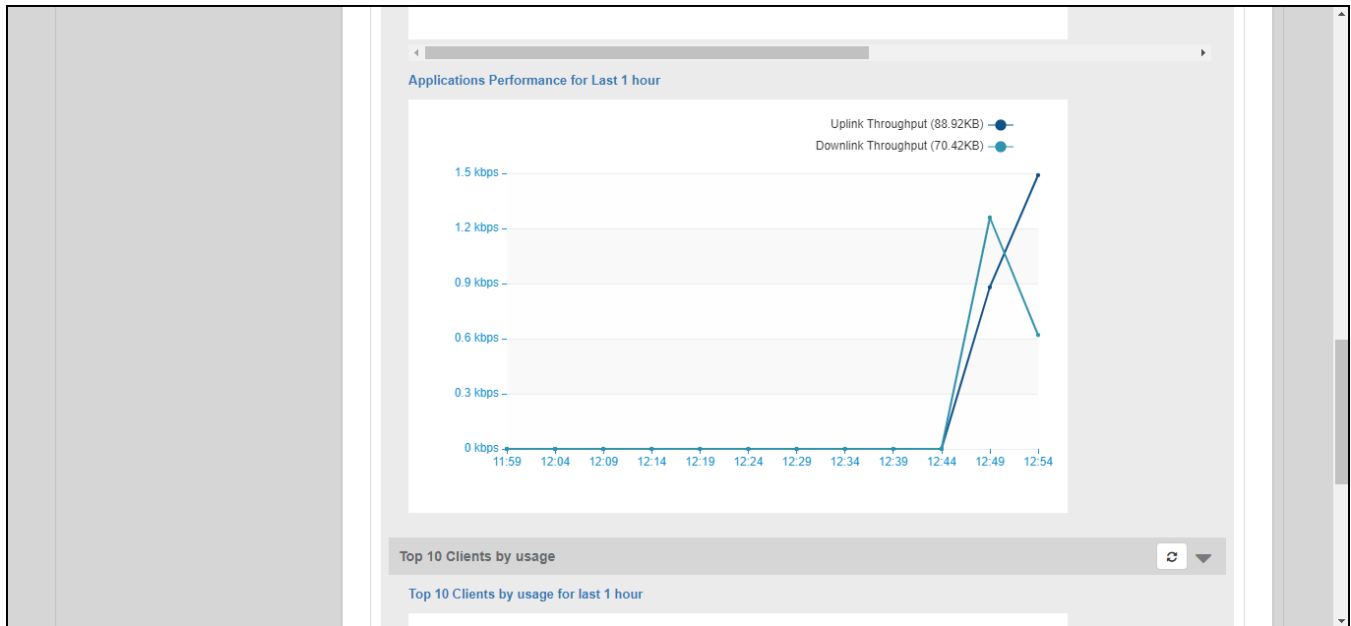


Figure 3. Top 10 clients by usage

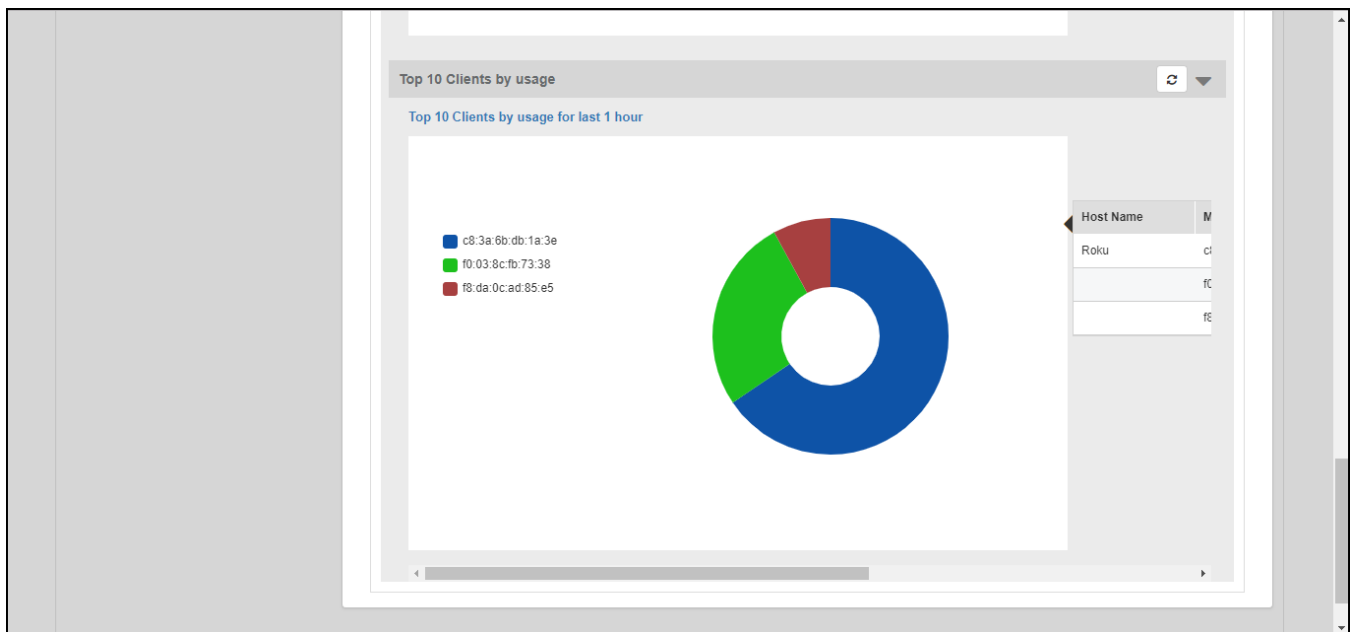

Parent topic: [Application Recognition and Control](#)

Application Policy

Application Policies can be configured to control access to applications or to control traffic generated by applications.

Note: For more information on Application Policies, see [Application Policies](#).

In addition to creating an Application Policy directly from the WLAN advanced options configuration screens, you can also create multiple policies from the **Admin & Services > Services > Application Recognition and Control > Application Policy** page, and then apply them to your WLANs one by one from the WLAN advanced options.

To create an Application Policy:

1. Go to **Admin & Services > Services > Application Recognition and Control**, and click the **Application Policy** tab.
 2. Click **Create New** to create a new policy.
 3. Enter a **Name** and optionally a **Description** for the policy.
 4. In **Rules**, click **Create New** to create a new rule for this policy.
 5. In **Rule Type**, select the type of application control policy to enforce:
 - **Denial Rules**: Block the application completely.
 - **QoS**: Apply QoS prioritization rules to the application.
 - **Rate Limiting**: Limit traffic volume consumed by the application.
 6. In **Application Type**, Select **HTTP Domain Name** or **Port**.
 - **System Defined**: Choose from a number of built-in categories.
 - **IP Based User Defined Application**: Choose from user-defined applications.
 - **Port Based User Defined Application**: Choose from user-defined applications.
 7. Select an application to control from the **Select an application** field.
 8. If Rate Limiting or QoS rule type is selected, configure the uplink and downlink speeds for rate limiting or the QoS marking and priority rules for QoS rules.
 9. Click **Save** to save the rule, and click **OK** to save the policy.
- Figure 1.** Application Policy


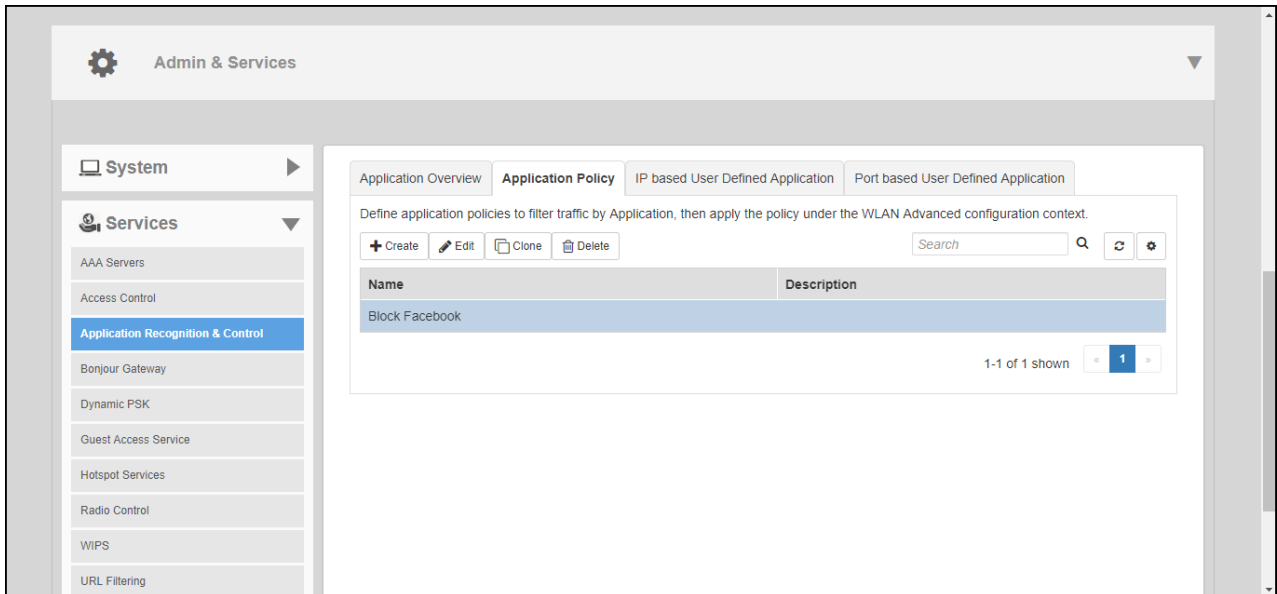


Figure 2. Creating a new Application Policy rule

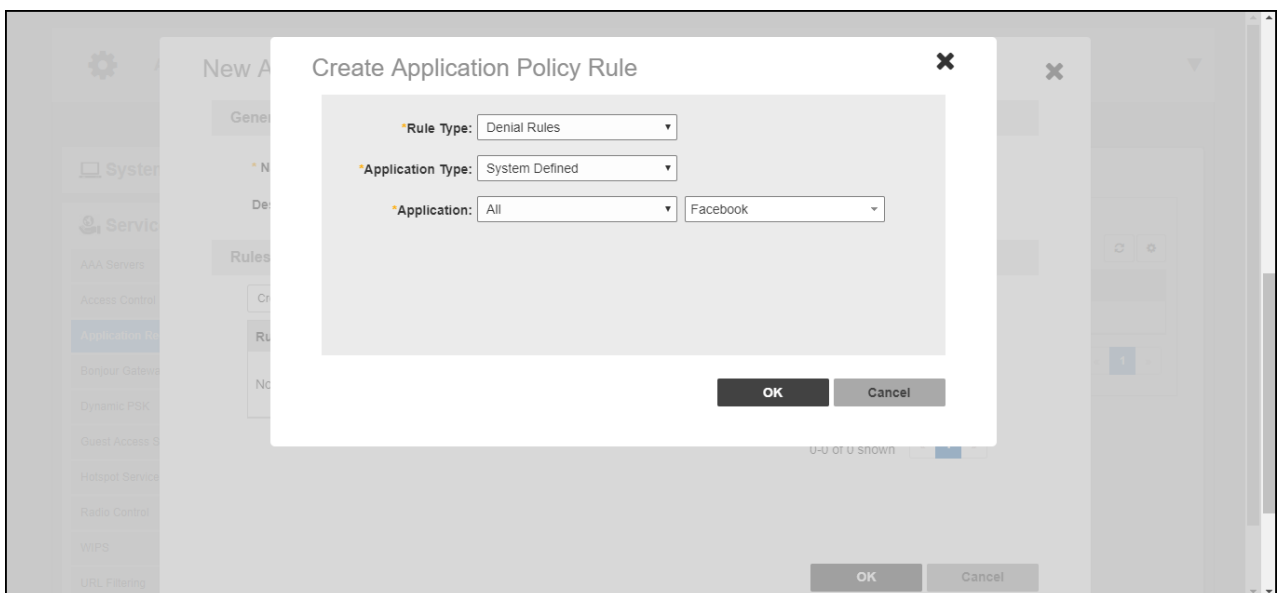

Parent topic: [Application Recognition and Control](#)

Applying an Application Policy to a WLAN

For instructions on applying an application policy to a WLAN, see [Configuring Advanced WLAN Options](#).

Parent topic: [Application Recognition and Control](#)

User Defined Applications

When an application is unrecognized and generically (or incorrectly) categorized, you can configure an explicit application identification policy by IP Address/Mask, Port and Protocol. Wireless traffic that matches the configured policy will be displayed using the policy's name on the **Application Overview** page.

Unleashed provides two methods to create new user-defined applications:

- IP-based User Defined Applications
- Port based User Defined Applications

Application identification policies are implemented according to the following priority order:

1. IP-based user defined applications
2. System defined applications
3. Port-based user defined applications


Parent topic: [Application Recognition and Control](#)

IP Based User Defined Applications

The following figure shows how to configure an IP-based user defined application policy to identify a corporate accounting application.

Unleashed identifies wireless traffic matching this policy as "Well Paid Accounting" and displays this name in the application recognition pie charts and tables.

Figure 1. Create new IP based User Defined Application

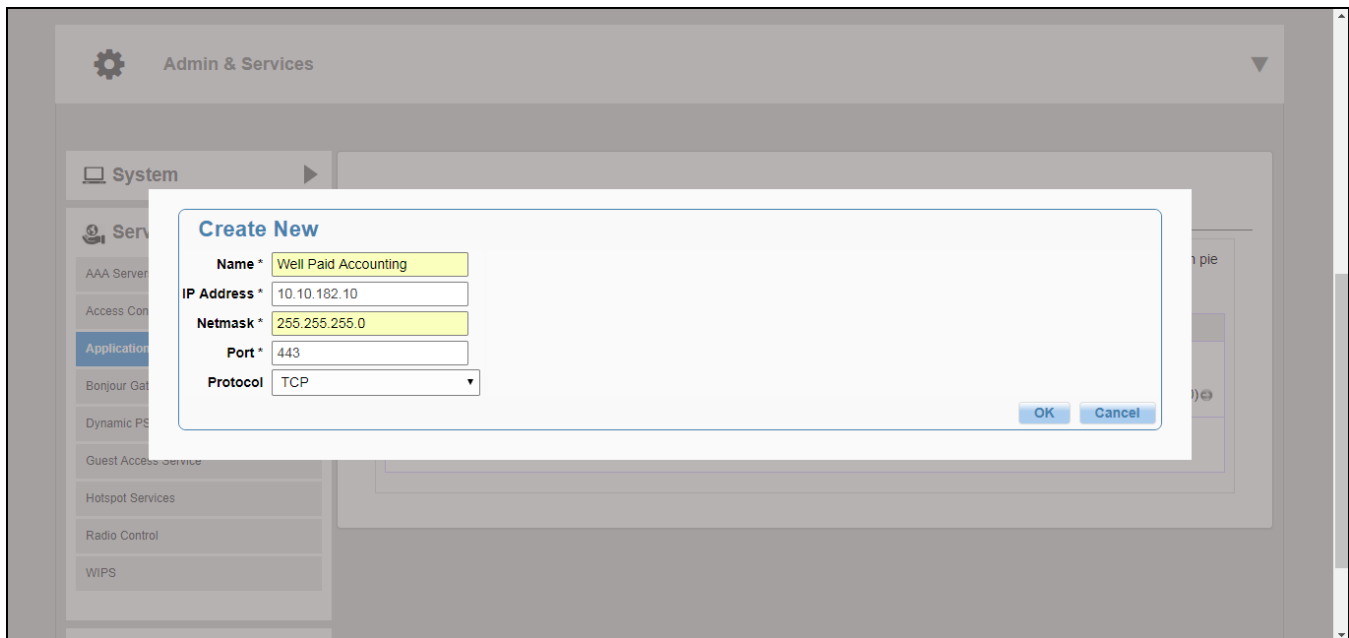

Parent topic: [User Defined Applications](#)

Port Based User Defined Applications

When an application is unrecognized and generically (or incorrectly) categorized you can configure an application identification policy by IP Port and Protocol.

Wireless traffic that matches a configured policy will be displayed using the policy's Description text in the Application Recognition pie charts. You can create new port-to-application name mappings individually using the Port based User Defined Application tab.

This type of application categorization is the least granular in configuration and hence it has the lowest priority as a means of application identification. If for example you configure a port-based user-defined Application for port 80/TCP, any such matching wireless traffic not identified by either an IP-based application or the default embedded applications will be identified as belonging to this application.

Figure 1. Application Port Mapping


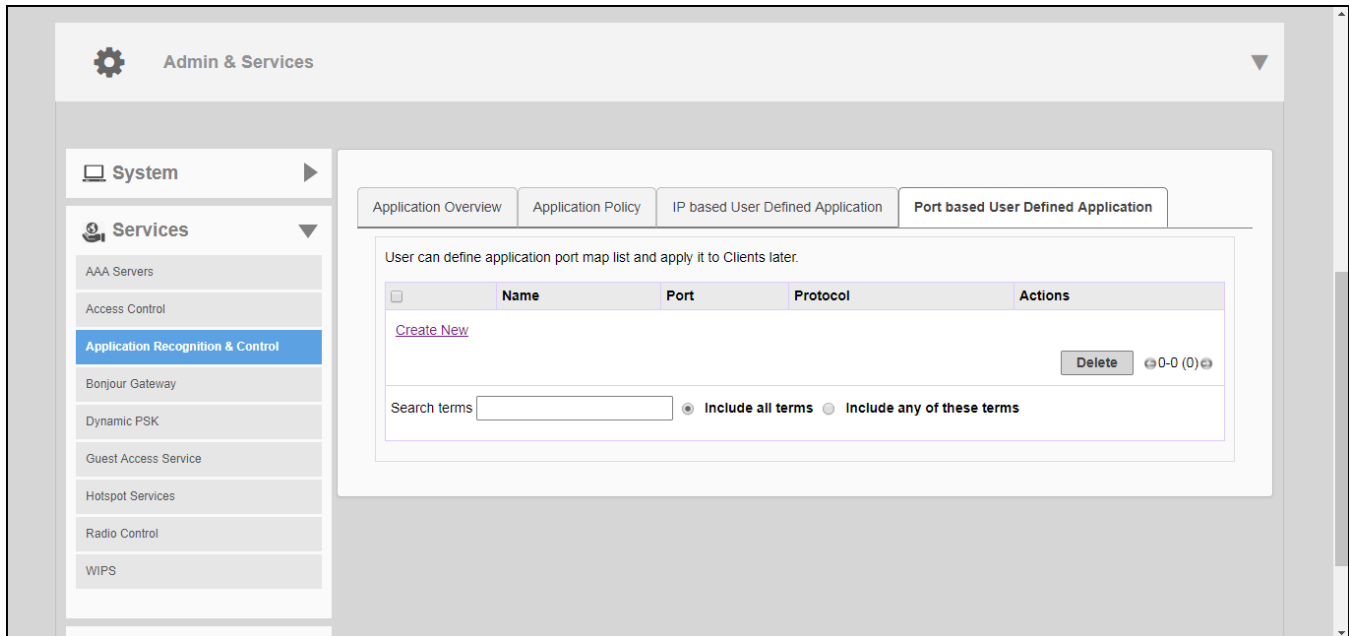


Figure 2. Create new port based user-defined application

The following figure shows how a port-based user-defined application policy could be used to identify all port 8081 wireless traffic as "HTTP Proxy" traffic and display this name in application recognition pie charts and tables.

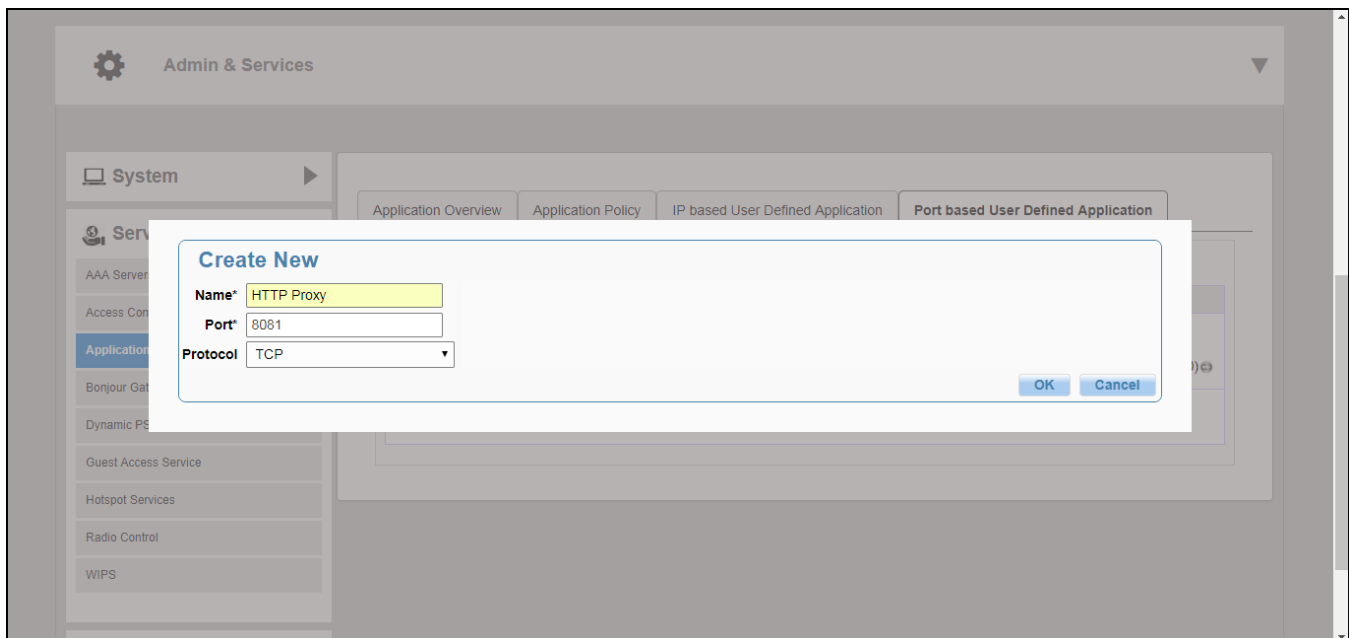

Parent topic: [User Defined Applications](#)

Bonjour Gateway

Bonjour is a multicast-based discovery protocol (aka mDNS) that is primarily used by Apple and Google devices such as Apple TV, Apple Printers and Google Chromecast. As these devices advertise their services, client devices

such as Apple Mac PCs and mobile devices such as iOS and Android phones can discover them using the Bonjour protocol.

Multicast applications such as Bonjour require special consideration when being deployed over wireless networks. Bonjour only works within a single broadcast domain, which is usually a small area. This is by design to prevent flooding a large network with multicast traffic. However, in some situations, a user may want to offer Bonjour services from one VLAN to another.

The Bonjour Gateway feature addresses this requirement by providing an mDNS proxy service configurable from the web interface to allow administrators to specify which types of Bonjour services can be accessed from/to which VLANs.

In order for the Bonjour Gateway to function, the following network configuration requirements must be met:

- The target networks must be segmented into VLANs.
- VLANs must be mapped to different WLANs.
- The controller must be connected to a VLAN trunk port.

Additionally, if the VLANs to be bridged by the gateway are on separate subnets the network has to be configured to route traffic between them.

Parent topic: [Services](#)

Creating a Bonjour Gateway Service

The Bonjour Gateway service is essentially a list of rules for mapping services from one VLAN to another. Using the Bonjour Gateway feature, the Unleashed AP serves as the proxy for forwarding Bonjour packets to the designated VLANs.

To configure rules for bridging Bonjour services across VLANs:

1. Go to **Admin & Services > Services > Bonjour Gateway**.
2. Enable the check box next to **Enable Bonjour gateway on AP**.
3. Click **Create New** to create a new Bonjour service.
4. Enter a **Name** and optionally a **Description** for the service.
5. Click **Create New** to create a new rule.
6. In the **Create New** form, configure the following options:
 - **Bridge Service**: Select the Bonjour service from the list.

- Selecting "Other" allows you to create custom rules, for example, creating a rule for "_googlecast._tcp" would allow you to bridge Chromecast services across VLANs.
 - **From VLAN:** Select the VLAN from which the Bonjour service will be advertised.
 - **To VLAN:** Select the VLAN to which the service should be made available.
 - **Notes:** Add optional notes for this rule.
7. Click **OK** to save your changes.
 8. Repeat for any additional rules.
 9. Click **Apply** to save the Bonjour Service.

Figure 1. Bonjour Gateway configuration


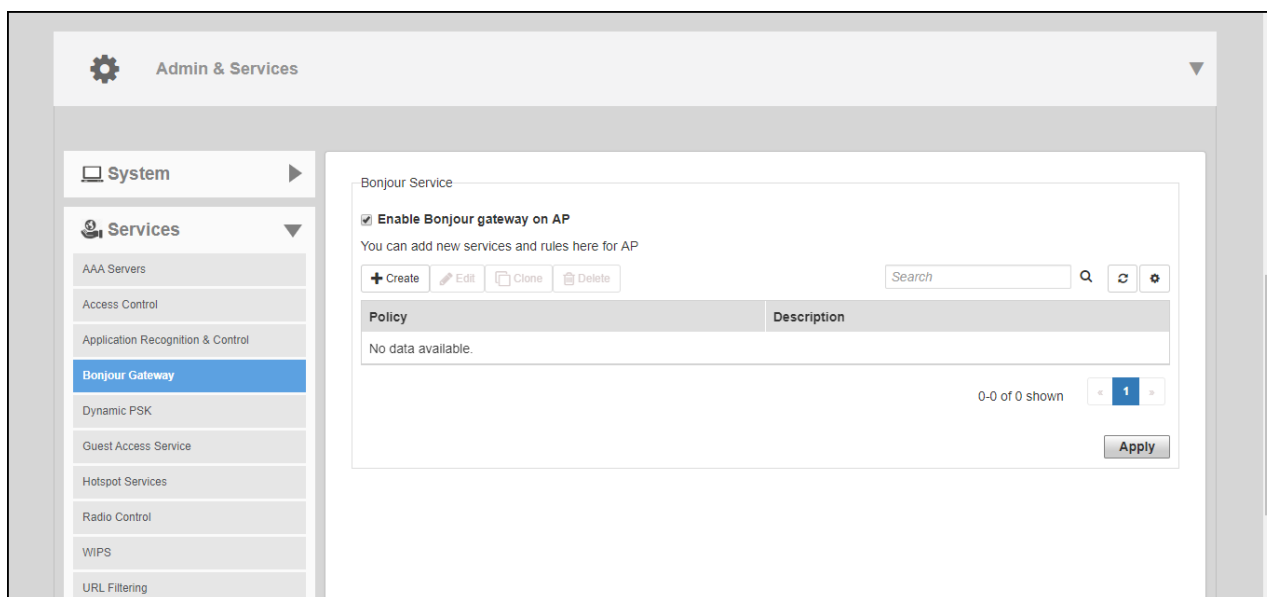


Figure 2. Create new Bonjour service

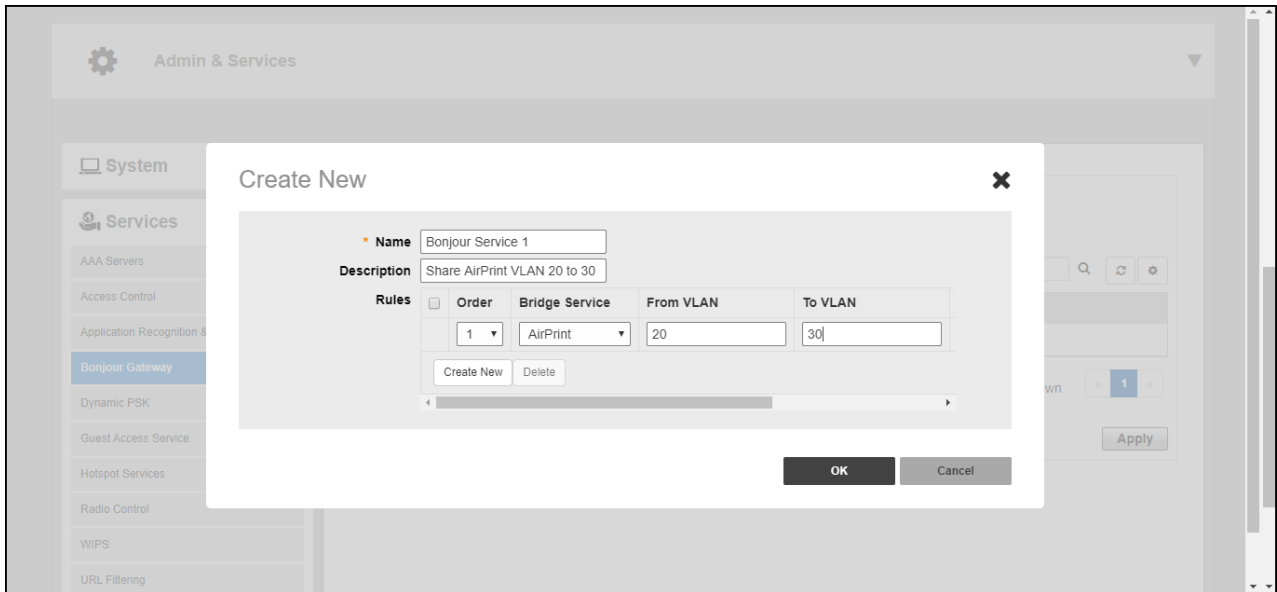

Parent topic: [Bonjour Gateway](#)


Deploying a Bonjour Service to an AP

Once a Bonjour Service has been created, you can select it from any Unleashed AP's configuration page to deploy the Bonjour bridging service from that AP.

- **Note:** Bonjour services can consume significant memory and CPU resources (especially when a large number of rules is created). Therefore, RUCKUS recommends deploying the Bonjour services to an AP that is not the Unleashed Master AP.
- **Note:** It is only necessary to configure Bonjour service on one AP in the Unleashed network.

1. From the **Dashboard**, go to **Access Points** > [select an AP] > **Edit** > **Other**.
2. Enable the **Choose Bonjour Gateway** box, and select the service you created from the drop-down menu.
3. Click **OK** to save your changes.

Figure 1. Select Bonjour service to be deployed on an AP

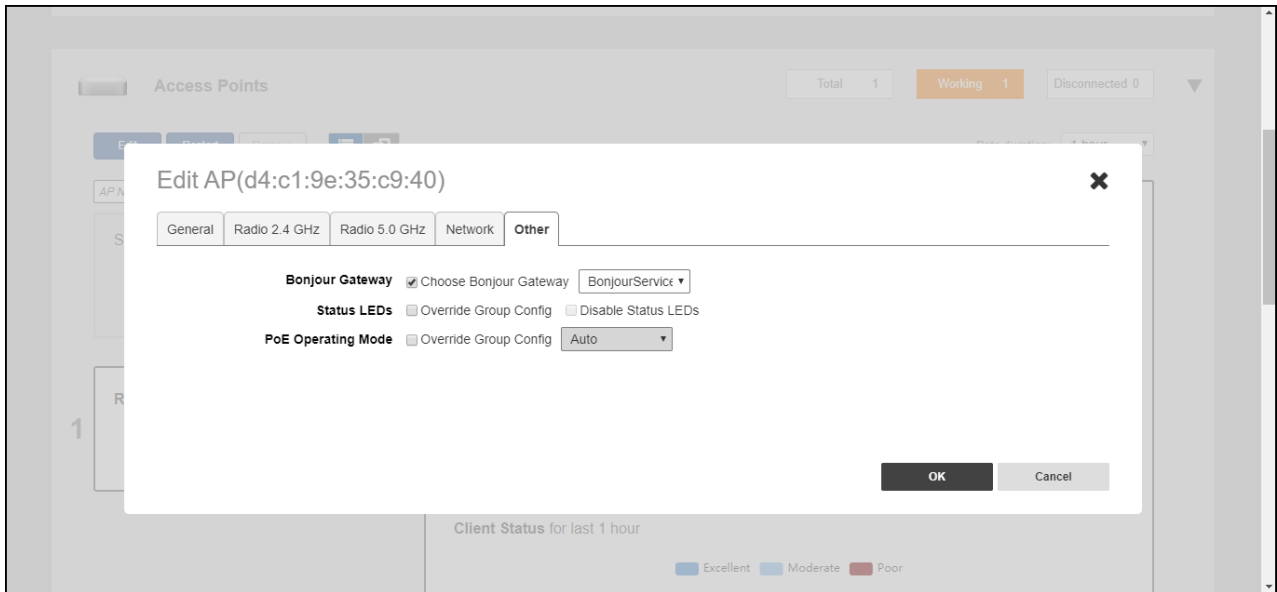


Parent topic: [Bonjour Gateway](#)

Dynamic PSK

Go to **Services > Dynamic PSK** to generate and manage administrator-generated DPSKs.

Only a DPSK-enabled WLAN can generate DPSKs. Refer to [Enabling DPSK for a WLAN](#).

Figure 1. Dynamic PSK Page

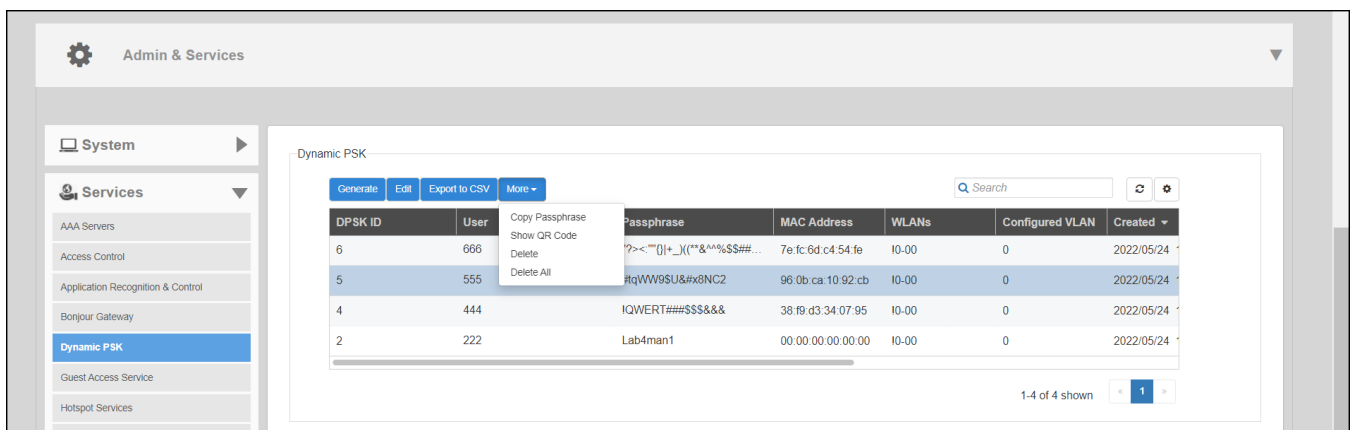

The following options are available from the **Dynamic PSK** page:

Generate: You can create DPSKs in one batch. For more information, refer to [Generating DPSKs in Batch](#).

Edit: You can edit the DPSK user name using the **Edit** option.

1. From the DPSK table, select a DPSK entry and click **Edit**.

2. In the **Edit** dialog box, enter the new DPSK user name, and click **OK**.

Figure 2. Editing the DPSK User Name


DPSK ID	User	Passphrase	MAC Address	WLANs	Config
6	666	"?><""{} +_)((**&^^%\$\$##...	7e:fc:6d:c4:54:fe	10-00	0
5	555	#tqWW9\$UNC2	96:0b:ca:10:92:cb	10-00	0

Export to CSV: Click **Export to CSV** to export all the generated DPSKs to a CSV file.

More: Click **More** to use the following options:

- **Copy Passphrase:** From the DPSK table, select a DPSK entry and click **More > Copy Passphrase** to copy a passphrase. When the confirmation message is displayed, click **OK**.

Figure 3. Successful Copying of the Passphrase

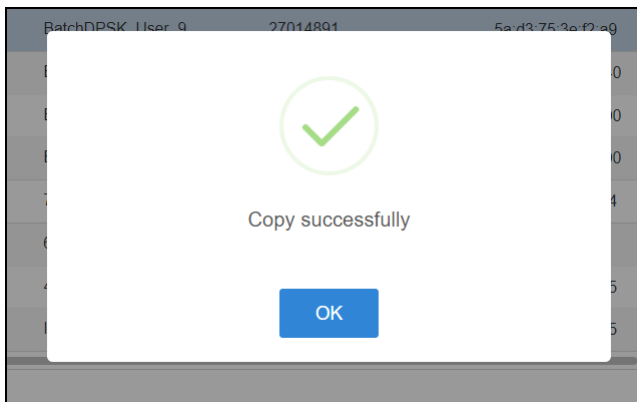

- **Show QR Code:** A WLAN-supported DPSK has the **Show QR Code** option to join a Wi-Fi network. From the DPSK table, select a DPSK entry and, click **More > Show QR Code** to display the **QR Code**. Click **Print** to print the QR code or scan the QR code using a smartphone camera.

Figure 4. QR Code Page




Parent topic: [Services](#)

Generating DPSKs in Batch

You can create DPSKs at once (from 1 through 50) or upload a CSV file with the custom DPSKs. Complete the following steps to generate DPSKs.

1. Go to **Admin & Services > Services > Dynamic PSK**.

Figure 1. Dynamic PSK Page

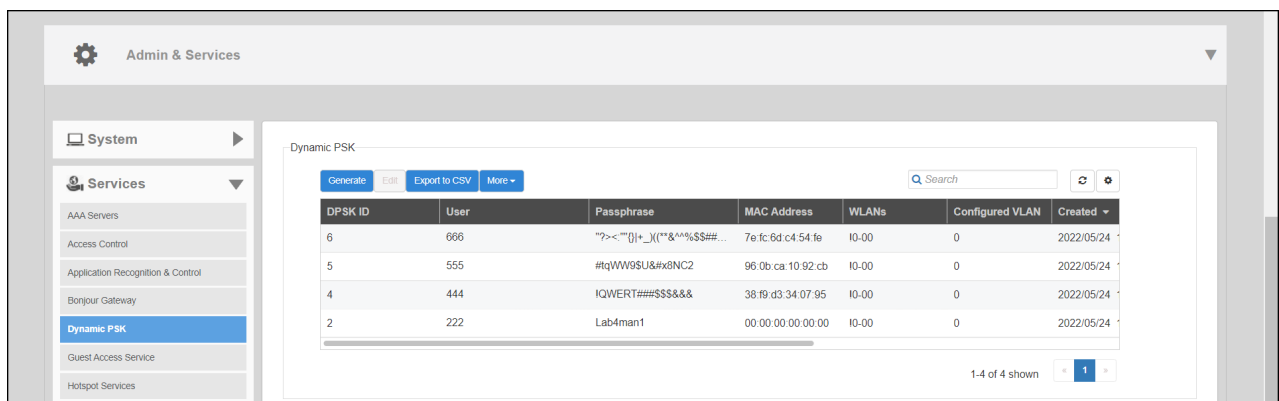

2. Click **Generate**.
3. In the **Dynamic PSK Batch Generation** dialog box, enter the following fields:
 - **Target WLAN:** Select the WLAN to which the DPSKs will be applied. (Only WLANs with the DPSK enabled are listed.)

- **Number to Create:** Enter the number of DPSKs you want to generate (ranging from 1 through 50; the default value is 5).
 - **Dynamic VLAN ID:** Enter a valid VLAN ID, ranging from 1 through 4094 (if **Dynamic VLAN ID** is enabled for this WLAN).
 - **Upload a Profile:** Refer to [Uploading a Dynamic PSK Profile](#).
4. Click **Generate** to generate the requested number of DPSKs.

Figure 2. Generating DPSKs Automatically

You can click the **click here** link to download the latest DPSK record that contains the generated DPSKs.

Parent topic: [Dynamic PSK](#)

Uploading a Dynamic PSK Profile

Use the following procedure to batch generate multiple DPSKs using a CSV file that can be edited using a spreadsheet application (such as Microsoft Excel).


Creating a DPSK batch generation profile is useful if you want to customize the user names that are used for accessing the DPSK WLAN, as opposed to user names such as "BatchDPSK_User_1".

1. Go to **Admin & Services > Services > Dynamic PSK**.
2. Click **Generate**.
Look for the following message: To download an example of profile, **click here**.
3. Click the **click here** link to download a sample profile.
4. Save the sample batch DPSK profile (in CSV format) to your computer.

5. Using a spreadsheet application, open the CSV file and edit the batch dynamic PSK profile by filling out the following columns:
 - **User Name:** (Required) Enter the name of the user (one name per row). The length of the user name must be from 1 through 128 characters.
 - **MAC Address:** (Optional) If you know the MAC address of the device that the user will be using, enter it here.
 - **VLAN ID:** (Optional) Enter a valid VLAN ID.
 - **Passphrase:** The administrator can set the DPSK characters on their own. The DPSK length must be 8 through 62 characters. For DPSK rules, refer to [DPSK Rules](#). If the **Passphrase** field is left empty, the system automatically generates DPSKs.
-  **Note:** The administrator is not allowed to set DPSKs using the batch method.
6. In the **Dynamic PSK Batch Generation** dialog box, click the **Browse** button to upload the CSV file you edited.
7. Click **Generate** to generate the custom DPSKs that you modified.

After the DPSKs have been generated, you can download the same file (with the passphrases filled in). Click the [click here](#) link to download the latest DPSK record generated.

Figure 1. Generating Batch Dynamic PSKs

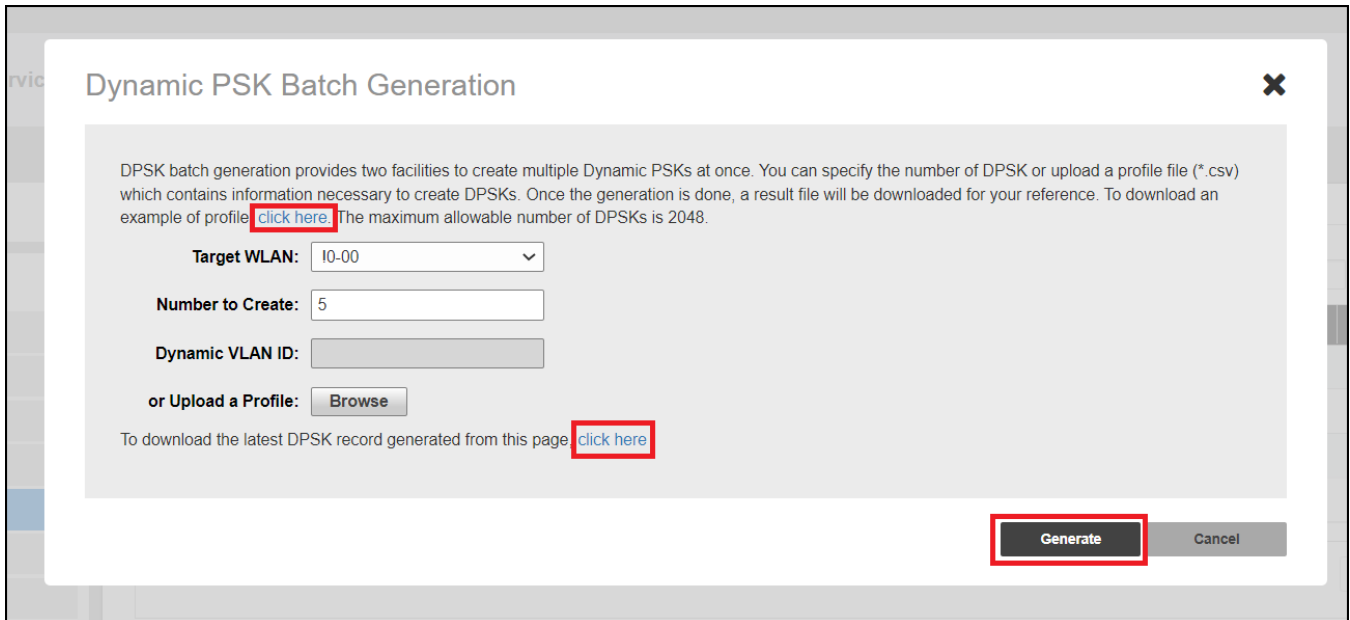

Dynamic PSK Batch Generation

DPSK batch generation provides two facilities to create multiple Dynamic PSKs at once. You can specify the number of DPSK or upload a profile file (*.csv) which contains information necessary to create DPSKs. Once the generation is done, a result file will be downloaded for your reference. To download an example of profile [click here](#). The maximum allowable number of DPSKs is 2048.

Target WLAN:

Number to Create:

Dynamic VLAN ID:

or Upload a Profile:

To download the latest DPSK record generated from this page [click here](#)

Parent topic: [Dynamic PSK](#)

DPSK Rules

You must adhere to the following DPSK rules:

1. Multiple DPSKs are allowed in the same WLAN and unbound MAC address (when the MAC address is empty), but duplicate DPSKs are not allowed (shared DPSKs).
2. Multiple DPSKs are allowed in the same WLAN and the same bound MAC address, but duplicate DPSKs are not allowed (because the MAC address and the WLAN are used as an index in the DPSK hash table).
3. Multiple and duplicate (legacy device) DPSKs are allowed in the same WLAN and a different bound MAC address.
4. Multiple and duplicate DPSKs are allowed in a different WLAN, either for the same MAC address (bound) or an empty MAC address (unbound).

- **Note:** In rules 1 and 2, if the DPSK CSV file includes the same passphrase that exists (for the same bound or unbound MAC address), Unleashed returns an error message when the administrator clicks **Upload** to import the DPSK CSV.

Figure 1. Duplicate Passphrase Error

The screenshot shows a web interface titled "Dynamic PSK Batch Generation" with a close button (X) in the top right corner. The main content area has a light gray background and contains the following text and form elements:

DPSK batch generation provides two facilities to create multiple Dynamic PSKs at once. You can specify the number of DPSK or upload a profile file (*.csv) which contains information necessary to create DPSKs. Once the generation is done, a result file will be downloaded for your reference. To download an example of profile, [click here](#). The maximum allowable number of DPSKs is 4000.

Target WLAN:

Number to Create:

Dynamic VLAN ID:


or Upload a Profile: The passphrase 12345678 of line 2 is duplicated with line 3. System does not allow the same passphrase if MAC address is the same. Please modify the file and upload it again.

To download the latest DPSK record generated from this page, [click here](#)

At the bottom right, there are two buttons: "Generate" and "Cancel".

- **Note:** If a DPSK CSV file includes the same passphrase that is existing in the same WLAN, Unleashed returns an error message when the administrator clicks **Upload** to import the DPSK CSV file and clicks **Generate**.

Figure 2. Duplicate Passphrase in the Same WLAN Error

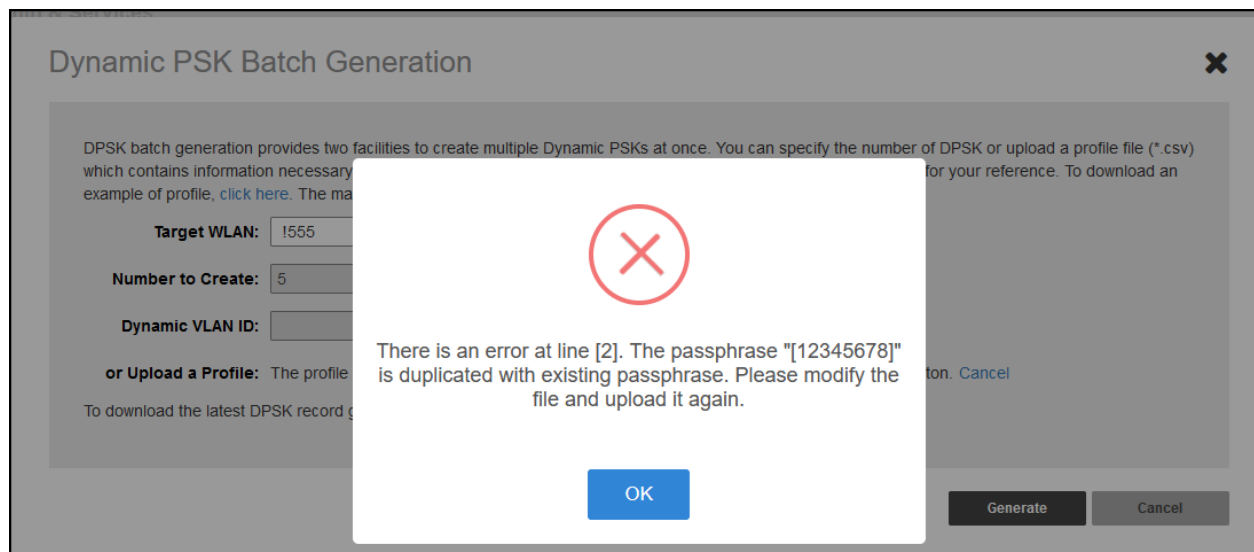

Parent topic: [Uploading a Dynamic PSK Profile](#)


Guest Access Services

The Guest Access Services pages provide options for monitoring and managing existing guest passes, customizing guest pass format and delivery methods, and deleting admin-generated or self-service guest passes.

To configure guest access services, go to Admin & Services > Services > Guest Access Service.

For more information on guest access and configuring a guest access WLAN, see [Guest WLANs](#) in Creating a New WLAN.

Figure 1. Monitoring and Configuring Guest Pass Options

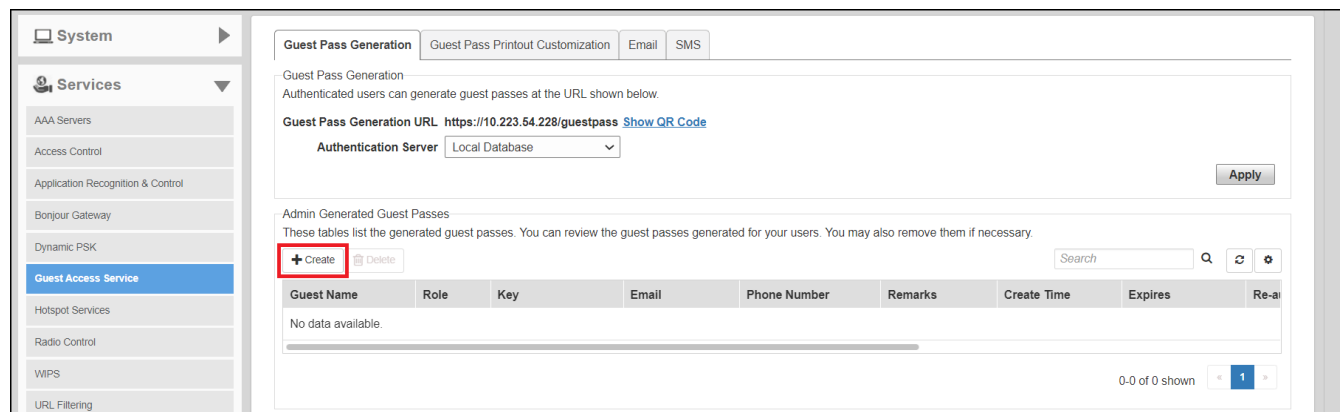

Click **Show QR Code** and the **QR Code** pop-up page is displayed. Click **Print** to print the QR code or scan the QR code using a smartphone camera.

Figure 2. QR Code Page



An administrator can generate guest passes from the web interface. Under **Admin Generated Guest Passes**, click **Create**. For more information, refer [Generating a Guest Pass](#).

Parent topic: [Services](#)

Hotspot Services

A Hotspot Service is required to deploy a Hotspot (WISPr 1.0) WLAN.

You can create a Hotspot service when creating a new WLAN (by clicking **Create New** after you select Hotspot Service as the WLAN type), or you can create multiple Hotspot services from the Administration settings and then deploy them to your Hotspot WLANs afterwards.

Additionally, you can use the **Admin & Services** pages to edit or reconfigure Hotspot service policy settings after WLAN creation.

Parent topic: [Services](#)

Creating a Hotspot Service

The **Admin & Services > Services > Hotspot Services** page can be used to configure a WISPr Hotspot service to provide public access to users. In addition to the Unleashed APs, you will need the following to deploy a Hotspot:

- **Captive Portal:** A special web page, typically a login page, to which users that have associated with your Hotspot will be redirected for authentication purposes. Users will need to enter a valid user name and password before they are allowed access to the Internet through the Hotspot. Open source captive portal packages, such as Chillispot, are available on the Internet. For a list of open source and commercial captive portal software, visit https://en.wikipedia.org/wiki/Captive_portal#Software_Captive_Portals, and

- **RADIUS Server:** A Remote Authentication Dial-In User Service (RADIUS) server through which users can authenticate.

For installation and configuration instructions for the captive portal and RADIUS server software, refer to the documentation that was provided with them. After completing the steps below, you will need to edit the WLAN(s) for which you want to enable Hotspot service, as described in [Assigning a WLAN to Provide Hotspot Service](#).

Unleashed supports up to 32 WISPr Hotspot service entries, each of which can be assigned to multiple WLANs.

To create a Hotspot service:

1. Go to **Admin & Services > Services > Hotspot Service**. Alternatively, you can create a new Hotspot service from the WLAN creation page (**Dashboard > Wi-Fi Networks > Create > Hotspot > Hotspot Services > Create New**).
2. Click **Create New**. The **Create New** form appears.
3. From the **General** tab, in **Name**, enter a name for this Hotspot service.
4. In **WISPr Smart Client Support**, select whether to allow WISPr Smart Client support:
 - **None:** (default).
 - **Enabled:** Enable Smart Client support.

 **Note:** The WISPr Smart Client is not provided by RUCKUS - you will need to provide Smart Client software/hardware to your users if you select this option.

 - **Only WISPr Smart Client allowed:** Choose this option to allow only clients that support WISPr Smart Client login to access this Hotspot. If this option is selected, a field appears in which you can enter instructions for clients attempting to log in using the Smart Client application.
 - **Smart Client HTTP Secure:** If Smart Client is enabled, choose whether to authenticate users over HTTP or HTTPS.
5. In **Login Page**, type the URL of the captive portal (the page where Hotspot users can log in to access the service).
6. Configure optional settings as preferred:
 - In **Start Page**, configure where users will be redirected after successful login. You could redirect them to the page that they want to visit, or you could set a different page where users will be redirected (for example, your company website).
 - In **User Session**, configure session timeout and grace period, both disabled by default.

- **Session Timeout:** Specify a time limit after which users will be disconnected and required to log in again.
 - **Grace Period:** Allow disconnected users a grace period after disconnection, during which clients will not need to re-authenticate. Enter a number in minutes, between 1 and 144,000.
7. In the **Authentication** tab, select the AAA server that you want to use to authenticate users from the **Authentication Server** drop-down menu.
- Options include **Local Database** and any AAA servers that you configured on the **Configure > AAA Servers** page.
 - **Enable MAC authentication bypass (no redirection):** Enabling this option allows users with registered MAC addresses to be transparently authorized without having to log in. A user entry on the RADIUS server needs to be created using the client MAC address as both the user name and password. The MAC address format can be configured in one of the formats listed in MAC Authentication with an External RADIUS Server.
 - **Accounting Server:** (If you have an accounting server set up), select the server from the list and configure the frequency (in minutes) at which accounting data will be retrieved.
 - In **Wireless Client Isolation:** Choose whether clients connected to this Hotspot WLAN should be allowed to communicate with one another locally. See [Configuring Advanced WLAN Options](#) for a description of the same feature for non-Hotspot WLANs.
 - **Location Information:** Enter Location ID and Location Name for this location if using RUCKUS Smart Positioning location services.
8. On the **Walled Garden** and **Policy** tabs, configure optional settings as preferred:
- In **Location Information**, enter Location ID and Location Name WISPr attributes, as specified by the Wi-Fi Alliance.
 - In **Walled Garden**, enter network destinations (URL or IP address) that users can access without going through authentication. A Walled Garden is a limited environment to which an unauthenticated user is given access for the purpose of setting up an account. After the account is established, the user is allowed out of the Walled Garden.
9. On the **Policy** tab, define L3/4 IP address access control rules for the Hotspot service to allow or deny wireless devices based on their IP address, port or protocol.
10. Click **OK** to save the Hotspot settings.

The page refreshes and the Hotspot service you created appears in the list. You may now assign this Hotspot service to the WLANs that you want to provide Hotspot Internet access, as described in [Assigning a WLAN to Provide Hotspot Service](#).

Figure 1. The Hotspot Services page


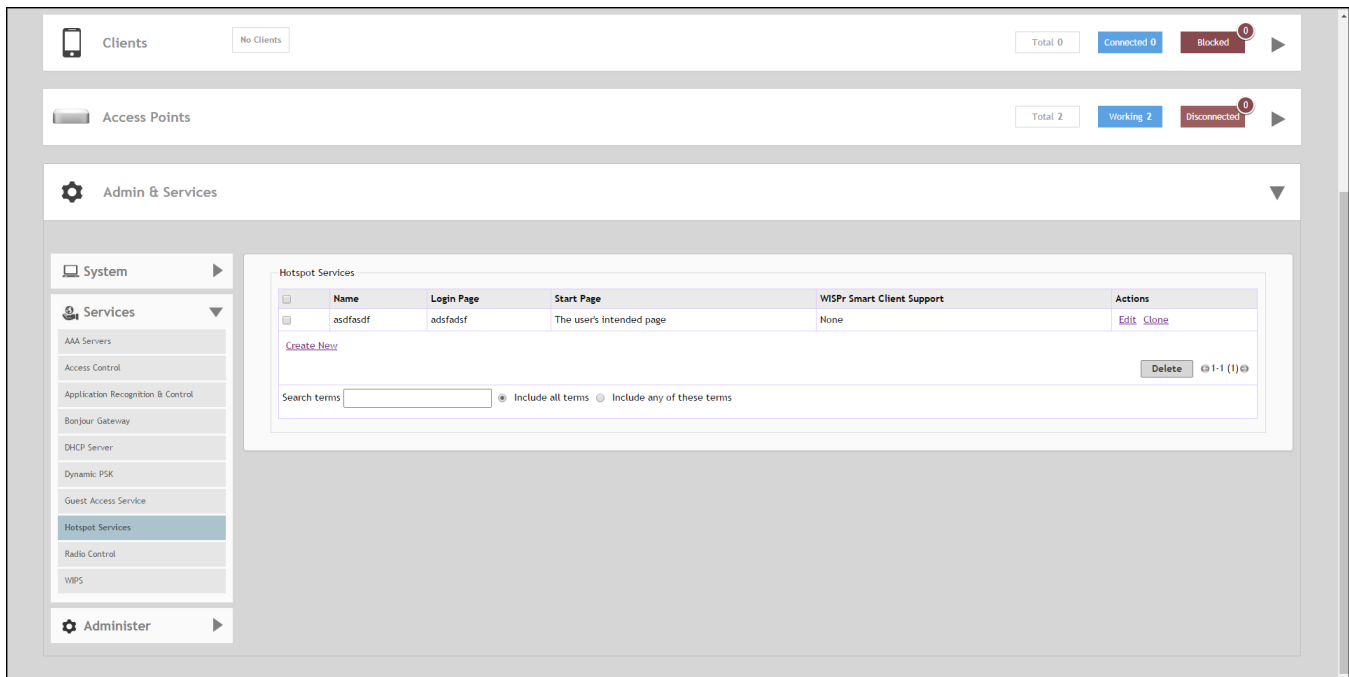


Figure 2. Creating a new Hotspot service

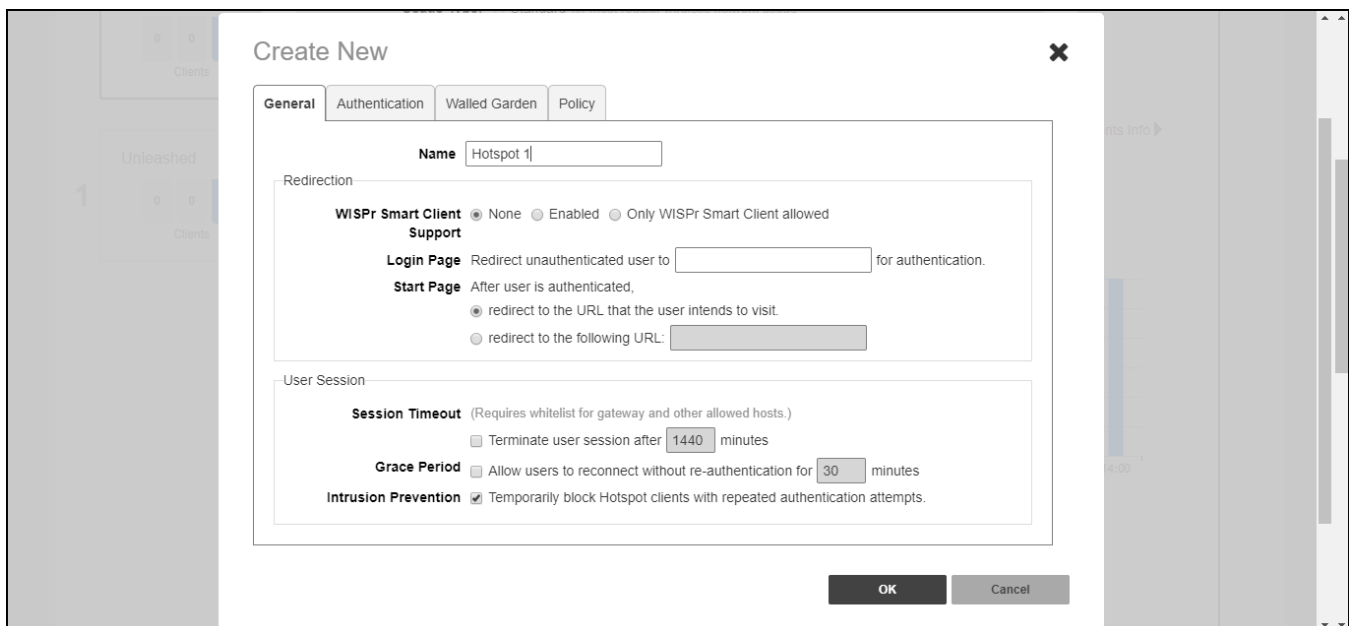

Parent topic: [Hotspot Services](#)

Assigning a WLAN to Provide Hotspot Service


Once you have created a Hotspot service, you need to specify the WLANs to which you want to deploy the Hotspot configuration.

To configure a WLAN to provide Hotspot service:

1. Go to **Dashboard > Wi-Fi Networks > [WLAN name] > Edit**.

2. In **Usage Type**, select **Hotspot Service**.
3. In **Hotspot Services**, select a Hotspot service from the list if you have already created one, or click **Create New** to begin creating a new Hotspot service for this WLAN. (See [Creating a Hotspot Service](#)).
4. In **Encryption Method**, choose one of the following:
 - **None:** (Default) Hotspot login is required.
 - **WPA2:** Requires the user to enter a WPA2 password to associate with the WLAN, in addition to the Hotspot login.
 - **WPA3:** Requires the user to enter a WPA3 password to associate with the WLAN, in addition to the Hotspot login.
 - **WPA2/WPA3-Mixed:** Requires the user to enter a WPA2 or WPA3 password to associate with the WLAN, in addition to the Hotspot login.
 - **OWE:** Does not require the user to enter an additional password (other than the Hotspot login).
5. Click **OK** to save your changes.

Figure 1. Assigning a Hotspot service to a Hotspot WLAN

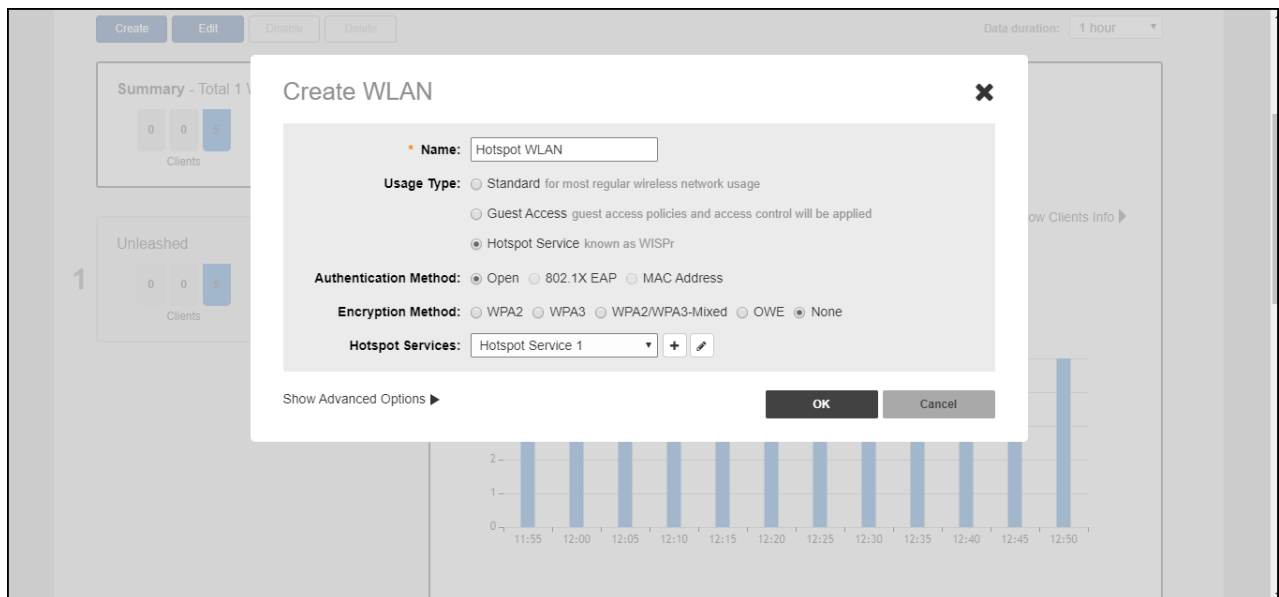

Parent topic: [Hotspot Services](#)

Radio Control

The Radio Control options include settings for automatic radio channel selection using Background Scanning or ChannelFly, client Load Balancing, Band Balancing and Radar Avoidance Pre-Scanning.

Parent topic: [Services](#)

Self Healing

RUCKUS Unleashed uses built-in network "self-healing" diagnostics and tuning tools to maximize wireless network performance.

From the RUCKUS Unleashed dashboard, select **Admin & Services > Services > Radio Control > Self Healing** to utilize built-in network diagnostics and tuning tools.

Automatically Adjusting AP Radio Power

You can automatically adjust AP radio power to optimize coverage when interference is present. Automatically adjusting AP radio power is designed to turn down the power of an AP if the following conditions are met:

- The power is set to **Auto** in the AP configuration.
- The AP can hear another AP that is on the same channel and same network.
- The AP can hear the other AP at a minimum of 50 dB, which means the APs are very close to each other.

Note that the 2.4 GHz, 5 GHz, and 6 GHz radio bands are considered independently. If all conditions are met, the AP will reduce its power by half. The other AP may or may not reduce its power simultaneously.

 **Note:** In general, RUCKUS does NOT recommend enabling automatically adjusting AP radio power because it can lead to non-optimal AP power levels. RUCKUS general guidelines for using the BeamFlex APs are to run access points at full power to maximize the throughput and SINR levels, therefore maximizing data rates and performance.

Automatically Adjusting 2.4 GHz, 5 GHz, and 6 GHz Radio Channels Using Background Scanning

Using background scanning, the Master AP regularly samples the activity in all APs to assess radio frequency (RF) usage, to detect rogue APs and to determine the optimal channel for automatic channel selection.

These scans sample one channel at a time in each AP so as not to interfere with network use. You can, if you prefer, customize the automatic scanning of RF activity, deactivate it if you feel it is not helpful, or adjust the frequency if you want scans at greater or fewer intervals (refer to [Background Scanning](#)).

 **Note:** Background scanning must be enabled to detect rogue APs on the network.

Automatically Adjusting 2.4 GHz, 5 GHz, and 6 GHz Radio Channels Using ChannelFly

The main difference between ChannelFly and background scanning is that ChannelFly determines the optimal channel based on real-time statistical analysis of actual throughput measurements, while background scanning uses channel measurement and other techniques to estimate the impact of interference on Wi-Fi capacity based on progressive scans of all available channels.

- **Note:** If you enable ChannelFly, background scanning can still be used for adjusting radio power and rogue AP detection while ChannelFly manages the channel assignment. Both cannot be used at the same time for channel management.

Benefits of ChannelFly

With ChannelFly, the AP intelligently samples different channels while using them for service. ChannelFly assesses channel capacity every 15 seconds and changes channel when, based on historical data, a different channel is likely to offer higher capacity than the current channel. Each AP makes channel decisions based on this historical data and maintains an internal log of channel performance individually.

When ChannelFly changes the channels, it utilizes 802.11h channel change announcements to seamlessly change channels with no packet loss and minimal impact to performance. The 802.11h channel change announcements affect both wireless clients and RUCKUS mesh nodes in the 2.4 GHz and 5 GHz bands.

Initially (in the first 30 to 60 minutes) there will be more frequent channel changes while ChannelFly learns the environment. However, once an AP has learned about the environment and which channels are most likely to offer the best throughput potential, channel changes will occur less frequently unless a large measured drop in throughput occurs.


ChannelFly can react to large measured drops in throughput capacity in as little as 15 seconds, while smaller drops in capacity may take longer to react to.

Disadvantages of ChannelFly

Compared to background scanning, ChannelFly takes considerably longer for the network to settle down. If you will be adding and removing APs to your network frequently, background scanning may be preferable. Additionally, if you have clients that do not support the 802.11h standard, ChannelFly may cause significant connectivity issues during the initial capacity assessment stage.

You can enable or disable ChannelFly per band. If you have 2.4 GHz clients that do not support 802.11h, RUCKUS recommends disabling ChannelFly for 2.4 GHz, but leaving it enabled for the 5 GHz or 6 GHz bands.

Figure 1. Self Healing Tab

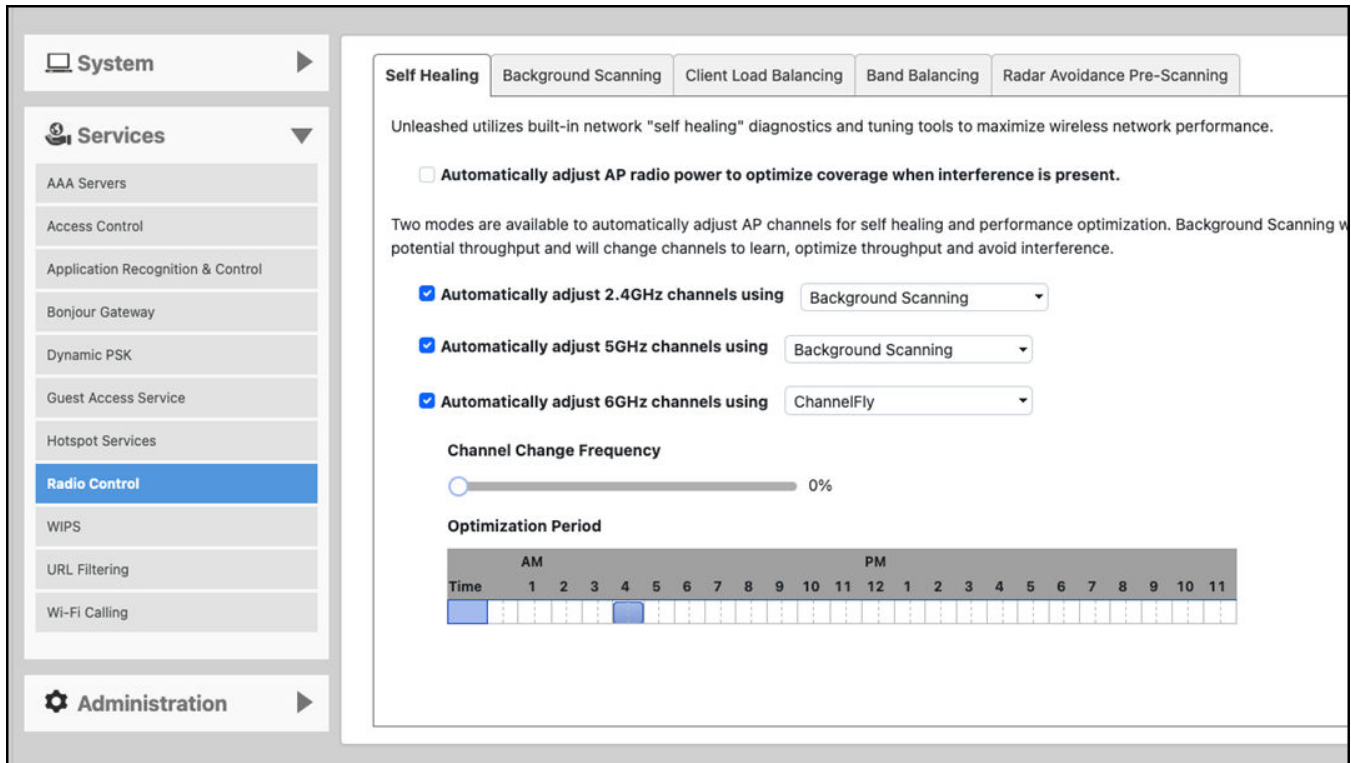

Parent topic: [Radio Control](#)

Background Scanning


Scanning intervals can be configured on the 2.4 GHz, 5 GHz, and 6 GHz radios independently.

- **Run a background scan on the 2.4 GHz radio every []:** Select this check box and enter the time interval (1~65535 seconds, default is 300) that you want to set between each scan.
- **Run a background scan on the 5 GHz radio every []:** Select this check box and enter the time interval (1~65535 seconds, default is 300) that you want to set between each scan.
- **Run a background scan on the 6 GHz radio every []:** Select this check box and enter the time interval (1~65535 seconds, default is 300) that you want to set between each scan.

- **Note:** If you want to disable Background Scanning, clear the check box; this should result in a minor increase in AP performance, but removes the detection of rogue APs. You can also decrease the scan frequency, as less frequent scanning improves overall AP performance.
- **Note:** You can also disable Background Scanning on a per-WLAN basis from the **Dashboard > Wi-Fi Networks** screen. To disable scanning for a particular WLAN, click the **Edit** link next to the WLAN for which you want to disable scanning, open **Advanced Options**, select the **Radio Control** tab, and click the check box next to **Disable Background Scanning**.

To see whether Background Scanning is enabled or disabled for a particular WLAN, click the **click here** link at the bottom of the page.

Figure 1. Viewing the WLANs with Background Scanning Disabled

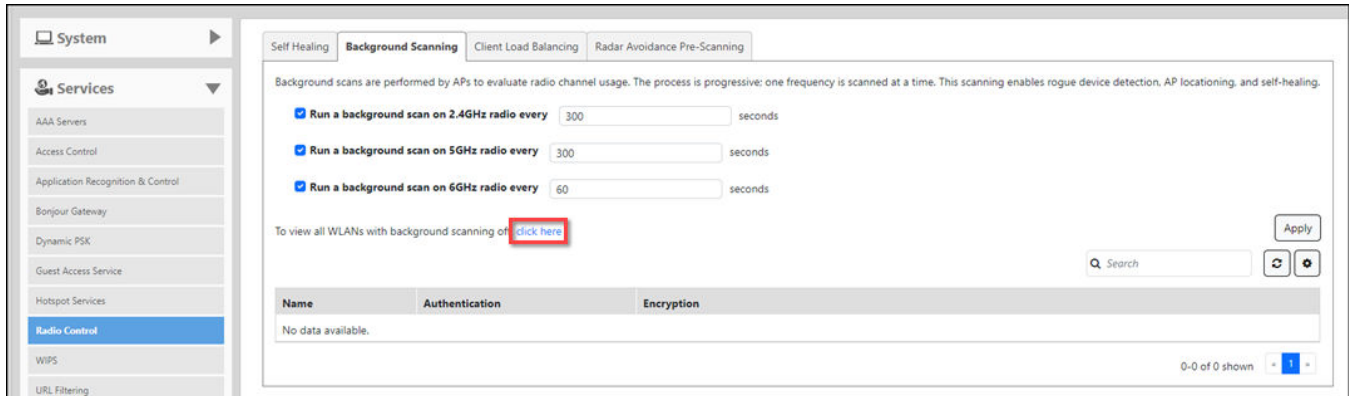

Parent topic: [Radio Control](#)

Client Load Balancing

Enabling load balancing can improve WLAN performance by helping to spread the client load between nearby access points, so that one AP does not get overloaded while another sits idle. Load balancing can be controlled from within the web interface to balance the number of clients per radio on adjacent APs. "Adjacent APs" are determined at startup by measuring the RSSI during channel scans. After startup, RUCKUS Unleashed uses subsequent scans to update the list of adjacent radios periodically and when a new AP sends its first scan report. When an AP leaves, RUCKUS Unleashed immediately updates the list of adjacent radios and refreshes the client limits at each affected AP.

After RUCKUS Unleashed is aware of which APs are adjacent to each other, it begins managing the client load by sending desired client limits to the APs. These limits are "soft values" that can be exceeded in several scenarios, including: (1) when a client's signal is so weak that it may not be able to support a link with another AP, and (2) when a client's signal is so strong that it belongs on this AP.

The APs maintain these desired client limits and enforce them once they reach the limits by withholding probe responses and authentication responses on any radio that has reached its limit.

Consider the following key points on load balancing:

- Load balancing does not disassociate clients already connected.
- Load balancing takes action before a client association request, reducing the chance of client misbehavior.
- The process does not require any time-critical interaction between APs.
- Load balancing provides control of adjacent AP distance with safeguards against abandoning clients.
- Load balancing can be disabled on a per-WLAN basis; for instance, in a voice WLAN, load balancing may not be desired due to voice roaming considerations.

- Background scanning must be enabled on the WLAN for load balancing to work.

Parent topic: [Radio Control](#)

ACLB and ABB

Adaptive Client Load Balancing (ACLB) and Adaptive Band Balancing (ABB) improve Wi-Fi performance by steering clients to APs with higher available capacity and guiding clients to different radio bands for better load balancing, respectively.

Feature Overview

ACLB enhances the existing Client Load Balancing (CLB) system by incorporating throughput-based capacity metrics alongside traditional station-count load metrics. IEEE 802.11k allows clients to request and receive information about neighboring APs. By knowing the status of neighboring APs, clients can make more informed decisions, aiding in balancing the load. IEEE 802.11v enables APs to communicate directly with clients about the best APs to connect to, facilitating smoother and more efficient handoffs. This helps prevent any single AP from becoming overloaded by dynamically guiding clients to less congested APs.

When enabled, ACLB works as follows:

- **Identify High-Capacity APs:** Detect APs with higher available capacity within the RF neighborhood.
- **Select Target Clients:** Determine which clients must be moved to less loaded, higher-capacity APs using 11k/v protocols and AP-to-AP communication.
- **Client Switch Request:** Prompt target clients to switch to the identified APs, which are ranked by priority.
- **Client Roaming:** Clients select a target AP and roam to it, ensuring balanced load and optimal service quality across the network.

Band balancing supports client load balancing by guiding clients to different radio bands (2.4GHz, 5GHz, and 6GHz, if available). Band balancing was originally designed to operate only at the time of client association, but the Adaptive Band Balancing (ABB) enhancement ensures load balancing by band occurs dynamically through the duration of the client connection.

Requirements

The ACLB and ABB features have no special hardware or software requirements for feature enablement or usage.

Considerations

Consider the following with regards to the ACLB enhancement:

- ACLB does not support non-802.11v-capable stations.

- ACLB does not steer stations that move away from the AP within 270 seconds of association, preventing unnecessary redirection of the station, especially if the station's movement away from the AP is temporary or if the signal strength remains robust despite the increased distance from the AP.
- ACLB estimates the available capacity of neighboring APs if they do not publish this information.

Best Practices

- Ensure all APs are running firmware that supports ACLB and IEEE 802.11k/v protocols.
- Place APs to maximize coverage and minimize signal overlap, creating distinct RF neighborhoods for effective load balancing.
- Enable regular background scanning (bgscan) on APs to maintain accurate data on neighboring APs and their available capacities.

Prerequisites

The following prerequisites facilitate optimal load balancing in your network:

- Ensure all APs and controllers run firmware that supports ACLB (Unleashed 200.8 and later releases) and IEEE 802.11k/v protocols.
- Deploy a robust network infrastructure with sufficient bandwidth and low latency to support real-time load balancing.
- Strategically place APs to maximize coverage and create distinct RF neighborhoods, minimizing signal overlap and interference.

Parent topic: [Client Load Balancing](#)

Enabling Load Balancing Globally


Enabling load balancing ensures that clients are evenly distributed across available access points (APs), preventing any single AP from becoming overloaded. It reduces congestion, provides better resource utilization, and ensures seamless connectivity.

Complete the following steps to enable load balancing options globally.

1. From the dashboard, select **Admin & Services > Services > Radio Control > Client Load Balancing**.
2. Enable **Use Load Balancing**.
A warning message "Enabling Load Balancing will increase the frequency of background scanning accordingly, are you sure to continue" is displayed. Click **Yes**.
3. For the **Load Balancing Method**, choose any one of the methods: **Based on Client Count** or **Based on Capacity**.

- **Based on Client Count:** Distributes clients evenly across APs by considering the number of connected devices. This is considered basic client load balancing.
 - **Based on Capacity:** Allocates clients to APs based on their available capacity, which includes factors such as bandwidth, data rate, and the number of streams. This is considered adaptive client load balancing.
4. For **Steering Mode**, choose one of the following modes: **Basic**, **Proactive**, or **Strict**. Steering Mode enhances Wi-Fi efficiency by automatically allocating devices to the optimal frequency band considering their capabilities and the prevailing network conditions.
- **Basic:** Prevents overcrowding on a heavily loaded band by encouraging clients to connect to a less crowded band.
 - **Proactive:** Actively manages and rebalances clients between bands using IEEE 802.11v BSS Transition Management.
 - **Strict:** Forcefully rebalances clients between bands using IEEE 802.11v BSS Transition Management.
5. Click **Apply**.

Figure 1. Client Load Balancing

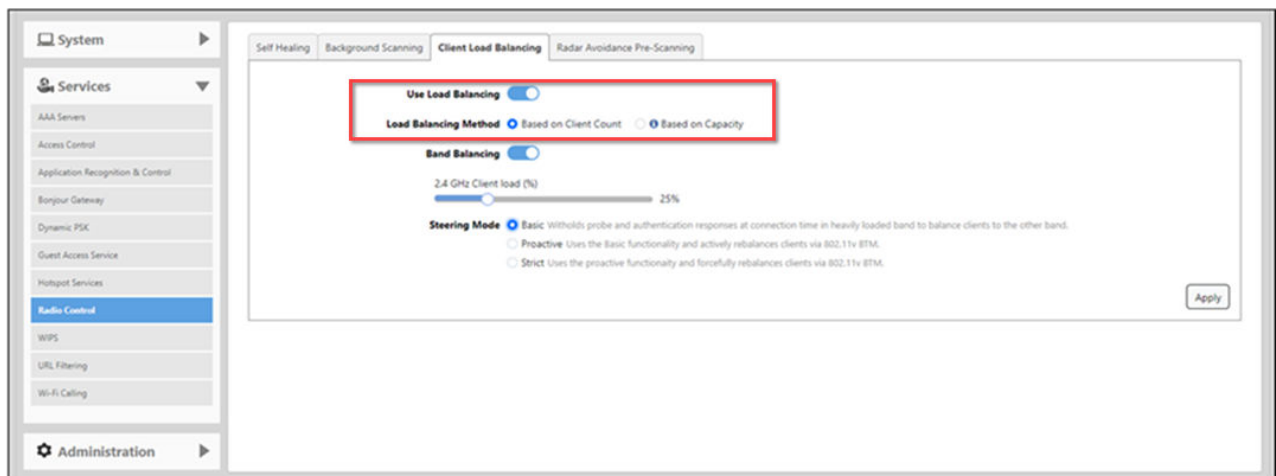

Parent topic: [Client Load Balancing](#)

Enabling Band Balancing Globally

Band balancing attempts to balance the client load on radios by distributing clients between the 2.4 GHz, 5 GHz, and 6 GHz radios.


Band balancing is disabled by default. To balance the number of clients connecting to the radios on an AP, the AP encourages dual-band and tri-band clients to connect to the 5 GHz band (and 6 GHz band, if available) when the configured percentage threshold is reached.

Complete the following steps to enable and configure band balancing globally.

1. From the dashboard, select **Admin & Services > Services > Radio Control > Client Load Balancing**.
2. Toggle the **Band Balancing** switch to ON.
3. For **2.4 GHz Client load (%)**, drag the slider along the bar to your desired value, which denotes the threshold above which dual-band and tri-band clients will be encouraged to connect to the 5 GHz or 6 GHz radios rather than the 2.4 GHz radio.
4. Click **Apply**.

Note: When enabled globally, Band Balancing is applied to all WLANs by default. To disable Band Balancing for a specific WLAN, edit the Radio Control Settings for the WLAN using the WLAN Advanced Options. Refer to [Disabling Load and Band Balancing for a WLAN](#).

Figure 1. Band Balancing

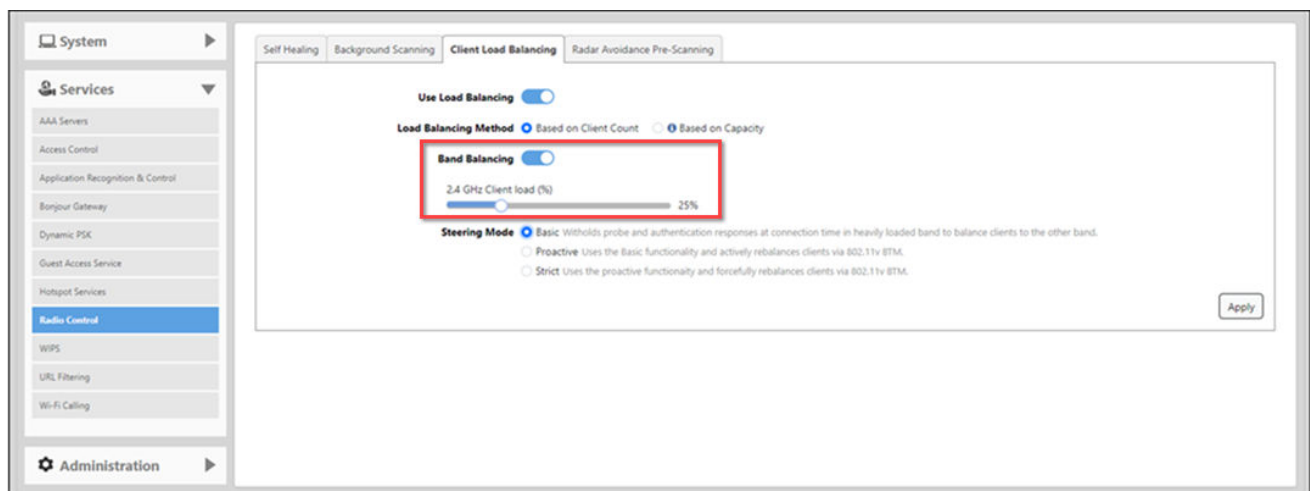

Parent topic: [Client Load Balancing](#)

Disabling Load and Band Balancing for a WLAN

Load balancing can be disabled on a per-WLAN basis; for instance, in a voice WLAN, load balancing may not be desired due to voice roaming considerations. Disabling load and band balancing on a WLAN may cause overloaded access points, increased congestion, unreliable roaming, and inefficient network use, especially in high-traffic networks.


Complete the following steps to disable load balancing and band balancing on a per-WLAN basis.

1. In the **Wi-Fi Networks** component, select the WLAN for which you want to disable load balancing and band balancing, and click **Edit**.
2. Click **Show Advanced Options > Radio Control** and clear the **Enable** check box for Load Balancing and Band Balancing.

- Note:** The **Load Balancing** and **Band Balancing** options are separate, meaning you can disable one without disabling the other.

3. Click **OK** to save your changes.

Figure 1. Disabling Load Balancing and Band Balancing for a WLAN

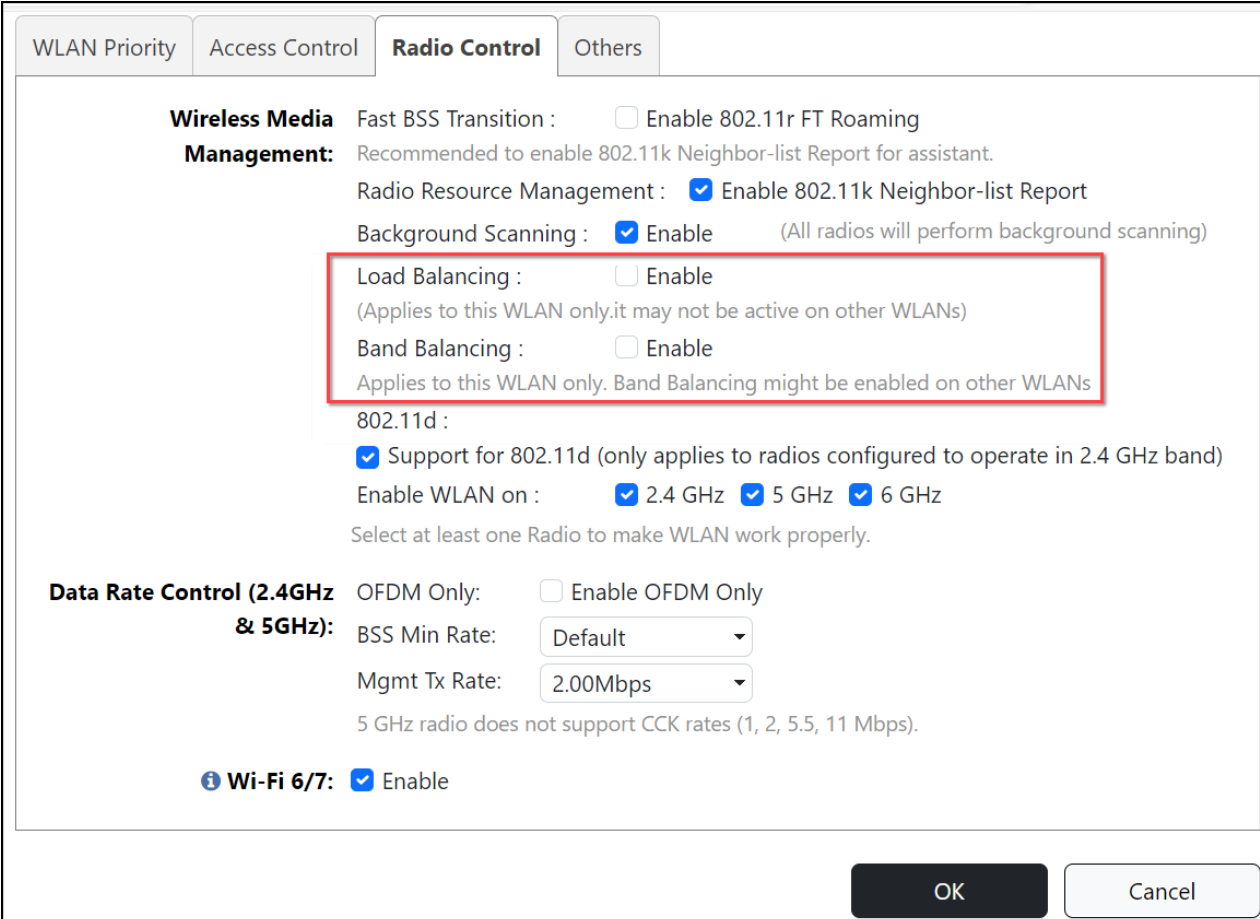

The screenshot shows the 'Radio Control' tab in the WLAN configuration interface. The 'Wireless Media Management' section contains the following settings:

- Fast BSS Transition : ☐ Enable 802.11r FT Roaming
- Recommended to enable 802.11k Neighbor-list Report for assistant.
- Radio Resource Management : ☒ Enable 802.11k Neighbor-list Report
- Background Scanning : ☒ Enable (All radios will perform background scanning)
- Load Balancing :** ☐ Enable
(Applies to this WLAN only.it may not be active on other WLANs)
- Band Balancing :** ☐ Enable
Applies to this WLAN only. Band Balancing might be enabled on other WLANs
- 802.11d : ☒ Support for 802.11d (only applies to radios configured to operate in 2.4 GHz band)
- Enable WLAN on : ☒ 2.4 GHz ☒ 5 GHz ☒ 6 GHz
- Select at least one Radio to make WLAN work properly.

The 'Data Rate Control (2.4GHz & 5GHz):' section contains the following settings:

- OFDM Only: ☐ Enable OFDM Only
- BSS Min Rate: Default
- Mgmt Tx Rate: 2.00Mbps
- 5 GHz radio does not support CCK rates (1, 2, 5.5, 11 Mbps).

At the bottom, the 'Wi-Fi 6/7:' section has the 'Enable' checkbox checked.


The 'OK' and 'Cancel' buttons are located at the bottom right of the dialog.

Parent topic: [Client Load Balancing](#)

Radar Avoidance Pre-Scanning

The Radar Avoidance Pre-Scanning (RAPS) setting allows pre-scanning of DFS channels in the 5 GHz band to ensure the channel is clear of radar signals prior to transmitting on the channel. This setting affects select outdoor dual band 802.11n/ac AP models only and has no impact on APs that do not support the feature. The option will also only be available if the Country Code settings are configured to allow use of DFS channels (see [Setting the Country Code](#)).

Figure 1. Radar Avoidance Pre-Scanning

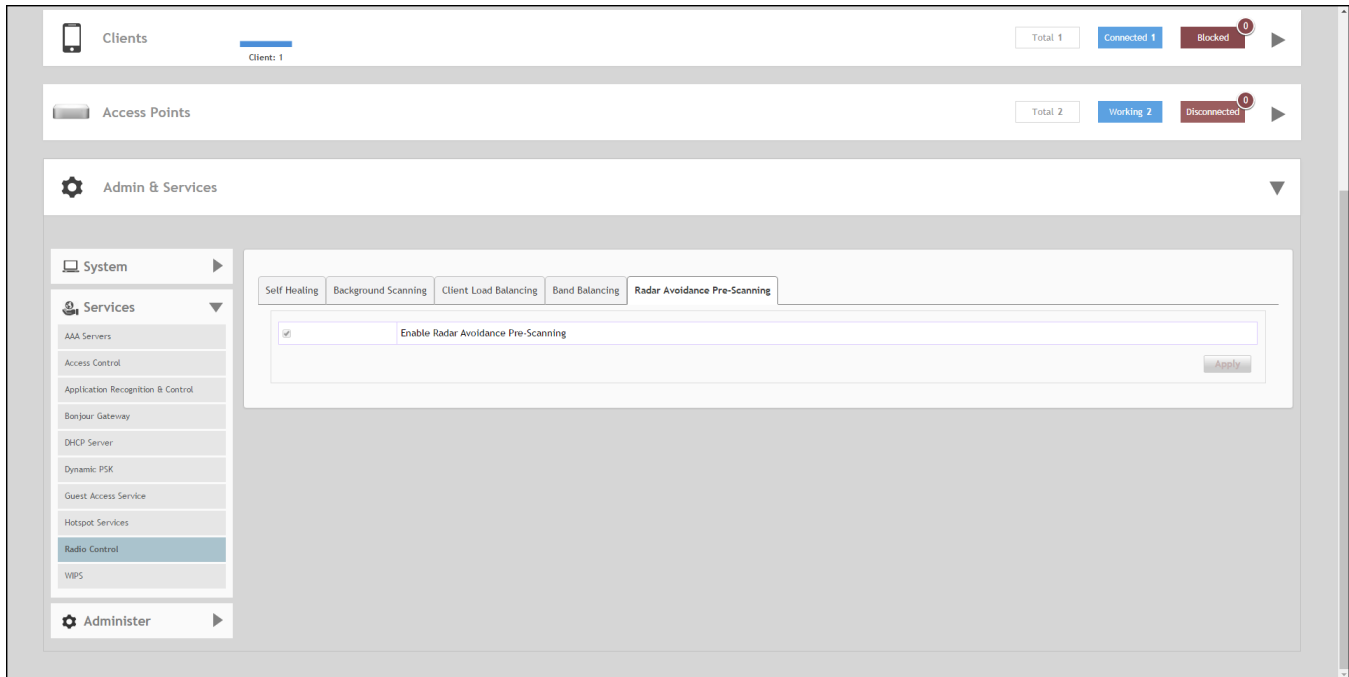

Parent topic: [Radio Control](#)

WIPS

Unleashed provides several built-in intrusion prevention features designed to protect the wireless network from security threats such as Denial of Service (DoS) attacks and intrusion attempts. These features, called Wireless Intrusion Prevention Services (WIPS), allow you to customize the actions to take and the notifications you would like to receive when each of the different threat types is detected.

Parent topic: [Services](#)

Denial of Service (DoS)


Two options are provided to protect the wireless network from Denial of Service attacks.

To configure the DoS protection options:

1. Go to **Admin & Services > Services > WIPS > Denial of Service (DoS)**.
2. Configure the following settings:
 - **Protect my wireless network against excessive wireless requests:** If this capability is activated, excessive 802.11 probe request frames and management frames launched by malicious attackers will be discarded.
 - **Temporarily block wireless clients with repeated authentication failures for [] seconds:** If this capability is activated, any clients that repeatedly fail in attempting authentication will be temporarily blocked for a period of time (10~1200 seconds, default is 30).

- Click **Apply** to save your changes.

Figure 1. Denial of Service (DoS)

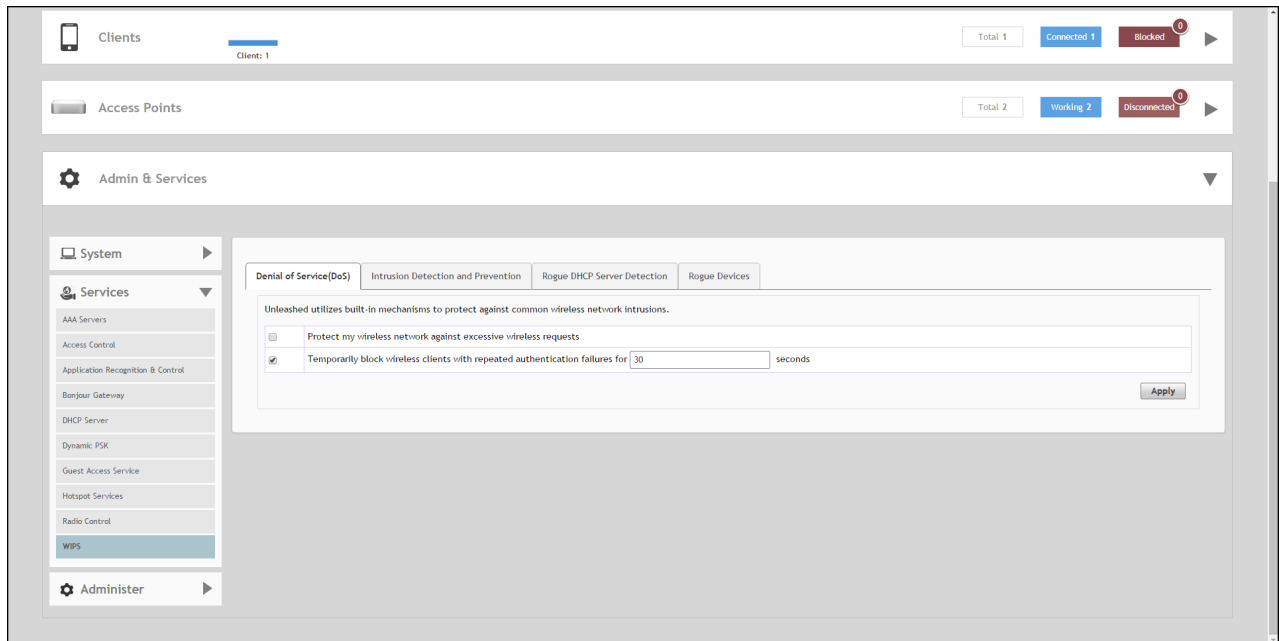

Parent topic: [WIPS](#)

Intrusion Detection and Prevention

Intrusion detection and prevention features rely on background scanning results to detect rogue access points connected to the network and optionally, prevent clients from connecting to malicious rogue APs.

Parent topic: [WIPS](#)

Rogue Access Points

A "Rogue Access Point" is any access point detected by an Unleashed access point that is not part of the Unleashed network. Rogue devices are detected during off channel scans (background scanning) and are simply other access points that are not part of the Unleashed network (e.g., an access point at a nearby coffee shop, a neighbor's apartment or shopping mall).

Typically, rogue access points are not a threat, however there are certain types that do pose a threat that will be automatically identified as "malicious rogue APs." The three automatically identified malicious access point categories are as follows:

- **WLAN-Spoofing:** These are rogue access points that are beaconing the same WLAN name as an Unleashed access point. They pose a threat as someone may be attempting to use them as a honey pot to attract your clients into their network to attempt hacking or man-in-the-middle attacks to exploit passwords and other sensitive data.
- **Same-Network:** These are rogue access points that are detected by other access points as transmitting traffic on your internal network. They are detected by Unleashed access points seeing packets coming

from a 'similar' MAC address to one of those detected from an over the air rogue AP. Similar MAC addresses are +-5 MAC addresses lower or higher than the detected over the air MAC address.

- **MAC-spoofing:** These are rogue access points that are beaconing the same MAC address as an Unleashed access point. They pose a threat as someone may be attempting to use them as a honey pot to attract your clients into their network to attempt hacking or man-in-the-middle attacks to exploit passwords and other sensitive data.

Parent topic: [Intrusion Detection and Prevention](#)


Managing Rogue Devices

The Rogue Devices screen displays all currently active rogue APs that have been detected by any of the Unleashed APs on the network.


To monitor rogue devices and mark specific rogues as either "known" or "malicious" rogue APs:

1. Go to **Admin & Services > Services > WIPS > Rogue Devices**.
2. View the list of Currently Active Rogue Devices and take note of any rogues marked as "malicious."
3. To view which Unleashed APs are detecting this rogue AP, click the **+** icon next to the rogue AP to expand the display. Use this information to help investigate where the rogue device is located in your site for removing it.


Figure 1. Monitoring rogue devices - expand the view to show which APs are detecting this rogue device

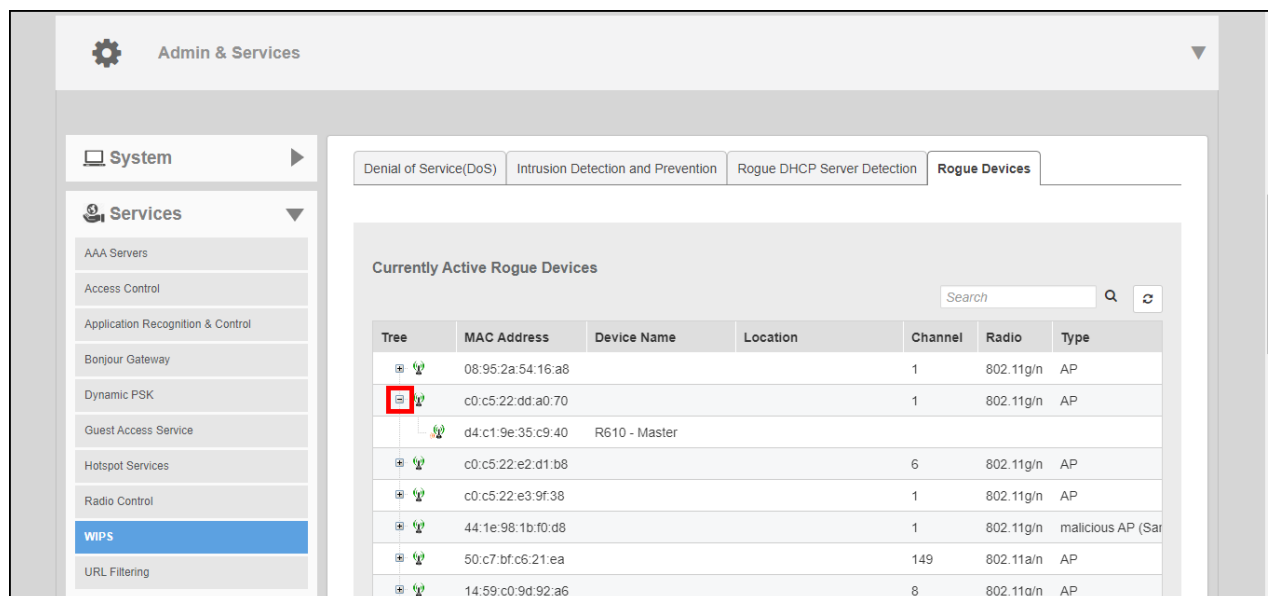

4. To mark a rogue device as a "Known" device (for example, a nearby neighbor's network), click **Mark As Known**. This device will no longer trigger rogue device detection alarm events on the Administration > Diagnostics pages.
5. To mark a rogue device as "Malicious" rogue (with the goal of physically locating and removing the offending device), click **Mark as Malicious**.

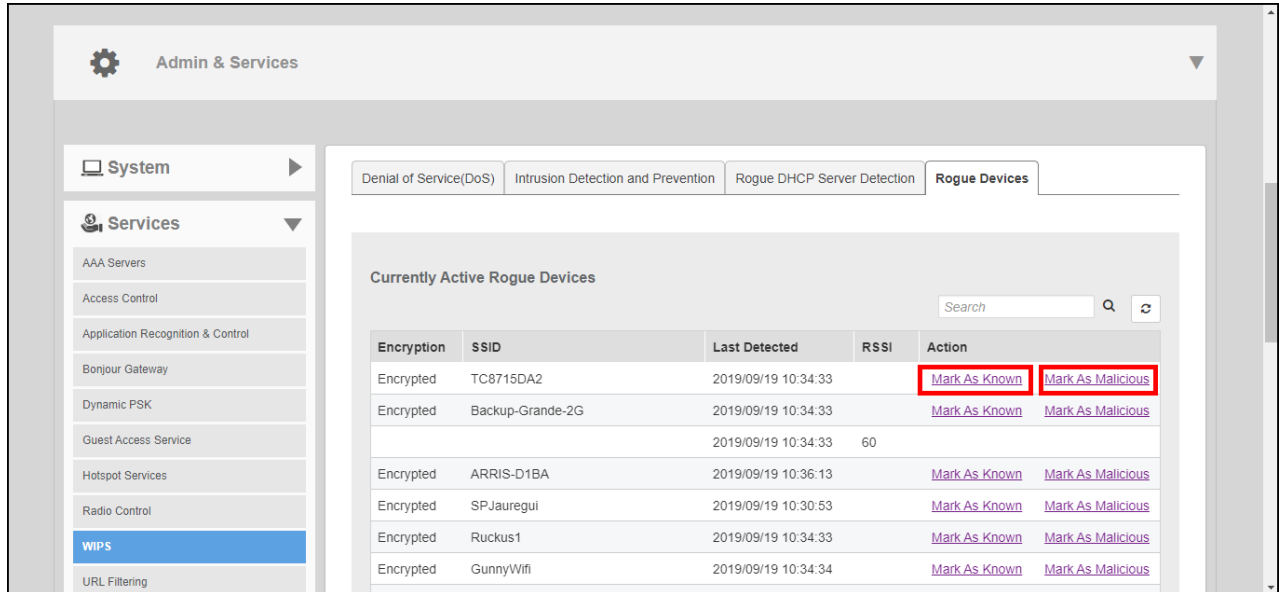Figure 2. Marking rogue devices as known or malicious

6. You can monitor and manage the lists of known/recognized and user-blocked rogue devices using the two tables below.

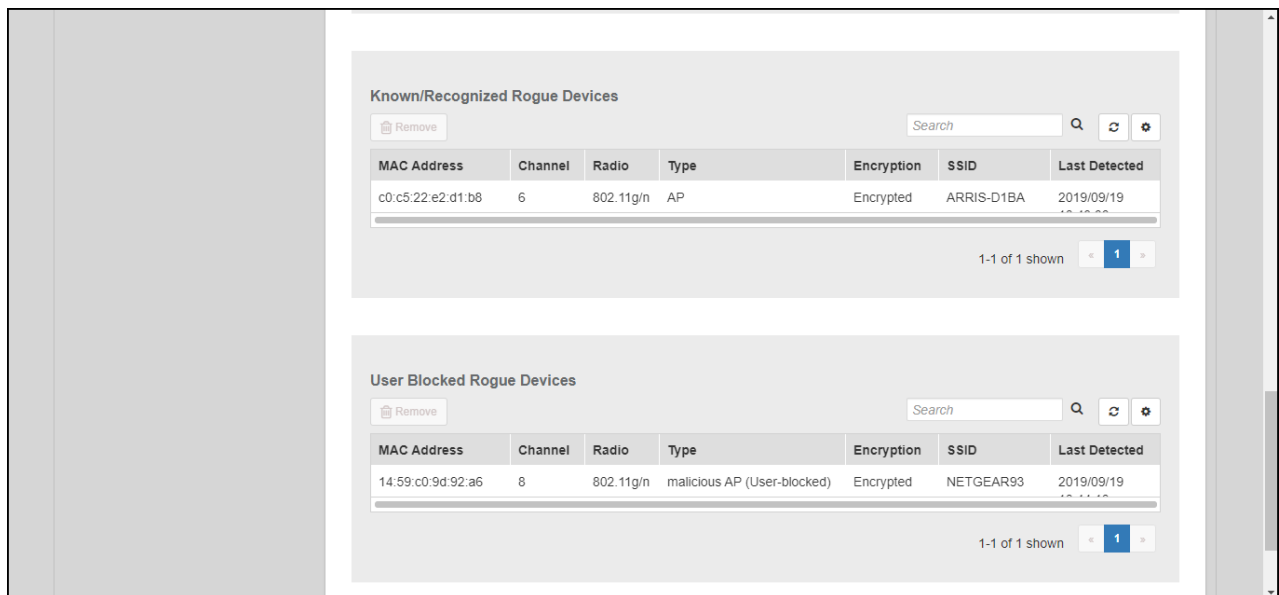Figure 3. Manage known rogue devices

Parent topic: [Rogue Access Points](#)


Rogue AP Detection

Complete the following steps to enable or disable and configure rogue access point detection.

1. From the dashboard, select **Admin & Services > Services > WIPS > Intrusion Detection and Prevention**.

2. Select the **Enable report rogue devices** check box to include rogue device detection in logs and email alarm event notifications.
3. Select which devices to include in rogue device reports:
 - **Report all rogue devices:** Send alerts for all rogue AP events.
 - **Report only malicious rogue devices of type:** Select which event types to report:
 - **SSID-Spoofing:** A malicious rogue AP that uses the same SSID as a RUCKUS Unleashed AP, also known as an "evil-twin" AP.
 - **Same-Network:** A malicious rogue AP that is connected to the same wired network.
 - **MAC-Spoofing:** A malicious rogue AP that has the same BSSID (MAC address) as one of the virtual APs managed by RUCKUS Unleashed.
 - **User-Blocked:** A rogue AP that has been marked as malicious by the user.
4. Select the **Protect the network from malicious rogue access points** check box to automatically protect your network from network-connected rogue APs, WLAN-spoofing APs, and MAC-spoofing APs. When one of these rogue APs is detected (and this check box is enabled), the RUCKUS AP automatically begins sending broadcast de-authentication messages spoofing the rogue's BWLAN (MAC address) to prevent wireless clients from connecting to the malicious rogue AP. This option is disabled by default.
5. Click **Apply** to save your changes.

Figure 1. Intrusion Detection and Prevention

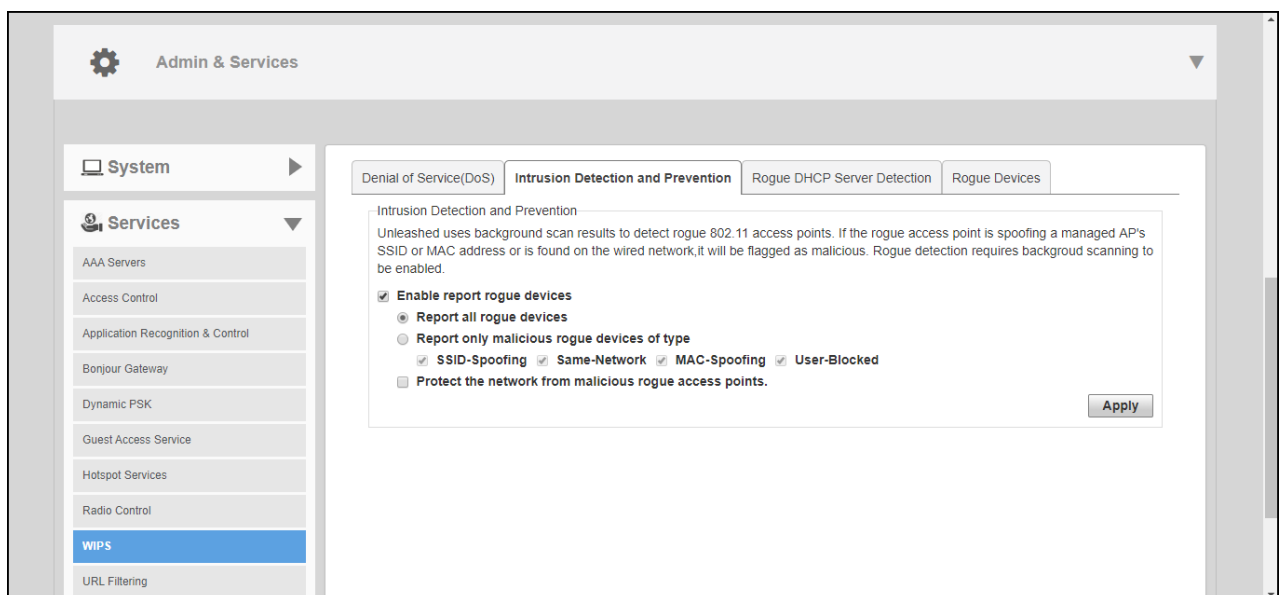


Parent topic: [Rogue Access Points](#)

Rogue DHCP Server Detection

A rogue DHCP server is a DHCP server that is not under the control of network administrators and is therefore unauthorized. When a rogue DHCP server is introduced to the network, it could start assigning invalid IP addresses, disrupting network connections or preventing client devices from accessing network services. It could also be used by hackers to compromise network security.

Typically, rogue DHCP servers are network devices (such as routers) with built-in DHCP server capability that has been enabled (often, unknowingly) by users. The rogue DHCP server detection feature can help you prevent connectivity and security issues that rogue DHCP servers may cause. When this feature is enabled, RUCKUS Unleashed scans the network every five seconds for unauthorized DHCP servers and generates an event every time it detects a rogue DHCP server.

Figure 1. Rogue DHCP Server Detection

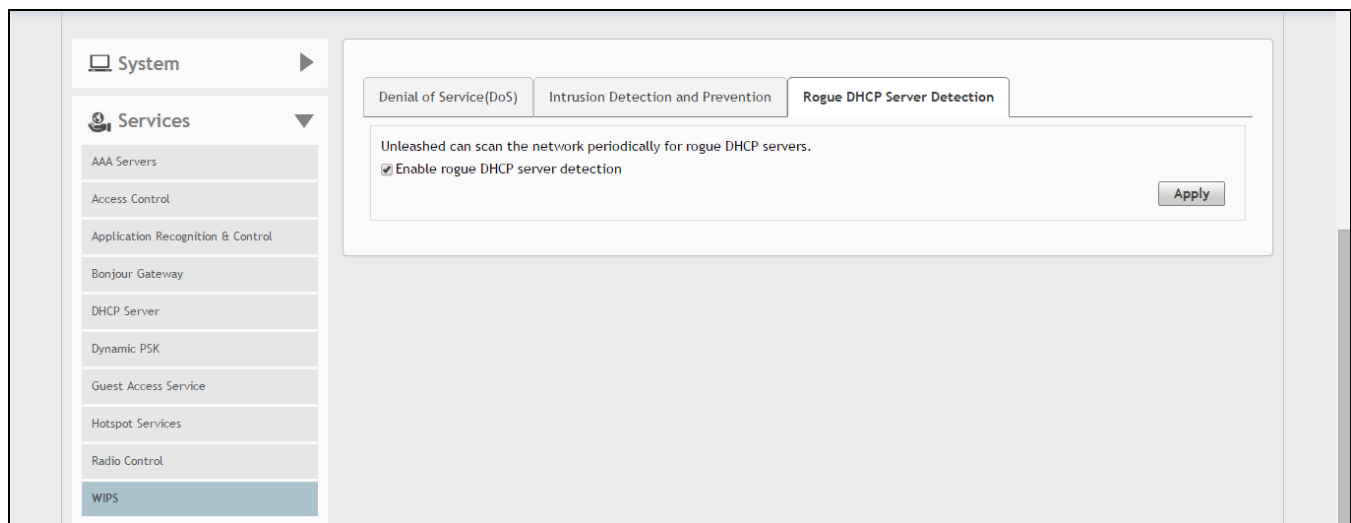

Parent topic: [WIPS](#)

URL Filtering

URL filtering allows administrators to manage internet usage by preventing access to inappropriate websites using a customizable combination of blocklists and allowlists.

The RUCKUS URL filtering implementation uses a third-party web classification system that groups a wide variety of internet domains into various levels of inappropriate content, and allows flexible control according to the deployment environment.

Each website is categorized into one of the 83 categories. To find out which category a website falls into, see the Webroot BrightCloud Server site lookup tool (<https://www.brightcloud.com/tools/url-ip-lookup.php>).


To deploy URL filtering, you must create a URL filtering profile using either one of the preset category groups or a customized selection of categories. Once a profile is created, you can apply it to one or more WLANs.

There are four pre-defined category groups and one custom category group:

- **No adult content:** No adult content or nudity.
- **Clean and safe:** No adult content plus no malware, spyware, phishing, botnets or spamware.
- **Child and student friendly:** Clean and safe plus no alcohol, intimate apparel, dating, or weapons.
- **Strict:** Child and student friendly plus no streaming media, personal storage and games.
- **Custom:** Select the categories of traffic to block from the list.

Once enabled, you can view lists of the top URLs blocked by the system, top clients attempting to visit restricted domains, top allowed URLs and content categories by traffic volume, and other useful metrics from the URL Filtering Summary tab.

Figure 1. URL Filtering

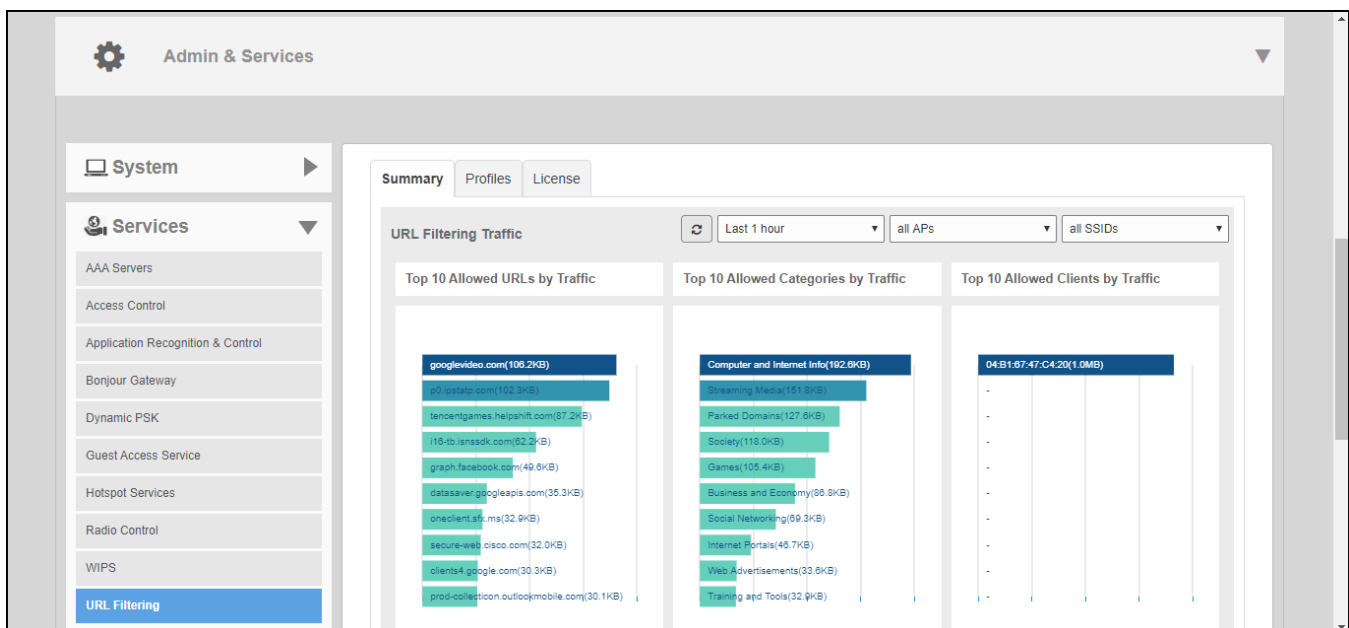


Parent topic: [Services](#)

Creating a URL Filtering Profile

You must create a URL filtering profile before you can apply the profile to a WLAN or to a user role. To create a URL filtering profile:

1. Go to **Admin & Services Services > URL Filtering**.
2. Click the **Profiles** tab.
3. Click **Create**. The Create New form appears.

Figure 1. Creating a URL Filtering Profile

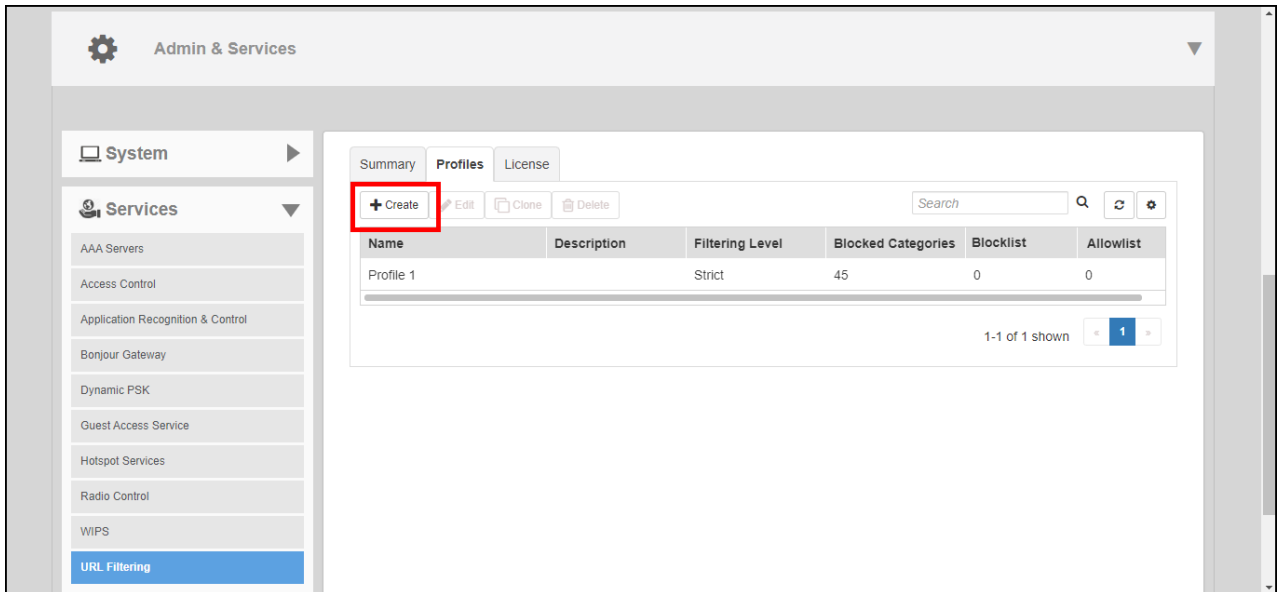

4. Enter a **Name** and optionally a **Description** for this profile.
5. Select one of the content filtering category groups, in increasing order of strictness, or select **Custom**, and select any number of individual categories.

Figure 2. Selecting Level of Strictness

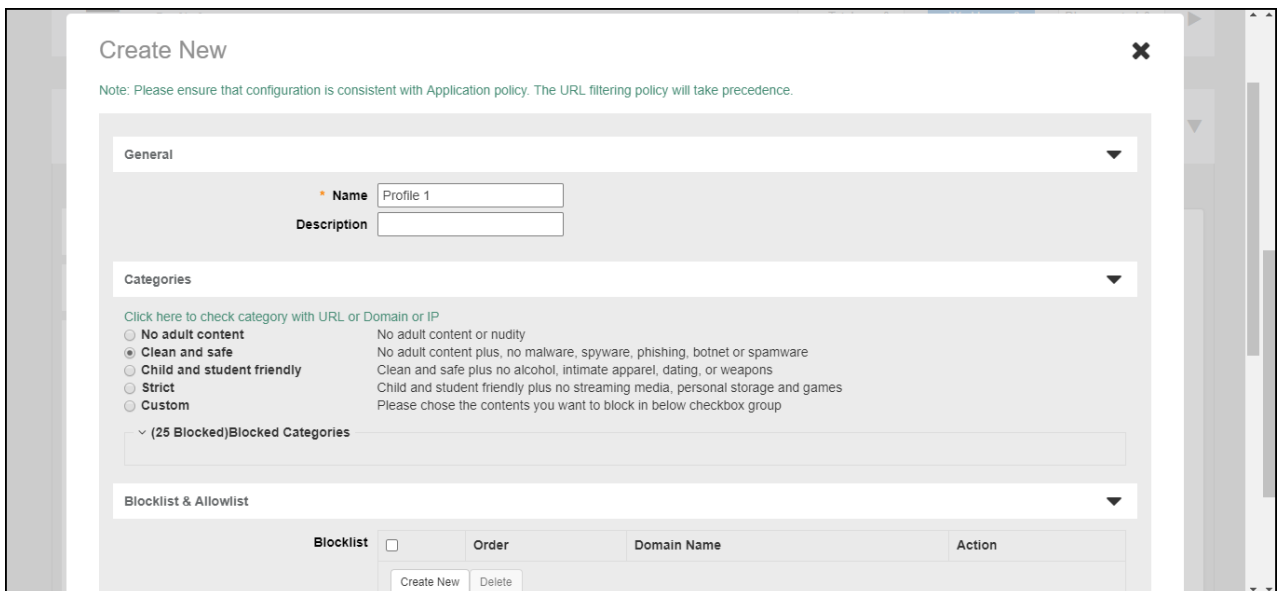


Figure 3. Blocklisting or Allowlisting a Specific URL

Click here to check category with URL or Domain or IP

☐ No adult content
☒ Clean and safe
☐ Child and student friendly
☐ Strict
☐ Custom

No adult content or nudity
 No adult content plus, no malware, spyware, phishing, botnet or spamware
 Clean and safe plus no alcohol, intimate apparel, dating, or weapons
 Child and student friendly plus no streaming media, personal storage and games
 Please chose the contents you want to block in below checkbox group

▼ (25 Blocked) Blocked Categories

Blocklist & Allowlist ▼

Blocklist	Order	Domain Name	Action
☐			
Create New Delete			

Allowlist	Order	Domain Name	Action
☐			
Create New Delete			

Safe Search ▼

Google Safe Search ☐ Enable Google Safe Search
 YouTube Safe Search ☐ Enable YouTube Safe Search
 Bing Safe Search ☐ Enable Bing Safe Search

- Optionally, in Blocklist & Allowlist, you can add custom URLs to either block or allow. Allowlist and blocklist entries override the rules configured above. A maximum of 16 blocklist and 16 allowlist entries can be created per profile.
- Optionally, in Safe Search, enable or disable "Safe Search" functionality from Google, Youtube, or Bing.
- Click **OK** to save your changes. A maximum of 32 profiles can be created.

Parent topic: [URL Filtering](#)


Applying a URL Filtering Policy to a WLAN

Once a URL filtering policy has been created, you can apply it to your wireless networks using the following procedure.

To apply a URL filtering policy to a WLAN:

- Go to **WiFi Networks**, select the WLAN you would like to configure, and click **Edit**.
- Scroll down and expand the **Advanced Options** section.
- Click the **Access Control** tab.
- In URL Filtering, select **Enable** and choose a **URL Filtering Profile** from the drop-down list. Alternatively, click the + (Create New) icon to create a new profile and apply it to this WLAN.
- Click **OK** to save your changes.

Figure 1. Enabling URL filtering for a WLAN

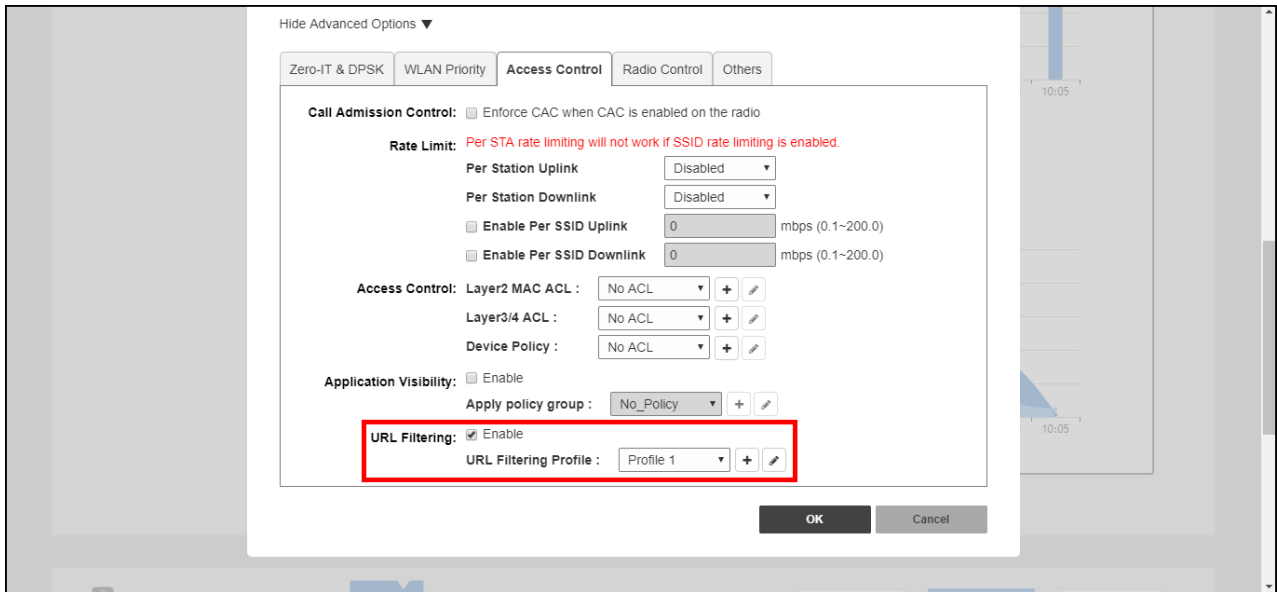


Parent topic: [URL Filtering](#)

Working with URL Filtering Licenses

URL filtering service requires an active URL filtering license to function. URL filtering licenses can be purchased from RUCKUS partners and distributors, and a temporary license is also available to allow customers to try out the service for a limited time of 90 days before purchasing.

Within 90 days, a valid URL filtering license that is greater or equal to the number of connected APs must be loaded; otherwise, URL filtering will be disabled until a valid license is loaded.

Figure 1. URL Filtering License Warning Message

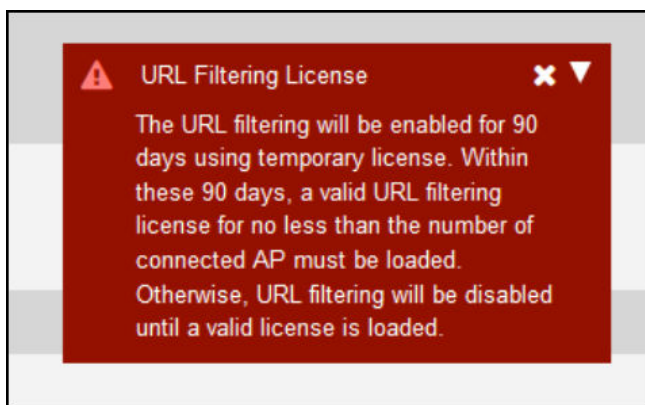


Complete the following steps to manage URL filtering licenses.

1. Go to **Admin & Services > Services > URL Filtering**.
2. Click the **License** tab and select one of the following options:
 - **Update Services By File:** Import a new locally saved license file.

- **Renew Services Online:** Connect to the RUCKUS license server to download a license file.
- **Show Details:** Select the license file from the list and click **Show Details** to view the license expiration details.

Figure 2. Working with URL Filtering Licenses

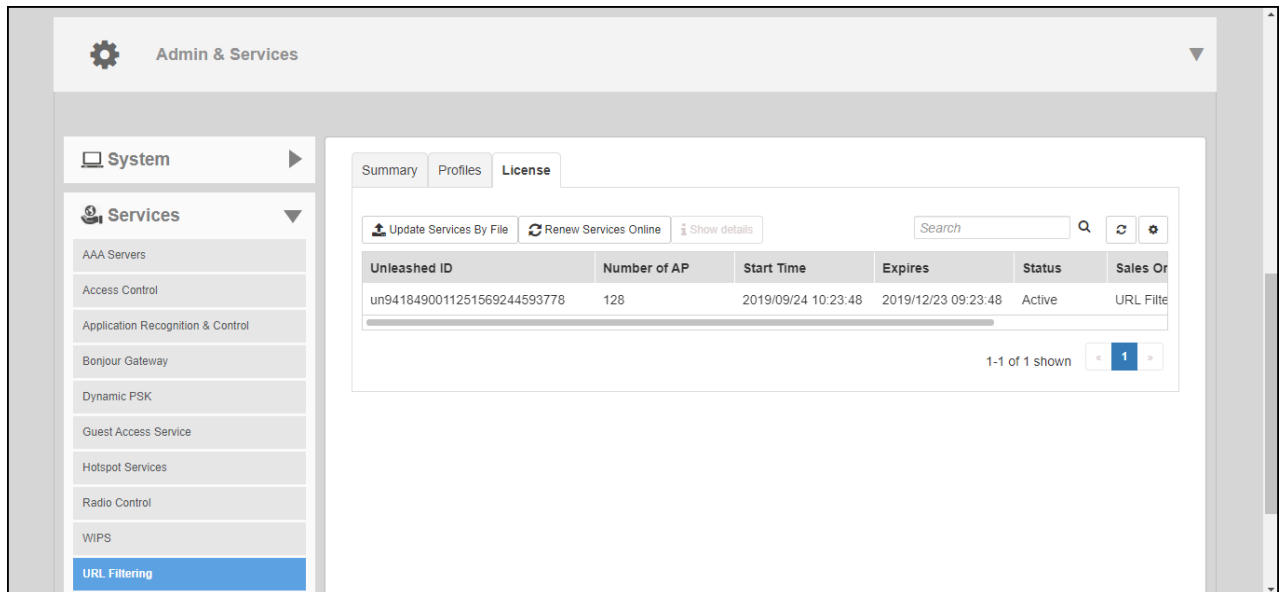

Parent topic: [URL Filtering](#)

Wi-Fi Calling

The RUCKUS Unleashed Wi-Fi Calling feature aims to provide better call quality by reducing latency, jitter, and roaming delays for voice calls over Wi-Fi.

To achieve this, the RUCKUS Unleashed access point must perform identification, classification, and marking of voice calls when **Wi-Fi Calling** is enabled and a call is made from a supported client device. Once a call is identified, voice packets are classified and marked to be delivered over an Internet Protocol Security (IPsec) tunnel from the client, through the AP and the controller, and on to the mobile operator's data center.

The Wi-Fi Calling feature provides the following benefits:

- Faster inter-AP roaming using RUCKUS SmartRoam along with standards-based 801.11r/k technologies minimize IPsec session timeouts or teardowns to avoid call drops.
- Voice-aware SmartCast prioritization helps maintain sustained call quality even when there are other clients generating regular Internet packet data.
- A voice call on one SSID will be prioritized in the voice queue over Internet packet data from other SSIDs.

The process consists of the following steps:

1. End user turns on Wi-Fi Calling in their smartphone menu, or turns on Wi-Fi and connects to the wireless network.
 2. Client initiates a DNS lookup to the domain name of the Evolved Packet Data Gateway (ePDG) (for example, T-Mobile: ss.epdg.epc.mnc260.mcc310.pub.3gppnetwork.org).
- 🔗 **Note:** The ePDG on an LTE network acts as an interface between the user device and the non-trusted 3rd Generation Partnership Project (3GPP) access network (for example, Wi-Fi hostpot), providing a security mechanism through a secure IPsec tunnel that is established with the user device.
3. Client initiates an Internet Key Exchange version 2 (IKEv2) handshake towards the ePDG to authenticate and set up an IPsec tunnel.
 4. Client initiates an IPsec session towards the ePDG.
 5. User is notified that Wi-Fi Calling is activated.
 6. User initiates a voice call. All voice traffic is tunneled to the ePDG within the IPsec tunnel.

Parent topic: [Services](#)

Creating a Wi-Fi Calling Profile

At least one Wi-Fi Calling profile must be associated to any WLAN with Wi-Fi Calling enabled. The system supports a total of ten Wi-Fi Calling profiles. Five profiles are provided by default, and you may create up to five additional profiles.

Complete the following steps to create a Wi-Fi Calling profile.

1. Select **Admin & Services** > **Services** > **Wi-Fi Calling** and click the **Profiles** tab.

By default, the **Profiles** tab displays five preconfigured, editable carrier profiles (**ATT**, **Verizon**, **TMobile**, **Sprint**, and **Others**).

🔗 **Note:** The system will retain the Wi-Fi Calling profile names from earlier versions when migrating to Unleashed 200.15. If the previous calling profile name is the same as any of the default profiles, the system will display the default profile as profile name_default.

2. Click **Create** to create a new profile.
3. In the **Create New** dialog box, enter the following fields to create a new profile:
 - **Name:** Enter a name for the profile.
 - **Description:** Optionally, enter a description of the profile.

- **QoS Priority:** Select a priority from the list (typically, **Voice** is selected for the highest QoS priority).
- **Evolved Packet Data Gateway (ePDG):** Click **Create New** to create a new ePDG entry. Enter the **Domain Name** and optionally the **IP Address**, and click **Save** to save the entry. Up to five ePDG entries can be created for a Wi-Fi Calling profile.

Figure 1. Creating a Wi-Fi Calling Profile

Rate Limit: Per STA rate limiting will not work if SSID rate limiting is enabled

Per Station Link: Disabled

Create New

General

Name: AT&T

Description: AT&T

QoS Priority: Voice

Evolved Packet Data Gateway (ePDG)

Order	Domain Name	IP Address	Action
1	internal.att.com	129.192.166.10	Save Cancel

Create New Delete

OK Cancel

- Click **OK** to save the new Wi-Fi Calling profile.

Parent topic: [Wi-Fi Calling](#)

Enabling Wi-Fi Calling for a WLAN


After a Wi-Fi Calling profile has been created, you must configure each WLAN with one or more profiles to enable the feature for the WLAN.

Note: A WLAN can support up to five Wi-Fi Calling profiles.

Complete the following steps to enable Wi-Fi Calling for a WLAN.

- Select the WLAN that will support Wi-Fi Calling, and click **Edit**.
- Click **Show Advanced Options > Access Control**.
- For the **WiFi Calling** option, click **Edit** to select Wi-Fi Calling profiles.


Figure 1. Enabling Wi-Fi Calling for a WLAN

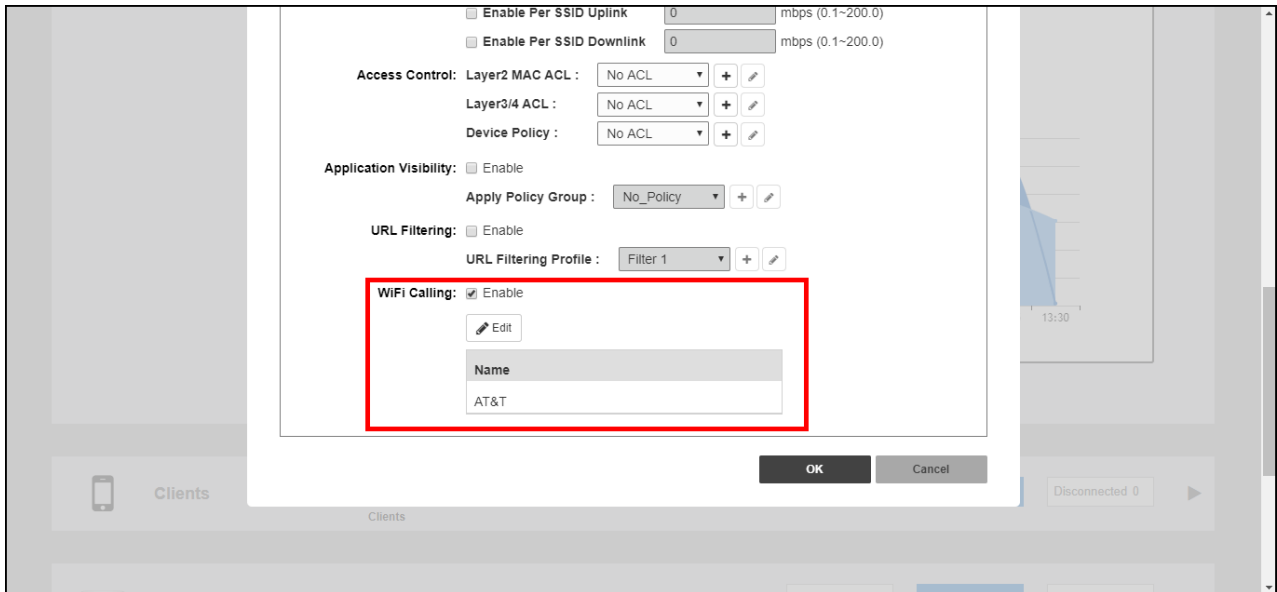

The **Select Wi-Fi Calling Profiles** dialog box is displayed.

4. Select a profile from the list of **Available Profiles**, click the right arrow to move it to the list of **Selected Profiles**, and click **OK** to save your changes.

Figure 2. Adding Wi-Fi Calling Profiles for the WLAN

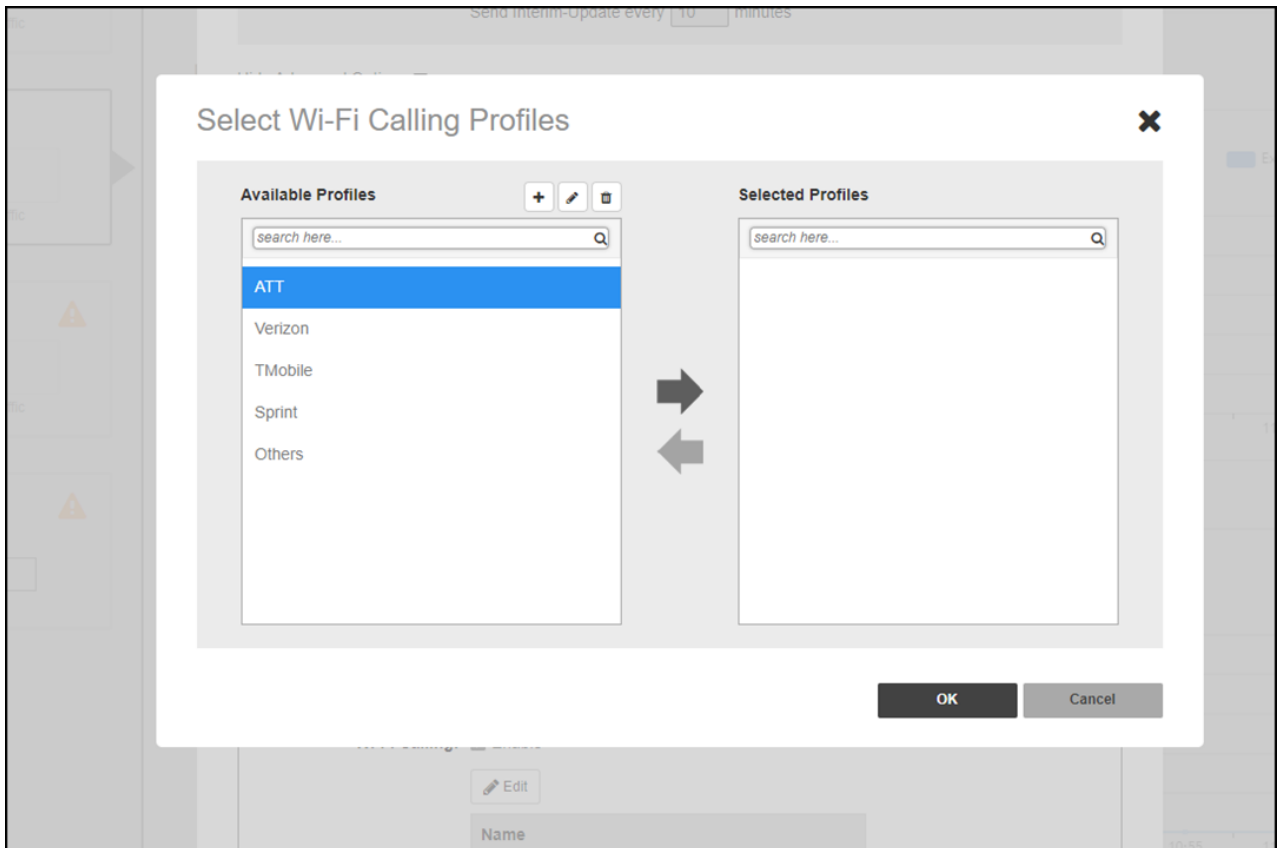

5. Click **OK** to save the changes in the **Advanced Options** window.

Parent topic: [Wi-Fi Calling](#)

Tunnel Configuration

Only WLANs that are enabled with Tunnel mode are affected.

Refer to [Configuring Advanced WLAN Options](#) in the WLAN configuration section for information on enabling Tunnel mode.


Complete the following steps to configure data encryption and filtering for tunneled WLANs.

1. From the dashboard, select **Admin & Services** > **Services**.
2. Scroll down to the bottom of the page and locate the **Tunnel Configuration** section.
3. Select the check boxes next to the options you want to enable.

- **Enable tunnel encryption for tunneled traffic:** By default, when WLAN traffic is tunneled to Dedicated Master, only the control traffic is encrypted while data traffic is unencrypted. When this option is enabled, the Access Point will decrypt 802.11 packets and use an AES-encrypted tunnel to send them to Dedicated Master.
- **Block multicast traffic from network to tunnel:** Prevents [all/non-well-known] multicast traffic from propagating on the tunnel.
- **Block broadcast traffic from network to tunnel except ARP and DHCP:** Prevents all broadcast traffic other than Address Resolution Protocol and DHCP packets.
- **Enable Proxy ARP of tunnel WLAN with rate limit threshold:** Reduces tunnels. When Dedicated Master receives a broadcast ARP request for a known host, it acts on behalf of the known host to send out unicast ARP replies at the rate limit it will forward it to the tunnel to all APs according to the rate limit threshold set in the Packet Inspection Filter program (like Wireshark).

4. Click **Apply** in the same section to save your changes.

Figure 1. Setting Tunnel Configuration Parameters for all WLANs with Tunnel Mode Enabled

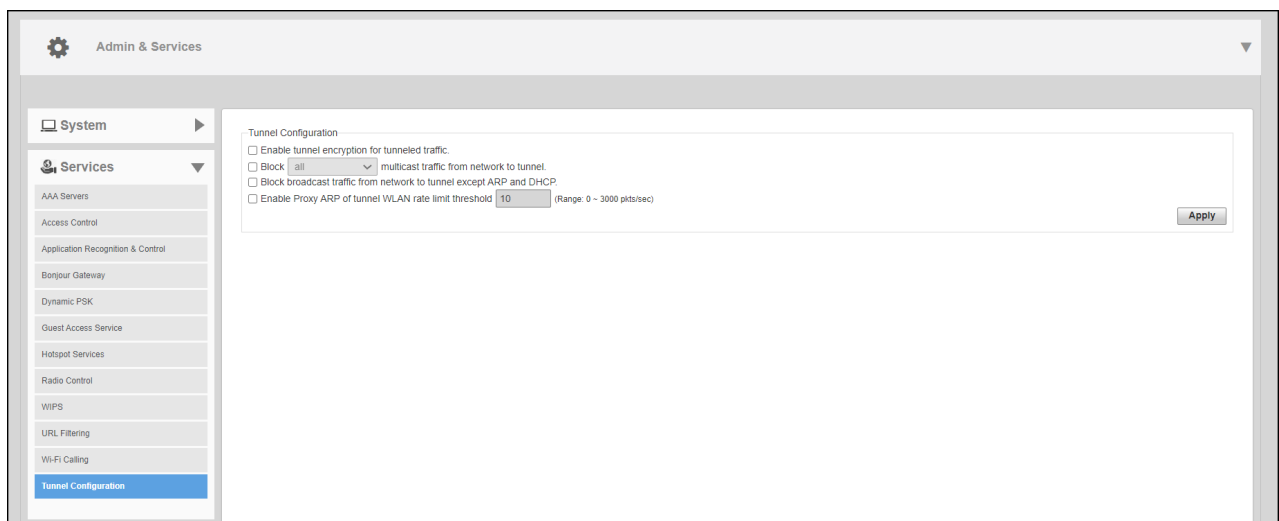

Parent topic: [Services](#)

Administration Settings

Administration settings that can be configured from the **Admin & Services > Administer** page include admin name/password, system backup and restore, upgrade, diagnostics and network management options.

Parent topic: [Configuring Admin & Services Settings](#)

Preferences

Select **Administration > Preferences** page to set the user interface language and to change the admin login name and password.

Configure the following admin preferences settings and click **Apply** to apply your changes:

1. Under **Language**, select the web interface language.
2. Under **Administrator Name/Password**, select the **Authenticate using the admin name and password** option for standard login using an admin username and password. This is the default option.
3. Select the **Authenticate with Auth Server** option, and select a Active Directory server from the list.

To enable this option, a valid Microsoft Active Directory AAA server object must be created so that RUCKUS Unleashed can authenticate users to the AD server. If enabled, optionally enable **Fallback to admin name/password if failed** to allow standard login if the AD authentication fails.

4. Under **Setup Password Recovery**, select the **Enable Password Recovery** check box. Enter admin name and current password to authenticate password recovery. Enter a security email, security question, and security answer that can be used to recover the admin password in the event that the password is lost.

Figure 1. Configuring Administrator Preferences

The screenshot displays the 'Admin & Services' configuration page. On the left sidebar, under 'Administration', the 'Preferences' option is selected. The main content area is divided into two sections:

- Language:** A section with a dropdown menu currently set to 'English'.
- Administrator Name/Password:** A section containing:
 - Two radio buttons: 'Authenticate using the admin name and password' (selected) and 'Authenticate with Auth Server'.
 - A dropdown menu for 'Auth Server' showing 'Ruckus AD'.
 - A checked checkbox for 'Fallback to admin name/password if failed'.
 - Fields for 'Admin Name*' (containing 'admin'), 'Current Password*', 'New Password' (with a hint 'Remain empty will keep current password'), and 'Confirm New Password' (with the same hint).
 - An 'Apply' button at the bottom right of this section.
- Setup Password Recovery:** A section at the bottom with an unchecked checkbox for 'Enable Password Recovery' and an 'Apply' button.

Figure 2. Enabling Password Recovery

Parent topic: [Administration Settings](#)

Backup and Restore

Select **Administration > Backup & Restore** to configure options for backing up your current configuration, restoring the configuration from a previous backup file, or restoring the Master AP to factory settings.

Note: The backup is a small encrypted file with a .bak extension saved to the location of your choosing.

Complete the following steps to restore settings from a backup file.

1. Click **Browse** to select your backup file and click **Open**.
2. After the .bak file has been uploaded to RUCKUS Unleashed, select one of the three restore options for your RUCKUS Unleashed network:
 - **Restore everything**
 - **Restore everything except system name and IP address settings**
 - **Restore only WLAN settings, access control lists, roles, users, country code and system time**
 - **Restore ICX Switches List**

Figure 1. Configuring Backup and Restore Options


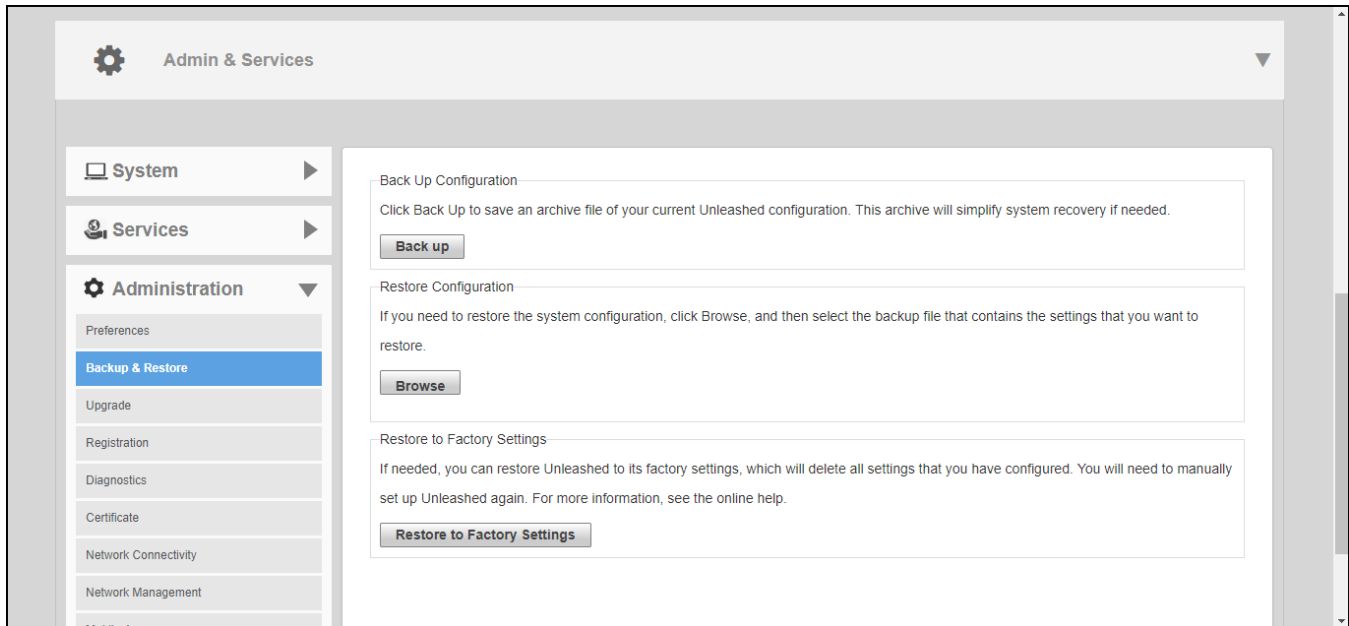


Figure 2. Choosing a Restore Type

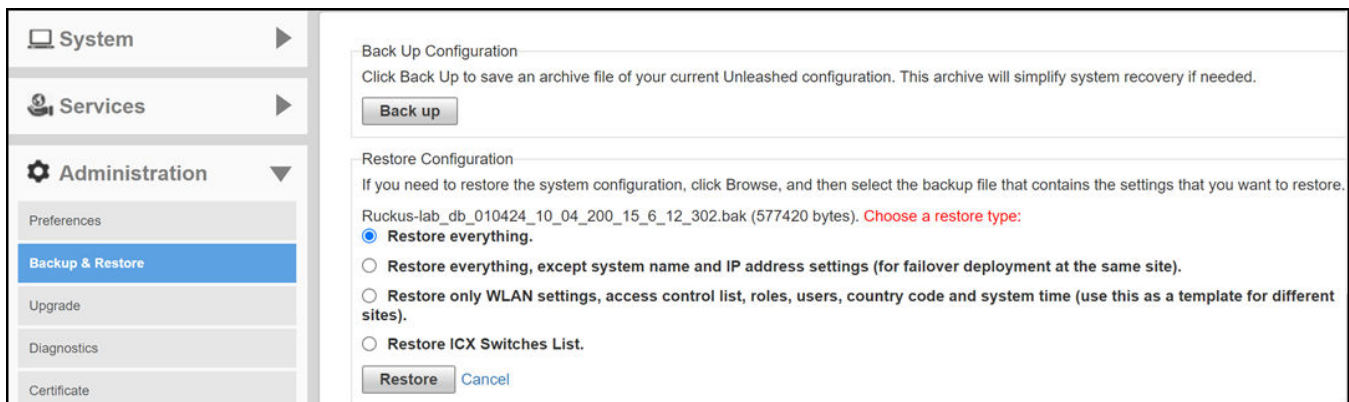

Parent topic: [Administration Settings](#)

Restore to Factory Settings

In certain extreme conditions, you may want to re-initialize your Master AP and reset it to the factory default state. Once the Master has been reset to factory default state, all AP logs, client logs, application data and other records, wireless networks, user accounts, and any other configuration settings must be reconfigured.


Complete the following steps to reset your Master AP to factory default settings:

1. Go to **Admin & Services > Administer > Backup & Restore**.
2. Click **Restore to Factory Settings**.
3. Click **OK** to confirm.

The **Restoring Unleashed to factory settings** progress screen appears. Wait for this progress screen to finish before attempting to login again.

4. Repeat the initial setup and configuration procedures as described in [Setting Up an Unleashed Wi-Fi Network](#).

Figure 1. Restore Factory Settings Progress Screen

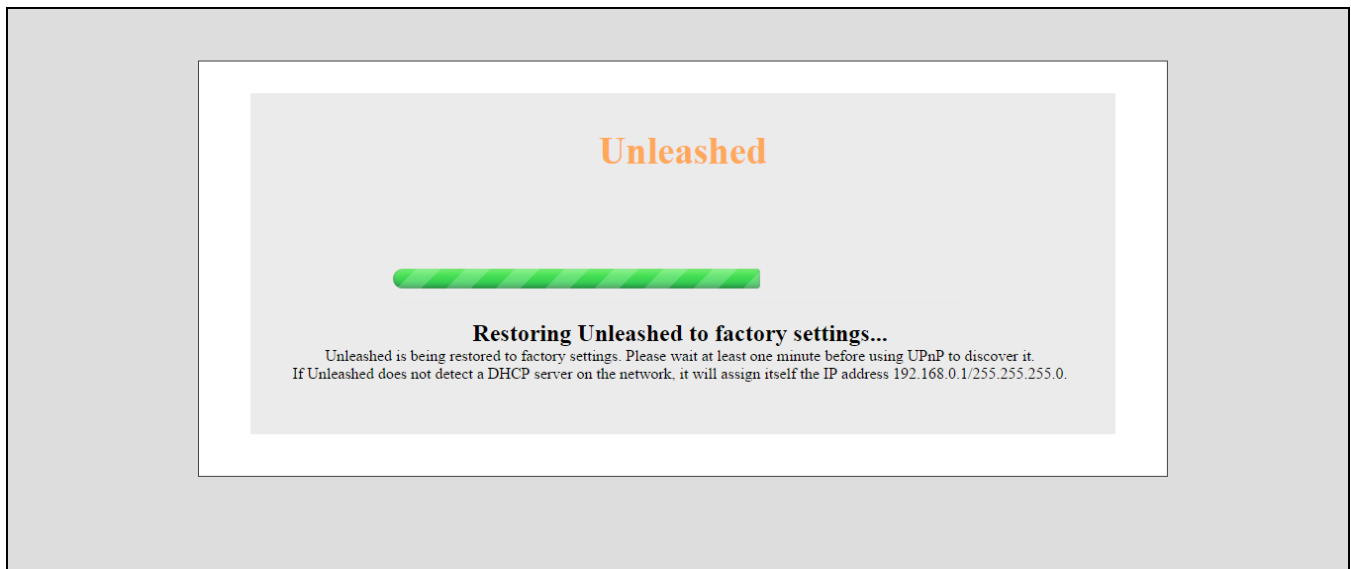

Alternate Factory Default Reset Method

If you are unable to complete the software-based resetting of RUCKUS Unleashed to factory default, you can use the following "hard restore" method.

Note: Do not disconnect the Master AP from its power source until this procedure is complete.

1. Locate the **Reset** pin hole on the rear panel of the Master AP.
2. Insert a straightened paper clip in the hole and press for at least 6 seconds.

After the reset is complete, the PWR LED will initially be solid red, indicating bootup is in process. The LED then blinks green, indicating that the system is in the factory default state.

After you complete the Setup Wizard, the PWR LED will be steady green.


Parent topic: [Backup and Restore](#)

Rediscovering the Unleashed AP on the Network

If you do not know the IP address, you can rediscover an Unleashed AP on the network using UPnP or Bonjour service discovery.

To discover an Unleashed AP using UPnP (Windows clients only), go to the **Network** section of Windows Explorer (**Start > Network** or **Start > Computer > Network**). Locate the Unleashed device in the Network Infrastructure section. Double-click the icon to launch the web UI, or right-click and select **View device webpage**, or type the address displayed into your browser's navigation bar.

Figure 1. Discovering Unleashed using UPnP in Windows

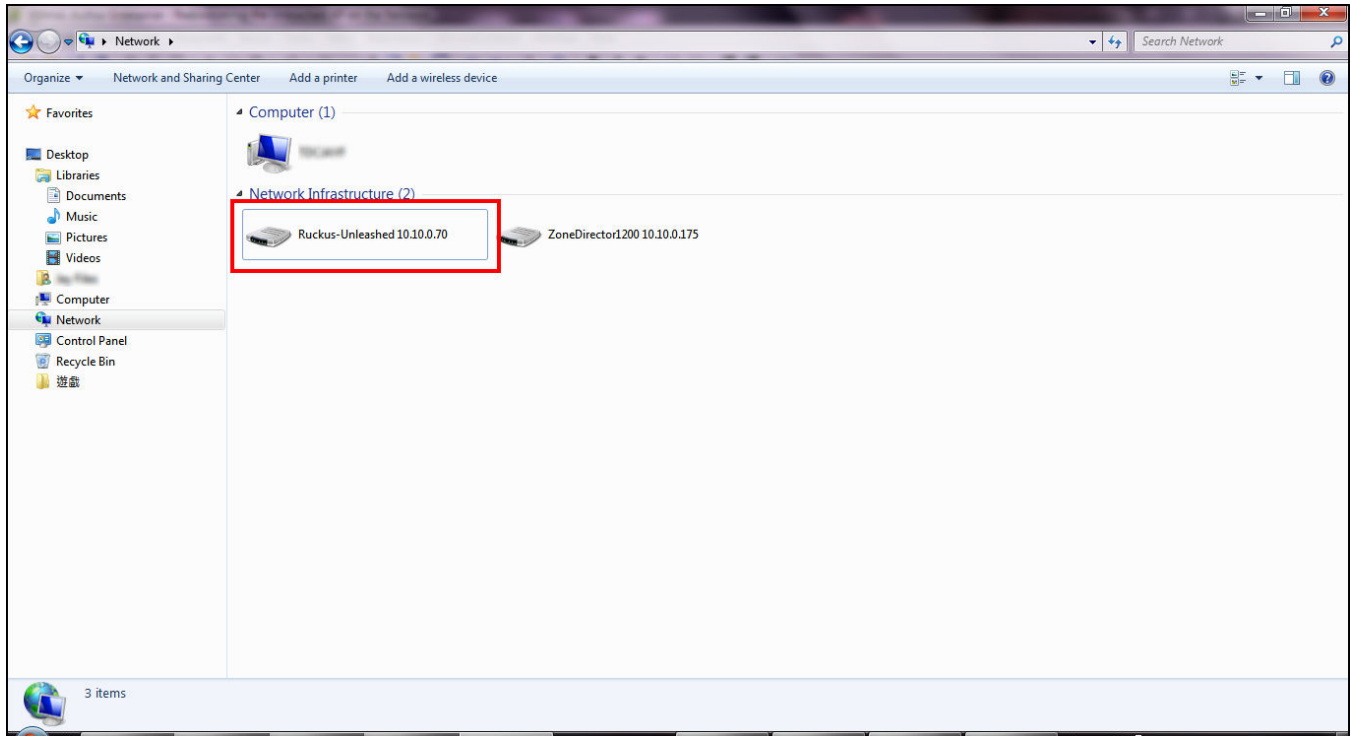

Additionally, Unleashed also supports Bonjour service discovery. Bonjour discovery allows devices running operating systems other than Windows (such as iOS and Android) to discover the Unleashed Master AP. This allows mobile clients to manage the system using the Unleashed Mobile App in addition to via web browser.

Parent topic: [Backup and Restore](#)

Upgrade

The **Upgrade** page displays the current firmware version and provides an **Upgrade** button which can be used to download the latest firmware and perform an upgrade of the entire Unleashed network.

Unleashed provides two methods of upgrading the firmware:

- [Online Upgrade](#)
- [Local Upgrade](#)

Parent topic: [Administration Settings](#)

Online Upgrade

Use the online upgrade method to upgrade your RUCKUS Unleashed network with the latest firmware available from the RUCKUS Unleashed firmware server.

Complete the following steps to upgrade the Master AP and all connected member APs using the online upgrade method:


1. Go to **Admin & Services > Administer > Upgrade**.
2. Select **Online Upgrade**.
3. Under **Select Firmware Version**, select one of the available firmware versions.

 **Note:** You can rollback to the previous image version and restore the configuration of the previous version. The roll back syncs automatically to all member APs. If the old Master AP reboot fails and a member AP becomes the Master AP, then the new Master AP can still roll back to the previous version with the corresponding configuration.

 **Note:** Optionally, select **Auto reboot the system** to automatically reboot each AP after the firmware has been deployed to the AP. By default, this option is enabled. You may want to disable this option if you prefer to wait until all APs have the new firmware before rebooting them all at once. That is, if you have multiple Unleashed AP models that require different firmware image files, you can either select the **Auto reboot the system** option and wait until all the APs have finished downloading the firmware and the entire Unleashed network is automatically rebooted, or you could choose to wait until all the APs have finished downloading the firmware and click **Reboot** to reboot the entire Unleashed network.


4. Click **Upgrade** to begin upgrading the APs shown in the list.

Figure 1. Configuring Online Upgrade

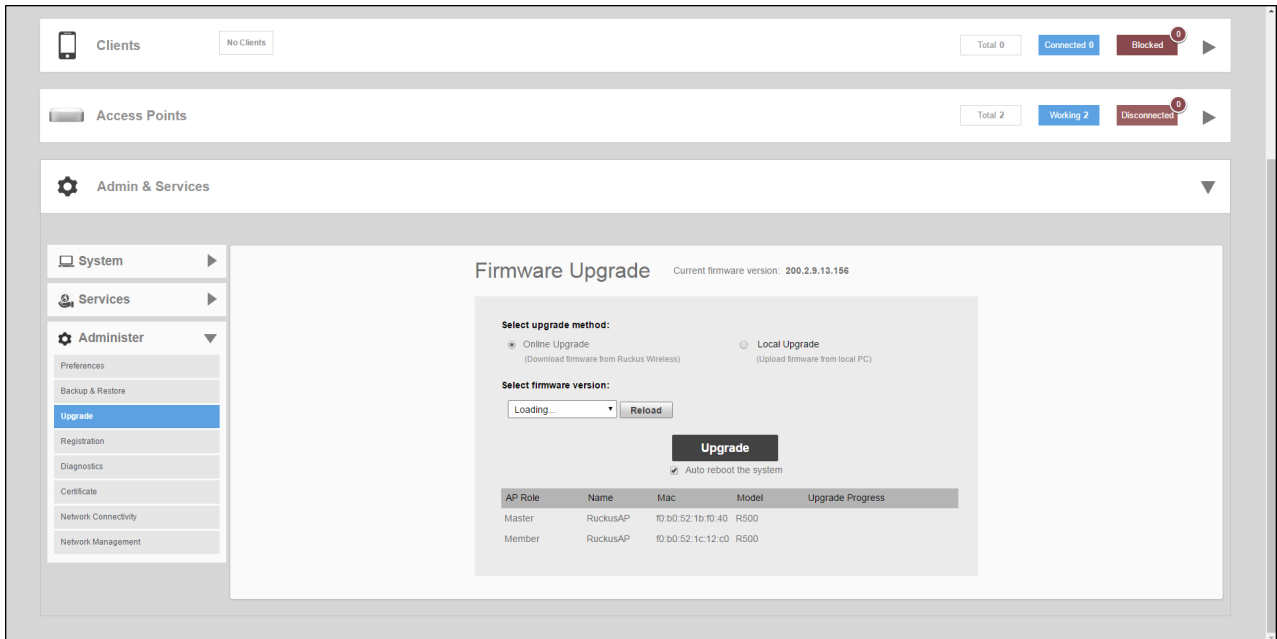


The **Upgrade Progress** column displays the progress for each AP. Once completed, the column will display "Success 100%" next to each AP for which the upgrade was successful.

Figure 2. Successful Online Upgrade

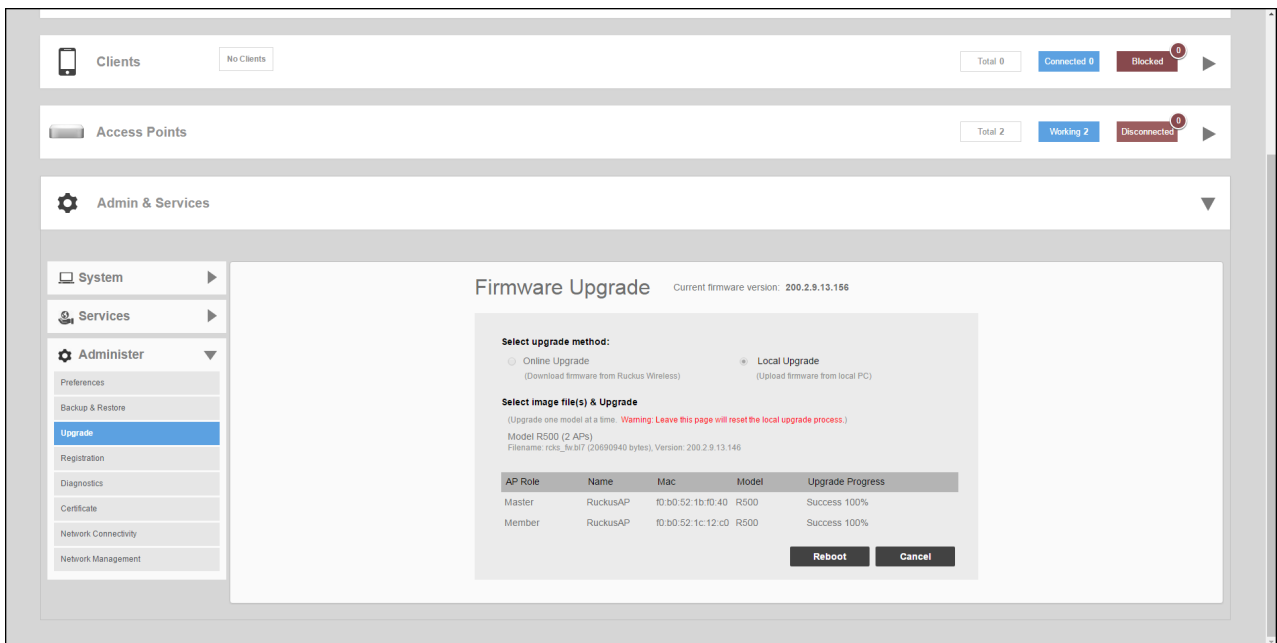

- When all of the APs in the list display "Success 100%" in the **Upgrade Progress** column, click **Reboot**. The **Rebuilding the Unleashed Network** progress screen appears.

Figure 3. Rebuilding the Unleashed Network Progress Screen

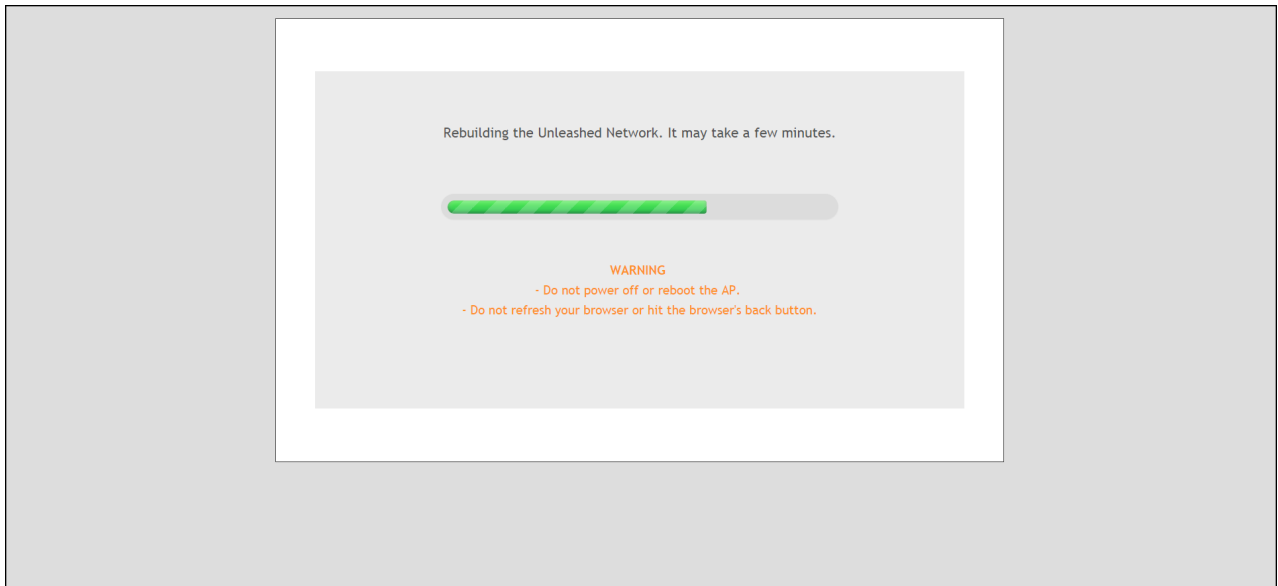

After the process is completed, you are redirected to the login page.

6. Log in and go to **Admin & Services > System > System Info** to confirm the new software build number.

Parent topic: [Upgrade](#)


Local Upgrade

Use the Local Upgrade method to upgrade the network using firmware files that you have downloaded from the RUCKUS Support site.

To upgrade the Master AP and all connected member APs using the Local Upgrade method, use the following procedure:

1. Select **Admin & Services > Administer > Upgrade**.

Figure 1. The Upgrade Page

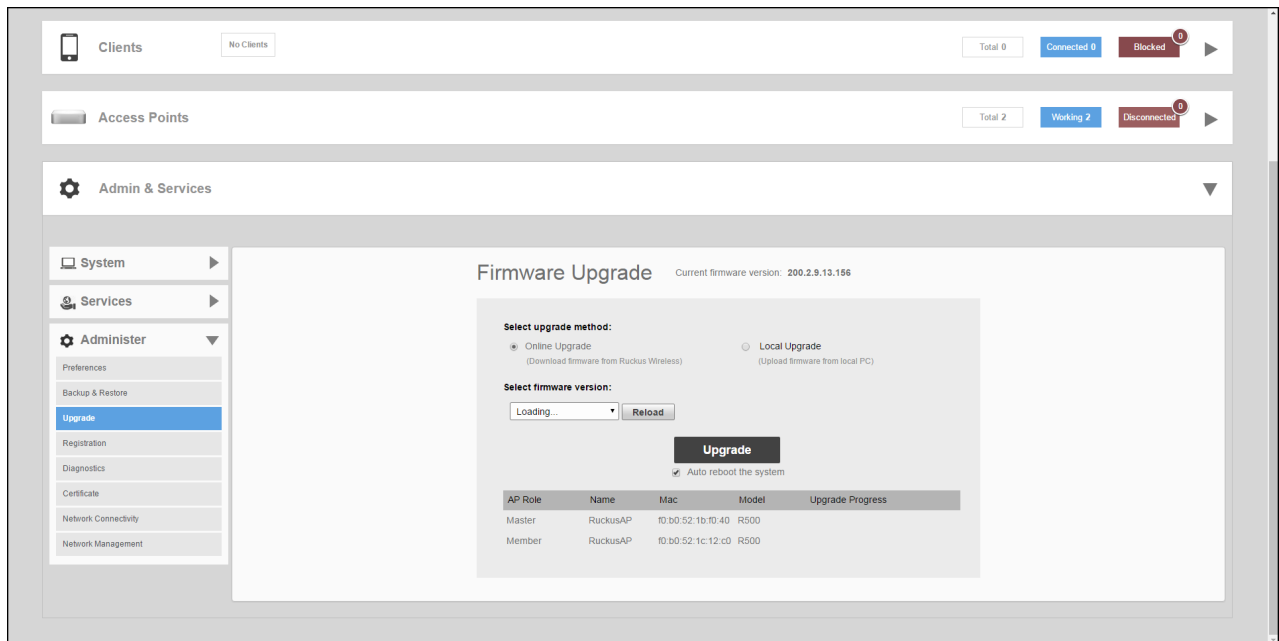


2. Select **Local Upgrade** as the upgrade method.
3. Click **Browse** to locate the firmware image file on your local computer.

RUCKUS Unleashed will perform a check to make sure it is the proper image for the AP model before proceeding.


- Note:** Each AP model has a different firmware image file that must be loaded onto the Master and then distributed to all member APs of that model. So, for example, if you have a mix of two different RUCKUS Unleashed APs, you could upgrade all the APs of one model first and then proceed to upgrade the APs of the other model, or the other way around, but you cannot upgrade both models at the same time.
- Note:** While the upgrade process will check to make sure you do not try to upgrade an RUCKUS Unleashed AP with the incorrect model firmware, there is no check to ensure that you do not upgrade/downgrade an RUCKUS Unleashed AP to a RUCKUS Solo AP (standalone) firmware image. If you do this, the AP will no longer function as an RUCKUS Unleashed AP until RUCKUS Unleashed firmware is re-loaded onto it.

Figure 2. Configuring Local Upgrade

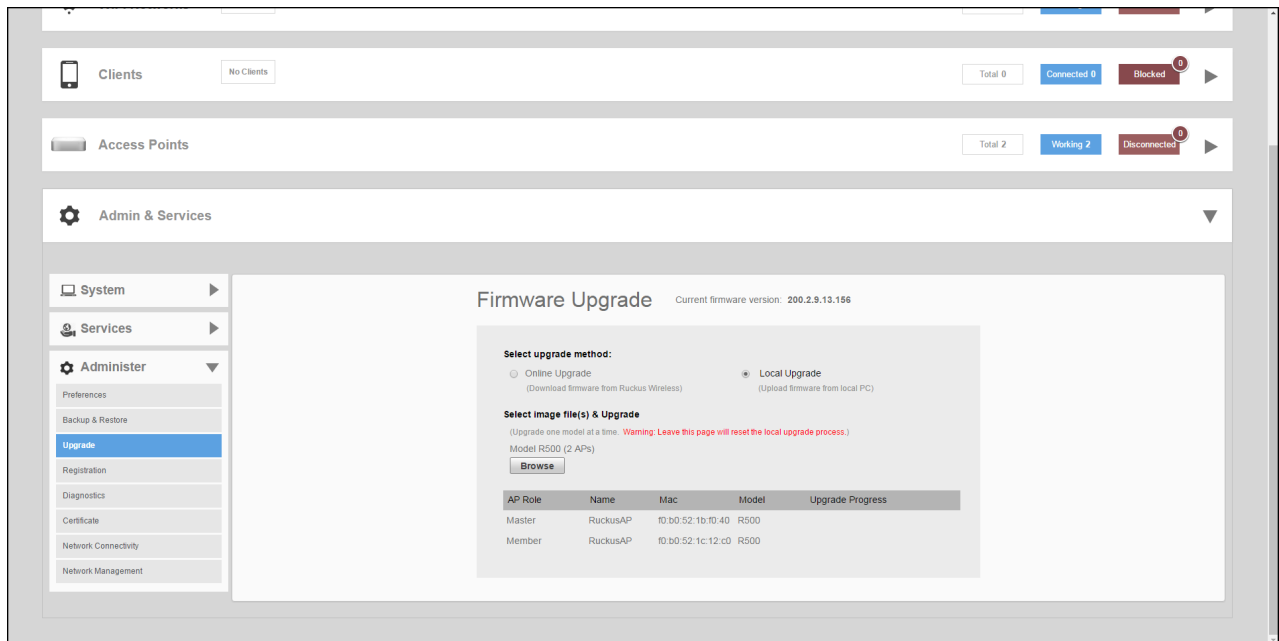


4. Click **Upgrade** to begin upgrading the APs shown in the list.
5. The **Upgrade Progress** column displays the progress for each AP. Once completed, the column will display **"Success 100%"** next to each AP for which the upgrade was successful.

Figure 3. Successful Local Upgrade

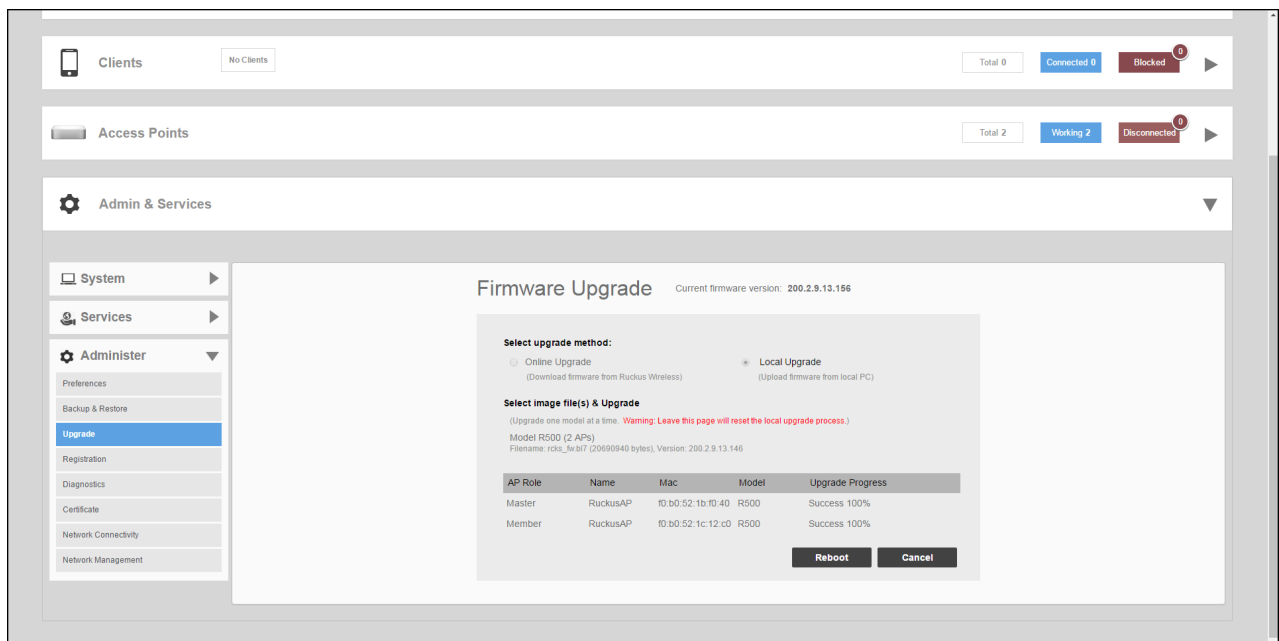

6. Repeat steps 3-5 for any additional AP models.
7. When all of the APs in the list are displayed as **"Success 100%"** in the **Upgrade Progress** column, click **Reboot**. A **"Rebuilding the Network"** progress screen is displayed. Wait until the process completes.

Figure 4. Rebuilding the Unleashed Network Progress Screen

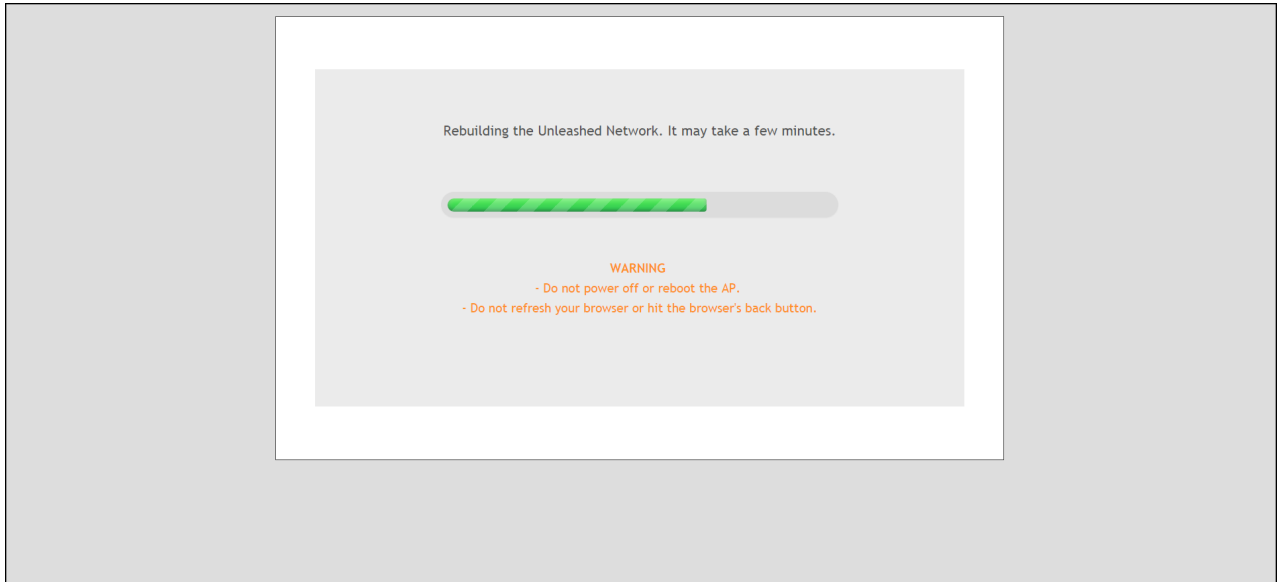


8. Once complete, you will be redirected to the login page.
9. Log in and go to **Admin & Services > System > System Info** to confirm the new software build number.

Parent topic: [Upgrade](#)

Diagnostics

The Diagnostics pages provide options for troubleshooting and diagnostics, including configuration settings for alarms, viewing system event log messages, configuring which debug information is to be collected in log files, and saving the current logs to your local computer.

Figure 1. Configuring Diagnostics Options

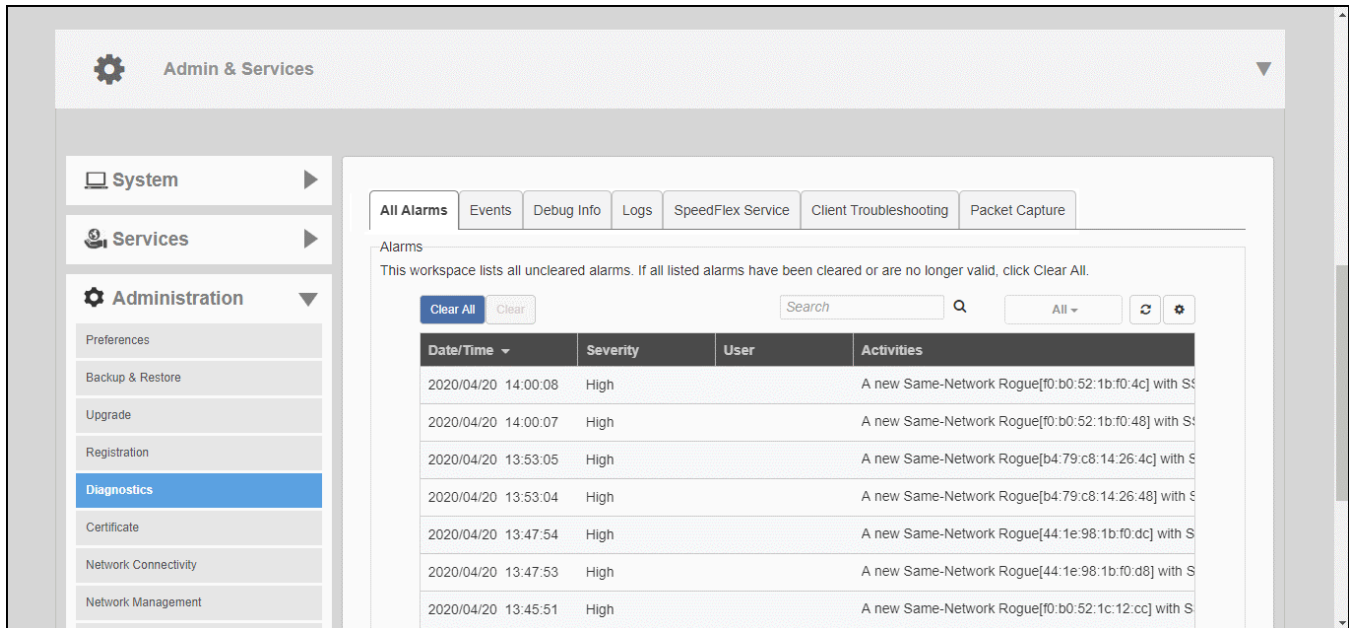

Parent topic: [Administration Settings](#)


Viewing Alarms

The All Alarms page displays a list of all recent alarms. Alarms include important events such as when an AP loses contact with the Master AP, a rogue AP is detected, an authentication server becomes unreachable, or when a Master/Member role change is detected.

To view and clear recent alarm messages:

1. Go to **Admin & Services > Administration > Diagnostics > All Alarms**.
2. To delete an alarm event from the list, select it and click **Clear**.
3. Click **Clear All** to clear all alarm events from the list.

Figure 1. Viewing a List of Alarm Event Messages

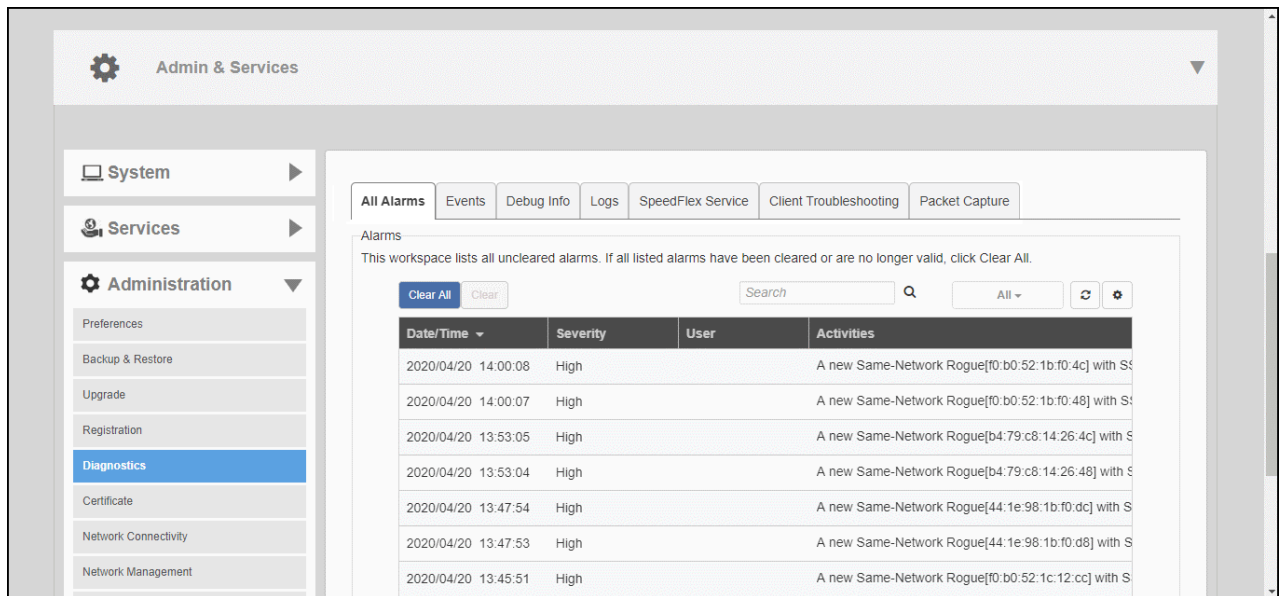

Parent topic: [Diagnostics](#)

Viewing System Event Messages


The **Diagnostics > Events** page displays the most recent records in the Master AP's internal log file.

Compared to Alarms, Event messages include less critical messages - such as when an AP changes channel, a configuration sync is performed, a new client joins the network, etc.

You can customize the level of events to display in the Events list using the **Event Log Level** setting, as follows:

- **Any:** All event log levels will be displayed.
- **Critical & Warning:** Only events whose log level is "critical" or "warning" level appear.
- **Critical Only:** Only events whose log level is "critical" will appear.

Figure 1. The Events Page

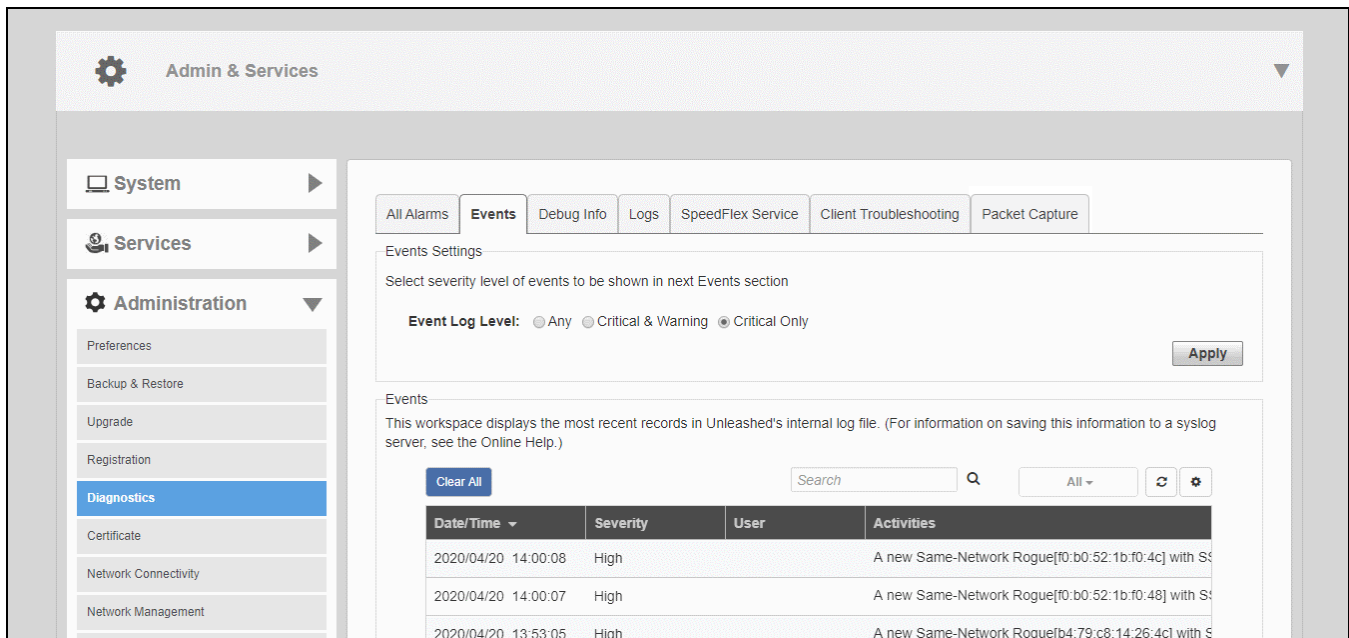

Parent topic: [Diagnostics](#)

Configuring Debug Logs

You can use the **Diagnostics > Debug Info** page to configure which debug components to include in log files and on the **Events** page.

- **Note:** Check the box **Debug log per APs or clients MAC address** and enter AP/Client info to filter debug output for a specific AP or client.


You can also save the log files using the **Save Debug Info** button. If you request assistance from RUCKUS technical support, you may be asked to supply detailed debug information from RUCKUS Unleashed.

Click the **Save Debug Info** button, and then save the file to your computer. You can then email this file to RUCKUS Support to assist with troubleshooting.

- **Note:** The Master AP's log files also contain all of the member APs' support info.

You can also allow the Master AP to automatically save log files to a specified FTP or TFTP server in the event of a controller process failure. By default, this feature is disabled. When enabled, the Master will send the core, dump, and debug files to an FTP/TFTP server before restart. This information can be very useful in debugging controller reboot issues. To enable this feature, select the check box next to **Enable upload debug logs to remote server**, select **FTP** or **TFTP**, and enter the server address only (for TFTP) or **Host, Port, Username** and **Password** (for FTP).

Figure 1. The Debug Info Page

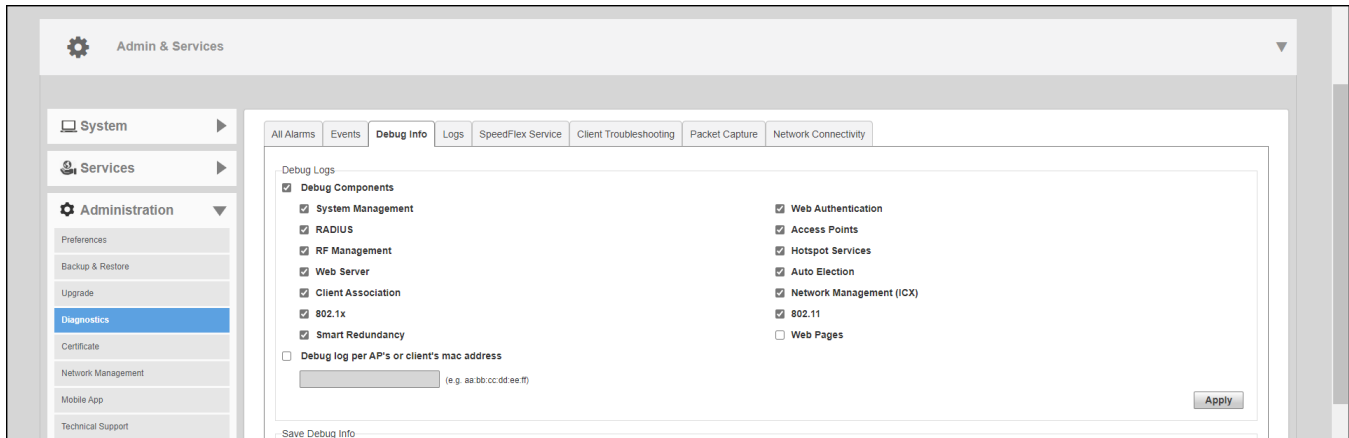


Parent topic: [Diagnostics](#)

Saving System Logs to Your Computer

The **Logs** tab provides an option to view the current system logs of the AP. Click **Save System Log** to save the current log file as a .tar file to a local computer.

Figure 1. Logs Tab

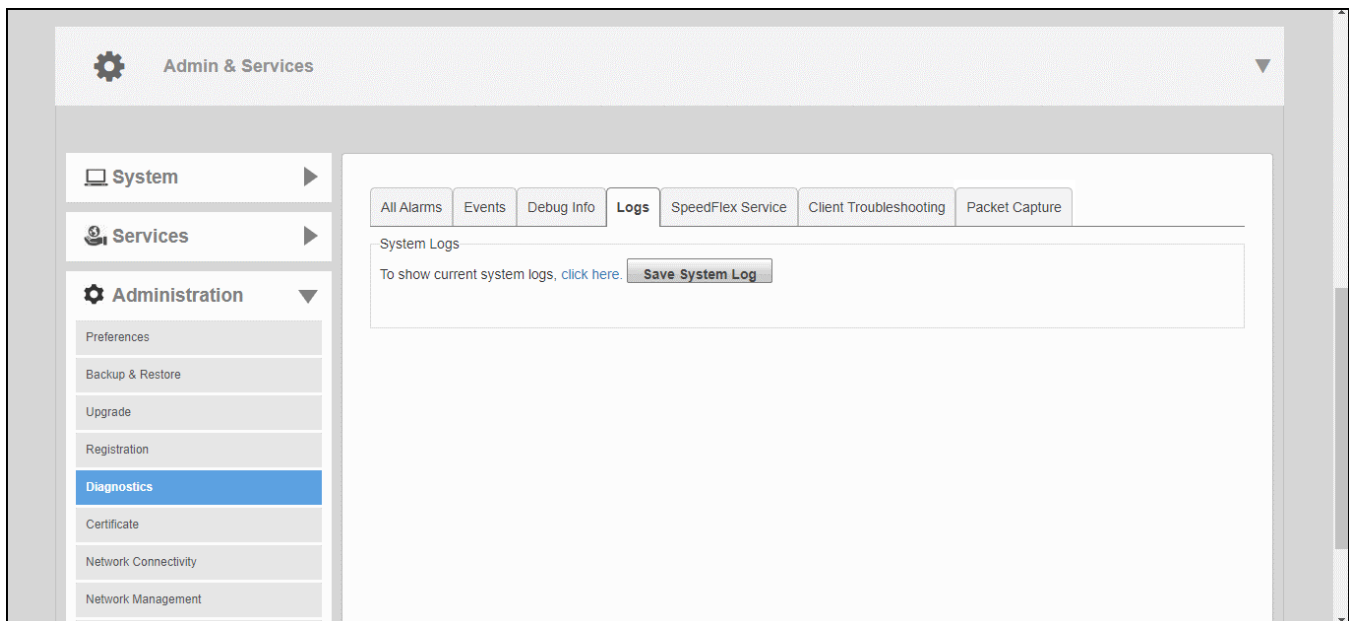

Parent topic: [Diagnostics](#)


SpeedFlex Service

SpeedFlex service (enabled by default) can be disabled to prevent mobile or web clients from performing a SpeedFlex performance test.

For more information on the SpeedFlex performance testing tool, see [Running a Speed Performance Test on a Wireless Client](#).

To disable SpeedFlex, clear the **Enable SpeedFlex Service** option and click **Apply**.

Figure 1. Enabling or Disabling SpeedFlex Service

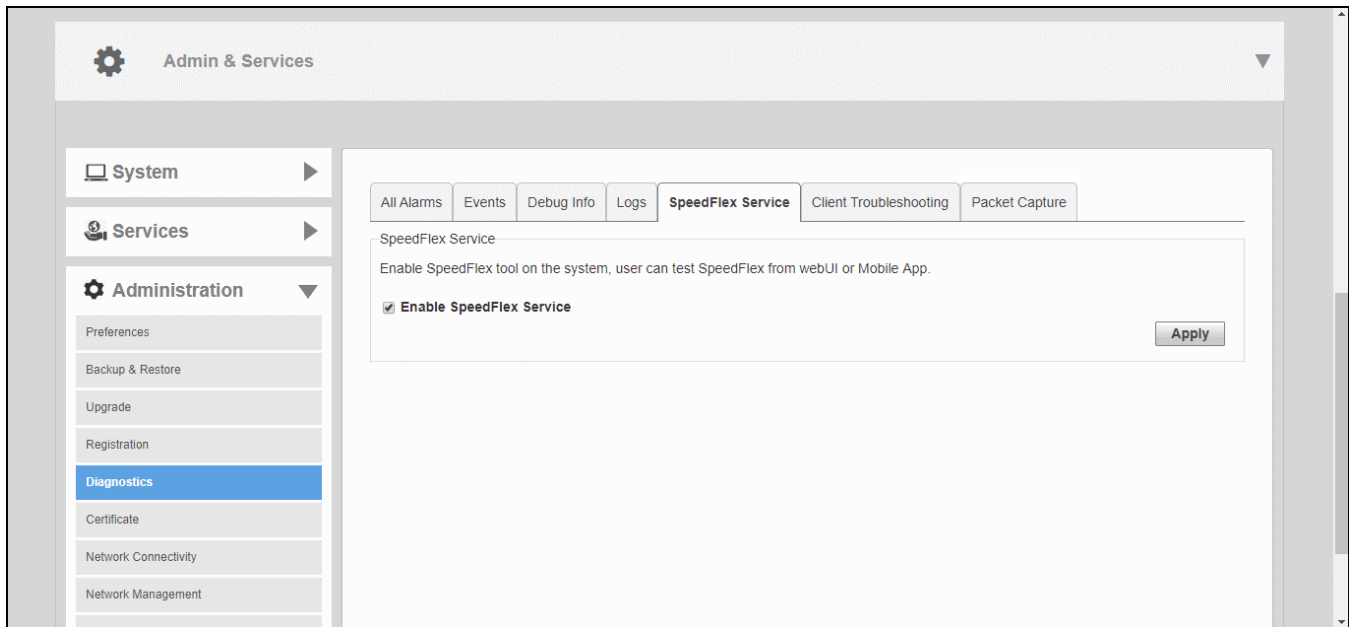

Parent topic: [Diagnostics](#)

Client Connection Troubleshooting

The client connectivity trace feature is designed to help customers diagnose wireless client connection issues to determine why a client fails to connect to the wireless network.

To perform a client connectivity trace:

1. Open the **Clients** section, and select the problematic client from the list.


Note: Alternatively, go to **Admin & Services > Administration > Diagnostics > Client Troubleshooting**, and locate the **Client Connection Logs** section.

Note: As of release 200.8, client connection traces can be performed on clients connected to the following WLAN types:

- WPA2
- Web Auth
- Hotspot
- Guest Access

2. Click **Troubleshooting**.

Figure 1. Click Troubleshooting to perform client connectivity trace

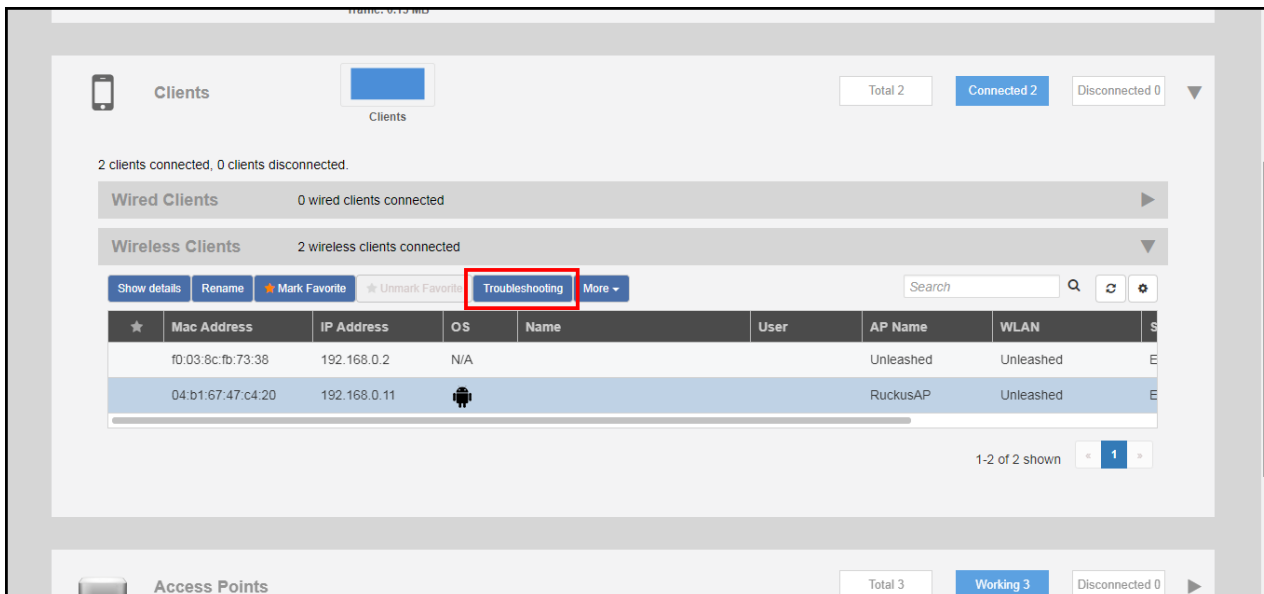

The Troubleshooting screen appears.

3. In Connectivity Trace, click the **Start** button to begin. The association trace begins. The page refreshes to display detailed results.

Figure 2. Click Start to begin connectivity trace


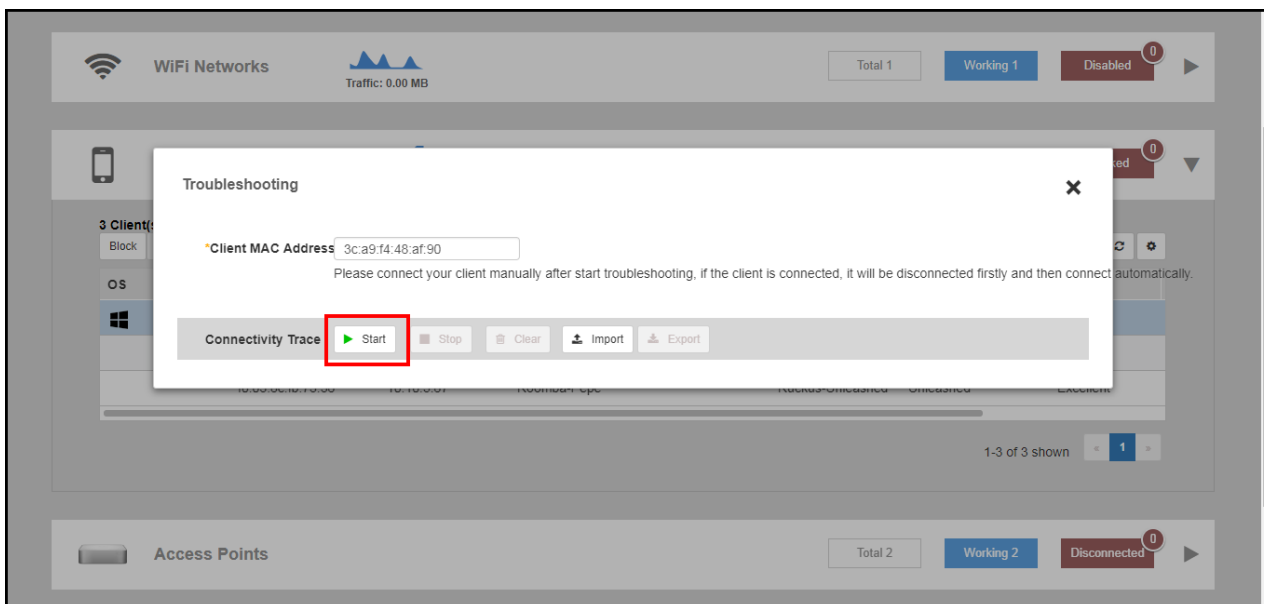


Figure 3. Connectivity trace in progress

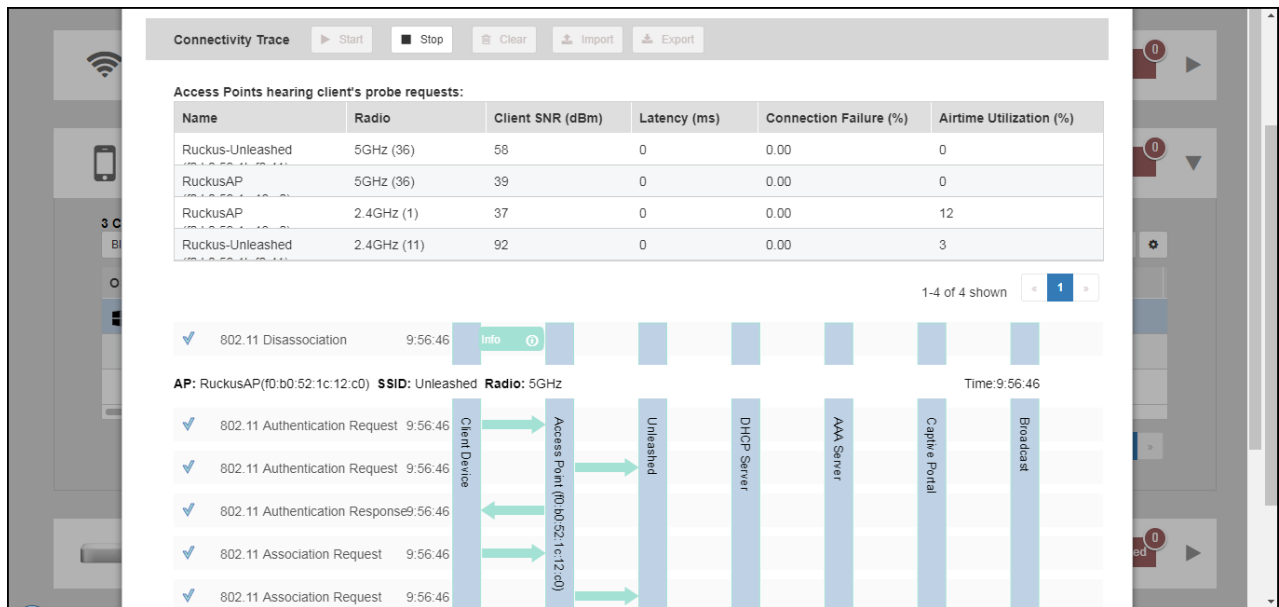

- Examine the results to isolate the problematic step in the process.
- If needed, you can download the client connectivity data to a file, which can later be imported for analysis. Click **Export** to download the data file and save it to your local computer. Click **Import** to import a previously exported file back into Unleashed.

Parent topic: [Working with Clients](#)

Parent topic: [Diagnostics](#)

Saving Client Connection Logs


Saving client connection logs may be helpful in troubleshooting client connectivity issues.

RUCKUS Unleashed provides two options for saving client connection logs - download the current log file immediately from the web interface, or configure RUCKUS Unleashed to send the logs to a syslog server automatically. For information on delivering logs to syslog, see [Customizing the Current Log Settings](#).

To download and save current client connection logs:

- Go to **Admin & Services > Administration > Diagnostics > Client Troubleshooting**, and locate the Client Connection Logs section.
- In "To save client connection logs, click here," click the **click here** link.
- Save the file to your local computer.

Figure 1. Saving Client Connection Logs to a Local Computer

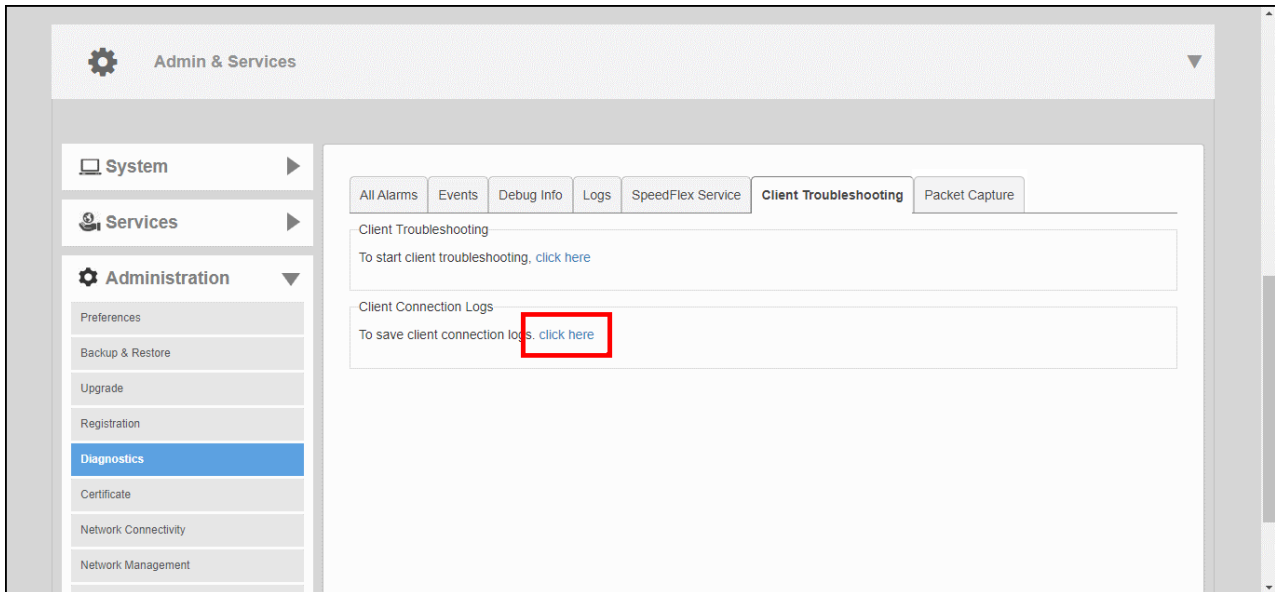


Parent topic: [Diagnostics](#)

Capturing Remote Packets

Remote packet capture puts one or more APs into packet sniffer mode, allowing them to capture the wireless packets. The packets are either saved to local files or streamed to packet inspection program such as Wireshark for later analysis.

1. Go to **Admin & Services > Administration > Diagnostics > Packet Capture**.
2. Under **Currently Managed APs**, select APs from the list and click **Add to Capture APs**.

Figure 1. Adding Currently Managed APs to Capture APs

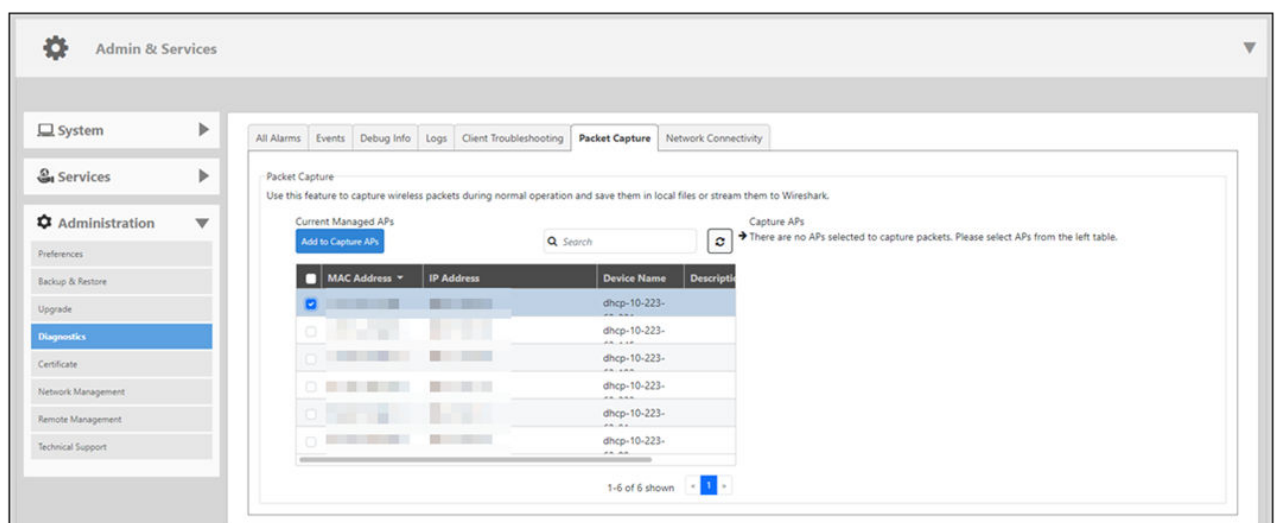

The selected currently managed APs are moved to the **Capture APs** table.


3. For **Radio**, select **2.4 GHz** or **5 GHz/6GHz**.

4. Select **Local Mode** or **Streaming Mode** as the capture mode.

- To capture a limited snapshot on each AP, select **Local Mode**.
 - a. Click **Start** to begin capturing packets.
 - b. Click **Stop** to end the capture.
 - c. Click **Save** to save the packet capture to a local file.
- To stream the captured packets to Wireshark, select **Streaming Mode**.
 - a. Click **Start** to launch Wireshark.
 - b. Select **Capture Options**. Under **Capture: Interface**, select **Remote**. A **Remote Interface** dialog box is displayed.
 - c. Under **Host**, enter the IP address of the AP you want to view. Leave the **Port** field empty and click **OK**.

The remote host interface list on the right side is updated.
 - d. Select **wifi0**, **wifi1**, or **wifi2** from the list, depending on whether you are streaming on the 2.4-GHz, 5-GHz, or 6-GHz radio.

Figure 2. Selecting the Capture Mode

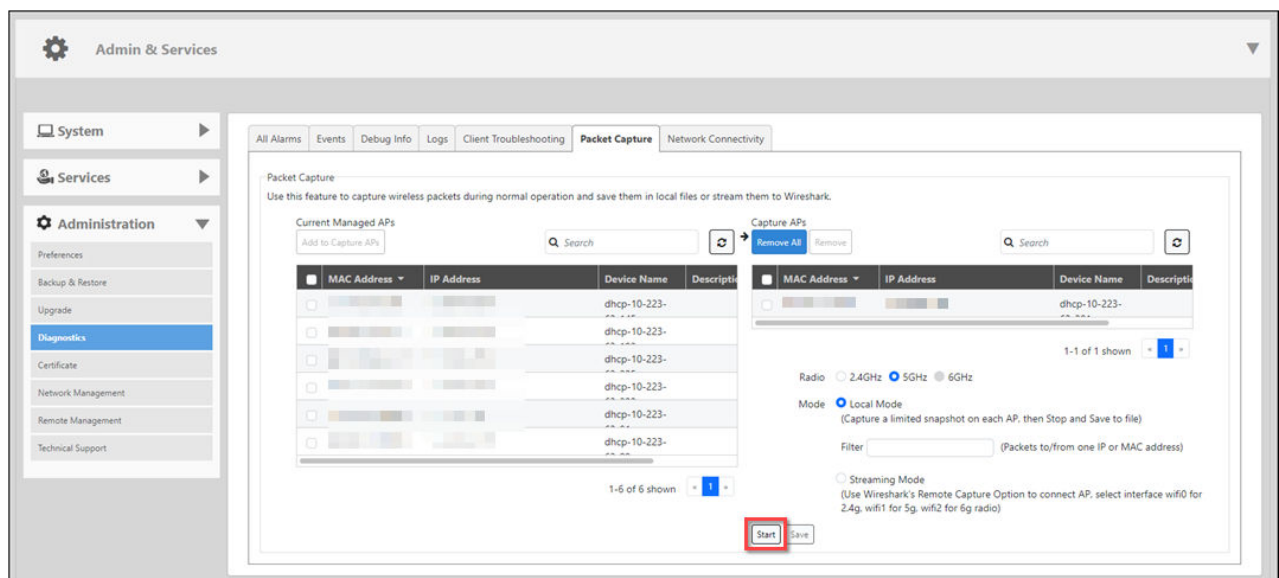

Parent topic: [Diagnostics](#)

Working with SSL Certificates

SSL certificates enable device or user identification, as well as secure communications.

Unleashed captive portal services and the web UI use an SSL certificate when establishing HTTPS connections.

The default SSL certificate that is installed on the Unleashed AP is self-signed and therefore not trusted by any web browser. This is the reason why the SSL security warnings appear when establishing an HTTPS connection to the Unleashed web interface.

To eliminate the security warnings, administrators may purchase a trusted SSL certificate from a public Certificate Authority (CA) and install it on the Unleashed Master AP.

The basic certificate installation process is as follows:

1. Generate a Certificate Signing Request (CSR) with the required requester information.
2. Submit the CSR to a public CA for signing.
3. Receive a signed certificate from the CA.
4. Import the signed certificate into Unleashed.

Parent topic: [Administration Settings](#)

Generating a Certificate Signing Request

If you do not have an existing SSL certificate, you will need to create a certificate signing request (CSR) file and send it to a certificate authority (CA) to purchase an SSL certificate.


The Unleashed web interface provides a form that you can use to create the CSR file. Fields with an asterisk (*) are required entries. Those without an asterisk are optional.

The **Admin & Services > Administer > Certificate** pages allow you to perform the following actions:

- Generate a certificate signing request.
- Import a signed certificate.
- View the currently installed certificate.
- Advanced Options link displays additional options
- Restore the default private key and certificate.
- Backup private key and certificate.

- Generate a new private key.

Figure 1. SSL certificate screens

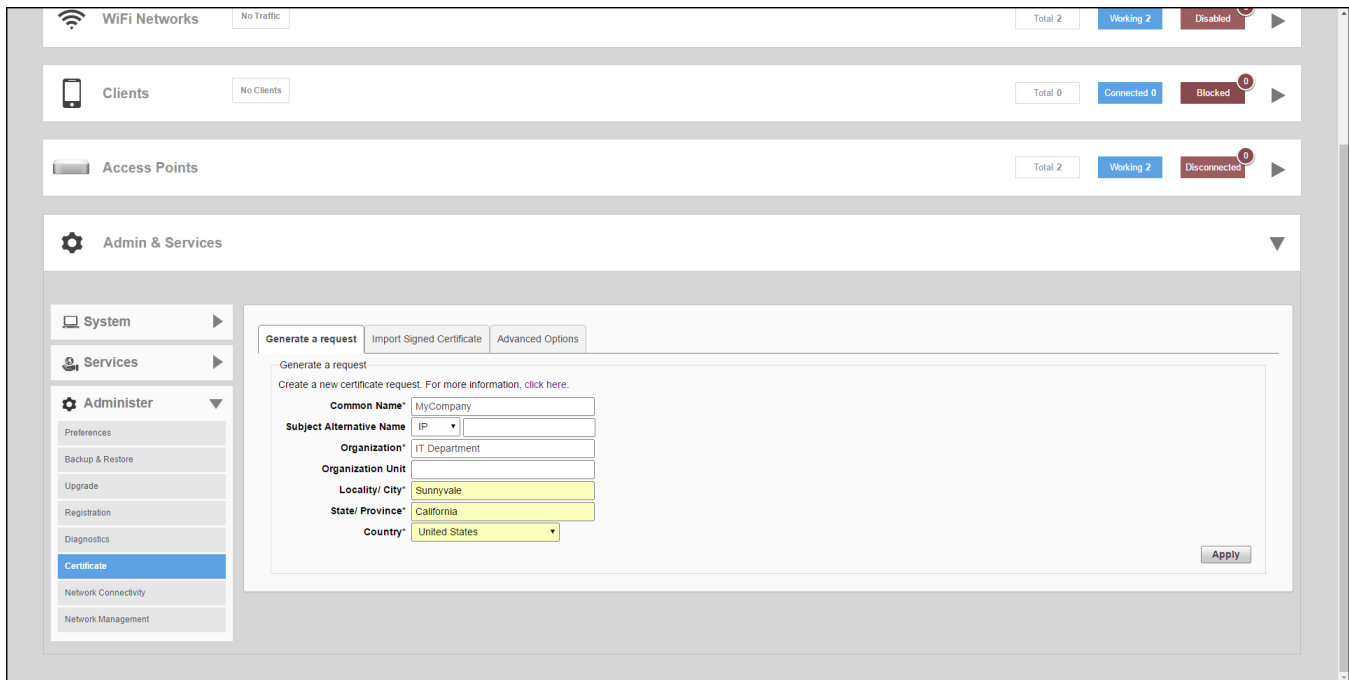

Parent topic: [Working with SSL Certificates](#)

Creating a Certificate Request File

To create a certificate request file (CSR):

1. Go to **Admin & Services > Administer > Certificate**.
2. In the **Generate a Request** form, complete the following options:
 - **Common Name***: Enter your company's Fully Qualified Domain Name (FQDN). Typically, this will be "unleashed.[your company].com". You can also enter the Master AP's IP address (e.g., "192.168.0.2"), or a familiar name by which the web UI will be accessed in your browser (e.g., by device name such as "unleashed").
 - 🔗 **Note:** RUCKUS recommends using the FQDN as the Common Name if possible. If your network does not have a DNS server, you may use the Master AP's IP address instead. However, note that some CA's may not allow this.
 - If you wish to access the web UI from a public network via the internet you must use a Fully Qualified Domain Name (FQDN).
 - In all cases when using a familiar name there must be an appropriate private or public DNS entry to resolve the familiar name to the AP's IP address.

- If you use a familiar name, this name will be shown in the browser's URL whenever accessing the web interfaces (i.e., administrator interface, standard captive portal and guest access captive portal).
 - **Subject Alternative Name:** (Optional) Select either IP or DNS from the menu and enter either alternative IP addresses or alternate DNS names.
 - **Organization*:** Type the complete legal name of your organization. Do not abbreviate your organization name.
 - **Organization Unit:** Division or department of the organization (for example, Network Management).
 - **Locality/City*:** Type the city where your organization is legally located (for example, Sunnyvale).
 - **State/Province*:** Type the state or province where your organization is legally located (for example, California). Do not abbreviate the state or province name.
 - **Country*:** Select your country or region from the pull-down menu.
3. Click **Apply**. A dialog box appears and prompts you to save the CSR file (myreq.csr) that you have just created.

4. Save the file to your computer.

Figure 1. Generating a CSR File

The screenshot shows the Ruckus Unleashed web interface. The top navigation bar includes 'WiFi Networks', 'Clients', and 'Access Points'. The left sidebar has a 'System' menu with 'Certificate' highlighted. The main content area is titled 'Admin & Services' and contains a 'Generate a request' form. The form has three tabs: 'Generate a request' (selected), 'Import Signed Certificate', and 'Advanced Options'. The 'Generate a request' tab contains the following fields and instructions:

- Common Name***: MyCompany. The fully qualified domain name for your web server. This must be an exact match. e.g. www.ruckuswireless.com
- Subject Alternative**: IP. The subject alternative name extension allows various literal values to be included in the configuration file. These include DNS (type your domain name), IP (type your IP address).
- Organization***: IT Department. The exact legal name of your organization. Do not abbreviate your organization name. e.g. Ruckus Wireless, Inc.
- Organization Unit**: (empty). Division or department of the organization. e.g. Network Management
- Locality/ City***: Sunnyvale. The city where your organization is legally located. e.g. Sunnyvale
- State/ Province***: California. The state or province where your organization is legally located. Can not be abbreviated. e.g. CA
- Country***: United States

An 'Apply' button is located at the bottom right of the form.

5. Go to a certificate authority's web site and follow the instructions for purchasing an SSL certificate.
6. When you are prompted for the certificate signing request, copy and paste the content of the text file that you saved to your local computer, and then complete the certificate purchase.

After the certificate authority approves your CSR, you will receive the SSL certificate via email. The following is an example of a signed certificate that you will receive from a certificate authority:

```
-----BEGIN CERTIFICATE-----
MIIFVjCCBD6gAwIBAgIQLfagUqKukMumWhbVf5v4vDANBgkqhkiG9w0B
AQUFADCBsDELMAkGA1UEBhMCVVMxFTZAVBgNVBAoTD1Z1cm1TaWduLCBJ
bmMuMR8wHQYDVQQLBgEFBQcBAQRtMGswJAYIKwYBBQUHMAAGGGGh0dHA6
Ly9vY3NwLnZ1cm1zaWduLmNvbTBDBggrBgEFBQcwAoY3aHR0cDovL1NW
U1N1Y3VyZS1haWEudmVyaXNpZ24uY29tL1NWU1N1Y3VyZTIwMDUyZW1h
LmN1cm1jBuBggrBgEFBQcBDARiMGChXqBcMFowWDBWFglpbWFnZS9naWYw
ITAFMAcGBSsOAwIaBBRLa7kolgYMu9BS0JsprEsHiyEFGDAmFiRodHRw
Oi8vbG9nb352ZXJpc2lnbi5jb20vdnNs2dvMS5naWYwDQYJKoZIhvcN
AQEFBQADggEBAI/S2dmm/kgPeVA1sIHmx-
751o4oq8+fwehRDBmQDaKiBvVXGZ5ZMnoc3DMuJdx0SrI91kPsn223CV
3UVBZo385g1T4iKwXgcQ7WF6QcUYOE6HK+4ZGcHermFf3fv3C1-
FoCjq+zEu8ZboUf3fWbGprGRA+MR/dDI1dTPtSUG7/zWjX05jC//
0pykS1dW/q8hg08kq30S8JzCwkqrXJfQ050N4TJtgb/
YC4gwH3BuB9wqpRjUahTiK1V1-
ju9bHB+bFkMWIIMIXc1Js62JC1WzwFgaGUS2DLE8xICQ3wU1ez8RUPGn
wSxAYtZ2N7zDxYDP2tEi05j2cXY708mR3ni0C30=
-----END CERTIFICATE-----
```

7. Copy the content of the signed certificate, and then paste it into a text file. Save the file.

You may now import the signed certificate into RUCKUS Unleashed. Refer to [Importing an SSL Certificate](#) for instructions.

Parent topic: [Working with SSL Certificates](#)


Importing an SSL Certificate

After you receive the signed certificate from the certificate authority, you must import it into RUCKUS Unleashed.

Complete the following steps to import a signed certificate.

1. Click the **Browse** button and select the file that contains the certificate (in PEM, CRT, or CER format) to upload it.

Figure 1. Import Signed Certificate Tab

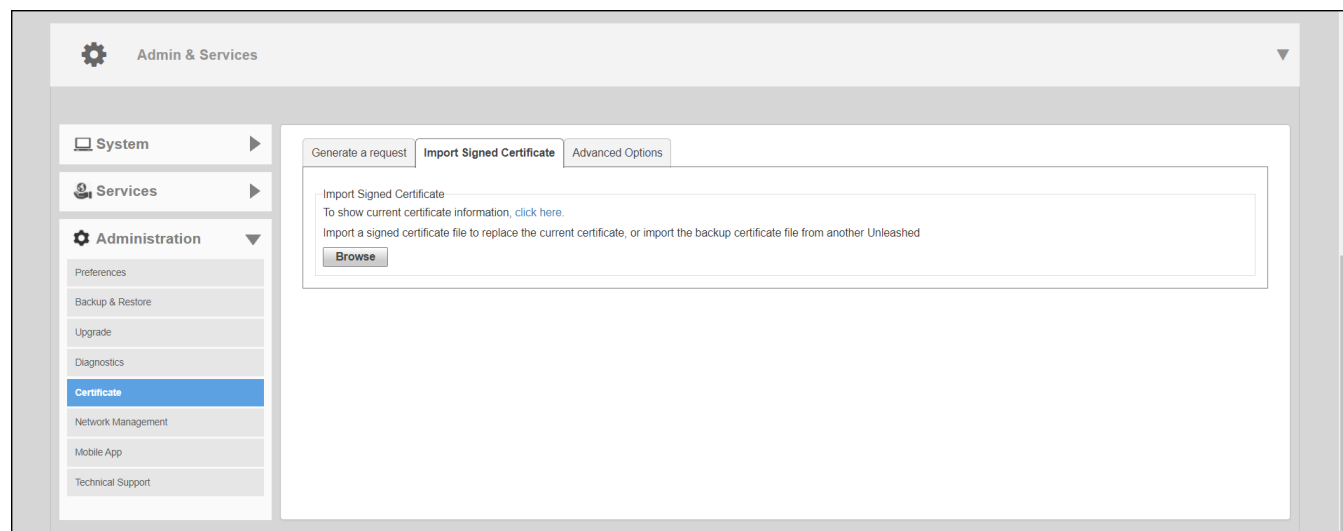

2. If there are no intermediate CA certificates, click the **Import** button to install the uploaded certificate.

- **Note:** If the certificate does not match the currently installed private key, you are prompted to upload the correct private key.
- **Note:** Beginning with Unleashed 200.13, the Elliptic Curve Cryptography (ECC) certificate is supported. The recommended encryption algorithm is Prime256v1.
- **Note:** Currently, the dual-certificate mode is not supported on an Unleashed AP. If an Elliptic Curve Cryptography certificate is used, the browser of the earlier version may fail to log in to the Unleashed web interface.

Figure 2. Installing a Private Key

Generate a request **Import Signed Certificate** Advanced Options

Import Signed Certificate

To show current certificate information, [click here](#).

Import a signed certificate file to replace the current certificate, or import the backup certificate file from another Unleashed 2brother.com.crt (1082 bytes). The uploaded certificate file does not match Unleashed's private key. **Import** **Cancel**

☐ Discard this certificate and then re-install a correct certificate which matches Unleashed's private key.

☒ Accept this certificate and then install a private key to match your certificate.

3. If the certificate was issued by an intermediate CA, you must also import the intermediate CA certificate (as well as all other intermediate CA certificates in the path to the root CA). In this event, you would receive intermediate CA certificate download instructions from the certificate vendor. Complete the following steps to import an intermediate CA certificate.
 - a. After selecting the end certificate, click the intermediate certificate import option.
 - b. Click the **Import** button to display the **Import Intermediate Certificates** form.
 - c. Click the **Browse** button and select the file containing the intermediate certificate (PEM, CRT, or CER format) to upload it.
 - d. If there are no additional intermediate certificates, click the **Import** button to install the uploaded certificate.

Figure 3. Installing the Certificate

Generate a request	Import Signed Certificate	Advanced Options
Import Signed Certificate To show current certificate information, click here. Signed Certificate has been imported. Please import private key to match your certificate. rsaserver.key (1708 bytes). Choose an import type: Import Cancel ☒ Install this certificate and then reboot. ☐ Install this certificate and additional intermediate certificates.		

Alternatively, you can simplify this process by appending the intermediate CA certificates to the RUCKUS Unleashed certificate file. Then, you only need to import a single file. The intermediate certificates will be imported automatically. In this case, you will see multiple ---BEGIN CERTIFICATE--- and ---END CERTIFICATE--- pairs in the file.

Parent topic: [Working with SSL Certificates](#)

SSL Certificate Advanced Options


The **Advanced Options** section allows you to perform additional certificate management functions.

These include the following:

- **Restore to Default Certificate/Private Key:** This deletes any certificate and private key that has been imported, and restores the factory default certificate/private key after restore and reboot.
-  **Note:** Restoring Unleashed to factory default state does not remove imported SSL certificates. Use this option to remove any imported certificates and revert to the factory default state.
- **Back Up Private Key:** Back up the current private key by downloading it for disaster recovery or for use on another Unleashed AP. If your Unleashed AP is replaced due to an RMA, you will need to restore the private key if you have installed a public certificate. Ensure that the private key is kept secure because the security of your SSL communications depends on it.
- **Back up certificates for Smart Redundancy:** If you have more than one Unleashed AP, you can install the same SSL certificate/private key pair on both devices. In this way, you can access the shared virtual management interface advertised in DNS for the same FQDN without seeing the security warning.
- **Back Up Trusted CA Information:** Use this option to apply the same trusted CA from this Unleashed AP to peer Unleashed APs. The file is output as a .tar.gz file containing all trusted Certificate Authority information currently installed on this Unleashed AP. This compressed file must be decompressed and the files imported into the peer Unleashed AP using the Add a Trusted CA feature described below.

- **Re-Generate Private Key of a Specific Key Length:** Use this option if your previous private key has been compromised or you need to use a stronger key (either 1024 or 2048 bits). Note that a new certificate must be generated and installed afterwards.
- **Add a Trusted CA:** Use this option to import CA information. Click the **Click Here** link to display all of the current trusted CA information, with each trusted CA separated by a string of number symbols (“#####”). Options include:
 - **Add a new trusted CA:** Import a single CA file.
 - **Cover all trusted CA:** Use the new trusted CA file to cover all existing trusted CA files

Figure 1. SSL Certificate Advanced Options

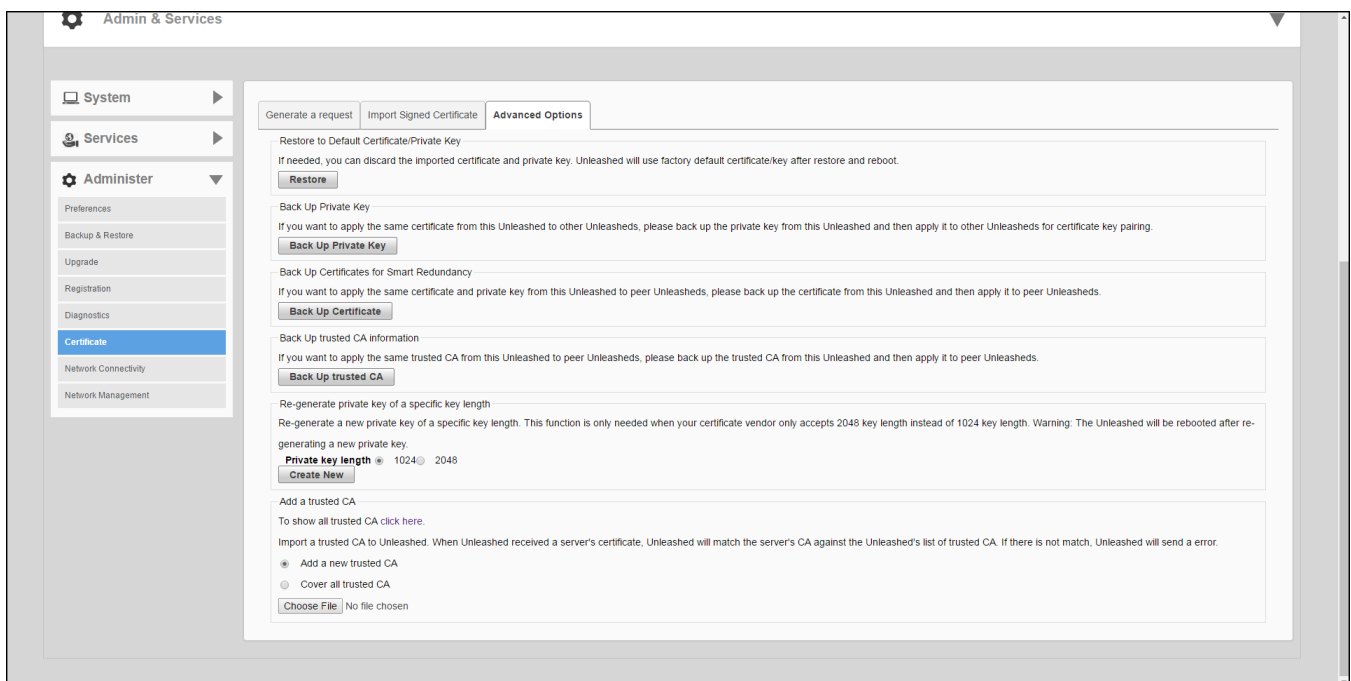


Parent topic: [Working with SSL Certificates](#)

Testing Network Connectivity

The Unleashed web interface provides two common tools used to diagnose connectivity issues. The Network Connectivity tools - **Ping** and **Traceroute** - can be accessed from the **Admin & Services > Administer > Network Connectivity** page.

Figure 1. Using Ping and Traceroute to test network connectivity

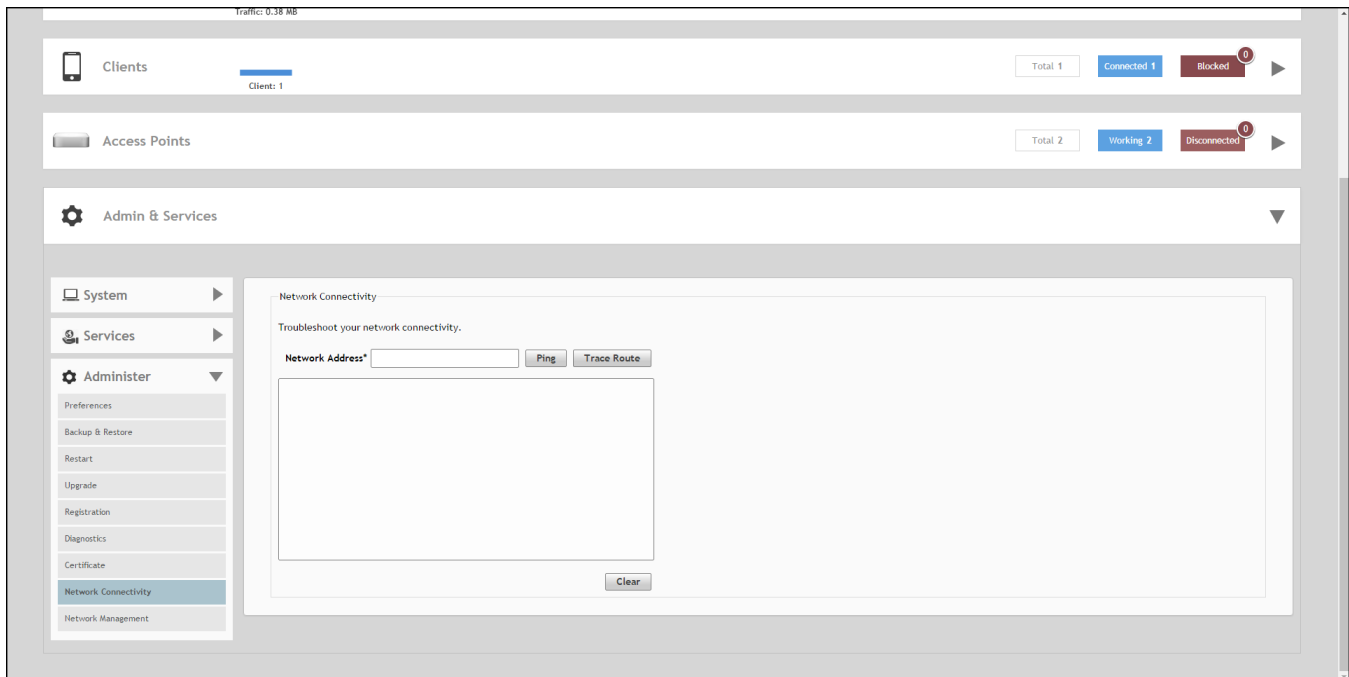

Parent topic: [Administration Settings](#)

Network Management

RUCKUS Unleashed provides support for Simple Network Management Protocol (SNMP v2 and SNMP v3), which allows you to query system information such as system status, AP status, AP Ethernet port status, and so on.

You can also enable SNMP traps to receive immediate notifications for possible AP and client issues.

- 🔧 **Note:** By default, all traps are disabled. If you need to enable a trap, you can do so using an SNMP SET command under the scalar MIB nodes: `ruckusUnleashedEventTrapSwitchCmd`.

The procedure for enabling the internal SNMP agent depends on whether your network is using SNMPv2 or SNMPv3. SNMPv3 mainly provides security enhancements over the earlier version, and therefore requires you to enter authorization passwords and encryption settings instead of simple clear text community strings.

Both SNMPv2 and SNMPv3 can be enabled at the same time. The SNMPv3 framework provides backward compatibility for SNMPv1 and SNMPv2c management applications so that existing management applications can still be used to manage Unleashed with SNMPv3 enabled.

- 🔧 **Note:** For a list of the MIB variables that you can get and set using SNMP, check the related SNMP documentation on the RUCKUS Support website at <http://support.ruckuswireless.com/documents>.


Parent topic: [Administration Settings](#)

SNMPv2

Complete the following steps if your network uses SNMPv2.

1. From the RUCKUS Unleashed dashboard, select **Admin & Services > Administer > Network Management**.
2. On the **SNMPv2 Agent** tab, select the **Enable SNMP Agent** check box and enter the information in the following fields.
 - **System Contact:** Type your email address (optional).
 - **System Location:** Type the location of the ZoneDirector device (optional).
 - **SNMP RO community** (required): Set the read-only community string. Applications that send SNMP Get-Requests to RUCKUS Unleashed (to retrieve information) will need to send this string along with the request before they will be allowed access. The default value is public.
 - **SNMP RW community** (required): Set the read-write community string. Applications that send SNMP Set-Requests to RUCKUS Unleashed (to set certain SNMP MIB variables) will need to send this string along with the request before they will be allowed access. The default value is private.
3. Click **Apply** to save your changes.

Figure 1. SNMPv2 Agent

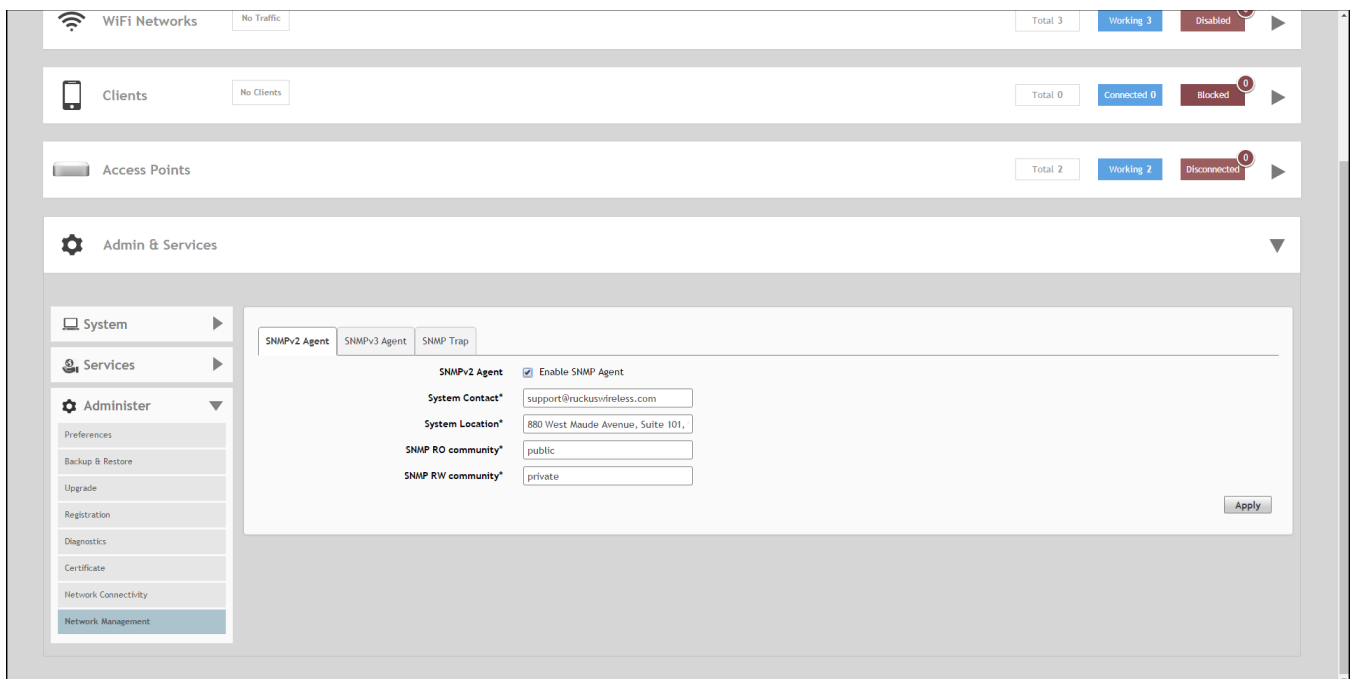


Parent topic: [Network Management](#)

SNMPv3

Complete the following steps if your network uses SNMPv3.

1. From the RUCKUS Unleashed dashboard, select **Admin & Services > Administer > Network Management**.
2. On the **SNMPv3 Agent** tab, select the **Enable SNMPv3 Agent** check box.
3. Enter the following information for both the **Read Only** and **Read/Write** privileges:
 - **User:** Enter a user name between 1 and 31 characters.
 - **Authentication:** Select one from the following authentication methods:
 - **MD5** (Message-Digest algorithm 5): Message hash function with 128-bit output (Default).
 - **SHA** (Secure Hash Algorithm): Message hash function with 160-bit output.
 - **Auth Pass Phrase:** Enter a passphrase between 8 and 32 characters in length.
 - **Privacy:** Select one from the following options: **DES**, **AES**, or **None**.
 - **DES** (Data Encryption Standard) uses data block cipher.
 - **AES** (Advanced Encryption Standard) uses data block cipher.
 - **None:** No privacy passphrase is required.
 - **Privacy Phrase:** If **DES** or **AES** is selected, enter a privacy phrase between 8 and 32 characters in length.
4. Click **Apply** to save your changes.

Figure 1. SNMPv3 Agent

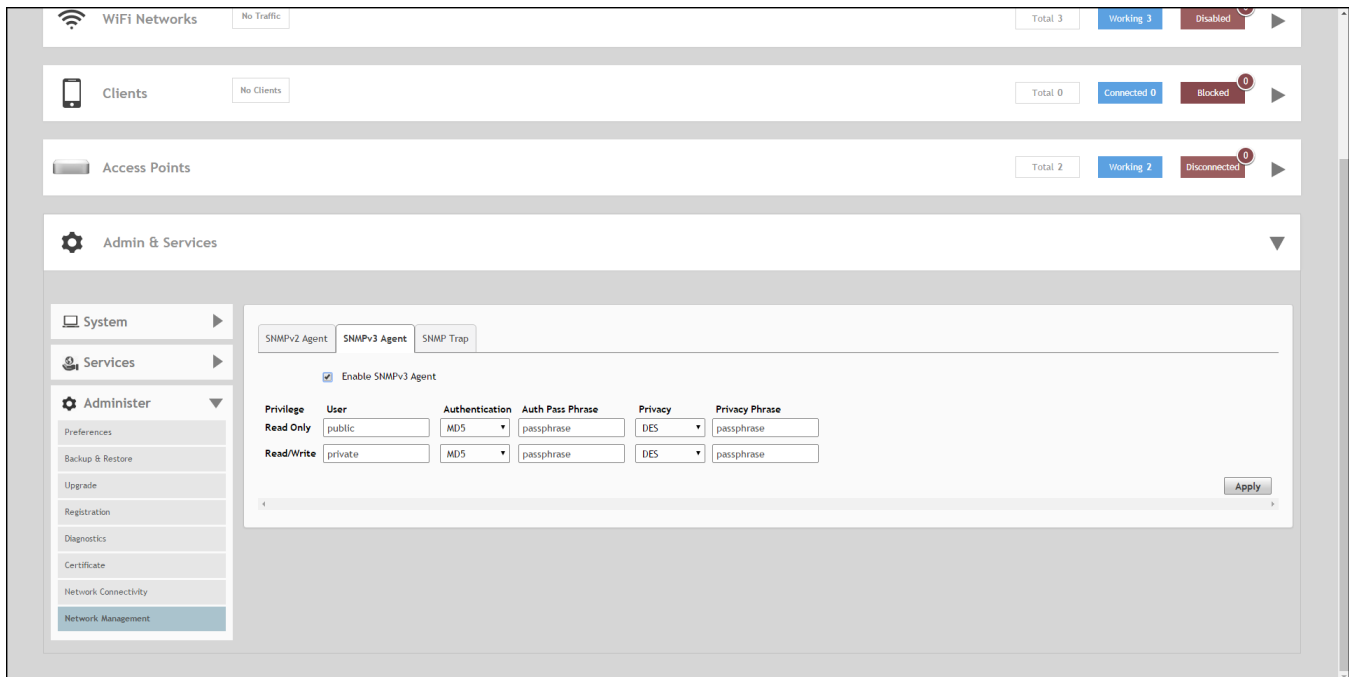

Parent topic: [Network Management](#)

Enabling SNMP Trap Notifications


If you have an SNMP trap receiver on the network, you can configure Unleashed to send SNMP trap notifications to the server.

Enable this feature if you want to automatically receive notifications for AP and client events that indicate possible network issues.

To enable SNMP trap notifications:

1. Go to **Admin & Services > Administer > Network Management**.
2. On the **SNMP Trap** tab, select the **Enable SNMP Trap** check box.
3. In **SNMP Trap format**, select either **SNMPv2** or **SNMPv3**. You can select only one type of trap receiver. If you select SNMPv2, you only need to enter the IP addresses of up to four SNMP trap receivers on your network. If you select SNMPv3, enter up to four trap receiver IP addresses along with authentication method passphrase and privacy (encryption) settings.
4. Click **Apply** to save your changes.

Figure 1. SNMP Trap

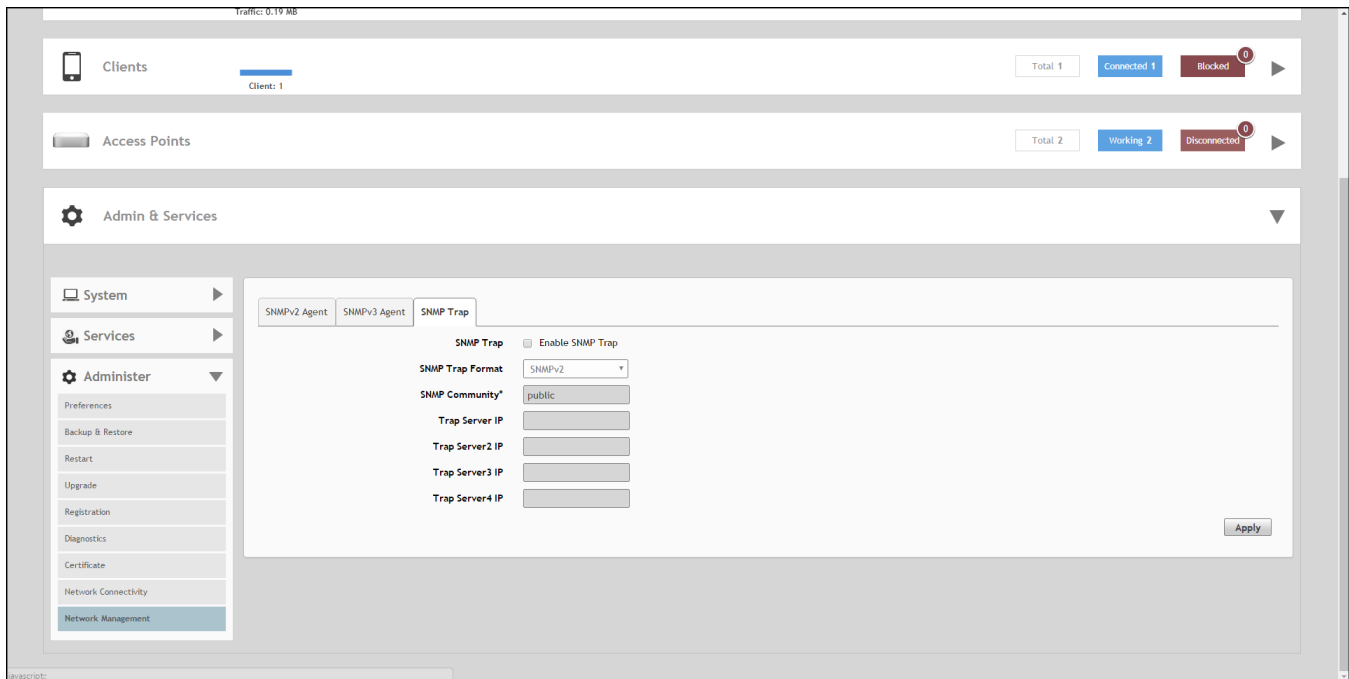

Parent topic: [Network Management](#)

Enabling Management via Unleashed Multi-Site Manager

If you have a RUCKUS Unleashed Multi-Site Manager (UMM) server installed on the network, you can enable Unleashed Multi-Site Manager management to centralize monitoring and administration of your remote Unleashed deployments.

The Unleashed Multi-Site Manager allows customers to manage up to 300 Unleashed networks from a central location, enabling remote administration of multiple Unleashed deployments using a single admin user name and password.

The Unleashed Multi-Site Manager provides the following critical centralized network management functions:


- **Monitoring:** Provides the ability to view the overall health status of all Unleashed networks, events and alarms, placement of APs on a world map, and connected client information from the dashboard.
- **Reporting:** Detailed statistics reports are available including device inventories, client associations, resource monitoring, throughput capacity, etc.
- **Management:** Enables several management activities from a central location, including scheduled software upgrades, backup and restore tasks, and the ability to create cookie-cutter configuration templates for deployment at multiple sites.

To enable Unleashed Multi-Site Manager administration:

1. Go to **Admin & Services > Administer > Network Management**, and click the **Unleashed Multi-Site Manager Management** tab.

2. Under Unleashed Multi-Site Manager Management, select the **Enable management by Unleashed Multi-Site Manager** check box.
3. In **URL**, type the Unleashed Multi-Site Manager DNS host name or IP address of the Unleashed Multi-Site Manager server.
4. In **Interval**, type the time interval (in minutes) at which Unleashed will send status updates to the Unleashed Multi-Site Manager server. The default interval is 15 minutes.
5. Click **Apply**. The message Setting Applied appears. You have completed enabling Unleashed Multi-Site Manager management. For more information on how to configure and manage your Unleashed deployment from the Unleashed Multi-Site Manager web interface, refer to the Unleashed Multi-Site Manager documentation.

Figure 1. Enabling Unleashed Multi-Site Manager management

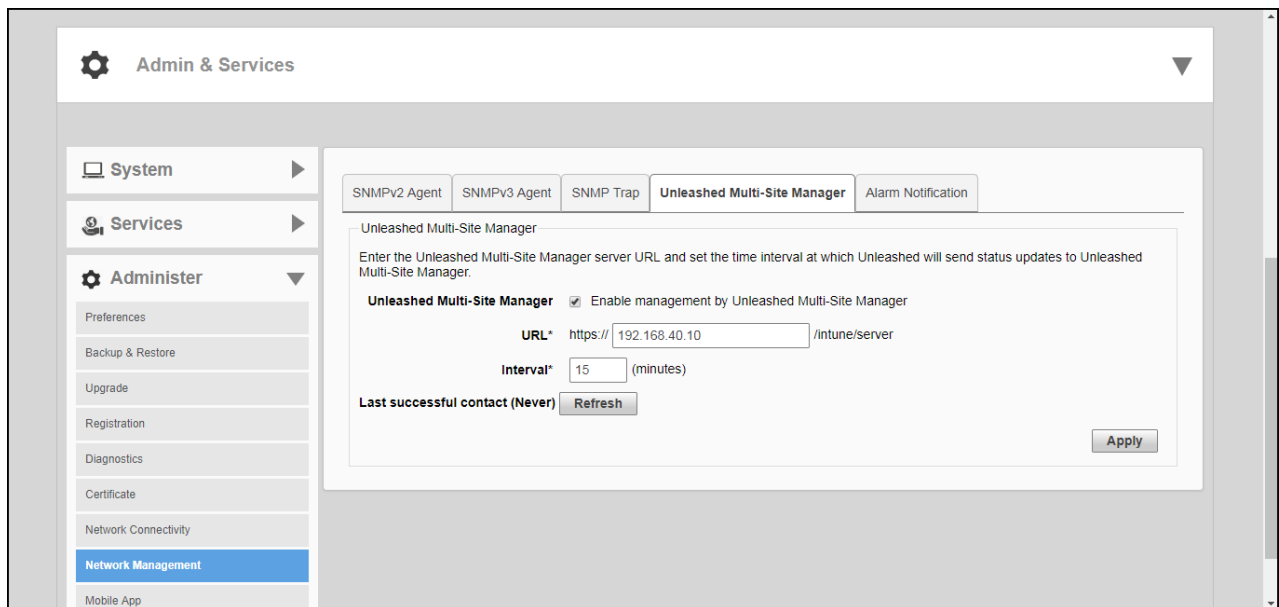

Parent topic: [Network Management](#)

Configuring Alarm Event Notification Settings

The web interface allows you to customize the content and delivery for a wide range of alarm events. When a matching event occurs, admins can be notified either through email or the mobile app.

To configure alarm event notifications and email/mobile app delivery:

1. Go to **Admin & Services > Administer > Network Management > Alarm Notification**.
2. In Alarm Event, select/deselect the event categories for which notifications will be delivered.
3. Click **Apply** to save your changes.

4. In Email Address, enable the check box and enter the destination address for alarm notifications. An email server must first have been configured from the System > System Info screen.
5. Click **Test** to test email delivery. Click **Apply** to save your changes.

Figure 1. Alarm Notification Settings

The screenshot shows the 'Alarm Notification' settings page. At the top, there are tabs for 'SNMPv2 Agent', 'SNMPv3 Agent', 'SNMP Trap', 'Unleashed Multi-Site Manager', and 'Alarm Notification'. Below the tabs, the 'Alarm Notification' section is active. It contains a list of alarm notification options, each with a checkbox. The 'Config Invalid' and 'Config Mismatch' options are highlighted with a red box. The 'Apply' button is located at the bottom right of the page.

Alarm Notification	AP Has Hardware Problem	RADIUS Authentication Server Unavailable
☒ AP Has Joined	☒ Rogue DHCP Server Detected	
☒ AP Lost Contact	☒ SSID-spoofing AP Detected	
☐ AP Radio Off	☒ Same-Network Rogue AP Detected	
☐ AP Radio On	☐ Survivability entries reach maximum	
☒ Config Invalid	☐ URL Filtering is disabled	
☒ Config Mismatch	☐ URL Filtering license expired	
☒ External Gateway status change	☐ URL Filtering license file download fail	
☐ ICX Urgent Message	☐ URL Filtering license will expire	
☒ MAC-spoofing AP Detected	☐ SIM Card Remove	
☒ Master AP Change	☐ Favorite Client Disconnect	
☒ RADIUS Accounting Server Unavailable	☐ Favorite Client Connect	

Apply

Parent topic: [Network Management](#)


Enabling Remote Management

The RUCKUS Unleashed mobile app provides another way to manage your RUCKUS Unleashed network when using an Android or iOS client.

Complete the following steps to enable remote management.

1. From the dashboard, select **Admin & Services > Administration > Remote Management > Remote Management & Mobile App Notification**.
2. Under **Remote Management**, select **Enable Remote Management** check box to manage RUCKUS Unleashed remotely using the mobile app or remote portal, and click **Apply**.
The **Enable Remote Management** option is disabled by default.
3. Under **Mobile App Notification**, select the **Send an app notification when an alarm is triggered** check box to send a notification to the app when an alarm is triggered. Click **Test** to send a test notification, and click **Apply** to save your changes.

Figure 1. Enabling Remote Management

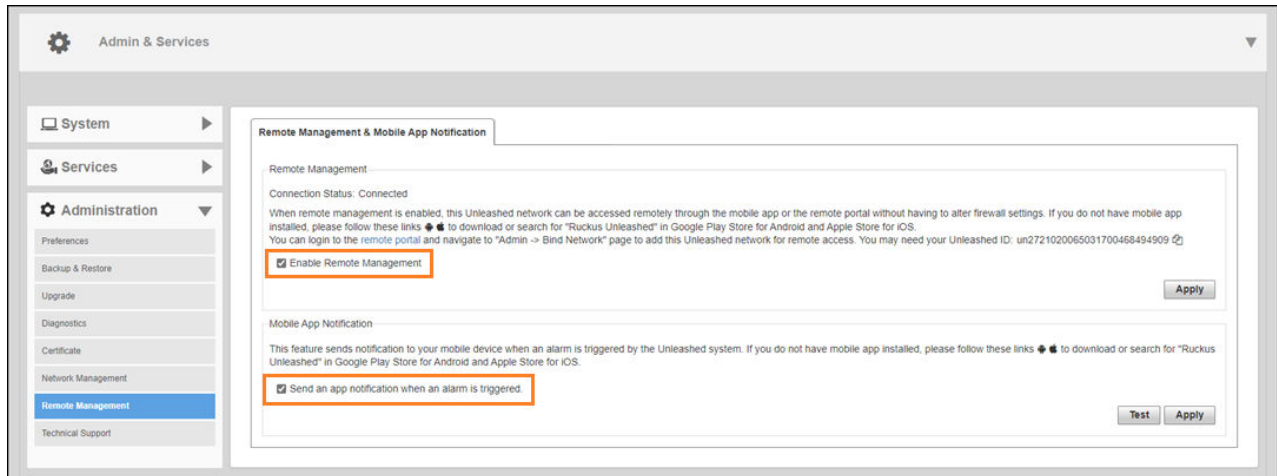

Parent topic: [Administration Settings](#)

Technical Support

You can request technical support to troubleshoot your Unleashed technical issues.

Complete the following steps to request technical support.

1. Select **Admin & Services > Administration > Technical Support**.

Figure 1. Requesting Technical Support

2. Enter your email address.
3. (Optional) Enter your phone number and company name.
4. From the **Problem Category** list, select a problem type.
5. Enter a description about your technical problem.

6. Select the **I have read, understood and accepted the terms & conditions** check box and click **Submit**.

 **Note:** When you enable technical support, Unleashed disconnects from its registered UMM and connects to the RUCKUS remote UMM. After the requested technical support is completed, Unleashed registers back to UMM.

Parent topic: [Administration Settings](#)

Remote Portal Support

[Remote Portal Overview](#)

[Registering on the Remote Portal](#)

[Logging in Using Social Media Accounts](#)

[Navigating the Remote Portal Dashboard](#)

[Structured Administration Account to Manage Networks](#)

[Monitoring Your Network](#)

[Administrator Settings](#)

[Viewing the Logs](#)

Remote Portal Overview

The RUCKUS remote portal is a free cloud portal that allows the network administrators to manage the RUCKUS Unleashed network remotely using the remote services.

You can access the remote portal from the RUCKUS Unleashed web interface. Likewise, you can remotely access the RUCKUS Unleashed web interface and command line interface (CLI) from the remote portal. The remote portal is capable of providing desktop features to the mobile app (MA) users. You can log in to the remote portal with a MA account and gain full remote access to the web interface and CLI. The remote portal shares the same account system with the MA and the information between the remote portal and MA is synchronized. You can manage your APs on the remote portal as well as on the MA.

As a prerequisite, enable **Remote Management** from the RUCKUS Unleashed web interface (**Admin & Services > Administration > Remote Management > Remote Management & Mobile App Notification**).

When **Remote Management** is enabled, as a Device Owner, you can manage your network from either the remote portal or the mobile app.

Parent topic: [Remote Portal Support](#)


Registering on the Remote Portal

You can log in to the remote portal by registering your email account on the remote portal.

As a prerequisite to login as a local account, you must register your email account on the remote portal by clicking **Sign up**. A verification code is sent to the registered email address to complete the registration process. Complete the following steps to log in to the remote portal.

1. Sign in to the remote portal using the local login credentials.


Figure 1. Logging in to the Remote Portal Using Local Login Credentials

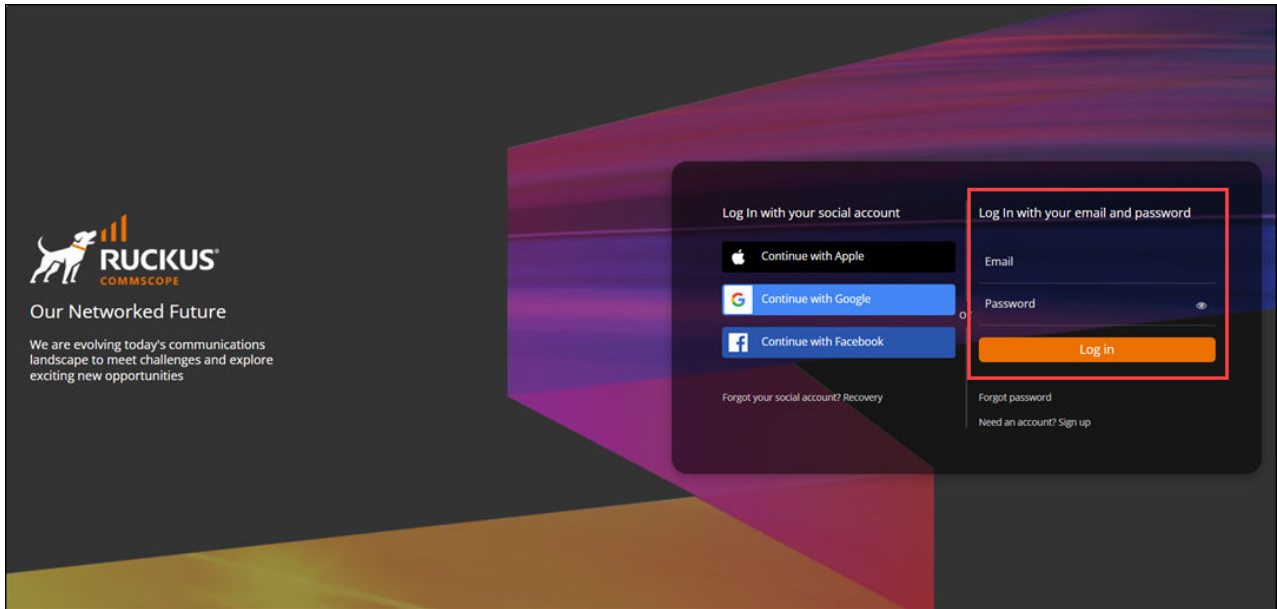

2. From the remote portal's home page, enter the registered email and password, and click **Log in**. A confirmation dialog box is displayed to use the registered email address for multi-factor authentication (MFA) and account recovery.


Note: Only local remote portal or mobile app (MA) accounts support MFA. Whenever a local user logs in to the remote portal, an email validation is sent for the first login everyday. Optionally, the user can choose to perform MFA every 7 days or 30 days depending on the browser. The user can also disable the MFA from the **Account Settings > Security Setting** screen.

Figure 2. Enabling Multi-Factor Authentication

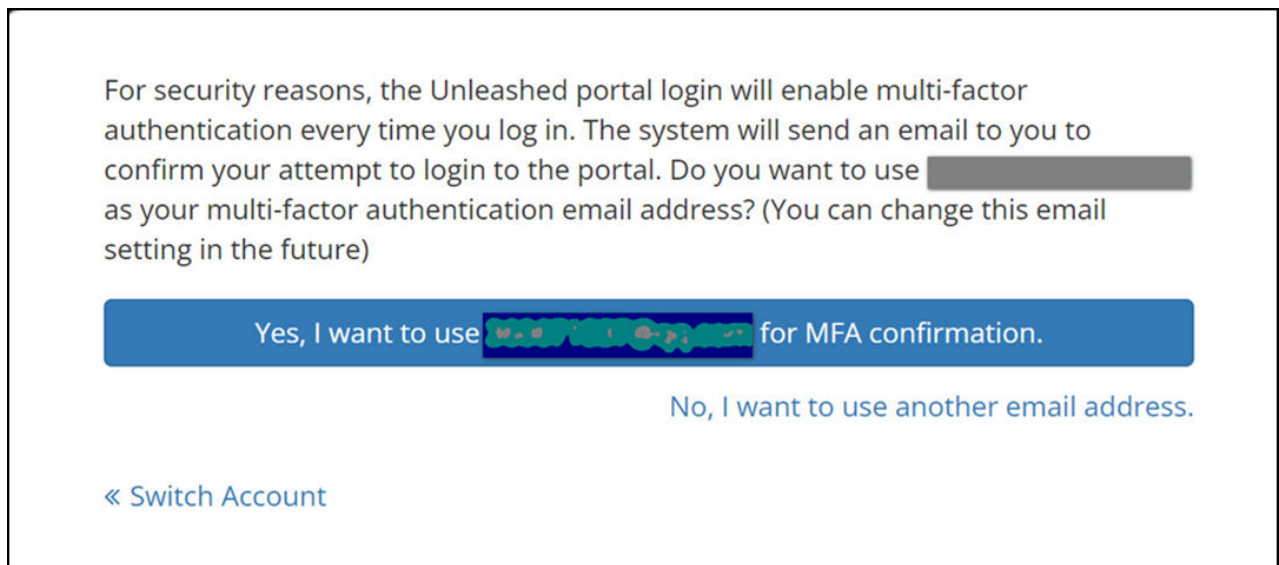

3. Click **Yes**. Enter the verification code and click **Confirm**.
4. (Optional) Click **No, I want to use another email address** and enter another email address, CAPTCHA code, and click **Send**.

Figure 3. Choosing Another Email Address

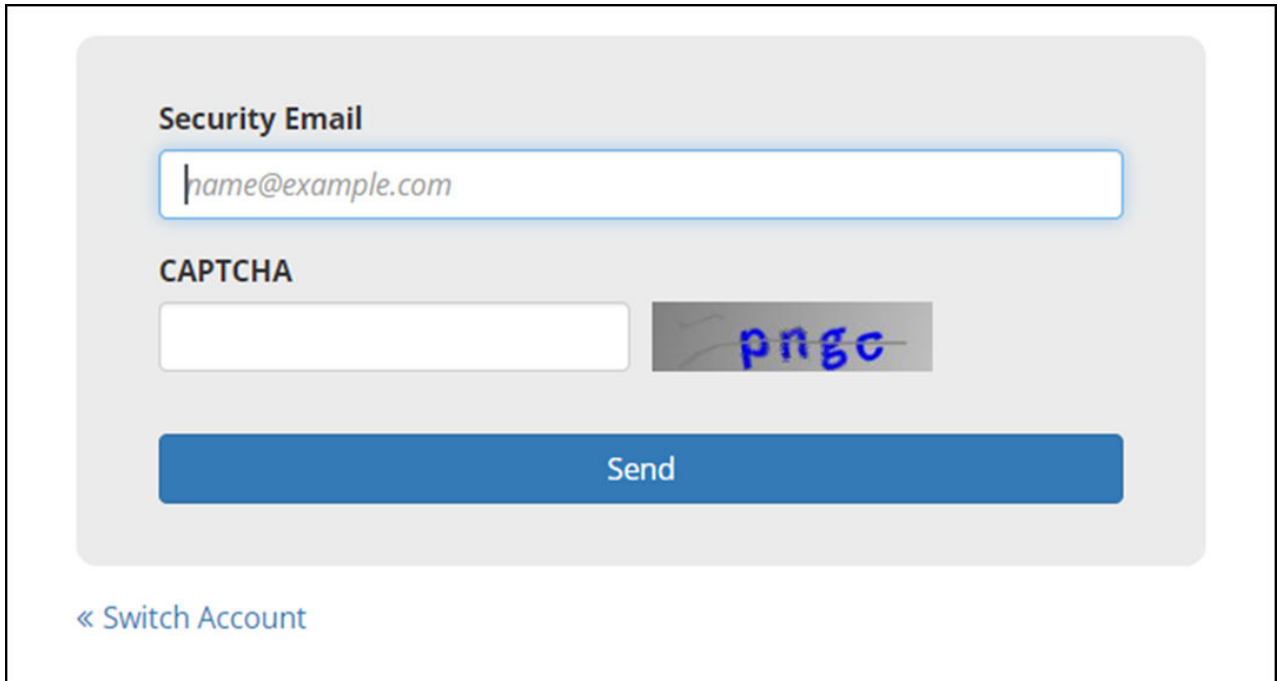

The screenshot shows a light gray dialog box with a white border. Inside, there's a section titled 'Security Email' with a text input field containing 'name@example.com'. Below this is a 'CAPTCHA' section with a white input field and a gray CAPTCHA image showing the characters 'pngc' in blue. At the bottom of the dialog is a large blue button labeled 'Send'. In the bottom left corner of the dialog, there is a blue link that says '<< Switch Account'.

A verification email is sent to the email account. In the dialog box that appears, enter the verification code and click **Confirm**.

To use the remote portal dashboard components, refer to [Navigating the Remote Portal Dashboard](#).

Parent topic: [Remote Portal Support](#)

Configuring Security Settings

Using the security settings, you can configure multi-factor authentication (MFA) for your local remote and mobile app (MA) accounts. You can also change the security email address of your local remote account and social media account.

Complete the following steps to configure the security settings.


1. Log in to the remote portal using the remote portal or MA credentials.
2. Click on the account settings and select **Security Setting**.

Figure 1. Configuring Security Setting



The **Security Setting** page is displayed.

Figure 2. Configuring Multi-Factor Authentication (MFA)

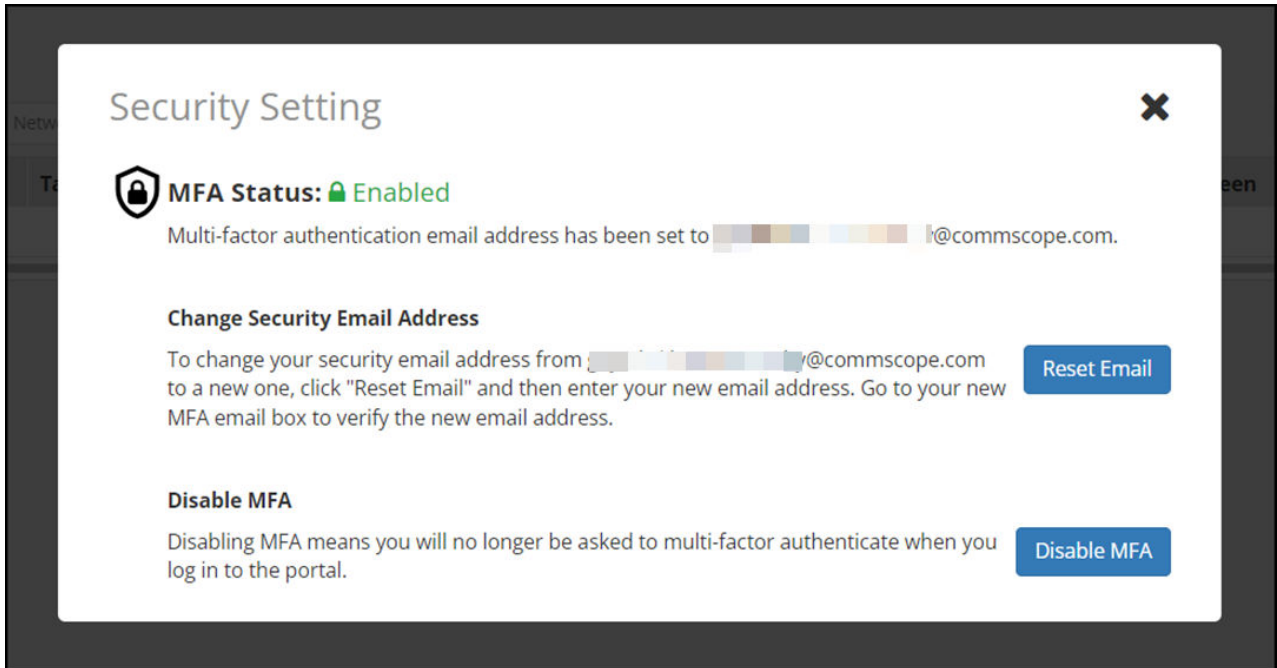


If MFA is active for the local account, the **MFA Status** shows as **Enabled**.

Note: Multi-factor authentication (MFA) is not available for social media logins.

3. (Optional) For **Change Security Email Address**, click **Reset Email** to change your security email address. The **Reset Email** dialog box is displayed.

Figure 3. Changing Security Email Address

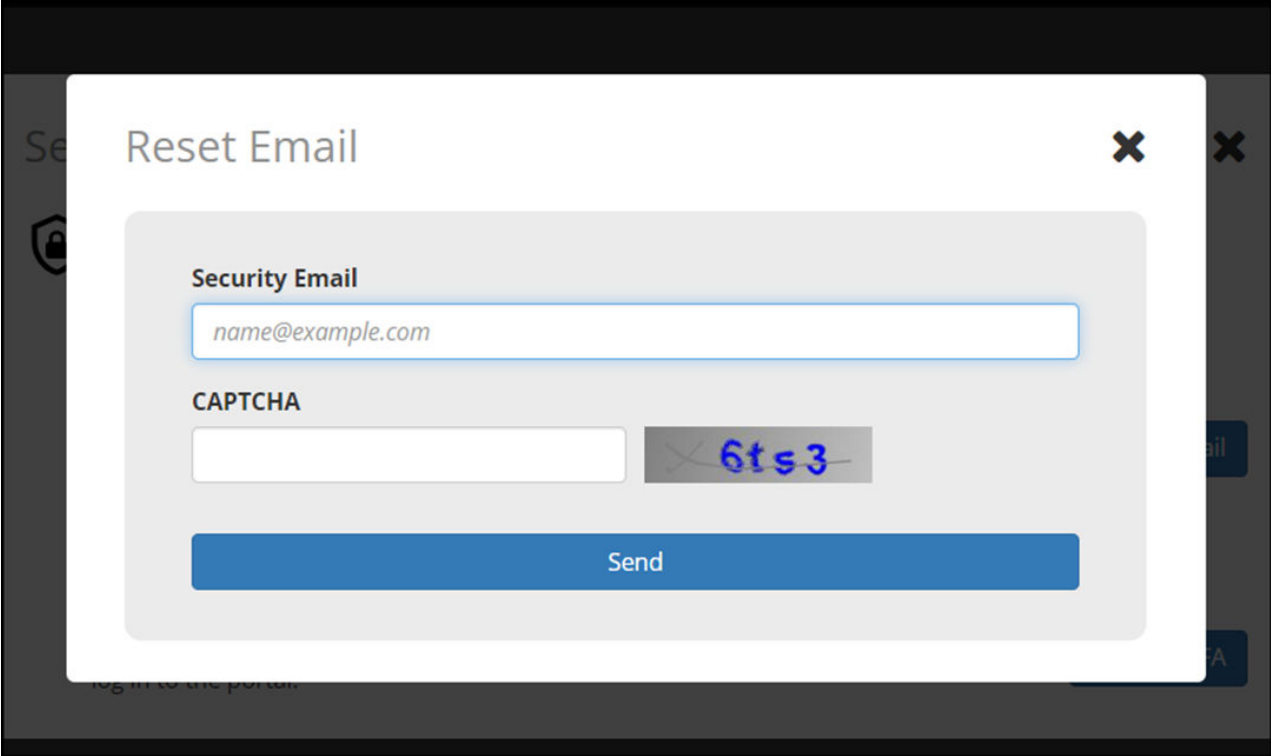

The image shows a 'Reset Email' dialog box with a close button (X) in the top right corner. Inside the dialog, there is a 'Security Email' field containing the text 'name@example.com'. Below this is a 'CAPTCHA' section with an empty input field and a CAPTCHA image showing the characters '6ts3'. At the bottom of the dialog is a blue 'Send' button.

- a. Enter the security email address, CAPTCHA code, and click **Send**.
A verification email is sent to the email account. When a user logs into the local account, the first-login attempt automatically raises an email validation. When entering the verification code, the local user can choose to do MFA every 7 or 30 days. This setting is based on the browser used.
- b. In the dialog box, enter the verification code and click **Confirm**.
4. (Optional) Click **Disable MFA** to log in to the remote portal without MFA.

Parent topic: [Registering on the Remote Portal](#)

Deleting a Registered Account

Using the **Delete Account** option, an administrator can delete a registered account.


Complete the following steps to delete a registered account.

1. Log in to the remote portal. Click on the account settings and select **Delete Account**.
Figure 1. Account Settings Menu



The **Delete Account** dialog box appears.

Figure 2. Delete a Registered Account

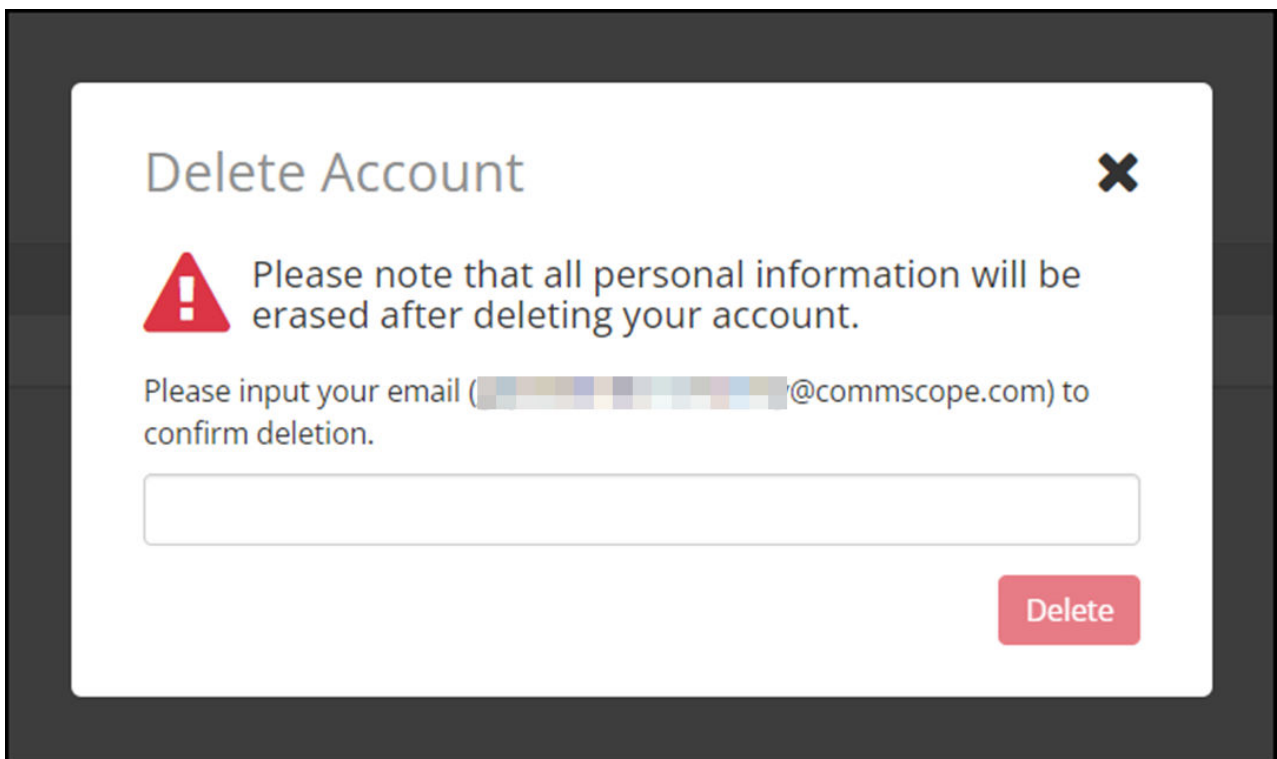

2. Enter your email address and click **Delete**.

A **Success** dialog box is displayed.

3. Click **OK**.

You are logged out of the remote portal within 10 seconds after you delete the account.

Parent topic: [Registering on the Remote Portal](#)

Logging in Using Social Media Accounts

You can log in to the remote portal using your social media accounts. The remote portal supports Apple, Google, and Facebook social media accounts. For any social media login, multi-factor authentication (MFA) is not required.

From the **Log In with your social account** section of the remote portal home page, log in with your credentials using any of the following options:

- **Continue with Apple**
- **Continue with Google**
- **Continue with Facebook**

Parent topic: [Remote Portal Support](#)


Logging In Using Your Apple Account

Complete the following steps to log in to the remote portal using your Apple account.

1. From the **Log In with your social account** section of the remote portal home page, click **Continue with Apple**.

The **Apple ID** login screen is displayed.


Figure 1. Logging in Using Apple Credentials

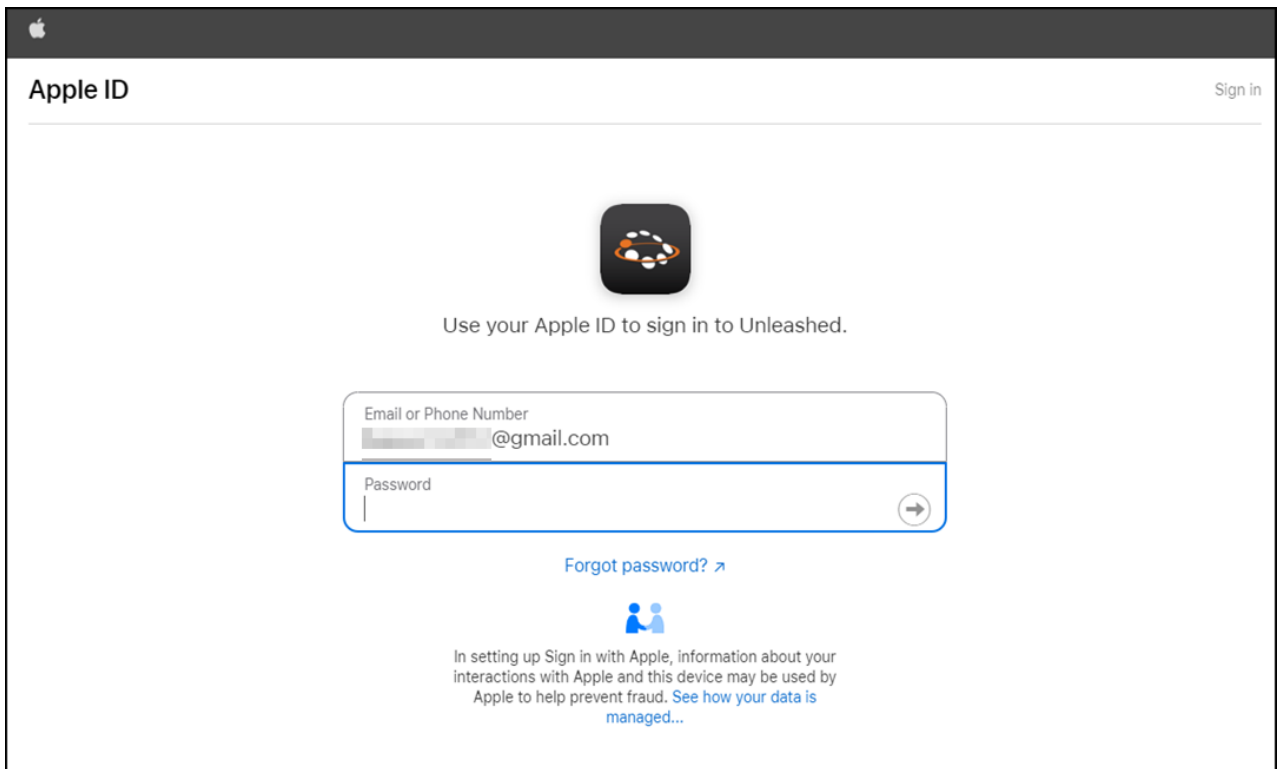

The screenshot shows the Apple ID sign-in interface. At the top left is the Apple logo, and at the top right is a "Sign in" link. The main heading is "Apple ID". Below this is the RUCKUS Unleashed logo, which consists of a dark square with a stylized orange and white circular pattern. Under the logo, the text reads "Use your Apple ID to sign in to Unleashed." Below this text are two input fields: "Email or Phone Number" and "Password". The "Email or Phone Number" field contains the text "____@gmail.com". The "Password" field is empty. To the right of the "Password" field is a right-arrow button. Below the input fields is a link that says "Forgot password? >". At the bottom, there is a small icon of two people, followed by the text: "In setting up Sign in with Apple, information about your interactions with Apple and this device may be used by Apple to help prevent fraud. [See how your data is managed...](#)"

2. Enter the email address or phone number associated with your Apple ID, and click the right-arrow button.
3. Enter the password and click the right-arrow button.
Upon successful login, the access permission dialog box is displayed.

Figure 2. Access Permission Dialog Box

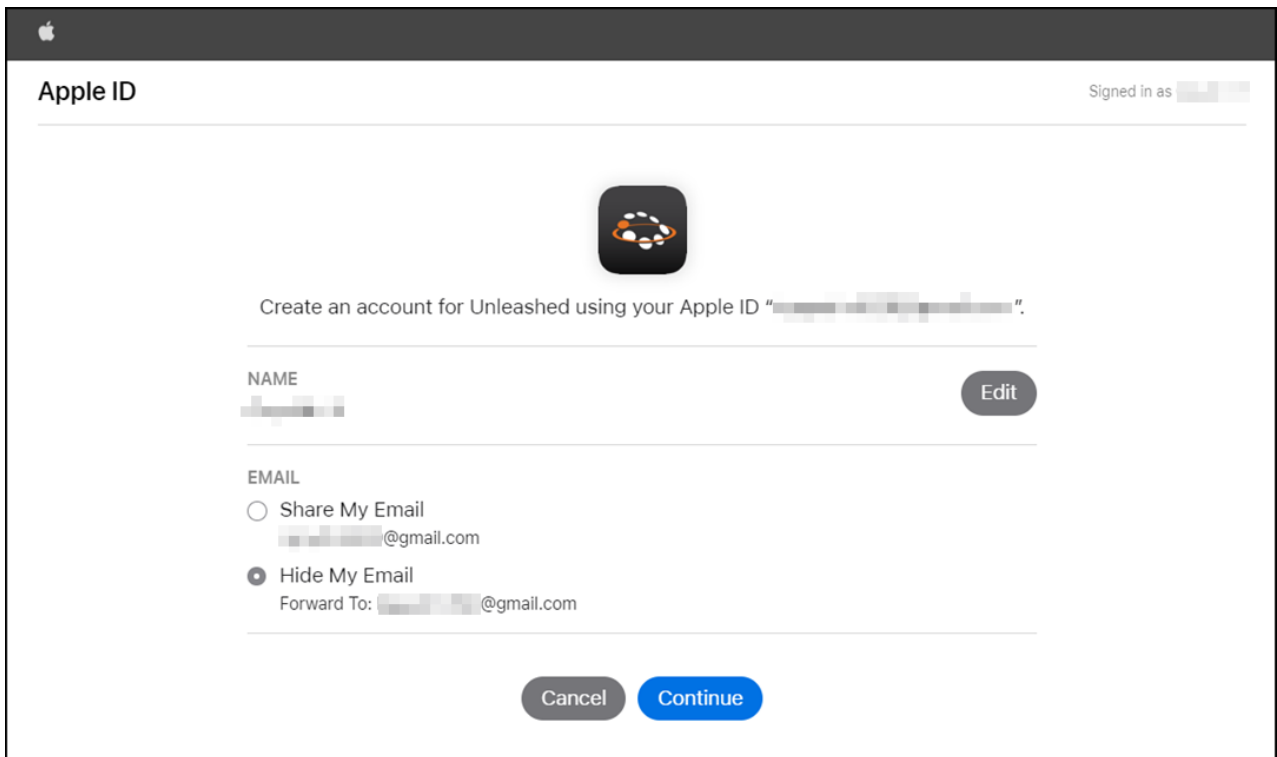


The screenshot shows an Apple ID creation interface. At the top left is the Apple logo, and at the top right is the text "Signed in as" followed by a blurred profile picture. The main heading is "Apple ID". Below this is a dark square icon with a circular pattern of dots. The text "Create an account for Unleashed using your Apple ID " followed by a blurred Apple ID and a closing quote is displayed. Below this is a "NAME" field with a blurred name and an "Edit" button to its right. Underneath is an "EMAIL" section with two radio button options: "Share My Email" (unselected) and "Hide My Email" (selected). The "Share My Email" option is followed by a blurred email address "@gmail.com". The "Hide My Email" option is followed by "Forward To:" and another blurred email address "@gmail.com". At the bottom are two buttons: "Cancel" and "Continue".

4. (Optional) Click **Edit** to edit your name.
5. If you wish to share your email address, select **Share My Email** or else select **Hide My Email**.
6. Click **Continue**.

A confirmation dialog box is displayed to confirm the security email address.


Figure 3. Confirmation Dialog Box

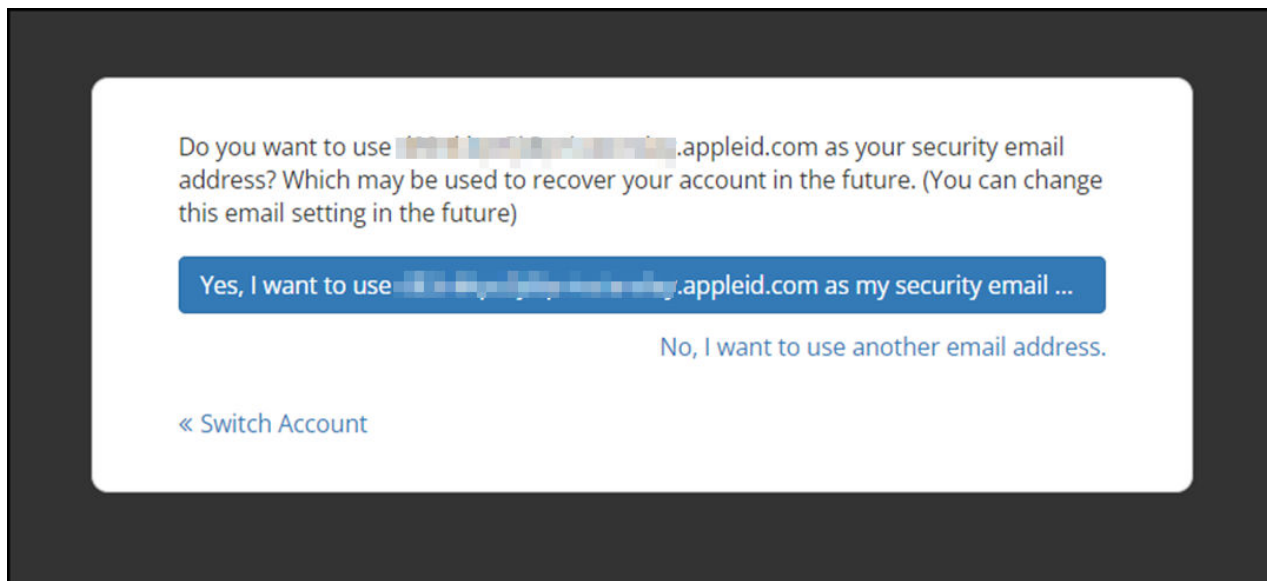

- Click **Yes** to confirm.

You are successfully logged into the remote portal.

Figure 4. Remote Portal

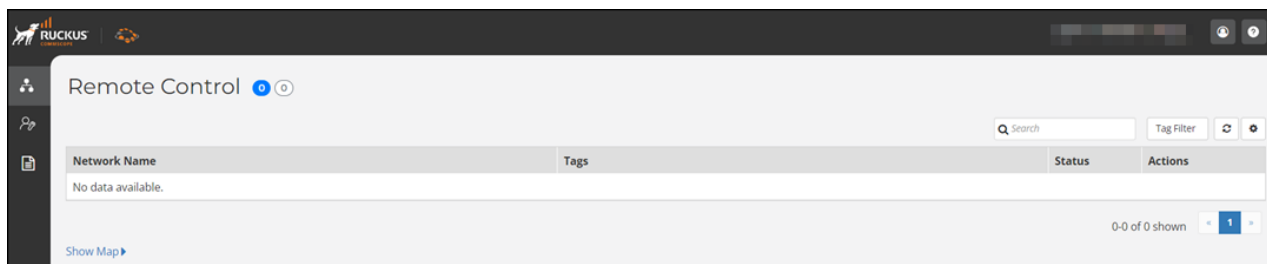

Parent topic: [Logging in Using Social Media Accounts](#)


Logging In Using Your Google Account

Complete the following steps to log in to the remote portal using your Google account.

- From the **Log In with your social account** section of the remote portal home page, log in with your Google credentials.

The **Google** login screen is displayed.

Figure 1. Logging in Using Google Account

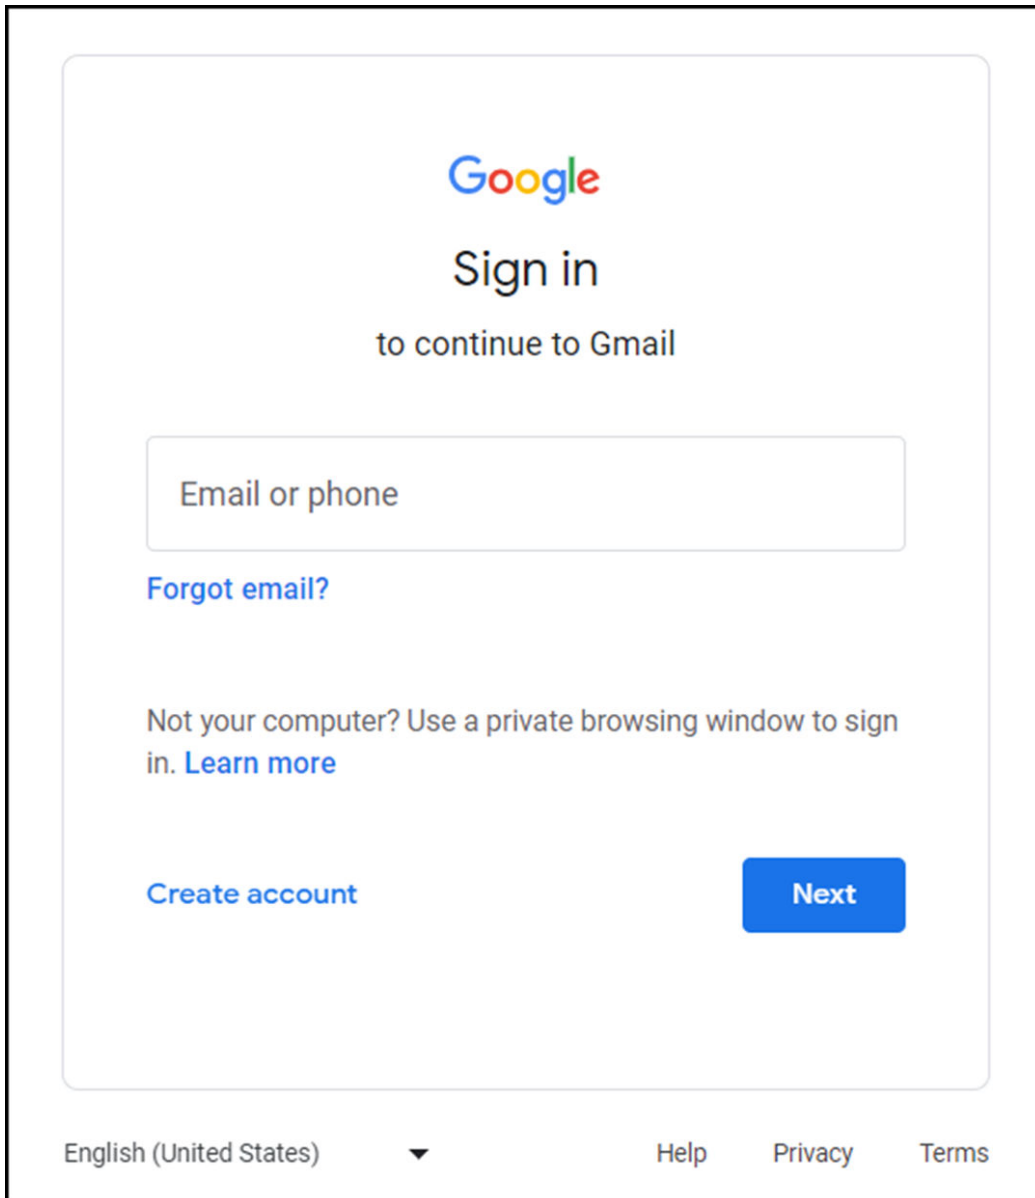The image shows a Google sign-in page. At the top is the Google logo. Below it, the text "Sign in" is centered, followed by "to continue to Gmail". There is a text input field labeled "Email or phone". Below the field is a link "Forgot email?". Further down, there is a message: "Not your computer? Use a private browsing window to sign in." followed by a link "Learn more". At the bottom left is a link "Create account", and at the bottom right is a blue button labeled "Next". The footer contains "English (United States)" with a dropdown arrow, and links for "Help", "Privacy", and "Terms".

Google

Sign in

to continue to Gmail

Email or phone

[Forgot email?](#)

Not your computer? Use a private browsing window to sign in. [Learn more](#)

[Create account](#) [Next](#)

English (United States) ▼ [Help](#) [Privacy](#) [Terms](#)

2. Enter the email address or phone number associated with your Google ID, and click **Next**.
3. Enter the password and click **Next**.

You are successfully logged into the remote portal using your Google credentials.

Figure 2. Remote Portal



To use the remote portal dashboard components, refer to [Navigating the Remote Portal Dashboard](#).

Parent topic: [Logging in Using Social Media Accounts](#)

Logging In Using Your Facebook Account


Complete the following steps to log in to the remote portal using your Facebook account.

1. From the **Log In with your social account** section of the remote portal home page, log in with your Facebook credentials.

Figure 1. Logging in Using Facebook Account

2. Enter your email address or phone number associated with your Facebook ID, and password. Click **Log In**. Upon successful login, the access permission dialog box is displayed.


Figure 2. Access Permission Dialog Box

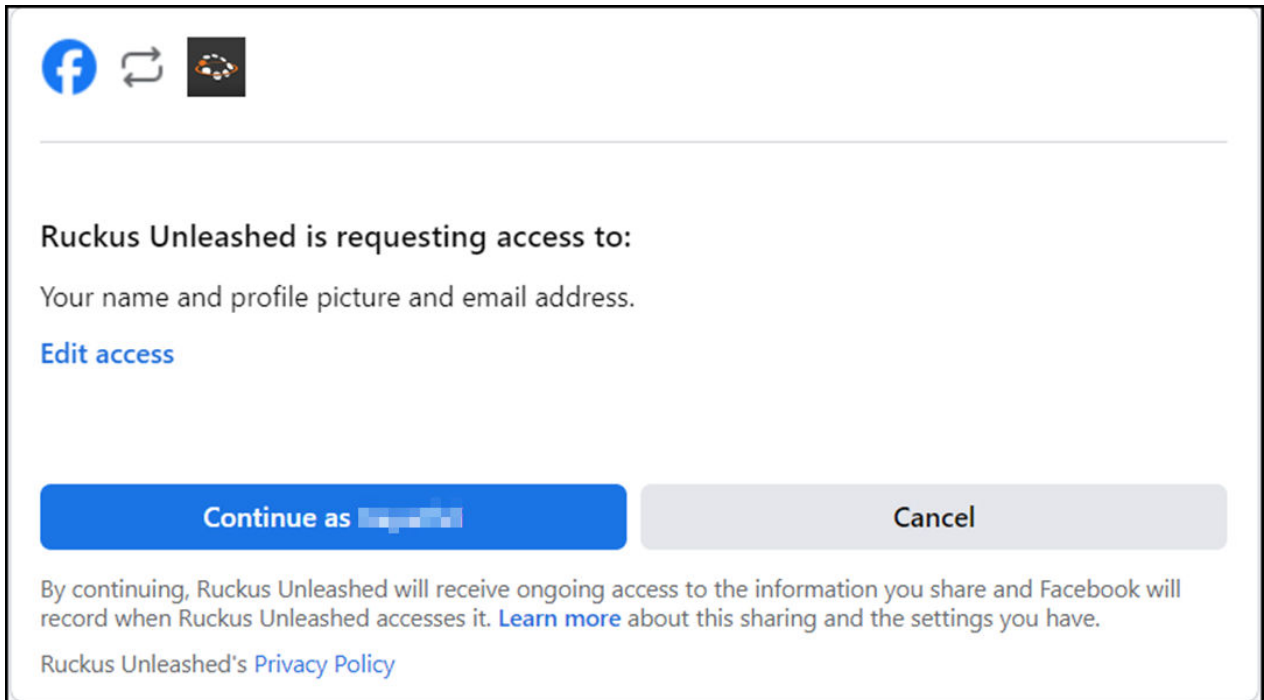

3. Click **Edit access** if you wish to edit the requested access.

The **Edit requested access** pop-up window is displayed.


Figure 3. Edit Requested Access Pop-up Window

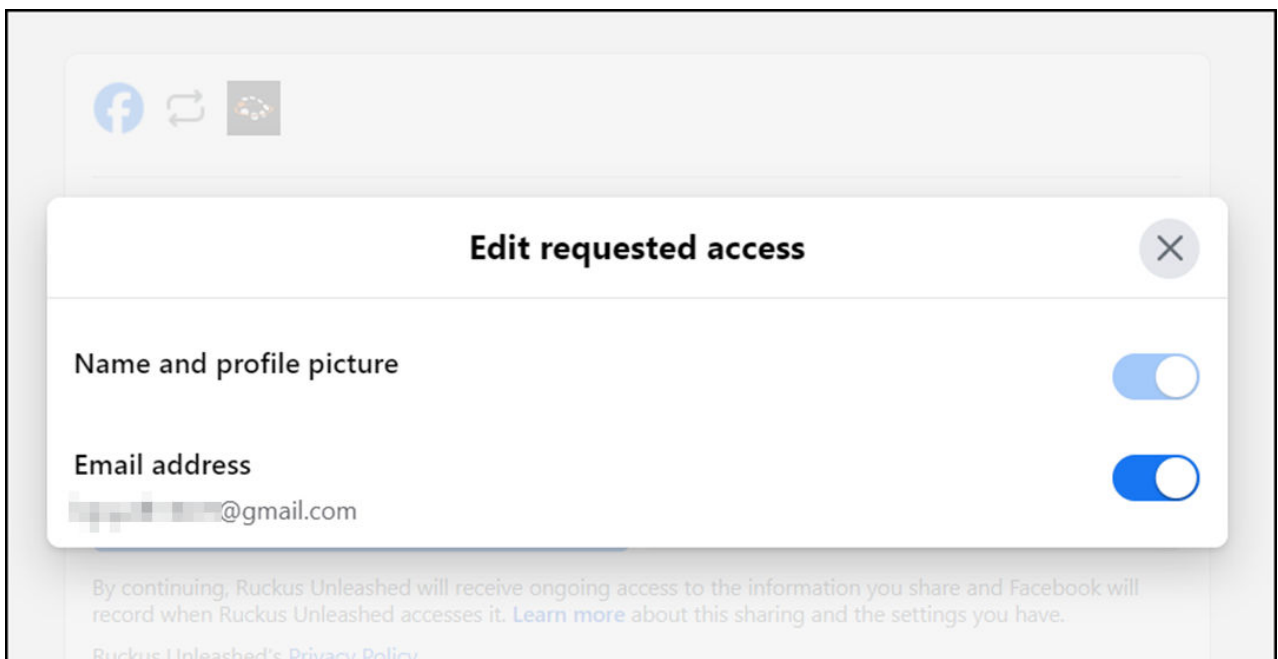

4. (Optional) Click the **Email address** toggle switch to **ON** to enable sharing or else toggle **OFF** to disable sharing.
5. Close the pop-up window and click **Continue**.

A confirmation dialog box is displayed to use the registered email address as the security email address.

Figure 4. Confirmation Dialog Box

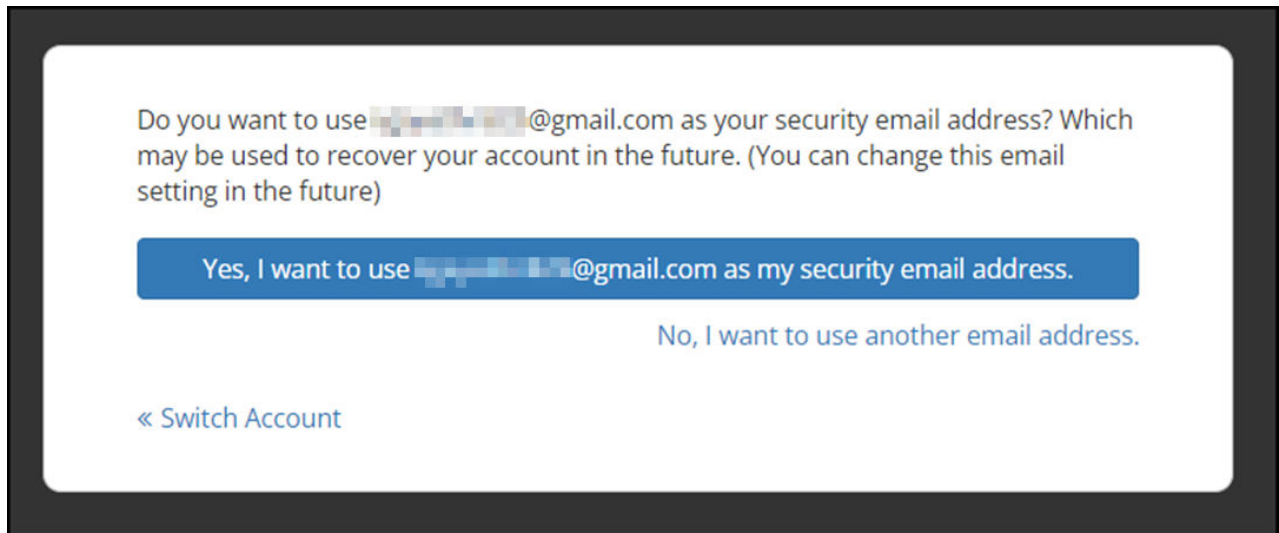

6. Click **Yes** to confirm.

You are successfully logged into the remote portal.

Figure 5. Remote Portal



To use the remote portal dashboard components, refer to [Navigating the Remote Portal Dashboard](#).

Parent topic: [Logging in Using Social Media Accounts](#)


Recovering Your Social Media Account

If you forget your social account credentials, or your social account login fails for some other reason, you can recover the account information and apply it to a new account.

Complete the following procedure to recover your social media account.

1. From the social media account login section of the login screen, click **Recovery**.


Figure 1. Remote Portal Login Screen

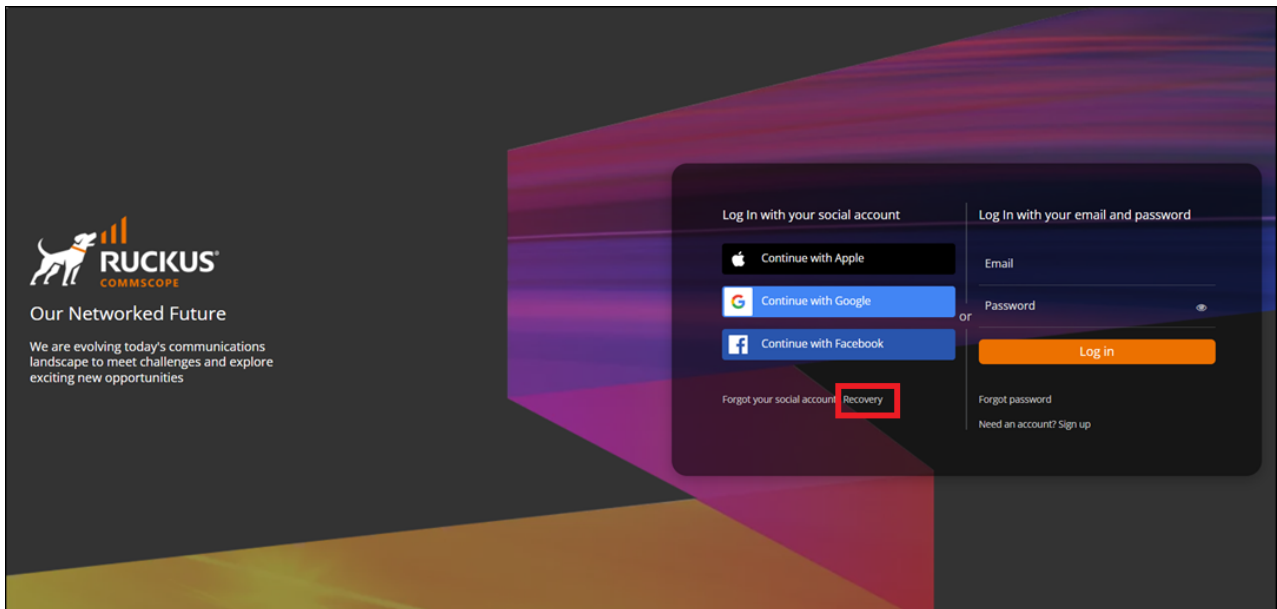


2. Enter the registered security email address and click **Confirm**.

A recovery account link is sent to your security email account.


Figure 2. Entering the Recovery Security Email Address

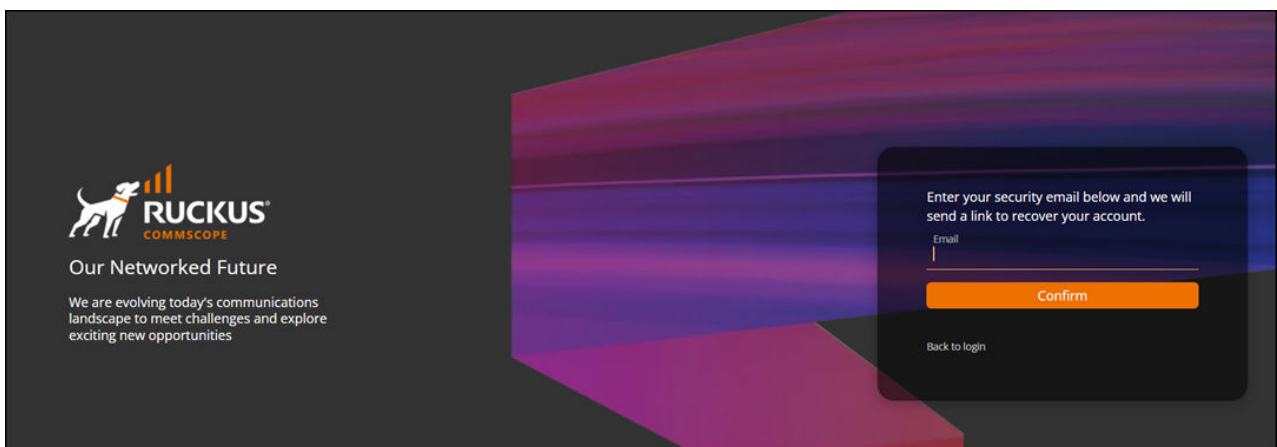

A pop-up appears as a confirmation message.

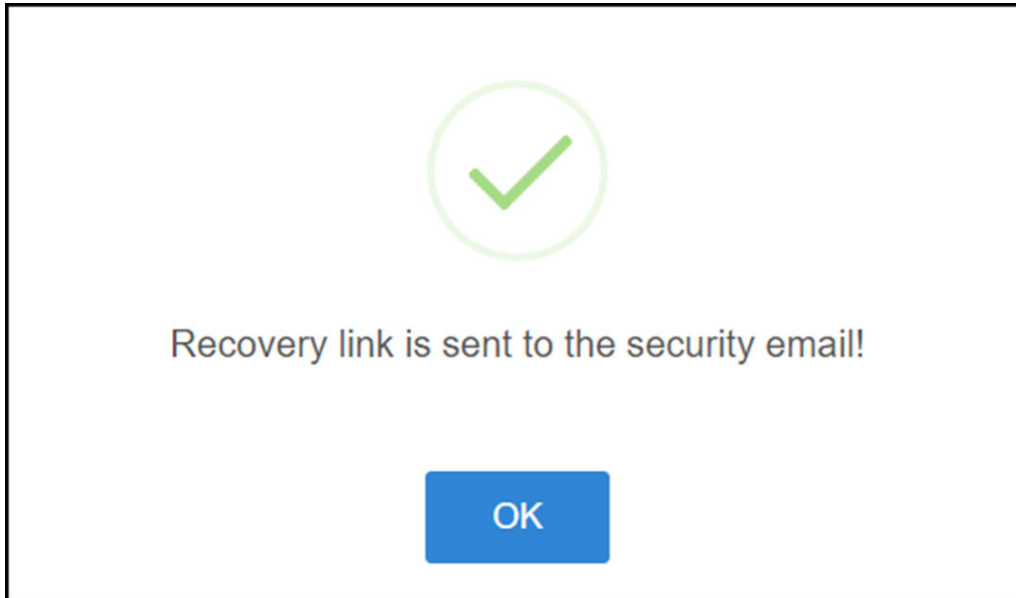Figure 3. Recovery Mail Sent Confirmation Message

3. Click **OK**.
4. Open the remote services security email and click the recovery link encoded in the email.

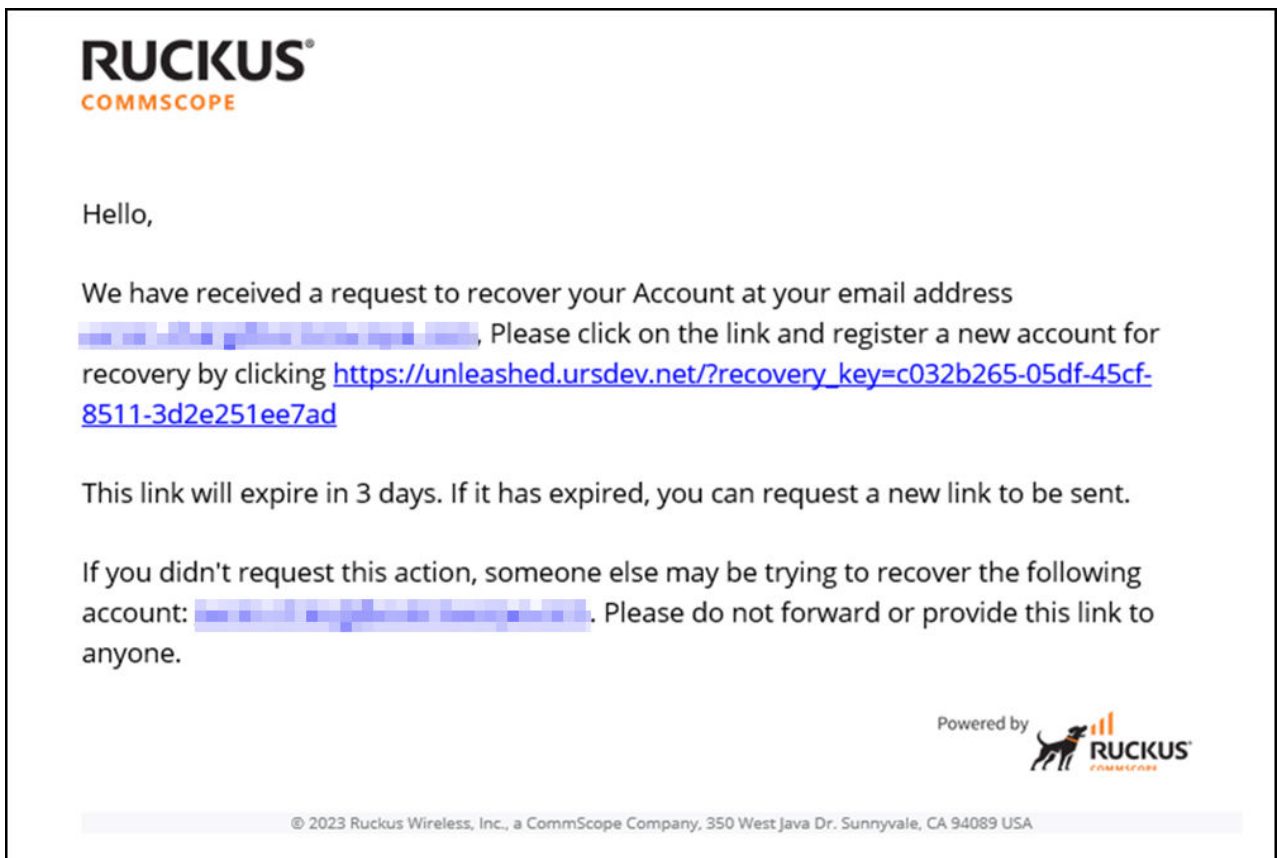Figure 4. Account Recovery Email

You are redirected to the remote portal login screen to register a new account for recovery.

Parent topic: [Logging in Using Social Media Accounts](#)

Navigating the Remote Portal Dashboard

The RUCKUS remote portal dashboard is the graphical user interface (GUI) that remotely monitors and manages your RUCKUS Unleashed network. You can log in to the remote portal or MA using your social media account or registered email account credentials .

Figure 1. Remote Portal Dashboard

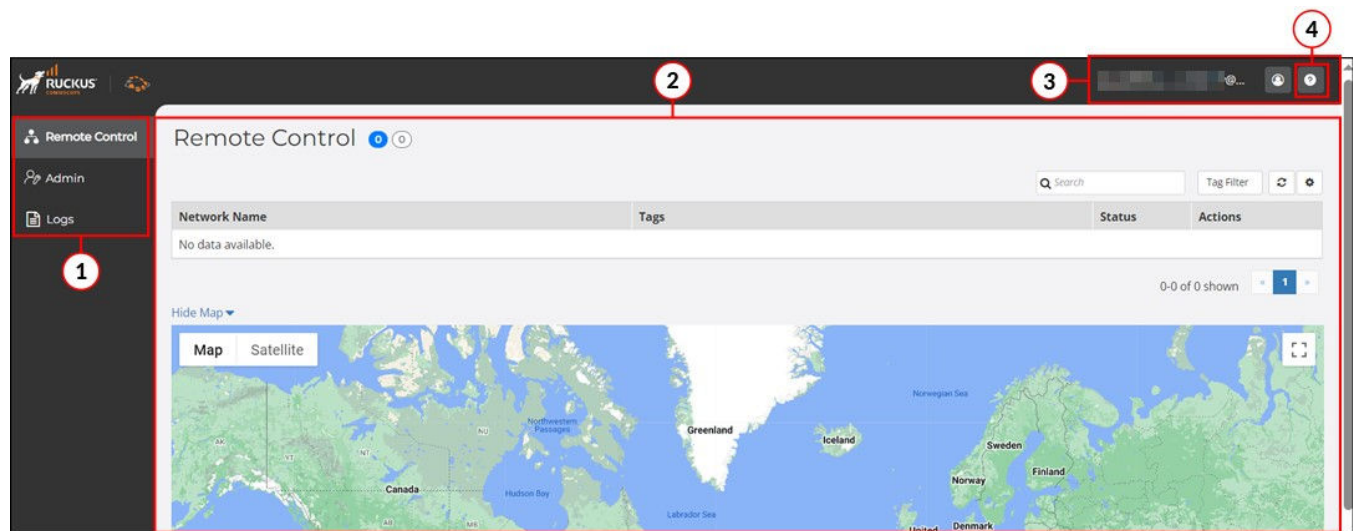


Table 1. Remote Portal Dashboard Components

Number	Component	Description
1	Menu	The following menu options are available. • Remote Control: Lists all the networks that are remotely connected to the remote portal. Refer to Remote Control for more information. • Admin: Provides access to the admin configuration options used to manage your network. Refer to Admin for more information.

Number	Component	Description
		• Logs: Displays the remote portal logs. Refer to Logs for more information.
2	Content Area	Click on a menu item to view the related information and configuration options. By default, Remote Control is displayed.
3	Account Settings	Displays the login email address with the following account settings. • Security Setting: Resets security email address and configures multi-factor authentication (MFA) for your remote portal and MA accounts. Refer to Security Setting for more information. •  Note: Multi-Factor Authentication (MFA) setting is not available for social media logins. • Delete Account: Deletes your account from the remote portal. Refer to Delete Account for more information. • Log Out: Logs out from the remote portal.
4	Online Help	Click to view the online documentation for the remote portal.

Parent topic: [Remote Portal Support](#)

Structured Administration Account to Manage Networks

A structured administration account can assign permissions to authorized remote portal and mobile app (MA) accounts. Account permissions include the following:

- Log in to the remote portal or MA using social media or registered email local account credentials.
- Invite another administrator to manage a selected network as either an **Administrator** or a **Read-Only Web UI** role.

Within the remote portal and MA account systems there are two roles:

- **Device Owner:**
 - Can associate devices with its account and is regarded as the owner of the associated devices.
 - Can invite another remote portal or MA account as device administrator to manage selected devices.
- **Device Administrator:** Can manage selected devices, but cannot share devices to others

Refer to the following table for a complete list of permissions per role.

Table 1. Roles and Permissions

Role		Permissions
Device Owner		Associate or disassociate devices.
		Manage devices remotely.
		Invite another account to manage selected devices.
		Remove administrator permission from selected devices.
		List invited administrator accounts.
		Remove permissions of invited administrator accounts.
Device Administrator	Administrator	Manage devices remotely.
		Remove accounts of admin permission from selected devices.

Role		Permissions
		Remove devices from own management list.
	Read-Only	View and monitor the devices remotely.

Parent topic: [Remote Portal Support](#)


Monitoring Your Network

The **Remote Control** table lists all the devices owned by the Device Owner including administrator-managed devices. You can manage up to 10 networks. The numbers in the two bubbles (blue and white) show the number of connected and disconnected networks, respectively.

You can view the following information and options from the **Remote Control** content area:

Network Name	Name of the network.
Tags	Customized tags used for the network.
Status	Status of the network connection (connected, disconnected).
Actions	Remote access to RUCKUS Unleashed web interface and CLI.
Show Map	View the map.
Search	Search the table by Network Name , Tags , and Status .
Tag Filter	Sort the table using the tags from the list. The list is populated as and when a tag is added to a network.
Refresh	Refresh the dashboard.
Table Settings	Sort the dashboard using the following criteria: Rows: Search the dashboard using key words. Enter the number of rows to be displayed for Show entries per page. Columns: Select the columns to be displayed. Click any column header to sort the table by that column.

Figure 1. Remote Control Screen

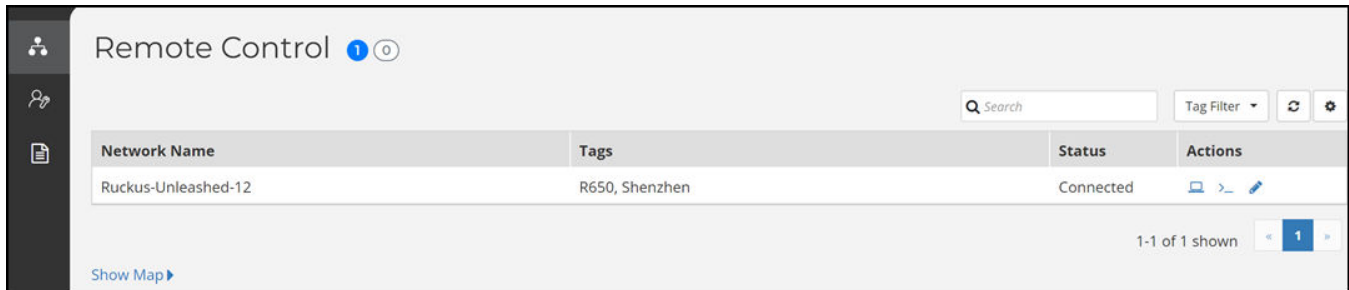

Parent topic: [Remote Portal Support](#)

Administrator Settings


The **Admin** screen lists only the devices owned by the Device Owner.

You can view the following information and options in the **Admin** content area:

Network Name	Name of the network.
Tags	Customized tags used for the network.
Status	Status of the network connection (connected, disconnected).
Admin Users	Administrator users associated with each network.
Firmware Version	Version of AP firmware.
Last Seen	The date and time that the administrator was last connected with the AP.
MAC Address	The unique media access control (MAC) address, also called physical address, network interface of the AP. This is a sortable field.
Unleashed ID	Unique identifier for each Unleashed network. You can obtain the ID from Admin & Services > System > System Info .
Search	Search the dashboard by Network Name , Tags , and Status .
Admin Filter	Sort the table based on admin users from the list. The list gets populated as and when any administrator is invited to manage the network.
Refresh	Refresh the dashboard.
Table Settings	Sort the dashboard using the following criteria:

	Rows: Search the dashboard using key words. Enter the number of rows to be displayed for Show entries per page. Columns: Select the columns to be displayed. You can sort the columns by clicking on the column headers.
--	---

Figure 1. Admin Screen

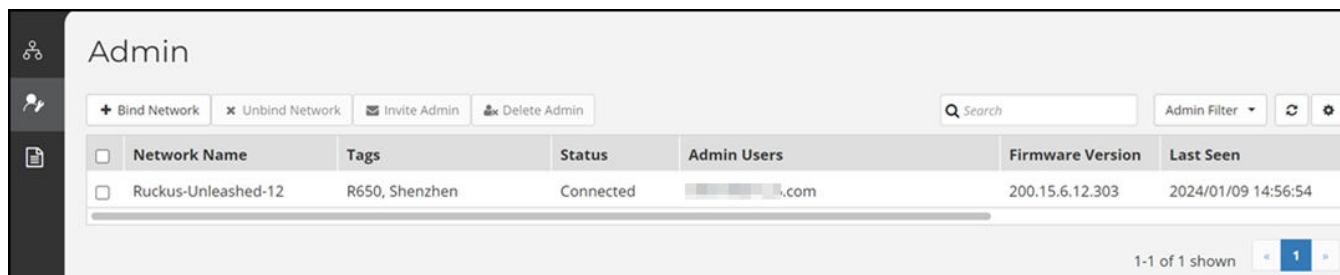

From the **Admin** menu option, you can perform the following actions as an administrator. Refer to [Managing Your Network](#) for more information.

- Associate (bind) or disassociate (unbind) a network as a device owner.
- Invite a remote portal or mobile app (MA) account to manage selected networks devices as a remote administrator who has the privilege of managing the networks, but cannot invite another administrator.
- Delete a remote administrator.

Parent topic: [Remote Portal Support](#)

Managing Your Network


When **Remote Management** is enabled, as a Device Owner, you can manage your network from either the remote portal or the mobile app (MA).

As a prerequisite, enable **Remote Management** from the RUCKUS Unleashed web interface (**Admin & Services > Administration > Remote Management > Remote Management & Mobile App Notification**).

Complete the following steps to bind your network to the remote portal account.

1. From the menu, click **Admin**.

Figure 1. Admin Menu

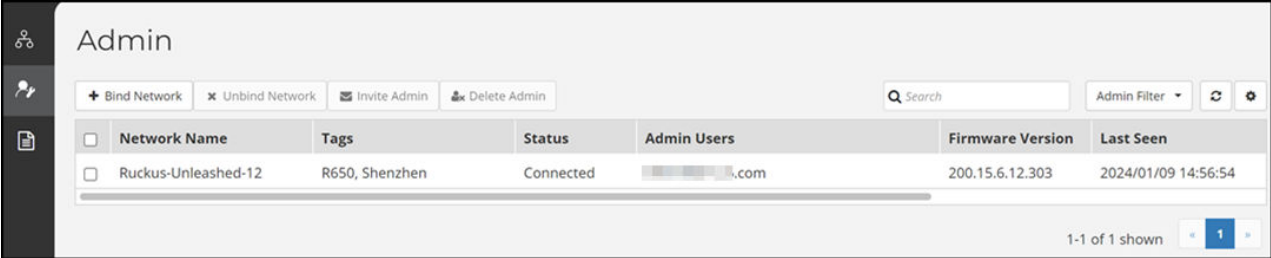


The screenshot shows the 'Admin' dashboard. At the top, there are buttons for '+ Bind Network', 'x Unbind Network', 'Invite Admin', and 'Delete Admin'. Below these is a search bar and an 'Admin Filter' dropdown. The main content is a table with the following columns: Network Name, Tags, Status, Admin Users, Firmware Version, and Last Seen. One network is listed: 'Ruckus-Unleashed-12' with tags 'R650, Shenzhen', status 'Connected', and last seen '2024/01/09 14:56:54'. At the bottom right, it says '1-1 of 1 shown' with a page indicator '1'.

Network Name	Tags	Status	Admin Users	Firmware Version	Last Seen
Ruckus-Unleashed-12	R650, Shenzhen	Connected	...	200.15.6.12.303	2024/01/09 14:56:54

- In the **Admin** dashboard, click **Bind Network**.
The **Bind Network** dialog box is displayed.

Figure 2. Binding the Network

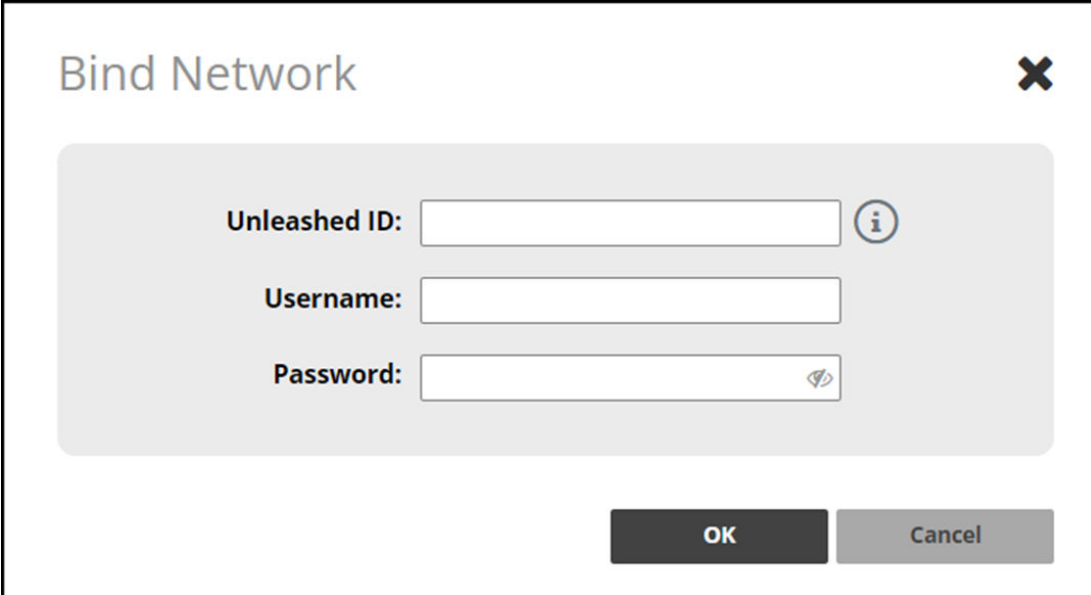


The 'Bind Network' dialog box has a title bar with a close button (X). It contains three input fields: 'Unleashed ID:' with an information icon (i), 'Username:', and 'Password:' with a toggle icon. At the bottom, there are 'OK' and 'Cancel' buttons.

- Enter the Unleashed ID, user name, password, and click **OK** to bind your network.
 - Note:** The MA or remote portal account associates with the AP using the Unleashed ID by providing the admin user and password. If an Unleashed ID is already bound to another account, the remote portal rejects the association of the network. You can reset the AP system ID and associate the network again.
 - Note:** In the event of a factory reset of an AP, the Unleashed ID will change and you need to repeat this procedure again to bind the new Unleashed ID of the AP to the remote portal.
- Click **Unbind Network** to disassociate the network.
 - Note:** You can reset the system ID of an AP to disassociate the network.
- To invite an administrator to manage a network remotely, select a network name from the **Admin** table and click **Invite Admin**.

The **Invite Admin** dialog box is displayed.

Figure 3. Inviting an Administrator

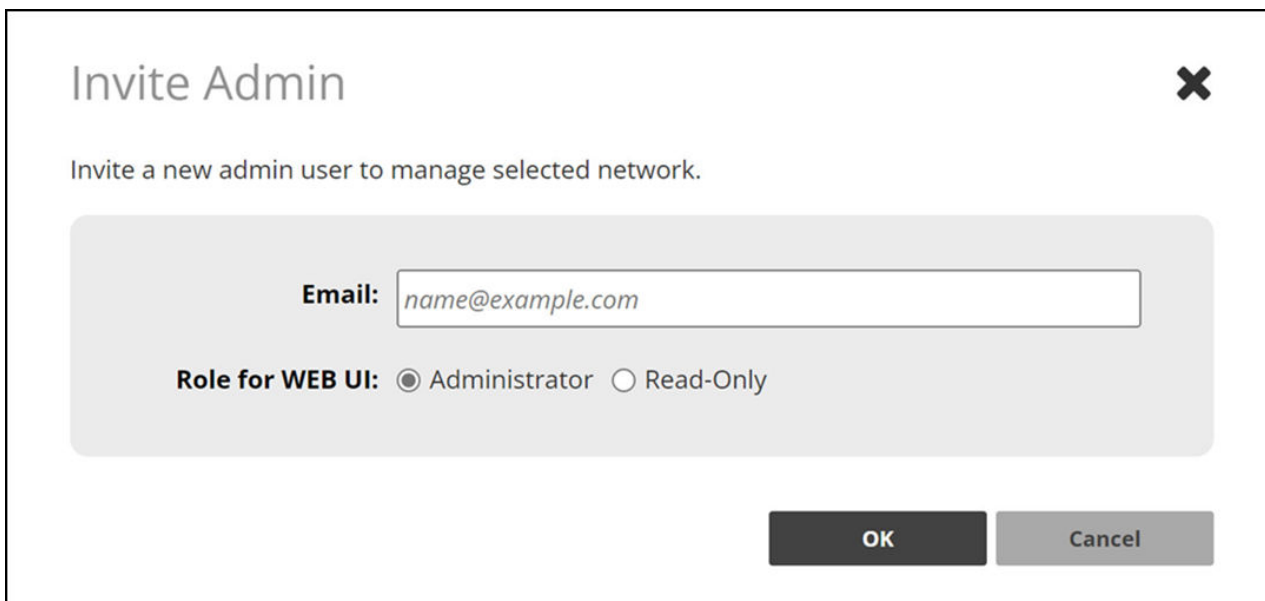

The dialog box titled "Invite Admin" has a close button (X) in the top right corner. Below the title, it says "Invite a new admin user to manage selected network." There is a text input field for "Email:" containing "name@example.com". Below that, the "Role for WEB UI:" section has two radio buttons: "Administrator" (selected) and "Read-Only". At the bottom right are "OK" and "Cancel" buttons.

6. Enter the email address of the admin user.

7. For **Role for WEB UI**, select the required role and click **OK**.

- **Administrator:** Can remotely manage and control the network using both the Unleashed web interface and the CLI.
- **Read-Only:** Can only view the Unleashed web interface remotely and cannot access the CLI remotely. Such a network is displayed with a Read-Only label in the **Remote Control** table.

Figure 4. Network With Read-Only Admin Permission



Remote Control 1 0			
Network Name		Tags	Status
Read-Only Ruckus			Connected

The invitee receives an email notification with a link to log in to the remote portal.

Figure 5. Email Notification

Powered by 

You have been invited to manage a Ruckus Unleashed Network by [redacted]

Please go to the cloud portal to accept the invitation. If you are the first time visitor of the cloud portal, please login with your social media login associated with this email address, or create a new log in password with a new registration by click on the **Sign up**.

Sign In with your social account

 Continue with Apple

 Continue with Google

 Continue with Facebook

[Forgot your social account? Recovery](#)

Sign In with your email and password

Email

Password

or

Log in

[Forgot password](#)

[Need an account? Sign up](#)


Click this link to start onboarding [redacted]

This invited will expire in 3 days. Please request a new invitation from the network manager if the link is expired.

© 2023 Ruckus Wireless, Inc., a CommScope Company, 350 West Java Dr. Sunnyvale, CA 94089 USA

- To remove the permissions for a remote administrator, select a network name from the **Admin** table and click **Delete Admin**.

Figure 6. Removing Admin Permissions

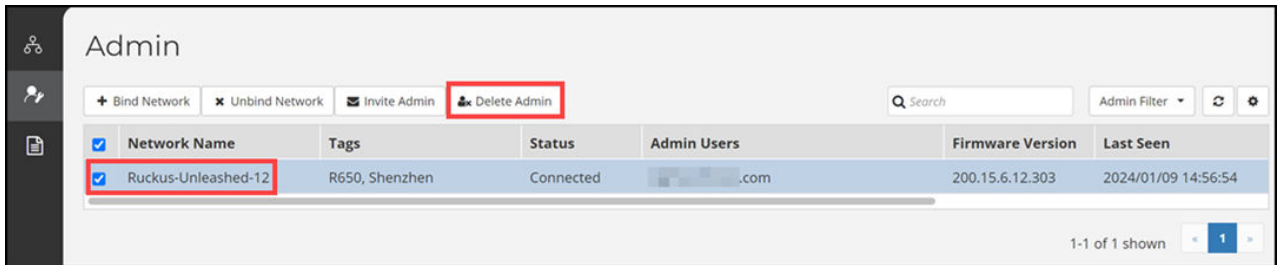

Network Name	Tags	Status	Admin Users	Firmware Version	Last Seen
☒ Ruckus-Unleashed-12	R650, Shenzhen	Connected	[redacted].com	200.15.6.12.303	2024/01/09 14:56:54

 **Note:** The remote portal displays the administrator permissions based on the AP.

 **Note:** You must remove the administrator permissions one at a time. Batch operation is not supported.

Parent topic: [Administrator Settings](#)

Viewing the Logs

From the menu, click **Logs** to view the user log activities on the remote portal. The **Logs** content area displays the following information and options:

Detail	Log activity details of the users.
Severity (High, Normal, Low)	Severity of a log activity.
Create Time	The date and time when the log activity occurred.
Search	Search the dashboard by Detail , Severity , and Create Time .
Log Type Filter	Sort the table based on log type.
Severity Filter	Sort the table based on severity level.
Refresh	Refresh the dashboard.
Table Settings	Sort the dashboard using the following criteria: Rows: Search the dashboard using key words. Enter the number of rows to be displayed for Show entries per page. Columns: Select the columns to be displayed. You can sort the columns by clicking on the column headers.

Figure 1. Viewing the Logs

Detail	Severity	Create Time
User [redacted] logged in.	Normal	2024/01/12 14:54:38
User [redacted] logged out.	Normal	2024/01/12 14:45:07
User [redacted] logged in.	Normal	2024/01/12 14:44:24
User [redacted] logged out.	Normal	2024/01/12 14:31:49
User [redacted] logged in.	Normal	2024/01/12 14:18:36
User [redacted] logged in.	Normal	2024/01/12 12:52:40
User [redacted] logged in.	Normal	2024/01/08 19:20:07
User [redacted] logged in.	Normal	2024/01/08 18:12:23
User [redacted] logged in.	Normal	2024/01/08 15:37:13
User [redacted] logged out.	Normal	2024/01/05 18:32:05

Parent topic: [Remote Portal Support](#)

Unleashed Access Point Power Supply Considerations


AP Power Warnings

Power Limitations by PoE Mode and AP Model

AP Power Warnings

Beginning with release 200.8, the RUCKUS Unleashed dashboard displays warning icons when an AP is operating in reduced power mode.

Figure 1. Warning icons indicate an AP is operating in reduced-power mode

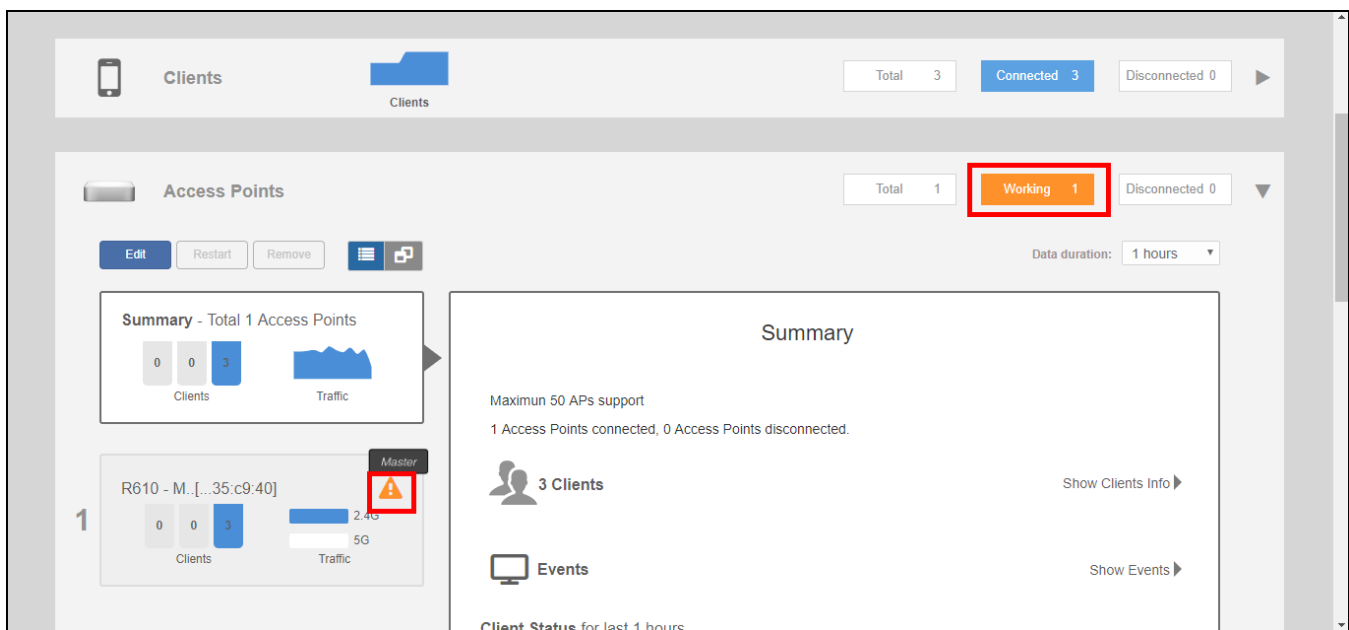

If a warning icon appears, click **Show AP Info** and locate the **Power Consumption Mode** entry. Refer to Power Limitations by PoE Mode and AP Model to see what limitations are in effect.

Figure 2. Showing AP Power Consumption Mode

The screenshot shows the 'System Overview' page for a Ruckus Unleashed access point. On the left, a summary card shows 0 clients and 3 traffic units. The main table lists various system parameters. The 'Power Consumption Mode' is highlighted with a red box, showing '802.3at PoE'. A 'Hide AP Info' button is also highlighted with a red box.

Mac Address	d4:c1:9e:35:c9:40
IP Address	192.168.0.3
External IP:Port	192.168.0.3:12225
Model	R610
S/N	941849001125
Group Name	System Default
GPS Coordinates	
Mesh Type	Disabled
Current Channel(802.11a/n/ac)	149
Current Channel(802.11b/g/n)	6
Power Consumption Mode	802.3at PoE
Max Clients	100
Version	200.8.10.3.173
Role Fixed	no
Download Logs	Logs

If power supply deficiency is caused by incorrect power level negotiation between the AP and the switch/PoE injector, you can enforce the AP Power Level on the AP's configuration page. Go to **Access Points > [AP] > Edit > Other > PoE Operating Mode**. Enable **Override Group Config** and select a power mode from the menu.

Figure 3. Override PoE Operating Mode

The screenshot shows the 'Edit AP(d4:c1:9e:35:c9:40)' dialog box with the 'Other' tab selected. In the 'PoE Operating Mode' section, the 'Override Group Config' checkbox is checked, and the dropdown menu is set to '802.3at PoE'. The 'Status LEDs' section also shows 'Override Group Config' checked.

Parent topic: [Unleashed Access Point Power Supply Considerations](#)

Power Limitations by PoE Mode and AP Model

The following tables list the Power over Ethernet (PoE) operating modes for each AP model, along with the performance and feature limitations when the AP is in any of the supported reduced power modes.

Indoor AP	Outdoor AP
R850	T750
R770	T750SE
R750	T350c
R670	T350d
R650	T350SE
R550	
H550	

R850

Table 1. R850 PoE Modes

	LLDP Power Ask	2.4G Tx/Rx	5G Tx/Rx	5Gbps Eth	1Gbps Eth	USB	Comments
DC		4/4	8/8	Enabled	Enabled	Enabled	
802.3af		1/4	1/8	Enabled	Disabled	Disabled	Not supported in operation mode
802.3at	25W	4/4	4/8	Enabled	Enabled	Enabled (0.5W)	
802.3bt/class5	35W	4/4	8/8	Enabled	Enabled	Enabled	
PoE injector (Model 480125A) 60W		4/4	4/8	Enabled	Enabled	Enabled	Force to 802.3bt/class5 from SZ GUI

R770

Table 2. R770 PoE Modes

	LLDP Power Ask	2.4G/5G/6G (Tx/Rx)	2.4G/5G/6G Tx Power (dBm)	10Gbps Eth	1Gbps Eth	USB	IoT	Comments
DC		2G: 2x2 5G: 4x4 6G: 2x2	23/22/22	Enabled	Enabled	Enabled	Enabled	
802.3af (PoE switch)		2G: 1x1 5G: 1x1 6G: 1x1	0/0/0 (2-5-6 mode) 0/0/- (2-5 mode) -/0/0 (5-6 mode)	Enabled	Disabled	Disabled	Disabled	Not supported in operation mode
802.3at (2-pair PoE switch or PoE injector (default))	25.5W (PoE peak power limited)	2G: 2x2 5G: 4x4 6G: 2x2	14/14/14 (2-5-6 mode) 19/19/- (2-5 mode) -/18/18 (5-6 mode)	Enabled	Disabled	Disabled	Disabled	
802.3bt /class5 (4-pair PoE switch or PoE injector (manual))	40W (PoE peak power limited)	2G: 2x2 5G: 4x4 6G: 2x2	23/22/22 (2-5-6 mode) 23/22/- (2-5 mode)	Enabled	Enabled	Enabled	Enabled	

	LLDP Power Ask	2.4G/5G/6G (Tx/Rx)	2.4G/ 5G/6G Tx Power (dBm)	10Gbps Eth	1Gbps Eth	USB	IoT	Comments
			-/22/22 (5-6 mode)					

R750

Table 3. R750 PoE Modes

	LLDP Power Ask	2.4G Tx/Rx	5G Tx/Rx	2.5Gbps Eth	1Gbps Eth	USB
DC		4/4	4/4	Enabled	Enabled	Enabled
802.3af		2/4	2/4	Enabled	Disabled	Disabled
802.3at	25W	4/4	4/4	Enabled	Enabled	Enabled
PoE injector (Model 480125A) 60W		4/4	4/4	Enabled (1Gbps speed)	Enabled	Enabled

R670

Table 4. R670 PoE Modes

	LLDP Power Ask	2.4G/5G/6G (Tx/Rx)	2.4G/ 5G/6G Tx Power (dBm)	10Gbps Eth	1Gbps Eth	USB	IoT	Comments
DC		2G: 2x2 5G: 4x4 6G: 2x2	22/22/22	Enabled	Enabled	Enabled	Enabled	
802.3af (PoE switch)		2G: 1x1 5G: 1x1 6G: 1x1	0/0/0 (2-5-6 mode)	Enabled	Disabled	Disabled	Disabled	Not supported in operation mode

	LLDP Power Ask	2.4G/5G/6G (Tx/Rx)	2.4G/5G/6G Tx Power (dBm)	10Gbps Eth	1Gbps Eth	USB	IoT	Comment
			0/0/- (2-5 mode) -/0/0 (5-6 mode)					
802.3at (2-pair PoE switch or PoE injector)	25.5W	2G: 2x2 5G: 4x4 6G: 2x2	14/14/14 (2-5-6 mode) 19/19/- (2-5 mode) -/18/18 (5-6 mode)	Enabled	Disabled	Disabled	Disabled	
802.3bt /class6 (4-pair PoE switch or PoE injector)	43W (2-5-6 mode), 35W (2-5 mode), 40W (5-6 mode)	2G: 2x2 5G: 4x4 6G: 2x2	22/22/22 (2-5-6 mode) 22/22/- (2-5 mode) -/22/22 (5-6 mode)	Enabled	Enabled	Enabled	Enabled	

Table 5. R670 PoE Modes

	LLDP Power Ask	2.4G Tx/Rx	5G Tx/Rx	6G Tx/Rx	10Gbps Eth	1Gbps Eth	USB	IoT	Comment
DC		2/2	4/4	2/2	Enabled	Enabled	Enabled	Enabled	
802.3af (PoE switch)					Enabled	Disabled	Disabled	Disabled	Not supported in

	LLDP Power Ask	2.4G Tx/Rx	5G Tx/Rx	6G Tx/Rx	10Gbps Eth	1Gbps Eth	USB	IoT	Comment
									operation mode
802.3at	25.5W	2/2	4/4	2/2	Enabled	Disabled	Disabled	Disabled	
802.3bt/ class6 (PoE switch or injector)	2-5-6 (43W), 2-5 (35W), 5-6 (40W)	2/2	4/4	2/2	Enabled	Enabled	Enabled	Enabled	

R650

Table 6. R650 PoE Modes

	LLDP Power Ask	2.4G Tx/Rx	5G Tx/Rx	2.5Gbps Eth(PoE)	1Gbps Eth	USB
DC		2/2	4/4	Enabled	Enabled	Enabled
802.3af		2/2	2/4	Enabled	Disabled	Disabled
802.3at	25W	2/2	4/4	Enabled	Enabled	Enabled
PoE Injector (Model 480125A)		2/2	4/4	Enabled (1Gbps speed)	Enabled	Enabled

R550

Table 7. R550 PoE Modes

	LLDP Power Ask	2.4G Tx/Rx	5G Tx/Rx	1Gbps Eth(PoE)	1Gbps Eth	USB
DC		2/2 (22 dBm)	2/2 (22 dBm)	Enabled	Enabled	Enabled
802.3af		2/2 (10 dBm)	2/2 (18 dBm)	Enabled	Disabled	Disabled
802.3at	25W	2/2 (22 dBm)	2/2 (22 dBm)	Enabled	Enabled	Enabled
PoE Injector (Model 480125A)		2/2 (22 dBm)	2/2 (22 dBm)	Enabled	Enabled	Enabled

H550

Table 8. H550 PoE Modes

	LLDP Power Ask	2.4G Tx/ Rx(16dBm)	5G Tx/ Rx(19dBm)	1Gbps Eth	USB	PSE		
						POE_Out	Power @ PD	Maximum Cable Length
DC		2/2	2/2	Enabled	Enabled	Enabled		
802.3af	12.95W	2/2	2/2	Enabled	Disabled	Disabled	NA	NA
802.3at/ injector	25W	2/2	2/2	Enabled	Enabled	Disabled	NA	NA
					Enabled	Enabled	8.4W	20m
					Disabled	Enabled	12.4W	20m
802.3bt, uPoE, PoH	40W	2/2	2/2	Enabled	Enabled	Enabled	12.95W	100m

T750

Table 9.

	LLDP Power Ask	2.4G Tx/Rx	5G Tx/Rx	2.5Gbps Eth	1Gbps Eth	USB	PSE	Comment
DC		4/4	4/4	Enabled	Enabled	Enabled	Enabled	
802.3af		1/4	1/4	Enabled	Disabled	Disabled	Disabled	Not supported operation mode
802.3at w/o USB	25W	4/4	4/4	Enabled	Enabled	Disabled	Disabled	
802.3at w/ USB	25W	2/4	4/4	Enabled	Disabled	Enabled	Disabled	Alt AT mode config by AP CLI
802.3bt/ Class 5	35W	4/4	4/4	Enabled	Enabled	Enabled	Disabled	
803.3bt/ Class 6		4/4	4/4	Enabled	Enabled	Enabled	Disabled	51W by H/W

	LLDP Power Ask	2.4G Tx/Rx	5G Tx/Rx	2.5Gbps Eth	1Gbps Eth	USB	PSE	Comment
								negotiation
802.3bt/ Class 7		4/4	4/4	Enabled	Enabled	Enabled	Enabled	62W by H/W negotiation
PoE injector (Model 480125A)		4/4	4/4	Enabled (1Gbps speed)	Enabled	Enabled	Disabled	Force to 802.3bt/ Class 5
PoE injector		4/4	4/4	Enabled	Enabled	Enabled	Enabled	Force to 802.3bt/ Class 7

T750SE

Table 10.

	LLDP Power Ask	2.4G Tx/Rx	5G Tx/Rx	2.5Gbps Eth	1Gbps Eth	USB	PSE	Comment
DC		4/4	4/4	Enabled	Enabled	Enabled	Enabled	
802.3af		1/4	1/4	Enabled	Disabled	Disabled	Disabled	Not supported operation mode
802.3at w/o USB	25W	4/4	4/4	Enabled	Enabled	Disabled	Disabled	
802.3at w/ USB	25W	2/4	4/4	Enabled	Disabled	Enabled	Disabled	Alt AT mode config by AP CLI
802.3bt/ Class 5	35W	4/4	4/4	Enabled	Enabled	Enabled	Disabled	
803.3bt/ Class 6		4/4	4/4	Enabled	Enabled	Enabled	Disabled	51W by H/W negotiation

	LLDP Power Ask	2.4G Tx/Rx	5G Tx/Rx	2.5Gbps Eth	1Gbps Eth	USB	PSE	Comment
802.3bt/ Class 7		4/4	4/4	Enabled	Enabled	Enabled	Enabled	62W by H/W negotiation
PoE injector (Model 480125A)		4/4	4/4	Enabled (1Gbps speed)	Enabled	Enabled	Disabled	Force to 802.3bt/ Class 5
PoE injector		4/4	4/4	Enabled	Enabled	Enabled	Enabled	Force to 802.3bt/ Class 7

T350c

Table 11. T350c PoE Modes

	LLDP Power Ask	2.4G Tx/Rx	5G Tx/Rx	1Gbps Eth
802.3af		2/2 (19dBm)	2/2 (18dBm)	Enabled
802.3at/PoE injector	25W	2/2	2/2	Enabled

T350d

Table 12.

	LLDP Power Ask	2.4G Tx/Rx	5G Tx/Rx	1Gbps Eth	USB
DC		2/2	2/2	Enabled	Enabled
802.3af		2/2 (19dBm)	2/2 (18dBm)	Enabled	Disabled
802.3at/PoE injector	25W	2/2	2/2	Enabled	Enabled

T350SE

Table 13. T350SE PoE Modes

	LLDP Power Ask	2.4G Tx/Rx	5G Tx/Rx	1Gbps Eth	USB
DC/PoE injector		2/2	2/2	Enabled	Enabled
802.3at	25W	2/2	2/2	Enabled	Enabled

	LLDP Power Ask	2.4G Tx/Rx	5G Tx/Rx	1Gbps Eth	USB
802.3af		2/2 (16dBm)	2/2 (16dBm)	Enabled	Disabled

Parent topic: [Unleashed Access Point Power Supply Considerations](#)



Corporate Headquarters

CommScope • Hickory • North Carolina • 28602 • USA

T: 1-828-324-2200

www.commscope.com